

Using the syllable-struct-forest package

Alan Munn

Department of Linguistics and Languages

amunn@msu.edu

Version 1.1

2018/09/15

Abstract

This is a package that allows you to draw syllable trees quickly with a simple input.

1 Package options

The package has one option: `[xslot]` which displays timing units as \times . If this option is not specified, segments are dominated simply by C or V as appropriate.

2 Package commands

2.1 Syllable commands



The package provides commands for the range of syllables shown in Table 1: The commands are straightforward: each macro consists simply of the CV specification of the syllable, and takes as many arguments as slots in that syllables. Each macro takes an optional argument to pass extra **forest** options if necessary. For most uses this will not be needed.

Table 1: Package syllable commands

Example Command	Number of arguments
<code>\V{a}</code>	1
<code>\CV{b}{a}</code>	2
<code>\VC{a}{b}</code>	2
<code>\CVC{k}{a}{v}</code>	3
<code>\CCV{s}{t}{a}</code>	3
<code>\VCC{a}{l}{p}</code>	3
<code>\CCVC{s}{t}{a}{l}</code>	4
<code>\CVCC{s}{a}{l}{t}</code>	4
<code>\CCCV{s}{t}{r}{i}</code>	4
<code>\CCVCC{s}{l}{a}{r}{p}</code>	5
<code>\CCCVCC{s}{t}{r}{i}{k}</code>	5
<code>\CCCVCC{s}{t}{r}{i}{l}{k}</code>	6
<code>\CCCVCC{s}{t}{r}{i}{l}{k}{s}</code>	7

3 Long vowels

All of the macros listed in Table syllables also have versions in which the V slot is doubled. If the two vowels provided as arguments are the same, then the single vowel will be doubly linked to two V slots. These macros therefore have one more argument each). For example: `\CVVC{b}{a}{a}{b}` will yield a doubly linked *a* vowel, as in (1a) while `\CVVC{b}{a}{i}{b}` will link each vowel to its own slot as in (1b):









4 IPA Fonts

When used with pdfLaTeX, the **tipa** package is automatically loaded, and segments are rendered in TIPA automatically.

When used with XeLaTeX or LuaLaTeX, Linux Libertine O is loaded as the default IPA font. If you are using another font for your IPA symbols, define the font using **fontspec**. For example if you are using Doulos IPA as your IPA font, you would use `\newfontfamily\myipafont{Doulos SIL}` and then use the following command to set the font used in the syllables: `\setIPAFont{\myipafont}`.


5 Examples




$\backslash VC\{a\}\{b\}$




$\backslash VVC\{a\}\{a\}\{b\}$




$\backslash VVC\{a\}\{i\}\{b\}$




$\backslash CVC\{k\}\{a\}\{v\}$



$\backslash CVVC\{k\}\{a\}\{a\}\{b\}$




$\backslash CVVC\{k\}\{a\}\{i\}\{b\}$




$\backslash CCV\{s\}\{t\}\{a\}$




$\backslash CCVV\{s\}\{t\}\{a\}\{a\}$




$\backslash CCVV\{s\}\{t\}\{a\}\{i\}$




$\backslash\text{VCC}\{\text{a}\}\{\text{l}\}\{\text{p}\}$




$\backslash\text{VVCC}\{\text{a}\}\{\text{a}\}\{\text{l}\}\{\text{p}\}$




$\backslash\text{VVCC}\{\text{a}\}\{\text{i}\}\{\text{l}\}\{\text{p}\}$




$\backslash\text{CCVC}\{\text{s}\}\{\text{t}\}\{\text{a}\}\{\text{l}\}$




$\backslash\text{CCVVC}\{\text{s}\}\{\text{t}\}\{\text{a}\}\{\text{a}\}\{\text{l}\}$




$\backslash\text{CCVVC}\{\text{s}\}\{\text{t}\}\{\text{a}\}\{\text{i}\}\{\text{l}\}$




$\backslash\text{CVCC}\{\text{s}\}\{\text{a}\}\{\text{l}\}\{\text{t}\}$




$\backslash\text{CVVCC}\{\text{s}\}\{\text{a}\}\{\text{a}\}\{\text{l}\}\{\text{t}\}$




$\backslash\text{CVVCC}\{\text{s}\}\{\text{a}\}\{\text{i}\}\{\text{l}\}\{\text{t}\}$




\CCVCC{s}{l}{a}{r}{p}




\CCVCC{s}{l}{a}{a}{r}{p}




\CCVCC{s}{l}{a}{i}{r}{p}




\CCCV{s}{t}{r}{i}




\CCCV{s}{t}{r}{a}{a}




\CCCV{s}{t}{r}{a}{i}




\CCVC{s}{t}{r}{i}{k}




\CCVC{s}{t}{r}{a}{a}{k}




\CCVC{s}{t}{r}{a}{i}{k}




\CCVCC{s}{t}{r}{i}{l}{k}




\CCVCC{s}{t}{r}{a}{a}{l}{k}

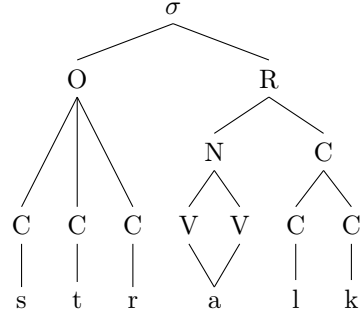


\CCCVVCC{s}{t}{r}{a}{i}{l}{k}

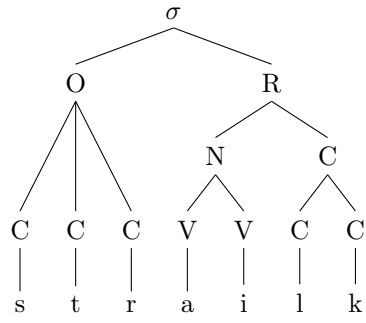


\CCCVCCC{s}{t}{r}{i}{l}{k}{s}

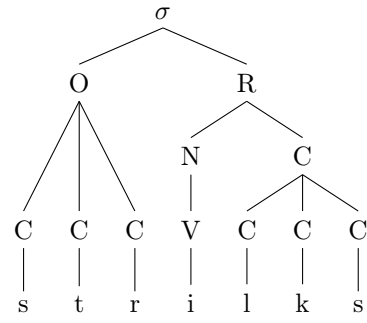

\CCCVCCCC{s}{t}{r}{a}{a}{l}{k}{s}

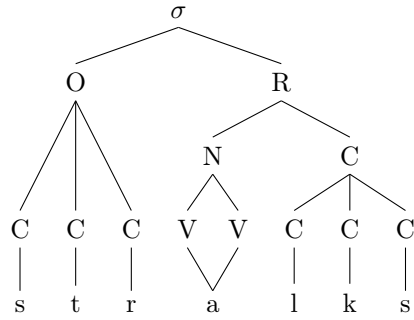

\CCCVCCCC{s}{t}{r}{a}{i}{l}{k}{s}

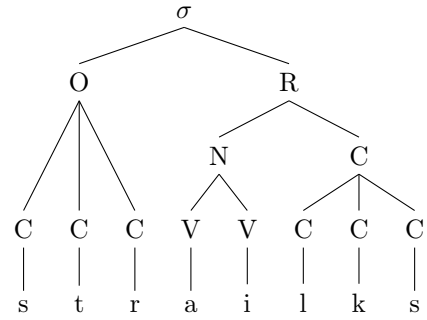

6 Limitations

The package currently does not represent geminate consonants with a shared segment linked to two slots. This would require more work than I have time and interest for.