




Selenium to Playwright Converter

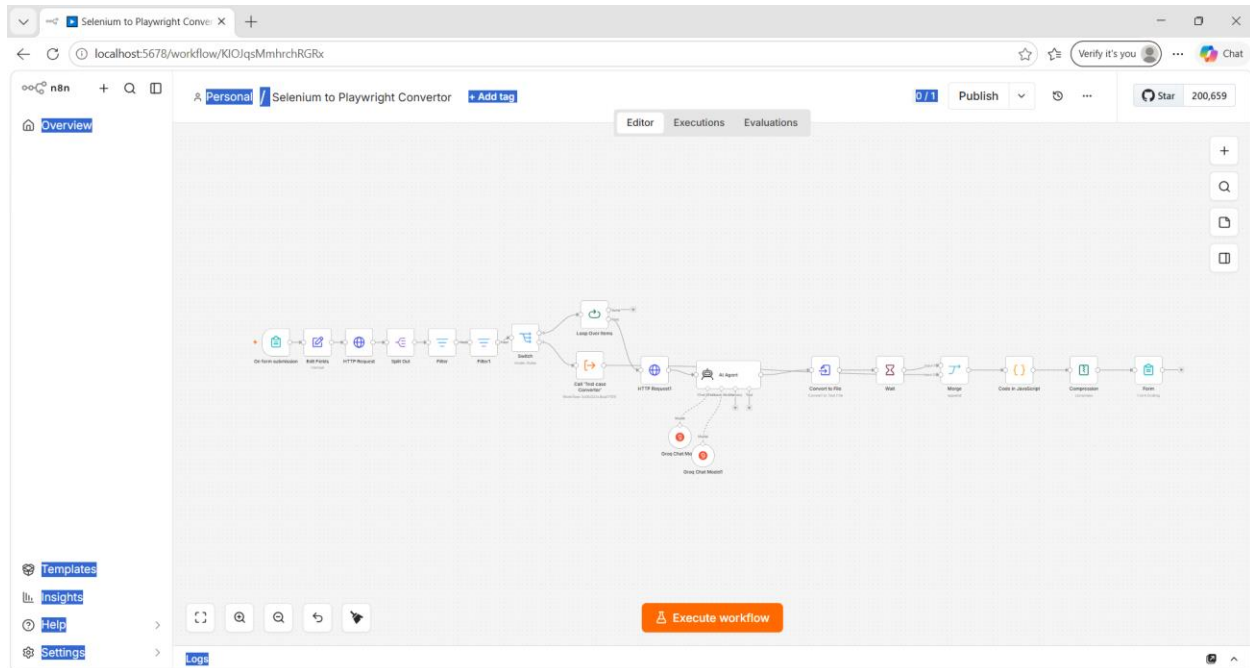

Note : Added Execute Sub workflow node to call the test case converter

Test case Converter


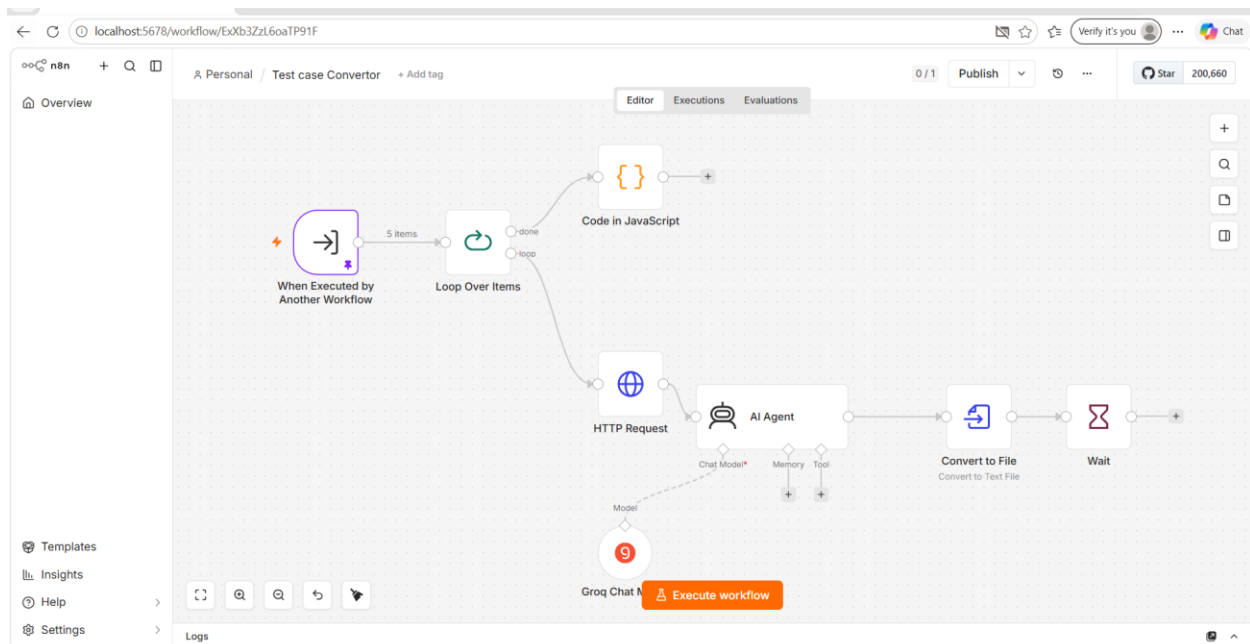


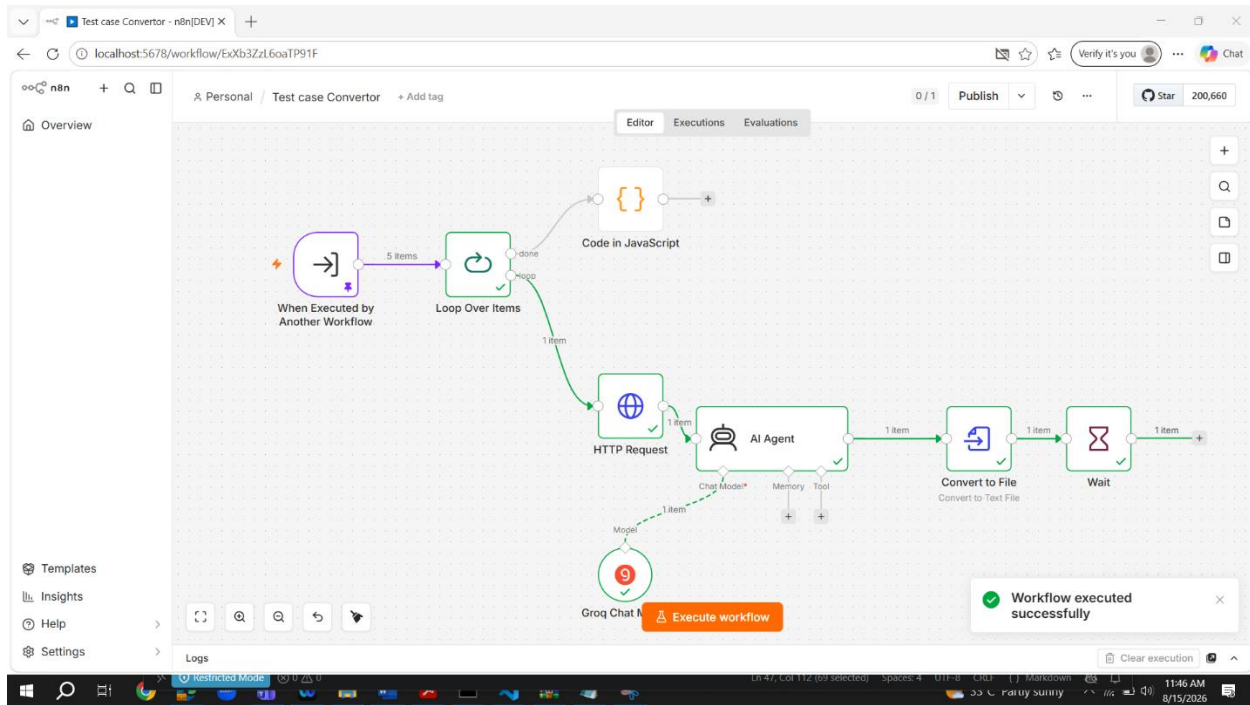

The screenshot shows a web form titled "Selenium to playwright converter" with the subtitle "Selenium to playwright converter". The form is hosted on the URL "localhost:5678/form-test/85155bd4-1c23-4966-8b4a-b652adfb0cc". The form includes the following fields:

- Selenium Github File URL**: A text input field containing "Selenium to Playwright Converter".
- Target_Branch**: A text input field containing "main".

A red "Submit" button is located at the bottom of the form. Below the button, it says "Form automated with n8n". The form is displayed in a Microsoft Edge browser window, with a Snipping Tool window open over it. The background shows the n8n workflow editor interface.

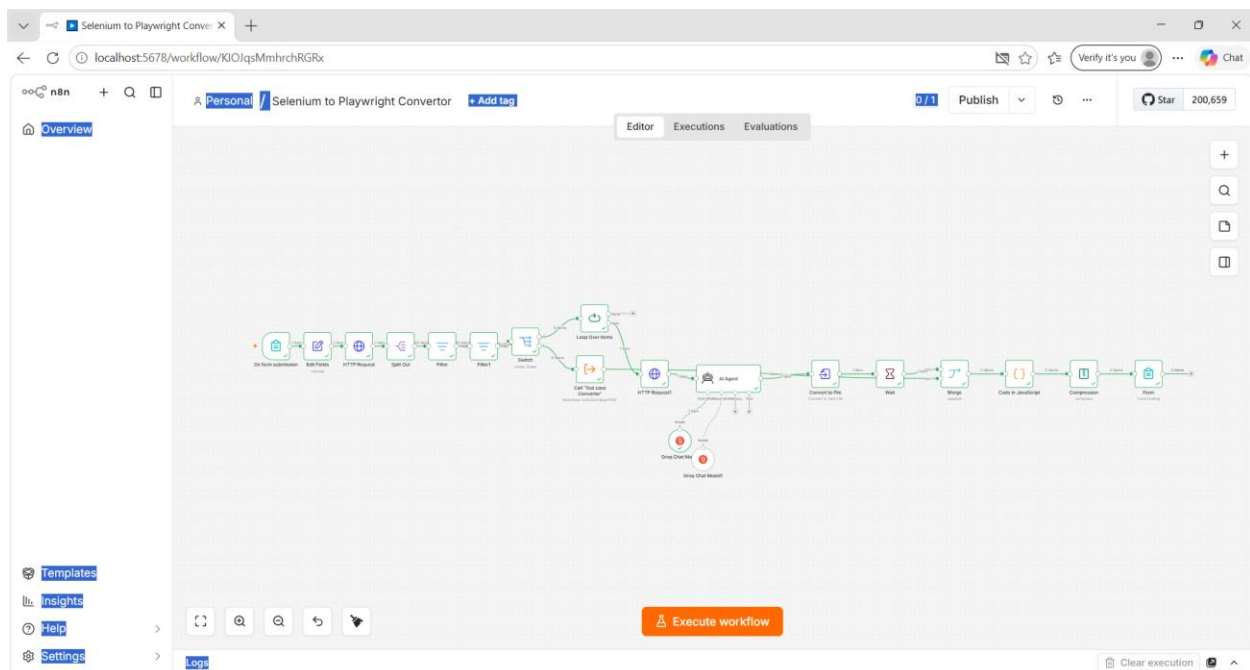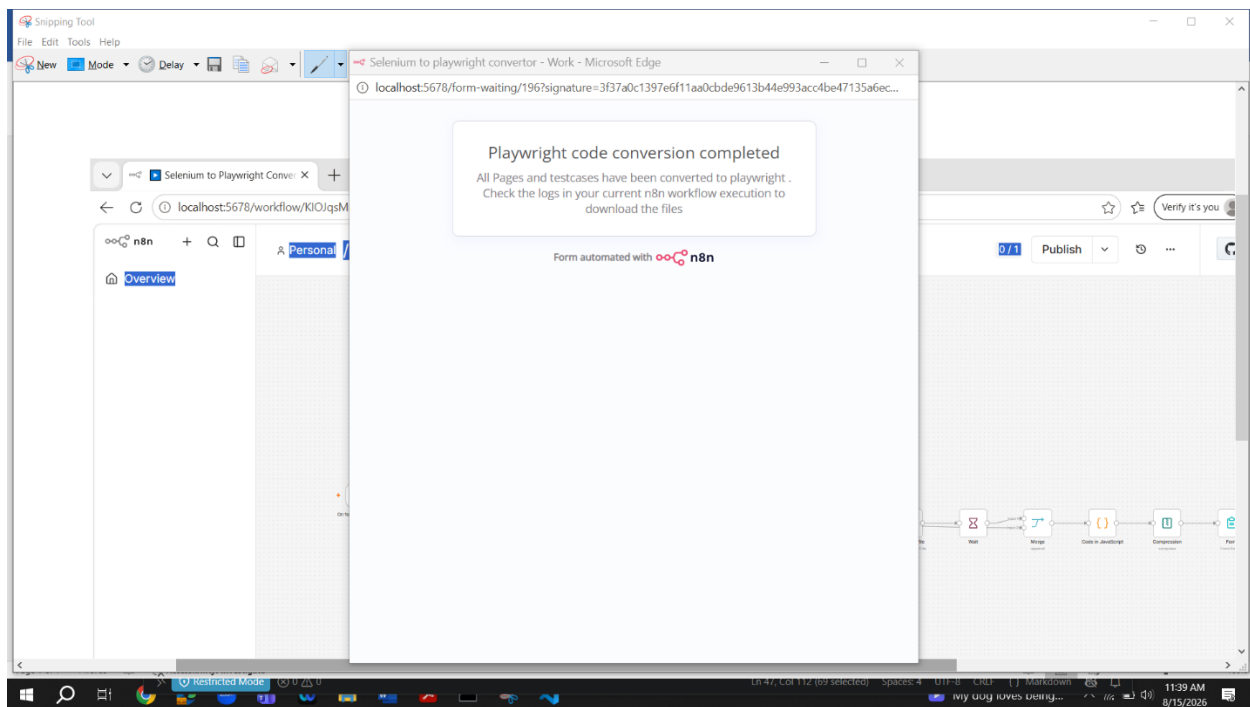

Output Downloaded :

```
CasePage - Notepad
File Edit Format View Help
|`typescript
import { Page, BrowserContext } from "@playwright/test";
import { PlaywrightWrapper } from "../helpers/playwright";

export class CasePage extends PlaywrightWrapper {
  private readonly selectors = {
    newCaseButton: "//div[@title='New']",
    contactNameInput: "//label[text()='Contact Name']/following::input[1]",
    newContactButton: "//span[@title='New Contact']",
    salutationDropdown: "//label[text()='Salutation']/following::button[1]",
    salutationOption: (salutation: string) => `//span[@title='${salutation}']`,
    firstNameInput: "//label[text()='First Name']/following::input[1]",
    lastNameInput: "//label[text()='Last Name']/following::input[1]",
    saveContactButton: "(//button[@name='SaveEdit'])[2]",
    caseOriginDropdown: "//label[text()='Case Origin']/following::button[1]",
    caseOriginOption: (origin: string) => `//span[@title='${origin}']`,
    statusDropdown: "//label[text()='Status']/following::button[1]",
    statusOption: (status: string) => `//label[text()='Status']/following::span[@title='${status}']`,
    slaViolationDropdown: "//label[text()='SLA Violation']/following::button[1]",
    slaViolationOption: (value: string) => `//label[text()='SLA Violation']/following::span[@title='${value}']`,
    subjectInput: "//label[text()='Subject']/following::input[1]",
    descriptionInput: "//label[text()='Description']/following::textarea[1]",
    saveCaseButton: "(//button[@name='SaveEdit'])[1]",
    editCaseButton: "//button[text()='Edit']",
    deleteCaseButton: "//button[text()='Delete']",
    confirmDeleteButton: "//span[text()='Delete']",
    toastMessage: "//span[@class='toastMessage slds-text-heading--small forceActionsText']",
  };

  constructor(page: Page, context: BrowserContext) {
    super(page, context);
  }

  public async clickNewCase() {
    await this.click(this.selectors.newCaseButton, "New Case", "Button");
  }

  public async clickContactName() {
    await this.click(this.selectors.contactNameInput, "Contact Name", "Input");
    await this.click(this.selectors.contactNameInput, "Contact Name", "Input");
  }

  public async clickNewContact() {
    await this.click(this.selectors.newContactButton, "New Contact", "Button");
  }
}
```

```
txt - Notepad
File Edit Format View Help
|`typescript
import { BrowserContext, Page } from "@playwright/test";
import { PlaywrightWrapper } from "../helpers/playwright";

export class LoginPage extends PlaywrightWrapper {
  private readonly selectors = {
    usernameField: "#username",
    passwordField: "#password",
    loginButton: "#login",
    appLauncherIcon: ".slds-icon-waffle",
    viewAllBtn: "//button[text()='View All']",
    appItemSearchField: "one-app-launcher-modal input.slds-input",
    casesLink: (linkName: string) => `//a[text()='${linkName}']`,
    newCaseButton: "//div[@title='New Case']",
    contactNameField: "//span[text()='Contact Name']",
    newContactButton: "//div[@title='New Contact']",
    salutationDropdown: "//select[@id='salutation']",
    firstNameField: "//input[@id='first_name']",
    lastNameField: "//input[@id='last_name']",
    saveButton: "//button[@title='Save']",
    statusDropdown: "//select[@id='status']",
    caseOriginDropdown: "//select[@id='case_origin']",
    subjectField: "//input[@id='subject']",
    descriptionField: "//textarea[@id='description']",
    saveCaseButton: "//button[@title='Save']",
  };

  constructor(page: Page, context: BrowserContext) {
    super(page, context);
  }

  public async enterUsername() {
    await this.validateElementVisibility(this.selectors.usernameField, "Username Field");
    await this.type(this.selectors.usernameField, "Username");
  }

  public async enterPassword() {
    await this.validateElementVisibility(this.selectors.passwordField, "Password Field");
    await this.type(this.selectors.passwordField, "Password");
  }

  public async clickLogin() {
    await this.click(this.selectors.loginButton, "Login Button");
  }
}
```