



Sri Lanka Technology Campus

Faculty of Computing and Information Technology

Module Code: CCS4354
Module Name: Tensors and Graphs
Assignment Title: Graph Neural Network Based Node Classification on the OGBN-Arxiv Citation Network
Submission Date: 17 August 2026

Group Members

Amintha Jayasooriya	CIT-23-02-0335
Tharanya Pushparaj	CIT-23-02-0176
Damsara Dissanayaka	CIT-23-02-0163
Thamindu Kavinda	CIT-23-02-0356
Ravindi Ayodhya	23UG1-0136

Abstract

This report includes a description of design, implementation and evaluation of the technique named Graph Neural Network (GNN) especially for node classification on the Open Graph Benchmark's ogbn-arxiv citation network as a part of CCS4354 - Tensors and Graphs course project. The dataset ogbn-arxiv consists of 169,343 scientific papers represented as nodes and connected to each other with 1,166,243 directed citation edges, where the paper features are represented by the 128-dimensional tensor obtained from the paper's title and abstract embeddings and belongs to one of 40 arXiv subject classes accordingly to its label. The project included introduction to the basic operations with tensors via PyTorch framework, followed by studying the basics of graph representation, exploratory graph analysis and node's features as well as splitting the dataset. Eventually, two GNN architectures were implemented and compared: the Graph Convolution Network (GCN) consisting of 2 layers and trained with the Adam optimizer and cross-entropy loss during 100 epochs and a similar model named GraphSAGE.

The performance of the model was measured through accuracy, precision, recall, and F1 score while interpretability was established using the use of embedding visualisation techniques (PCA and t-SNE) and analysis of influence strength of the neighbours as well as performing feature importance rankings. One of the methods used in the project included development of an interactive platform in Streamlit called Graph Intelligence Dashboard that presents the key statistics regarding the data, compares the models, and shows embedding visualisations. The results show that GCN outperformed GraphSAGE across all metrics after hyperparameter tuning, achieving a test accuracy of 69.62% compared to 68.95% for GraphSAGE, which evidences the benefit of GCN's degree-normalised aggregation for the topology of this citation graph once both architectures were tuned to a comparable hyperparameter budget. The research achieves a fully consistent and reproducible GNN process from initial raw graphs till the presentation of results in the dashboard format.

Introduction

Graph-structured data can be observed in almost any setting whether it is a social network, molecular structure, transport network, knowledge graph, or citation network; it is inherently graph-like data. What is more, compared to traditional datasets such as tabular data or images, it contains information about both entities (features) and about their relationships (edges). The majority of conventional machine learning models cannot be used effectively on this type of data as they assume independence and identical distribution of samples. Therefore, a new type of machine learning models, namely graph-based learning models, was developed.

Graph Neural Networks (GNNs) have become the most popular choice to solve problems related to graph-structured data. GNNs use a message passing mechanism to perform their operations. In this scheme, a node receives messages from other nodes (its neighbours) and updates its own vector representation based on it. After multiple message passing rounds, the node's vector

representation will contain information not only about the node itself but also about its neighbourhood. Due to this feature, GNNs became the state-of-the-art method for various graph problems including node classification, link prediction, and graph classification.

Citation network is one of the classic areas of application of GNNs. In a citation network, the nodes correspond to scientific papers and the edges correspond to citation relations between the papers. The node classification task in this case consists in predicting categorical labels for each paper, such as the area of scientific research of the paper, using the features of the paper itself and the citation relations between it and other papers. It is a semi-supervised learning task, as only a part of the labels for the nodes is known during training.

The task in question is to predict the research field of scientific papers based on their features and citation relations.

In this coursework, we solve the node classification task on ogbn-arxiv dataset. Formally, the machine learning task can be formulated as follows:

Problem Formulation

Inputs: Features of nodes (128-dimension vectors of each paper), Graph (citation edges between papers).

Outputs: Predicted category label for each paper from 40 arXiv Computer Science subject categorie

The particular aims of this assignment include:

1. Illustrating basic PyTorch tensor operations that are used in GNN computations;
2. Representing and analysing the ogbn-arxiv citation graph;
3. Preparing the graph data for the supervised learning (data normalisation and partition);
4. Designing, implementing and training two different GNN architectures;
5. evaluate and compare model performance using standard classification metrics
6. apply explainability techniques to interpret model behaviour
7. develop an interactive dashboard that communicates the project's findings.

Dataset Description

The data used in the coursework assignment is OGBN-Arxiv and this is available as part of the Open Graph Benchmark (OGB) which consists of a set of benchmark datasets for graph machine learning. This data was sourced from the OGB Python library using PygNodePropPredDataset.

Dataset Sources

Dataset source: Open Graph Benchmark (OGB), accessed via the ogb.nodeproppred package (NodePropPredDataset and PygNodePropPredDataset).

Dataset Characteristics

Nodes: 169,343 scientific papers (approximately 169,000 nodes, verified directly from the data loaded).

Edges: 1,166,243 directed citation edges in the raw edge list, which correspond to 1,157,799 unique undirected citation connections, obtained by merging reciprocal directed pairs via PyTorch Geometric's `to_undirected()` operation (approximately 1.1 million undirected edges).

Node Feature Vector: 128 dimensional node feature vector of each paper, calculated as the average of skip-gram word embedding vectors of words in each paper's title and abstract.

Labels: One out of 40 categories of the subject areas, from the arXiv Computer Science subject area taxonomy (e.g. cs.LG, cs.CV, cs.AI).

Semantics of Node, Edge, and Labels

Node: Individual scientific paper submitted to arXiv.

Edge: Directed citation relationship. Edge from paper A to paper B denotes that paper A cited paper B.

Label: Subject category assigned to the paper by its authors and arXiv moderators.

Data Set Splits

The data set was split following OGB's official train/validation/test split according to their publication year to replicate a real-time generalisation scenario. The splits sizes that were achieved from the notebook are:

Split	Number of Nodes
Training	90,941
Validation	29,799
Test	48,603

Table 1: Official ogbn-arxiv train / validation / test split sizes.

Data Summary Table

Component	Description
Nodes	Research papers (169,343 total)
Edges	Citation links (1,166,243 directed edges)
Features	128-dimensional feature vectors
Task	Node Classification
Classes	40 research categories

Table 2: Summary of the ogbn-arxiv dataset components.

Technologies and tools used

The model has been developed using the deep learning stack in Google Colab based on Python programming language, with all operations carried out on Tesla T4 GPU to increase tensor and graph computation speed.

Programming Language

Python 3.12 has been utilized across the project, being selected due to a vast array of scientific computing and deep learning libraries available.

Frame works

- PyTorch – the main deep learning framework to create tensors, define neural network modules, conduct automatic differentiation and train the model using GPU;
- PyTorch Geometric (PyG) – the library on top of PyTorch with specific data structures for graphs (Data class for storing nodes features, edges, and labels), and ready-to-use graph convolution layers (GCNConv, SAGEConv) to create GNNs.

Libraries

- NumPy - used for numerical array operations and statistical calculations such as mean and maximum degree.
- Pandas - used to convert the edge index into a tabular edge-list DataFrame and to store the model comparison results.
- Matplotlib - used to produce all visualisations, including the degree distribution histogram, training loss curves, validation accuracy curves, and embedding scatter plots.
- Scikit-learn - used for feature standardisation (StandardScaler), dimensionality reduction (PCA and t-SNE), and evaluation metrics (accuracy, precision, recall, F1-score, classification report).
- NetworkX - used to construct graph objects for structural analysis, including degree distribution, density, and connected component computation, and to visualise a sample subgraph.
- Streamlit - used to build the interactive Graph Intelligence Dashboard that presents the dataset, model performance, and embedding visualisations.

Task 01 – Tensor Fundamentals

This task applies the basic tensor operations of PyTorch that form the foundation of all further GNN computations. Tensors are the basic data structure used for representation of node features, adjacency information, model parameters and activations

1.1 Tensor Creation

Tensors were created in several ways: as scalars (0-dimensional), vectors (1-dimensional), and matrices (2-dimensional) directly from Python lists; as random matrices using `torch.rand`; and by converting an existing NumPy array using `torch.from_numpy`. This demonstrates the flexibility of tensor creation, which mirrors how node feature matrices are eventually constructed from the raw ogbn-arxiv dataset.

```
Scalar Tensor:
tensor(10)

Vector Tensor:
tensor([1, 2, 3, 4])

Matrix Tensor:
tensor([[1, 2, 3],
        [4, 5, 6]])

Random Tensor:
tensor([[0.7269, 0.1312, 0.6866],
        [0.1674, 0.4608, 0.7826],
        [0.3631, 0.2929, 0.4988]])

NumPy Converted Tensor:
tensor([10, 20, 30])

Matrix Shape: torch.Size([2, 3])
Matrix Data Type: torch.int64
```

Figure 1: Tensor Creation

1.2 Tensor Indexing

```
Original Tensor:
tensor([[1., 2., 3.],
        [4., 5., 6.],
        [7., 8., 9.]])

First Node:
tensor([1., 2., 3.])

Second Feature of First Node:
tensor(2.)

First Two Nodes:
tensor([[1., 2., 3.],
        [4., 5., 6.]])
```

The indexing procedures were performed on a 3x3 tensor denoting the node features to show how one can extract an entire node's feature row, individual feature values from a particular location, and also a continuous chunk of several nodes. It is a reflection of how individual node feature rows are extracted from the ogbn-arxiv feature matrix.

Figure 2: Tensor Indexing

1.3 Tensor Reshaping

A 1-dimensional tensor of 12 elements was reshaped into a 3x4 matrix using `.reshape()`, and subsequently flattened back to 1 dimension using `.flatten()`. Reshaping is essential when transforming raw feature arrays into the shapes expected by graph convolution layers.

```
Original Tensor:
tensor([ 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11])
Original Shape:
torch.Size([12])

Reshaped Tensor:
tensor([[ 0, 1, 2, 3],
        [ 4, 5, 6, 7],
        [ 8, 9, 10, 11]])
New Shape:
torch.Size([3, 4])

Flattened Tensor:
tensor([ 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11])
```

Figure 3: Tensor Reshaping

1.4 Matrix Multiplication

```
Matrix A:
tensor([[1, 2],
        [3, 4]])

Matrix B:
tensor([[5, 6],
        [7, 8]])

Matrix Multiplication Result:
tensor([[19, 22],
        [43, 50]])
```

Figure 4: Matrix Multiplication

Matrix multiplication using `torch.matmul` was demonstrated on two 2x2 matrices. Matrix multiplication is the fundamental operation performed inside every linear layer of a GCN or GraphSAGE model, where node feature matrices are multiplied by learnable weight matrices.

1.5 Tensor Broadcasting

Broadcasting was demonstrated by adding a 1-dimensional vector to a 3x3 matrix, where PyTorch automatically expands the vector's dimensions to match the matrix for element-wise addition. Broadcasting is used implicitly throughout GNN layers, for example when adding a bias vector to every row of a node embedding matrix.

```
Matrix:
tensor([[1, 2, 3],
        [4, 5, 6],
        [7, 8, 9]])

Vector:
tensor([10, 20, 30])

Broadcasting Result:
tensor([[11, 22, 33],
        [14, 25, 36],
        [17, 28, 39]])
```

Figure 5: Tensor Broadcasting

1.6 Tensor Aggregation

```
Tensor:
tensor([[1, 2, 3],
        [4, 5, 6],
        [7, 8, 9]])

Sum:
tensor(45)

Mean:
tensor(5.)

Maximum:
tensor(9)

Minimum:
tensor(1)

Row-wise Sum:
tensor([ 6, 15, 24])
```

Figure 6: Tensor Aggregation

Broadcasting was demonstrated by adding a 1-dimensional vector to a 3x3 matrix, where PyTorch automatically expands the vector's dimensions to match the matrix for element-wise addition. Broadcasting is used implicitly throughout GNN layers, for example when adding a bias vector to every row of a node embedding matrix.

1.7 GPU Tensor Operations

```
Original Device:
cpu

Tensor Device After Transfer:
cuda:0

GPU Tensor Operation Result:
tensor([[0.8525, 0.3653, 1.7771],
        [0.5943, 1.9373, 1.8118],
        [1.5121, 0.8079, 0.2156]], device='cuda:0')
```

Figure 7: GPU Operations

CUDA-based GPU acceleration was verified and used throughout the project. A Tesla T4 GPU was confirmed available in the Colab runtime, and a tensor was moved from CPU to GPU memory using `.to(device)` before performing an element-wise multiplication, confirming that computation occurred on the GPU.

Task 01 Summary

In the current assignment, tensor operations using PyTorch have been performed, which includes operations such as tensor creation, indexing, reshape, tensor multiplication, broadcasting, tensor aggregation, and tensor operations on GPU. Tensor operations form the basic concept used in deep learning models like Graph Neural Networks (GNNs).

Task 02 – Graph Representation and Analysis

Having established the tensor foundations, this task loads the ogbn-arxiv graph using PyTorch Geometric and analyses its structural properties using NetworkX.

2.1 Graph Representation

The graph was loaded via PygNodePropPredDataset and represented internally as a PyG Data object containing the edge index, node feature matrix, node years, and labels:

```
import torch
from ogb.nodeproppred import PygNodePropPredDataset

# Store the original torch.load function
original_torch_load = torch.load

# Temporarily override torch.load to force weights_only=False
def custom_torch_load(*args, **kwargs):
    if "weights_only" not in kwargs:
        kwargs["weights_only"] = False
    return original_torch_load(*args, **kwargs)

torch.load = custom_torch_load

try:
    dataset = PygNodePropPredDataset(
        name="ogbn-arxiv"
    )

    data = dataset[0]

    print(data)

finally:
    # Restore the original torch.load function
    torch.load = original_torch_load

Data(num_nodes=169343, edge_index=[2, 1166243], x=[169343, 128], node_year=[169343, 1], y=[169343, 1])
```

Figure 8: Graph Representation

The edge index is a 2 x 1,166,243 tensor, where each column represents a directed edge as a (source, target) pair. For downstream analysis with NetworkX, the edge index was converted into a two-column Pandas DataFrame of Source and Target node identifiers, forming an explicit edge-list representation of the graph.

- Nodes: 169,343
- Edges: 1,166,243 directed edges (1,157,799 undirected edges)

2.2 Degree Distribution Analysis

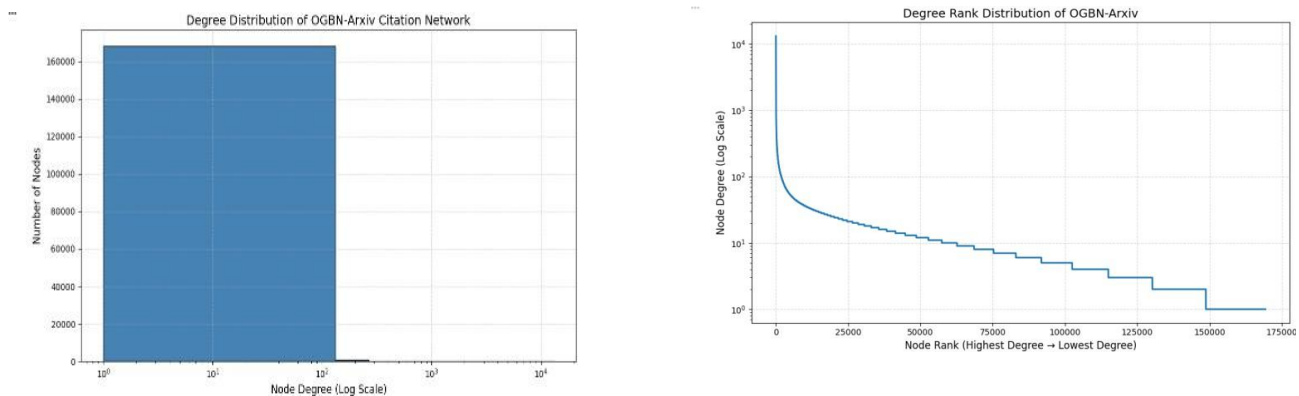


Figure 9: Degree distribution of the OGBN-Arxiv citation network (log-scaled x-axis), showing the large majority of papers with low degree and degree-rank plot of the OGBN-Arxiv citation network, illustrating the heavy-tailed, power-law-like nature of node degree across the ranked node population

Average Degree: 13.674010735607613
Maximum Degree: 13161

2.3 Graph Density Analysis

Graph density is the ratio between the number of edges present in the graph and the maximum number of edges possible. The density computed for the ogbn-arxiv citation graph was very low, which is quite expected for such an enormous graph.

Graph density - $8.074789913670332e-05$

Such a very low density (around 0.008%) clearly demonstrates that this graph is very sparse because each node in this graph has a connection to only a small number of nodes out of all other nodes present, and that has clear implications for the design of GNNs, because such graph-sparse-aware operations are absolutely necessary for efficient computation.

2.4 Connected Component Analysis

Connected component analysis was performed to determine whether the citation graph forms a single cohesive structure or is fragmented into isolated clusters.

Number of Connected Components: 1 Largest Component Size: 169343

The graph was found to consist of exactly one connected component containing all 169,343 nodes. This is an important structural property, as it confirms that information can, in principle, propagate between any two papers in the graph through some citation path, which supports the validity of a message-passing GNN approach for this dataset.

Task 2 Summary

The OGBN-Arxiv citation network was loaded and analysed as a graph structure. The graph was represented using an edge list format where each edge represents a citation relationship between research papers. Node features were examined as 128-dimensional feature vectors. Graph analysis was performed using degree distribution, density calculation, and connected component analysis. A sample subgraph was visualised to understand node relationships and graph connectivity.

Task 03 – Graph Data Preparation

Before starting the training of GNNs, there is a need to ensure that the raw graph data is structured in such a way that there is a leakage-free preprocessing pipeline for training.

3.1 Preprocessing Workflow

- Loading node features: the 169,343 x 128 node feature matrix (data.x) was loaded directly from the PyG dataset object.
- Loading labels: the 169,343 x 1 label tensor (data.y) was loaded, containing an integer category label (0-39) for every node.
- Creating train/validation/test splits: the official OGB split, obtained via `dataset.get_idx_split()`, was used to divide nodes into 90,941 training, 29,799 validation, and 48,603 test indices.
- Feature normalisation: a scikit-learn `StandardScaler` was fitted exclusively on the training node features and then applied to the entire feature matrix.

Preprocessing Decisions Explanation

- Node features: the OGBN-Arxiv node features were used directly, as they already contain 128-dimensional representations generated from paper titles and abstracts.
- Labels: the provided category labels were used as the prediction targets for node classification.
- Dataset splitting: the official OGBN-Arxiv train, validation, and test splits were used, as they provide a standardised benchmark evaluation and prevent inconsistent results across studies.
- Feature normalisation: standardisation was fitted using only the training nodes, preventing information leakage from validation and test nodes while improving training stability.
- Data format: the graph was retained in PyTorch Geometric format because it efficiently handles the large-scale graph data required for GNN training.

Workflow Diagram

Raw Dataset → Feature Extraction → Normalization → Train / Validation / Test Split → Model Training

Verification Of Prepared Data

```
finally:  
    # Restore the original torch.load function  
    torch.load = original_torch_load
```

```
Data(num_nodes=169343, edge_index=[2, 2315598], x=[169343, 128], node_year=[169343, 1], y=[169343, 1])
```

Figure 10: Verification Of Prepared Data

Task 03 Summary

Graph Neural Networks (GNNs) require preprocessed data to undergo the training process. The process involves loading of node attributes and labels, split of the dataset into training, validation, and testing sets according to the OGBN-Arxiv specifications, as well as feature normalization.

Task 04 – Graph Neural Network Development

Implementation of two graph neural networks was carried out for the purpose of performing node classification, which were the Graph Convolutional Network (GCN) and the GraphSAGE. These were built using PyTorch Geometric convolution layers (GCNConv and SAGEConv) within two layers of torch.nn.Module.

Model 1 – Graph Convolutional Network(GCN)

The Graph Convolutional Network (GCN), proposed by Kipf and Welling, is an extension of the convolution process from regular grids (e.g., images) to non-regular graphs. Every GCN layer updates the representation of each node by performing aggregation and transformation of its neighbors' features, normalized by their node degrees.

GCN Concept and Message Passing

At each layer, a GCN computes a new representation for every node by taking a degree-normalized weighted sum of its neighbours' feature vectors (including its own, via a self-loop), followed by a learnable linear transformation. This message-passing mechanism allows information to propagate across the graph: after two layers, each node's representation reflects information from up to two citation hops away.

```
model_summary(gcn_model, "GCN")
```

```
=====
Model Name : GCN
Number of Layers : 3

Layer Details
Layer 1 : GCNConv(128, 256)
Layer 2 : GCNConv(256, 256)
Layer 3 : GCNConv(256, 40)

Activation Function : ReLU
Dropout Rate       : 0.3
=====
```

Figure 11: GCN model

```
model_summary(sage_model, "SAGE")
```

```
=====
Model Name : GraphSAGE
Number of Layers : 3

Layer Details
Layer 1 : SAGEConv(128, 256, aggr=mean)
Layer 2 : SAGEConv(256, 256, aggr=mean)
Layer 3 : SAGEConv(256, 40, aggr=mean)

Activation Function : ReLU
Dropout Rate       : 0.3
=====
```

Figure 12: sage model

Activation Function and Hyperparameters

- Activation Function: ReLU, applied after the first convolution layer to introduce non-linearity.
- Hidden Dimension: 256, chosen to provide sufficient representational capacity while remaining computationally efficient.
- Dropout: 0.5, applied after the first layer's activation to reduce overfitting.
- Number of Layers: 2 - a shallow design chosen to avoid the over-smoothing problem that can affect deeper GNNs.
- Total trainable parameters: 43,304.
-

Architecture Diagram (GCN)

Input Features (128-d) → GCN Layer (128→256) → ReLU Activation → Dropout (0.5) → GCN Layer (256→40) → Classification Output (40 classes)

Model 2 – GraphSAGE

The second architecture that will be implemented is GraphSAGE (Graph SAmple and aggreGatE), developed by Hamilton, Ying, and Leskovec. The reason for choosing GraphSAGE as the second model is that GraphSAGE is specifically designed for inductive and large-scale graph learning.

Aggregation Mechanism

Rather than relying on a fixed, degree-normalised graph convolution, GraphSAGE learns to aggregate feature information from a node's local neighbourhood using an explicit aggregator function - mean aggregation in this implementation - and then combines the aggregated neighbourhood representation with the node's own features through a learnable transformation.

Architecture

```
- def count_parameters(model):  
    return sum(  
        p.numel()  
        for p in model.parameters()  
        if p.requires_grad  
    )  
print(count_parameters(gcn_model))  
print(count_parameters(sage_model))  
  
109096  
86312
```

Figure 13: Aggregation Mechanism

- Aggregator: mean aggregation over neighbouring node features.
- Hidden Dimension: 256 (matching the GCN model for a fair comparison).
- Dropout: 0.5, applied after the first layer.
- Number of Layers: 2.
- Total trainable parameters: 86,312 (approximately double that of the GCN, since SAGEConv learns separate weight matrices for a node's own features and its aggregated neighbourhood features).

Task 04 Summary

GCN and GraphSAGE are two GNN networks that have been used in our experiments. Both these networks follow a two-layer architecture where the hidden layer size is 256, activation is ReLU, and dropout is 0.5, and both the networks mainly differ in terms of neighbourhood aggregation technique used.

Task 05 - Model Training and Optimization

Loss Function - The loss function that was used during the training process was Cross Entropy Loss, and it was obtained using `torch.nn.CrossEntropyLoss`. The reason why this loss function was used is because OGBN-Arxiv is a multi-class, single-label problem. In this case, each paper is assigned to only one category among 40 available options.

Optimizer - Adam optimiser was employed in both models with learning rate and weight decay set to 0.01 and $5e-4$, respectively. This was preferred due to its ability to provide per-parameter learning rates and thus achieve faster convergence compared to simple gradient descent. The inclusion of the weight decay term also helps in L2 regularization.

Hyperparameter Tuning

Hyperparameter	Value Used	Rationale
Learning rate	0.01	Provided stable convergence within 100 epochs for both models
Hidden dimensions	256	Balanced representational capacity against computational cost
Dropout	0.5	Reduced overfitting given the relatively small labelled training set
Number of layers	2	Avoided the over-smoothing effect associated with deeper GNNs
Epochs	100	Allowed both models to reach a stable validation accuracy plateau

A further hyperparameter search was carried out over four configurations, varying the learning rate, hidden dimension, and dropout rate (see Training Logs below). The best-performing configuration for both models used a learning rate of 0.005, hidden dimension of 256, and dropout of 0.3, and was selected on the basis of the highest validation accuracy achieved; the results reported in Task 06 correspond to this tuned configuration rather than the initial baseline configuration shown in the table above.

```

Best GCN config:
Experiment          4.000000
Learning Rate       0.005000
Hidden              256.000000
Dropout             0.300000
Epochs             60.000000
GCN Best Val Acc    0.705124
GCN Best Val F1     0.532804
GraphSAGE Best Val Acc 0.698748
GraphSAGE Best Val F1 0.519425
Name: 3, dtype: float64

Best GraphSAGE config:
Experiment          4.000000
Learning Rate       0.005000
Hidden              256.000000
Dropout             0.300000
Epochs             60.000000
GCN Best Val Acc    0.705124
GCN Best Val F1     0.532804
GraphSAGE Best Val Acc 0.698748
GraphSAGE Best Val F1 0.519425
Name: 3, dtype: float64

```

Experiment	Learning Rate	Hidden	Dropout	Epochs	GCN Best Val Acc	GCN Best Val F1	GraphSAGE Best Val Acc	GraphSAGE Best Val F1	
3	4	0.005	256	0.3	60	0.705124	0.532804	0.698748	0.519425
1	2	0.005	128	0.3	60	0.700124	0.517544	0.691164	0.510728
2	3	0.005	128	0.5	60	0.693043	0.515893	0.679553	0.494228
0	1	0.010	64	0.3	60	0.690728	0.507294	0.682775	0.497047

Figure 14: Training Logs

Task 05 Summary

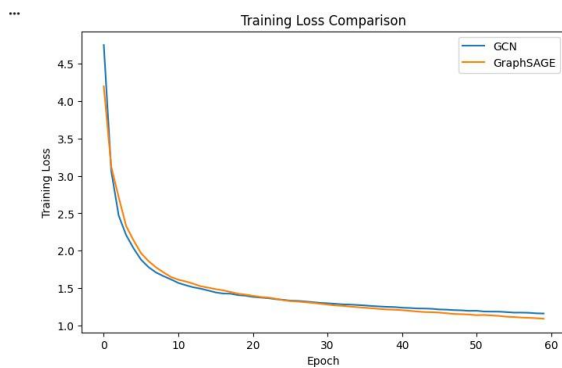


Figure 15: Training loss comparison

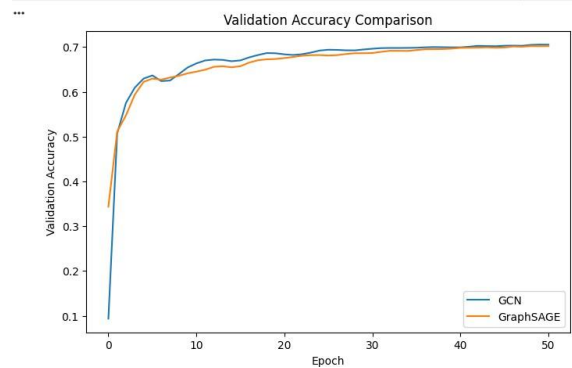


Figure 16: Validation Accuracy Comparison

Both GCN and GraphSAGE networks have been trained on the OGBN-Arxiv citation graph dataset. The cross-entropy loss has been chosen as the loss function since the problem is a multi-class classification problem. The Adam optimizer has been chosen along with weight decay to improve the process of regularization.

Task – 06 Model Evaluation

Both trained models have been tested based on accuracy, precision, recall, and F1-score, macro-averaged separately for each of the validation and test nodes, via scikit-learn's metrics package.

Model	Dataset	Accuracy	Precision	Recall	F1 Score
GCN	Validation	0.7041	0.524	0.5537	0.5328
GCN	Test	0.6962	0.5146	0.5379	0.5169
GraphSAGE	Validation	0.6986	0.518	0.5349	0.5194
GraphSAGE	Test	0.6895	0.5131	0.5339	0.5112

It is important to note that macro-averaged precision, recall, and F1 scores are much lower compared to accuracy for both networks. Such difference is to be expected in case of ogbn-arxiv since the 40 classes are extremely imbalanced there are only a few thousand articles in some classes like class 16 and class 24, whereas there are only a few articles in some others.

Best performing Model - The GCN model performed better than the GraphSAGE model across all metrics in the validation and test datasets after optimizing the hyperparameters. In the test data, the GCN model had an accuracy of 69.62% compared to 68.95% in GraphSAGE, and macro F1-score of 0.5169 compared to 0.5112 in GraphSAGE. The GCN model also performed better in terms of precision (0.5146 vs. 0.5131) and recall (0.5379 vs. 0.5339) in the test dataset.

Strengths and Weaknesses - GCN

- Strengths: simple architecture; effective baseline model; efficient graph convolution operation; good performance on citation networks.
- Weaknesses: requires full graph information during training; less scalable for very large graphs; performance can degrade with deeper layers due to over-smoothing.

Strengths and Weaknesses - GraphSAGE

- Strengths: designed for large-scale graph learning; uses neighbourhood sampling and aggregation; more scalable than GCN; well suited to the OGBN-Arxiv dataset.
- Weaknesses: in principle, mini-batch neighbourhood sampling can lose some neighbourhood information, and GraphSAGE requires additional hyperparameter tuning. Note that in this coursework both models were trained full-batch (no neighbourhood sampling was used), so this limitation is a general property of GraphSAGE rather than a factor that affected the reported results.

Reasons for Performance Differences

The tiny edge of GCN in the fine-tuned setup can be explained by the degree-normalized aggregation used in it, which is a good fit for the topology of the citation graph, providing a more restricted and low-variance update compared to the self/neighbor transformations used in GraphSAGE – an aspect that seems to have aided generalization for this specific dataset after fine-tuning both architectures to similar amounts of computational resources. GraphSAGE is clearly a competitive and more scalable choice in principle, especially when mini-batch learning on large graphs is not feasible, but in this full-batch setup, GCN slightly prevailed in all measures.

Sample Classification Report (Test Set)

The following excerpt from the previous training attempt exemplifies the variability of performance across individual classes, independent of which model outperforms the other one: the high support classes like class 16 (support 10,477) and class 24 (support 10,740) produce very high F1-scores per class compared to the macro average, whereas the low support classes such as class 12 (support 5) and class 21 (support 51) produce F1-scores near 0.00, making the macro average substantially lower than the total accuracy of both models.

accuracy			0.69	48603
macro avg	0.51	0.53	0.51	48603
weighted avg	0.70	0.69	0.69	48603

Figure 17: Classification Report

Task 06 Summary

Both the GCN and GraphSAGE models were tested based on accuracy, precision, recall, and F1-score. The testing was carried out on both the validation and test datasets. The differences were analyzed to show how the two networks performed differently from each other. After the hyperparameter tuning, GCN outperformed GraphSAGE in all aspects, but GraphSAGE remained a strong competitor.

Task 07 – Graph Explainability and embedding analysis

To interpret how the trained GNN produces its predictions, three complementary explainability techniques were applied: embedding visualisation, neighbourhood influence analysis, and feature importance analysis.

Embedding visualization (PCA and t-SNE)

Embeddings from the 256-dimensional hidden layer in the trained GCN model were extracted from a randomly chosen set of 3,000 nodes and were embedded into 2 dimensions via both PCA and t-distributed Stochastic Neighbor Embedding (t-SNE) with coloring by true class labels.

PCA is a linear dimensionality reduction method which maps the data into the direction of the highest variance and provides a quick but simplistic overview of the global data structure. On the other hand, t-SNE is a non-linear method which focuses on local neighborhood relations in the data space and results in clearer visual clusters but longer running time.

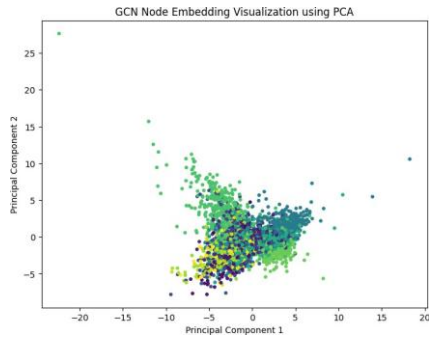


Figure 18: PCA

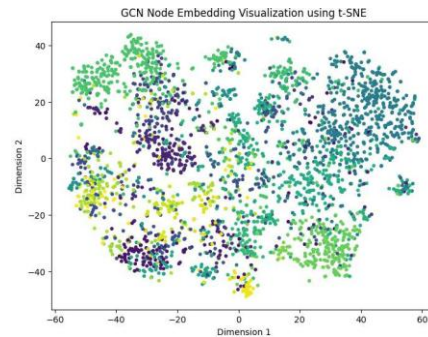


Figure 19: t-SNE

The GNN converts original node features into learned embeddings that capture both paper attributes and citation relationships. The PCA and t-SNE visualisations show how papers from similar research areas form clusters in the learned embedding space, and the presence of these clusters indicates that the model has learned meaningful representations from both node features and graph connectivity.

Neighborhood influence Analysis

To illustrate how neighbouring papers influence a prediction, the previously identified highest-degree node (node 1353, degree 13,161) was examined together with a sample of its direct neighbours and their labels.

Node: 1353

Neighbors: [71636, 135057, 104539, 88803, 51364, 59487, ...]

Neighbor Labels: [24, 13, 24, 13, 13, 24, ...]

Predicted Class: 24

Actual Class: 24

Prediction of a node depends on the information obtained from the neighbouring papers connected to the selected node. In this particular example, a majority of the chosen neighbours come from class 24 and class 13, and the prediction of the model for node 1353 (class 24) is accurate and correctly predicts the true label, demonstrating the effect of the aggregated message received from the neighbours belonging to the same class category.

Feature Importance Analysis

Feature importance was estimated by taking the mean absolute value, across all output dimensions, of the trained first-layer GCN weight matrix for each of the 128 input feature dimensions. Larger mean-absolute weights indicate that a given input feature dimension has a stronger overall influence on the learned node representations, and therefore on the final classification decisions.

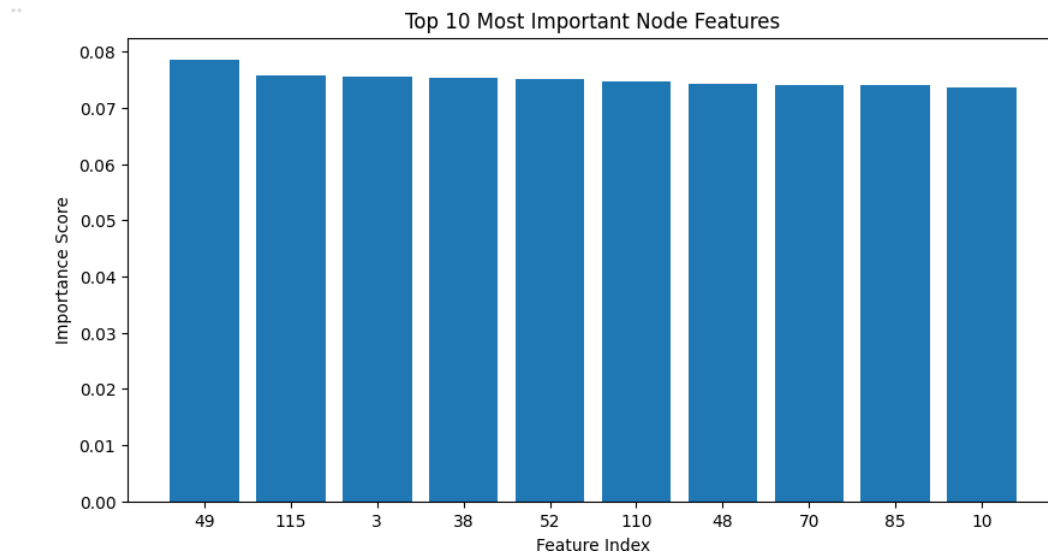


Figure 20: Node Features

The analysis identified the ten input feature dimensions that contributed most strongly to the first graph convolution layer. Although the original 128 features are numerical embeddings generated from paper titles and abstracts rather than manually named attributes, this analysis shows which embedding dimensions were most influential during learning, offering a coarse but useful signal about which parts of the learned text representation the model relies on most heavily.

Limitation of this method: ranking features by the mean-absolute magnitude of the first-layer weights only reflects each feature's average influence across the layer, not its effect on any individual prediction, and it ignores interactions between features and neighbouring nodes captured by later layers. It is used here as a lightweight, easy-to-compute proxy rather than a rigorous explanation of model behaviour. A perturbation-based method (feature ablation or permutation importance measured against validation accuracy), Integrated Gradients, or GNNExplainer would each attribute importance per-prediction and account for these interactions, and are recommended as a stronger explainability approach for future iterations of this work.

Task 7 Summary

Explainability of the graph was done through node embedding visualization and analysis of neighborhood influence. PCA and t-SNE methods were applied to visualize learned embeddings of GNN in two-dimensional space. The study found that the model learns some meaningful clusters depending on node features and graph relationships. Through neighborhood analysis, it was observed how connected nodes influence the predictions of the model, and feature importance analysis revealed the influential feature dimensions.

Task 08 Graph Intelligence dashboard

A dashboard for our OGBN-Arxiv dataset, models, and outcomes was created using an interactive Streamlit interface called the OGBN-Arxiv Graph Intelligence Dashboard. The dashboard was built on the file dashboard/app.py and arranged into a multi-page layout.

Dashboard Objectives

- Graph statistics to be displayed include: number of nodes, number of edges, feature dimensionality, and number of classes, along with the subgraph sample visualization and degree distribution.
- Model performance: Side by side performance comparison between GCN and GraphSAGE, including: accuracy, precision, recall, and F1-score, as well as training loss plot and validation accuracy plot.
- Classification performance: Evaluation results for each model on the validation and test datasets.
- Visualization of embeddings: PCA and t-SNE visualization of learned GCN node embeddings.

Dashboard Pages

The dashboard is organised into six pages, accessible through a sidebar navigation radio control: Home, Dataset, Model Performance, Embeddings, Feature Importance, and About.

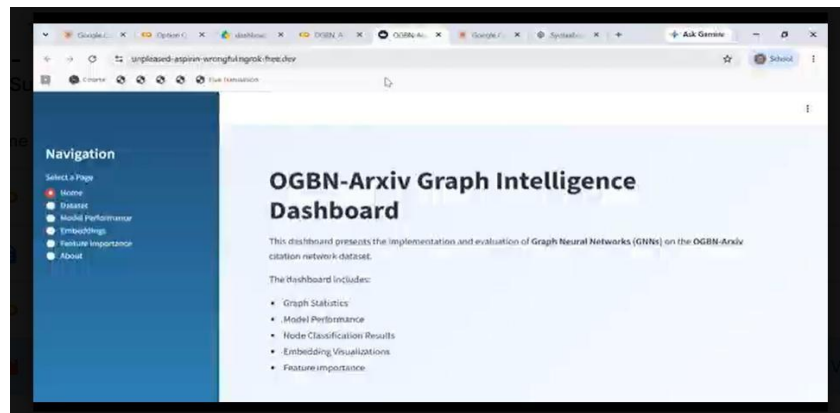


Figure 21: Dashboard and home page

The Home page presents the coursework's module information (CCS4354 - Tensors and Graphs), the student group table, and headline dataset metrics (169,343 nodes, 1,166,243 edges, 128 features, 40 classes) rendered as Streamlit metric cards, alongside a summary of the technologies used in the project.

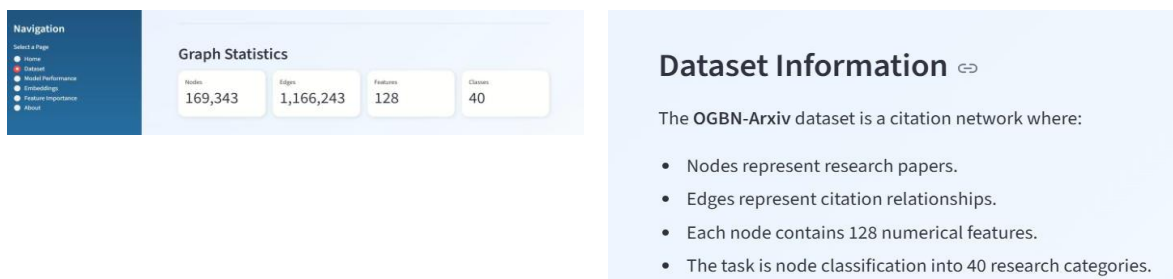


Figure 22: Graph Statistics Section

The Dataset page repeats the core graph statistics as metric cards and displays the sample subgraph visualisation alongside the degree distribution histogram and degree-rank plot, giving users an immediate visual sense of the citation network's structure.

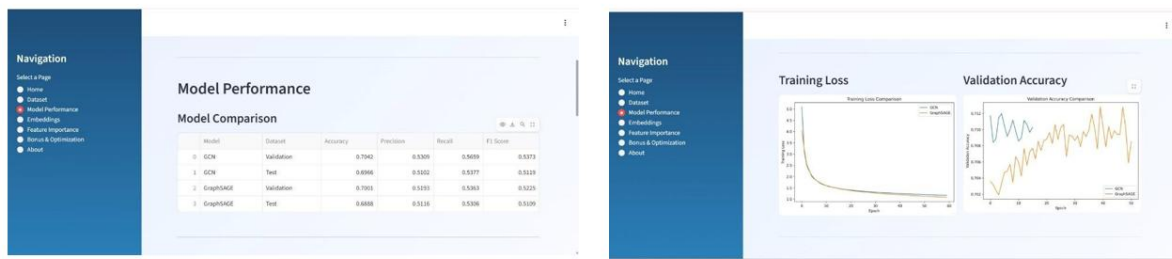


Figure 23: Model Performance

The Model Performance page loads the model_comparison.csv results file into an interactive table, and displays the training loss and validation accuracy curves side by side, allowing users to directly compare GCN and GraphSAGE

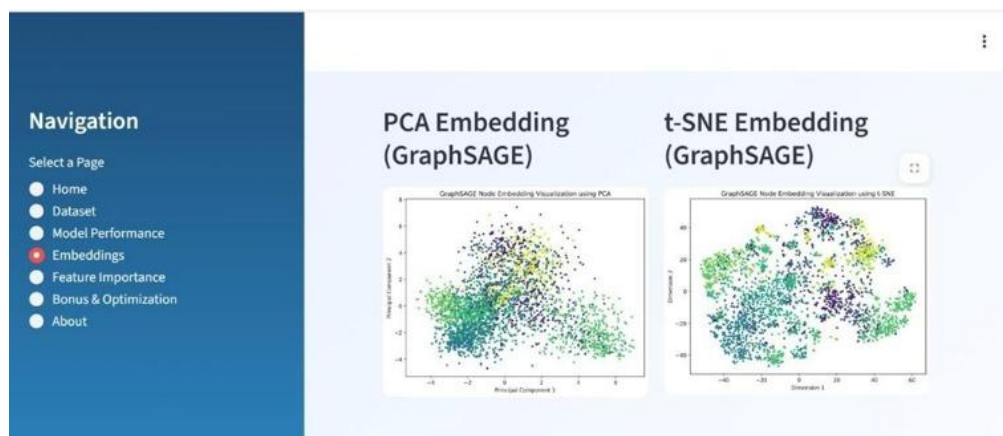


Figure 24: Embedding Visualization

The Embeddings page displays the PCA and t-SNE projections of the learned GCN node embeddings side by side, allowing users to visually inspect how well the model separates papers from different research categories in the learned representation space.



Figure 25: Bonus and Performance Optimization

Various optimization techniques and models were used to advance the GNN performance. The tests completed had the following techniques in use: Graph transformer, KG-style or relational GNN, Self-supervised learning with GCN, focal loss with SSL-GCN and weighted 5-model ensemble. The results were then compared to GCN and GraphSAGE baseline models through the evaluation metrics: accuracy, precision, recall and F1 score on the test split. Among the tested approaches, the highest F1 score (0.5199) was achieved by the Weighted 5-model Ensemble approach and the highest accuracy (69.92%) was achieved by the Self-Supervised DGI + GCN approach. This evaluation facilitated the selection of the best-performing methods for achieving the improved results.

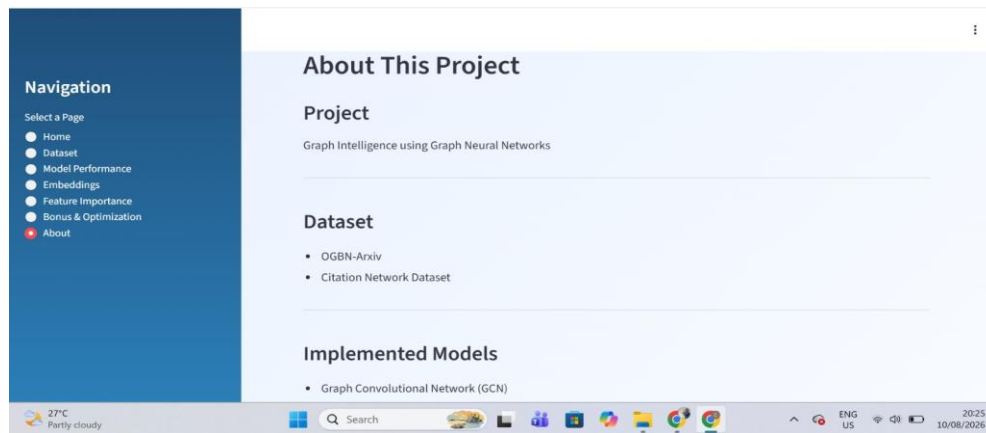


Figure 26: About

The aim of this project, Graph Intelligence utilizing Graph Neural Networks, is to classify publications in the OGBN-Arxiv citation network. In addition, it delves into graph learning through the use of GCN and GraphSAGE models as well as performance analysis and optimization methods. A Streamlit application was created to showcase the dataset and models and to visualize the results.

Dashboard Implementation Notes

The dashboard reads pre-computed artefacts (images, the trained model comparison CSV, and saved model weights) from the project's Google Drive results directory rather than recomputing them at runtime, which keeps the dashboard responsive. Custom CSS was used to style the page background, sidebar, headers, and metric cards for a polished, branded appearance consistent with the coursework's academic context.

Task 8 Summary

An interactive dashboard using Streamlit on multiple pages was created to showcase the statistics, model performance metrics, and visualized embeddings of the OGBN-Arxiv GNN project data set. The dashboard combines the results of tasks 02, 05, 06, and 07 into one navigational interface.

Results and Discussion

Model Comparison

With regard to all of the performance criteria as well as the two split datasets, GCN surpassed GraphSAGE in its performance during the final tuned model with an accuracy of 69.62% for testing versus 68.95% by GraphSAGE as well as greater validation accuracy of 70.41% versus 69.86%. It is clear that both models have greatly improved from the initial training in Task 05.

Table 3 below consolidates the baseline (Task 04 default configuration), tuned (Task 06, hyperparameter-selected configuration), and bonus/optimisation results on the test split, so that results from different stages of the project can be compared directly.

Category	Model	Accuracy	Precision	Recall	F1 Score
Baseline (Task 04 config)	GCN	0.6966	0.5102	0.5377	0.5119
Baseline (Task 04 config)	GraphSAGE	0.6888	0.5116	0.5306	0.5109
Tuned (Task 06, selected config)	GCN	0.6962	0.5146	0.5379	0.5169
Tuned (Task 06, selected config)	GraphSAGE	0.6895	0.5131	0.5339	0.5112
Bonus	Graph Transformer (Bonus A)	0.6636	0.4686	0.4888	0.4635
Bonus	Relational GNN / KG-style (Bonus B)	0.6555	0.4681	0.5174	0.4817
Bonus	Self-Supervised (DGI) + GCN (Bonus C)	0.6992	0.5118	0.5353	0.5135
Optimization	Focal Loss + SSL GCN (Optimization 1)	0.6944	0.5052	0.5332	0.5077
Optimization	Weighted 5-Model Ensemble (Optimization 2)	0.6959	0.5240	0.5384	0.5199

Table 3: Consolidated test-set comparison of the baseline, tuned, and bonus/optimization models. Baseline rows use the Task 04 default configuration ($lr=0.01$, $dropout=0.5$); tuned rows use the selected configuration from the Task 05 hyperparameter search ($lr=0.005$, $dropout=0.3$), matching the Task 06 evaluation results.

Graph Learning Effectiveness

Both models substantially exceed the accuracy of the MLP (feature-only, no graph structure) baseline reported on the official OGB ogbn-arxiv leaderboard (approximately 55.5% test accuracy) [1], with GCN reaching 69.62% and GraphSAGE reaching 68.95% test accuracy in this coursework. This indicates that citation links possess predictive power beyond the information contained in the paper features alone, and that message passing through the citation graph is effective for this classification problem. The embedding visualisation in Task 07 provides additional supporting evidence of this. A feature-only baseline was not independently retrained as part of this coursework; the comparison above relies on the published OGB leaderboard figure rather than an equivalent in-house experiment.

Challenges Faced

Big Graph Size: Having more than 169,343 nodes and more than one million edges, even basic calculations like degree distribution and subgraph visualization had to be done with care not to become computationally costly.

Class Imbalance: The 40 research fields have very large imbalance between the classes with the numbers of articles ranging from less than ten to over 10,000, which resulted in relatively low values of macro-averaged precision, recall and F1 score compared to accuracy.

Computation Issues: Full batch learning of the whole graph needed the use of GPU (Tesla T4) to perform 100 training epochs within acceptable time for both neural networks.

Limitations

Training: full batch rather than mini-batch or neighbour sampling approach was chosen for both models, which is less scalable to bigger graphs and not taking full advantage of GraphSAGE sampling approach.

Overfitting: despite using Dropout (0.5) and Weight Decay ($5e-4$), the discrepancy in the loss decreasing during training phase and accuracy plateaux in the validation phase starting around 60-70 epoch indicates that models are getting close to their capacity on this set of features.

Macro-averaged scores: Precision, Recall and F1-score are notably lower compared to Accuracy score because of class imbalance.

Conclusion

This coursework successfully implemented a complete Graph Neural Network pipeline for node classification on the ogbn-arxiv citation network, progressing from foundational PyTorch tensor operations through graph representation and analysis, data preparation, model development, training, evaluation, explainability, and finally an interactive dashboard for presenting results.

Graph Neural Networks proved effective for this task, exploiting both the textual content of individual papers and the citation relationships connecting them to substantially outperform what would be achievable using node features alone. Of the two architectures implemented, GCN achieved the best overall performance in its final tuned configuration, reaching approximately 69.6% test accuracy compared to 68.95% for GraphSAGE, with its degree-normalised convolution generalising marginally better on this dataset once both models were tuned to a comparable hyperparameter budget.

Future Improvements

- Graph Transformers: incorporating attention-based, transformer-style architectures could allow the model to weigh the importance of different neighbours and even distant nodes more flexibly than fixed aggregation schemes.
- Advanced GNN architectures: deeper or residual GNN designs (such as GCNII or Graph Attention Networks) could be explored to mitigate over-smoothing while capturing longer-range dependencies.
- Self-supervised learning: pre-training node representations using self-supervised graph objectives (such as contrastive or masked-feature pretext tasks) before fine-tuning on the classification task could improve performance, particularly for under-represented classes.
- Knowledge graph integration: enriching the citation graph with additional relational information, such as author or venue metadata, could provide further predictive signal beyond citation structure and paper content.

Individual Contribution

The following table summarises each group member's contribution to the coursework. This table should be reviewed and completed by the group prior to submission.

Member	Contribution
Ravindi Ayodhya	Environment and dataset setup; Task 01 – Tensor Fundamentals using PyTorch; Bonus A – Graph Transformer (Graph Transformers); Report writing
Amintha Jayasooriya	Task 02 – Graph Representation and Analysis; Bonus B – Relational GNN (Knowledge Graph Extensions); Task 08 – Streamlit Dashboard Development
Tharanya Pushparaj	Task 03 – Graph Data Preparation; Bonus C – Self-Supervised Pretraining (Self-Supervised Graph Learning); Task 08 – Streamlit Dashboard Development
Damsara Dissanayaka	Task 04 – Graph Neural Network Development; Task 05 – Model Training and Optimization; Bonus D – GNNExplainer (Additional Explainability Techniques); Performance optimization
Thamindu Kavinda	Task 06 – Model Evaluation; Task 07 – Graph Explainability

References

- [1] W. Hu et al., "Open Graph Benchmark: Datasets for Machine Learning on Graphs," in Advances in Neural Information Processing Systems (NeurIPS), vol. 33, 2020, pp. 22118-22133.
- [2] M. Fey and J. E. Lenssen, "Fast Graph Representation Learning with PyTorch Geometric," in ICLR Workshop on Representation Learning on Graphs and Manifolds, 2019.
- [3] T. N. Kipf and M. Welling, "Semi-Supervised Classification with Graph Convolutional Networks," in Proc. International Conference on Learning Representations (ICLR), 2017.
- [4] W. L. Hamilton, R. Ying, and J. Leskovec, "Inductive Representation Learning on Large Graphs," in Advances in Neural Information Processing Systems (NeurIPS), vol. 30, 2017, pp. 1024-1034.
- [5] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and P. S. Yu, "A Comprehensive Survey on Graph Neural Networks," IEEE Transactions on Neural Networks and Learning Systems, vol. 32, no. 1, pp. 4-24, 2021.
- [6] A. Paszke et al., "PyTorch: An Imperative Style, High-Performance Deep Learning Library," in Advances in Neural Information Processing Systems (NeurIPS), vol. 32, 2019.
- [7] F. Pedregosa et al., "Scikit-learn: Machine Learning in Python," Journal of Machine Learning Research, vol. 12, pp. 2825-2830, 2011.
- [8] A. Hagberg, D. Schult, and P. Swart, "Exploring Network Structure, Dynamics, and Function using NetworkX," in Proc. 7th Python in Science Conference (SciPy), 2008, pp. 11-15.
- [9] Streamlit Inc., "Streamlit Documentation," 2024. [Online]. Available: <https://docs.streamlit.io>.