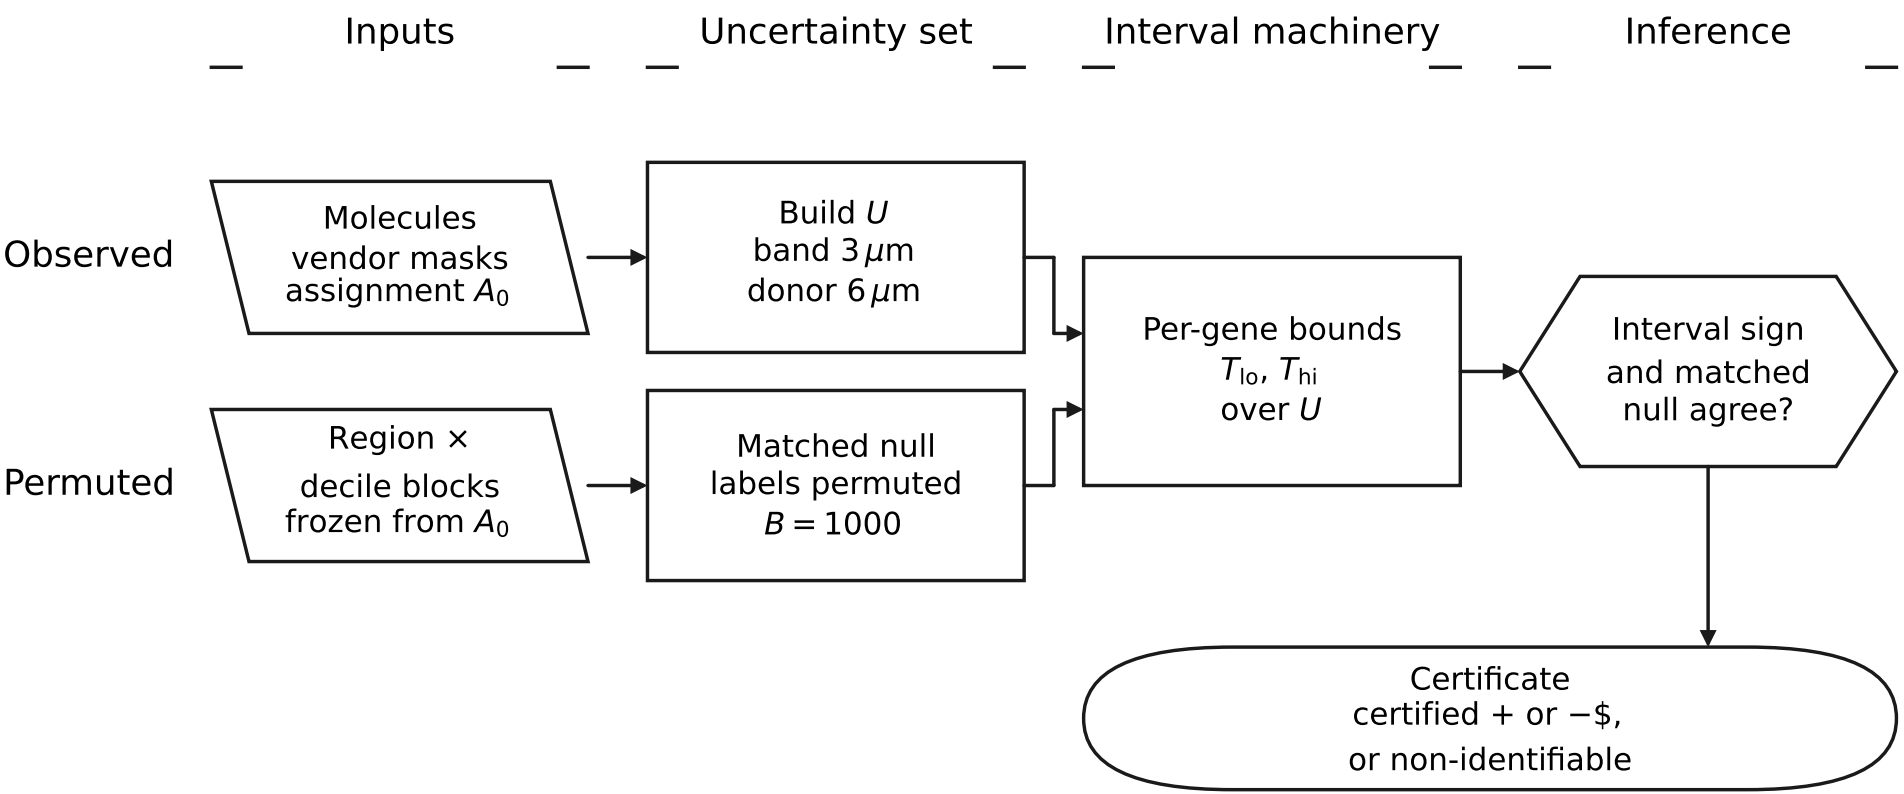

Both inputs enter the same interval machinery, so the null is computed on the same layer as the observed bound.