

BedSAT: Antarctica

Exploring what lies beneath using big data and modelling

Ana Fabela Hinojosa¹
September, 2026

Supervisors:
Dr. Felicity McCormack
Dr. Jason Roberts
Dr. Richard Jones

Panel:
Dr. Fabio Capitanio (Chair)
Dr. Andrew Gunn
Dr. Ariaan Purich



MONASH University



¹ana.fabelahinojosa@monash.edu

Contents

1	Aims	3
1.1	Science Questions	3
1.2	Science Objectives	3
1.3	Project Deliverables	4
2	Preliminary Literature review	5
2.1	Approaches to Bed Topography Reconstruction	5
2.2	Quantifying the Bed Morphometry and Spectral Statistics	6
2.3	From Signal Transfer to Tractable Inversion	6
3	Research Significance	8
4	Project Methodology	9
4.1	Development of the BedSAT Inversion Framework	9
4.2	ODSA's Landscape Classification Vector	9
5	Progress	14
5.1	Key research achieved (ODSA)	14
5.2	Thesis Progress Summary	17
5.3	Resources	17
5.4	Timeline	18

Aims

My PhD project is a modelling approach that combines satellite observations of the ice surface, airborne radar surveys of the bed, and numerical ice flow modelling to improve our knowledge of the landscape beneath the Antarctic Ice Sheet, I call it **BedSAT: Antarctica**. Bed topography exerts a first-order control on ice flow and grounding-line stability, yet large parts of the Antarctic bed remain poorly constrained between radar flight lines. BedSAT addresses this by first characterising the observed bed through its morphometric and spectral statistics, using these to define a new physically-based classification of Antarctic subglacial landscapes. These statistics then drive the generation of synthetic bed topographies for simulations with the Ice-sheet and Sea-level System Model (ISSM) [1]. Using machine learning trained on these physics-based simulations, I will learn how bed topography is transferred to the ice surface across different landscape types and flow regimes. Inverting this bed-to-surface transfer allows the surface expression observed in satellite data to be mapped back to bed topography, producing a new Antarctic bed topography product with improved accuracy, higher resolution, and landscape-aware uncertainties.

1.1 Science Questions

- **SQ1** To what extent can the subglacial landscape type be determined from along-track radar profiles alone, and which additional observables are needed where it cannot?
- **SQ2** Which morphometric and spectral properties of the bed are expressed at the ice surface, and how do rheology and flow regime change it?
- **SQ3** To what extent can bed topography be recovered from satellite observations of the ice surface by inverting a learned non-linear bed-to-surface mapping, and where does landscape type limit that recovery?

1.2 Science Objectives

- (SQ1) develop Observational Data Spectral Analysis (ODSA), a physically informed spectral framework for quantifying Antarctic subglacial landscape characteristics from radar observations. ODSA will be used to bound the landscape archetypes admissible for each segment of a radar track, and identify the observables needed to separate them, potentially providing a new statistical basis for representing bed topography in ice sheet modelling.
- (SQ2) design a synthetic bed topography generator (Bedrock factory) that takes ODSA morphometric and spectral statistics for each landscape archetype as inputs and produces realistic bed realisations at ice sheet model resolution. Run ISSM simulations on ensembles of these beds to assess how landscape type and bed roughness influence ice flow and surface expression.

- (SQ3) train a machine learning model on the physics-based ISSM simulations to learn how the bed expression is modulated through the ice onto the surface (bed-to-surface transfer function), and invert it using satellite observations of the ice surface to produce a new Antarctic bed topography product. The product will include uncertainty estimates informed by the landscape classification, identifying where the bed can be reliably recovered from the surface and where further radar surveys are most needed.

1.3 Project Deliverables

- **Paper 1 — ODSA:** a window-level landscape classification framework for airborne radar echo sounding (RES) elevation profiles, with a catalogue of admissible archetypes and required externals.
- **Paper 2 — Bedrock factory:** an open-source synthetic bed generator for each landscape archetype.
- **Paper 3 — BedSAT: Antarctica:** a new Antarctic bed topography product with landscape-dependent uncertainties.

Preliminary Literature review

Bed topography is one of the most crucial boundary conditions that influence ice flow and loss from the Antarctic Ice-Sheet (AIS) [2]. Bed topography datasets are typically generated from RES surveys, which are sparse and unevenly distributed across the Antarctic continent (Fig. 2.1). Interpolation schemes used to “gap fill” these sparse datasets yield bed topography estimates that have uncertainties of multiple hundreds of metres in elevation [2–4]. Some examples of these products are the Bedmap ice bed, surface and thickness gridded datasets for Antarctica [3, 5, 6], or BedMachine [7, 8]. These uncertainties then propagate through simulations of AIS evolution under climate change [9]. Given the logistical challenges of accessing large parts of Antarctica, an opportunity lies in exploiting the vast wealth of underutilised high-resolution satellite surface observations including NASA’s Making Earth System Data Records for Use in Research Environments (MEaSUREs) [10] velocities and the Reference Elevation Model of Antarctica (REMA) surface elevations [11].

2.1 Approaches to Bed Topography Reconstruction

The generation of gridded bed topographies in Antarctica is based on two primary modelling approaches, forward and inverse models.

Forward models aim to understand how different bed properties influence ice flow. These often generate interpolated gridded topography using geostatistical techniques like kriging [12] and are valuable for investigating how uncertainties in the bed can impact outcomes like simulated ice mass loss. Forward models can generally be classed as elevation-preserving or texture-preserving (the bed’s geostatistical properties are maintained). Their limitation is the reliance on assumptions about the bed conditions rather than direct observation, so they explore possibilities instead of determining the actual topography.

Inverse models involve methods that assimilate other data sources and work by inferring bed properties, such as topography or basal slipperiness, from surface observations like ice elevation and velocity. Techniques like control method inversion [13] and 4dVAR (an iterative data assimilation process that integrates the time dimension) minimise mismatches between observed and simulated data [14–16]. On the other hand, mass conservation approaches use physical laws to reconstruct the bed, especially where measurements are sparse [2, 7]. Despite their power, these methods face significant challenges. Variational approaches often require regularisation to prevent non-physical results and over-fitting [16], and time-dependent methods like 4dVAR are computationally expensive, and probabilistic methods such as Markov Chain Monte Carlo (MCMC) quantify uncertainty well but remain too computationally intensive for large-scale models [16].

2.2 Quantifying the Bed Morphometry and Spectral Statistics

It is still uncommon for methods to systematically quantify the relationship between bed topography and its morphometric and spectral landscape statistics. Studies that measure the statistics report them as continuous fields, and terrain types are assigned to specific regions rather than to individual cells, with each parameter described qualitatively. Siegert et al. [17] define three bed roughness groups across named areas of East Antarctica, and Rippin et al. [18] assign three terrain types to the areas of their survey. Numerical thresholds have been published for single parameters, and Jordan et al. [19] divide the Hurst exponent at 0.5 and 0.75 to define low, medium and high roughness categories, but no scheme applies thresholds to a combination of axes per analysed cell. For published classified maps, each cell is often assigned to one class with no margin reported alongside it. Ockenden et al. [4] map the Antarctic bed into five landscape classes on $50 \text{ km} \times 50 \text{ km}$ cells, and the accompanying data release [20] records each assignment with no confidence interval or alternative class. Ambiguity in landscape class is usually acknowledged only as a caveat and is not quantified. The absence of margins makes such maps vulnerable to survey artefacts, like local roughness measurement bias due to radar migration status [17, 21, 22] or measurement limitations from the orientation and along-track sampling resolution due to uneven survey coverage [23].

Assigning a single class to a region or cell also averages the terrain within it. Rippin et al. [18] note that their large-scale grouping masks some complexities within the groups, and the selective erosion class of Ockenden et al. [4], which covers 56% of Antarctica, is defined as all topography that is not clearly “low-relief” or “alpine”. Such classes cannot capture the gradual change in roughness reported by Bingham and Siegert [24] or the continuum of landscape types described by Sugden [25].

2.3 From Signal Transfer to Tractable Inversion

Connecting observable surface features to the subglacial bed below while ensuring that the governing physics of ice-sheet flow are respected at the same time requires surface-bed transfer functions. The core principle behind a transfer function is that the ice-sheet acts as a physical filter, modifying the expression of bed features as they propagate to the surface. The work by Budd [26] established that ice preferentially dampens short-wavelength bed undulations while features with a wavelength approximately $3.3\times$ the ice thickness are most clearly expressed at the surface. This process also introduces a phase lag in the ice flow direction, and can be described mathematically using frequency-dependent transfer functions. More recent studies have built directly on this foundation. For instance, Gudmundsson [27] refined the transfer function concept for ice streams, and Ockenden et al. [28] applied it in reverse across the continent [4], using full-Stokes transfer functions to invert high-resolution satellite observations of surface elevation and velocity to infer bed properties. These studies collectively establish that the physical relationship between the bed and the surface provides a viable pathway for subglacial mapping.

Despite the success of these approaches, their practical application has been limited by simplifying assumptions about ice physics. A primary limitation is the reliance on a linear (Newtonian) ice rheology, where stress is directly proportional to the strain rate (i.e., a “constant viscosity”). This assumption is often utilised to make the inversion mathematically tractable, but it contrasts with the widely accepted non-linear Glen’s Flow Law, where the stress exponent is typically $n \approx 3$ or even $n = 4$ [29]. My results in previous work show that the choice of rheology is a critical control on the bed-to-surface signal transfer; a non-linear rheology

($n = 4$) produces markedly different surface expressions compared to a linear one ($n = 1$) [30]. By largely ignoring non-linear rheology and complex basal sliding conditions, past inversion methods have introduced uncertainties and biases and may not be robustly applicable across all dynamic regimes of the ice-sheet.

With Physics-Informed Machine Learning (Physics-ML), we can eliminate the computational bottleneck that has forced previous methods to rely on unrealistic simplifications. By leveraging NVIDIA PhysicsNeMo, a framework designed to blend governing physics (PDEs) with training data [31], BedSAT can learn the non-linear mapping between surface expressions and bed topography without linearising the physics. This approach is designed to transform what was previously computationally intractable into a fast, accurate inverse solver. Through an iterative process where initially inverted bed topography is integrated into forward models for progressive refinement, BedSAT will deliver physically consistent reconstructions validated against independent datasets.

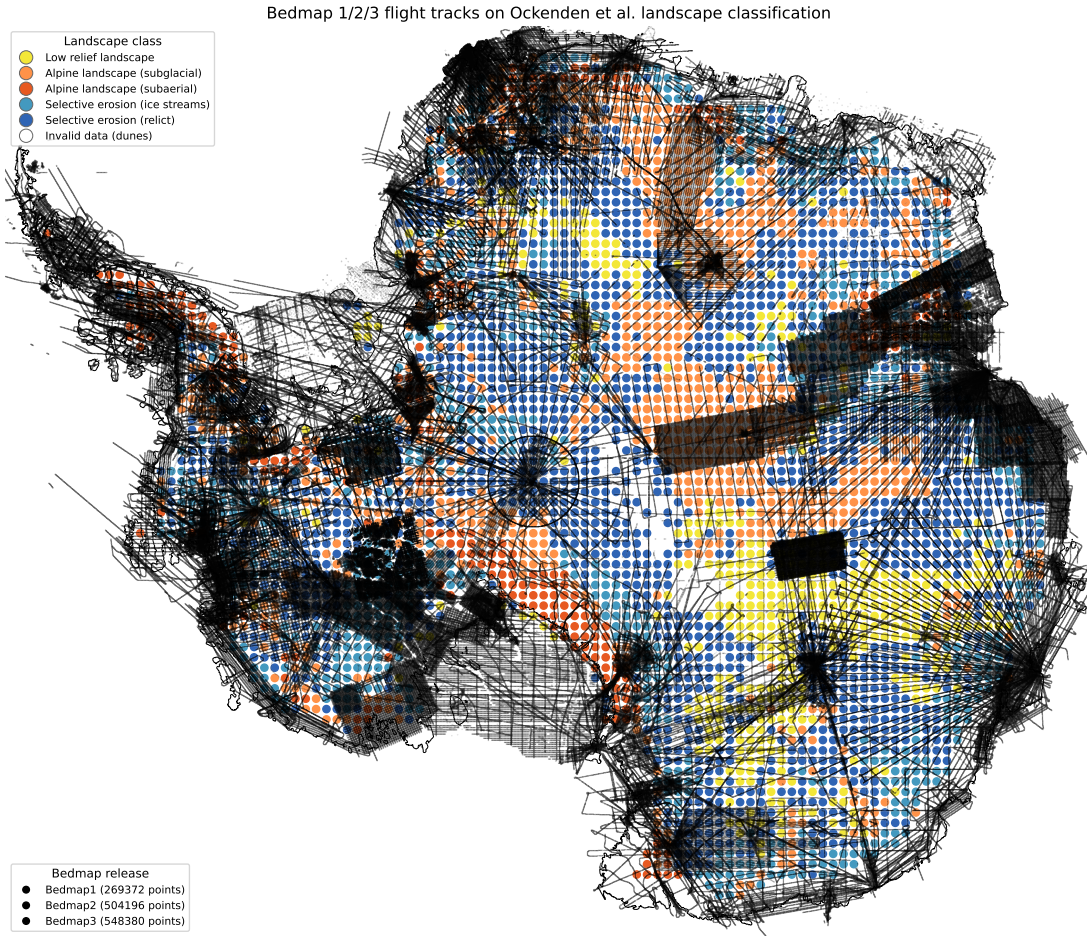


Figure 2.1: Bedmap1, Bedmap2 and Bedmap3 along-track survey points (black) over the continental landscape classification map by Ockenden et al. [4] (coloured cells, cells masked as invalid data (dunes) are drawn white). We reproduce the classification from the published metric grids [20] on 50 km cells. The point counts in the legend show the number of subsampled plotted points rather than published picks. ODSA operates on these along-track data, so the figure shows the sampling available to us across a continental landscape classification.

Research Significance

The accelerating loss of continental ice-sheets in both Greenland and Antarctica is a major contributor to global sea level rise [32]. Impacts extend beyond direct ice loss: as fresh water from melting ice-sheets is added into the ocean, it increases ocean stratification disrupting global thermohaline circulation [33]. In addition, cold freshwater can dissolve larger amounts of CO_2 than regular ocean water creating corrosive conditions for marine life [32]. While there is high confidence in current ice loss and retreat observations in many areas, there is more uncertainty about the mechanisms driving these changes and their future progression [34]. Uncertainty increases in regions with variable bed conditions, where characteristics like bed slipperiness and roughness have been difficult to verify via direct observations. Other problematic areas involve the ice-sheet grounding line (GL): the line which delineates where the ice-sheet is grounded on bedrock. The GL retreat rate depends crucially on topographical features like pinning points [34], which lead to buttressing of upstream flow. Although this mechanism is established, major knowledge gaps persist in mapping bed topography across Antarctic ice-sheet margins, with over half of all margin areas having insufficient data within 5 km of the grounding zone [35]. Addressing this data gap through systematic mapping enhanced by auxiliary data streams with more complete coverage would significantly improve both our understanding of current ice dynamics and the accuracy of ice-sheet models projecting future changes.

Subglacial bed roughness is already being used as a tool to infer basal processes and ice-sheet history [23], and it may provide information on basal drag, which is a key boundary condition for ice-sheet models [4]. In many regions of Antarctica the spacing between radar survey tracks is 10 to 100 km [4], but away from survey tracks, interpolated bed maps have not been able to reproduce the roughness of subglacial terrain observed along radar profiles [4]. In the 500 m horizontal resolution Bedmap3 bed topography dataset, 93% of the grid cells are interpolated [3], which introduces substantial uncertainties and biases into simulations

As part of the first stage of BedSAT, ODSA quantifies subglacial landscape characteristics directly from the radar profiles. Previous studies have characterised bed roughness with one or two spectral parameters [17–19, 23, 36, 37]. ODSA describes each analysed window of a RES track with a landscape vector of measured elements. Four of these elements are classifying axes or “classifiers” (Table 4.1). Each is divided into bands by thresholds, and a literature-informed catalogue of landscape archetypes is defined by bounds on these bands. The remaining vector elements are “descriptors” (Table 4.2). An analysed window will be reported as resolved, degenerate, out-of-catalogue or resolved-with-external. This last category means that the scheme cannot reduce the class because it is missing information that is not contained in the picked ice-bed interface. The ODSA pipeline names the axis responsible for the overlap and reports the observable required to break the tie (Table 4.3). These capabilities augment survey design by telling us which instrument to fly in a future survey. Additionally, bed texture decorrelation between nearby transects constrains the track spacing that is required to resolve a given landscape.

Project Methodology

4.1 Development of the BedSAT Inversion Framework

My goal with BedSAT is to leverage a physically informed transfer function with improved understanding of how ice rheology and basal sliding conditions affect the surface expression of subglacial topography. Its development requires the following stages.

1. **Training:** BedSAT will be trained and validated using a physically informed (ODSA) synthetic bedrock database (Bedrock Factory) and a data-rich region, such as the Aurora Subglacial Basin, where extensive ice-penetrating radar data of the bed is available for direct comparison.
Forward Ice Flow Model: The forward model of ice dynamics will be configured for the chosen study site, including key model assumptions, such as the choice of ice flow equations and the parameters governing ice rheology. The robustness of the numerical configuration will be confirmed through grid independence testing to ensure that the results are not an artefact of the model’s spatial resolution.
Inversion Pre-processing: The primary observational inputs for the model will be satellite-derived surface velocity, surface elevation [10, 11] and ice thickness [38, 39]. A critical pre-processing step will involve filtering high-frequency noise (e.g., aeolian features) from the surface data to ensure that the glaciological signal from the underlying bed is isolated.
2. **Inverse Modelling to Estimate Bed Topography:** The core of BedSAT is the inversion. BedSAT will iteratively adjust an initial estimate of the bed topography, aiming to minimise the mismatch between the forward model’s simulated surface velocities and the satellite-observed velocities.
3. **Validation and Sensitivity Analysis:** BedSAT’s performance will be rigorously evaluated. First, the inverted bed topography will be directly validated against the “ground-truth” radar-derived bed maps for the study region. Second, a series of sensitivity analyses will be conducted to quantify the model’s robustness. These tests will systematically alter key assumptions, such as the rheological parameters for different regions, to determine their impact on the final inverted topography and to establish the uncertainty bounds of the framework’s results.

4.2 ODSA’s Landscape Classification Vector

To inform the synthetic bedrock database that will be used in the training, we need bed morphometric and spectral statistics to describe a landscape class. I apply ODSA to seven reference regions as proof of concept (Fig. 4.1), quantifying how well the flight lines sample their survey footprint.



Figure 4.1: The seven RES survey regions analysed with ODSA. Five regions use the PS71 boxes from [20] directly, while the Pensacola Pole Basin region and the Aurora low-relief region use boxes that I defined, with the Aurora low-relief region restricted to cells selected as low-relief from the published metric grids of [20].

My proposal is that to bound subglacial landscape class it is necessary to have multiple measured statistics that characterise different landscape properties. Each classifier carries a $\pm 2\sigma$ envelope, from the spectral fit covariance for β and from measurement error budgets for relief, velocity and elevation. A window is admissible for an entry if its envelope overlaps the entry’s bounds, even when the central value lies outside them.

Table 4.1: Classification axes of the landscape classification vector. Across all four, the framework classifies each axis on value $\pm 2\sigma$, so a window can be admissible in more than one band.

Variable	Description/Thresholds
Classifiers β	Slope of the bed power spectrum over the fitted band (the first of two degrees of freedom obtained by the fit: β and A_{1km}). A measure of bed roughness shape: low β distributes power to the short wavelengths; high β concentrates it at long wavelengths. The fit band spans 250 m to 50 km. The classes are: chaotic < 1.5 , hard 1.5 to 2.0, transitional 2.0 to 2.5 and soft ≥ 2.5 . The 2.0 and 2.5 breaks follow the Hurst-exponent splits of [19]. The 1.5 break is an operational choice. Beds in the hard class are interpreted as scoured crystalline terrain, like in the areal-scouring landscapes of [25].
Relief	Elevation range within a window, calculated as $\max(\text{bed}) - \min(\text{bed})$ over the raw 50 km profile, in metres. It gives the amplitude of the largest structure a window contains. Regional slope enters the range directly. Relief classes are flat: < 350 m; mountainous: ≥ 800 m; while values in between these are labelled as subdued. These are set based on the median relief for the tested regions.
MEaSURES speed	Mean MEaSURES InSAR surface ice speed at the window’s track points, sampled over the same points that enter the spectral fit. Bands are very_low (< 5), low (5 to < 10), moderate (10 to < 50) and fast (≥ 50) all in m/yr and set operationally. Antarctic surface speed is bimodal, with a slow mode at 4 to 5 m/yr and a fast mode at 250 m/yr, and measured speed departs from internal deformation above about 15 m/yr [40]. Each window carries a sampled error from the ERRX/ERRY fields of MEaSURES [10].
Elevation	The mean bed elevation within a window, in metres above present-day sea level. Classes are submerged: < 0 m; elevated at ≥ 1000 m, and emerged for values in between. Motivated by [17, 18, 41].

Table 4.2: Descriptors of the landscape classification vector. These are continuous variables with no breaks.

Variable	Description
A_1km	$\log_{10}$ of bed power spectrum at a 1 km reference wavelength evaluated from the fit. It gives the magnitude of the roughness in $\log_{10}(\text{m}^3)$ and fixes the level inside the fitted wavelength band. It carries a propagated uncertainty that includes the slope and intercept covariance. The spectral fit returns two degrees of freedom (β and A_1km) following the conclusion established by [18, 19, 37].
RMS Roughness	Root mean square height [42] of the window's detrended elevation residuals, in metres. It gives the amplitude of the topography with the regional ramp removed, which distinguishes it from relief. It depends on profile length, and is retained for comparability with the space-domain roughness literature rather than as a separate degree of freedom.
ξ	Integral of the bed power spectrum over the bedform band from 300 m to 1200 m, in m^2 . ξ is the numerator of η [37]. Supported by [43, 44].
η	Characteristic wavelength for the window, in metres, following [37]. It is the square root of the weighted harmonic mean of the square of the wavelength at each frequency in the band from 300 m to 1200 m with the spectrum as the weight.
Hill count	Number of distinct local maxima in the window's detrended bed profile, similar to the bumpiness metric by [4] but in transect form (1D). A point counts if it is the maximum of a 5 km box centred on it and the box relief exceeds 20 m; adjacent flagged points count once and maxima touching a window edge are dropped. Two hills must be at least 2.5 km apart, so the count cannot exceed 20 per 50 km window.
Skewness	Third standardised moment of the window's detrended, untapered bed elevation residuals (bias-corrected). Positive values imply narrow highs on a broad low base, negative values mean narrow lows cut into a broad high surface, following the qualitative hills-against-troughs distinction in [25]. It is the only phase-asymmetry information in the vector.
Kurtosis	Excess kurtosis of the window's detrended, untapered bed elevation residuals (bias-corrected). Positive values mean a few extreme highs or lows against a flat background, negative values mean a flat-topped or evenly spread distribution.

Table 4.3: Observables that ODSA cannot supply from the picked ice-bed interface. They are required to separate the admissible entries, or to confirm the entry on a row with one admissible entry.

External	Description
Reflectivity	Bed-echo strength and specularity. An ice–water interface returns a bright, specular echo. Required by: BASIN. Separates: water from sediment under a flat, smooth bed below 1000 m. Why ODSA doesn't measure it: ODSA uses the picked ice-bed interface, not the returned power and phase from which reflectivity and specularity are measured.
Composition	Gravity / magnetics (sediment vs smooth bedrock). Required by: BASIN-HIGH, BASIN. Separates: smooth hard bedrock from soft sediment, including under BASIN above sea level. Why ODSA doesn't measure it: needs airborne gravity or magnetics.
Flow history	Disrupted internal layers, dating (active vs relict). Required by: TRUNK-RELICT. Separates: TRUNK-RELICT from BASIN. Why ODSA doesn't measure it: needs disrupted internal layers or dating.
Origin	Erosional vs structural provenance of the trough-ridge contrast. Required by: DISSECTED. Separates: the three possible origins of DISSECTED, and DISSECTED and DIVIDE from RIFT. Why ODSA doesn't measure it: needs independent geological context

Progress

5.1 Key research achieved (ODSA)

I have built ODSA and applied it to 651 windows in seven Antarctic regions: a single transect narrows the landscape class to a median of two of the eleven catalogue entries, resolves 15% of windows to one entry (a further 7% resolve pending an external), and ODSA’s roughness measures barely separate the classes of the gridded Ockenden et al. [4] classification. ODSA operates on the along-track picks of ice-bed interface elevation published with Bedmap1 to 3 rather than a gridded product (Ch. 2). The tracks used are shown in Fig. 2.1. The ODSA pipeline splits tracks into segments, cuts them into 50 km windows (when possible) with a 25 km step (i.e. 50% overlap), applies a Hann taper, and fits the spectrum over 250 m to 50 km using a Lomb–Scargle periodogram. Fig. 5.1 shows a subset of ODSA’s catalogue, in which each entry is paired with an analysed window from five of the seven regions (Fig. 4.1) as proof of concept. Of the 651 windows, 650 fall in an Ockenden et al. cell with a valid landscape class, and the windows split into 425 degenerate, 97 resolved, 82 out-of-catalogue and 47 resolved-with-external.

In the case of my catalogue I found that a combination of classifiers narrowed down the set of admissible landscape classes more than any single classifier for the windows analysed (Fig. 5.2). The figure shows the best combination at each number of classifiers. Resolved fraction peaks with β , relief and velocity (24%). Adding elevation lowers it to 22% and nearly doubles the out-of-catalogue rate, from 7% to 13%. However, elevation is the classifier that separates the most classes of the Ockenden et al. [4] classification (Fig. 5.3). Their classification is constructed from gridded bed elevation, so this is expected. Yet I found that no combination of classifiers separates their alpine and selective-erosion classes from one another.

The classes reported by Ockenden et al. [4] are partly defined by roughness metrics (RMS slope, hill counts, Fourier fractal dimension), yet over all 650 valid windows ODSA’s roughness measures (β , relief, and the descriptors) barely separate them. A window can straddle two cells of different class. When I restricted to the 421 windows whose second-nearest cell carries the same class as the nearest, the seven descriptors together separate three of the six class pairs, including Alpine (subglacial) from Selective erosion (relict). The differing outcomes for roughness may be due to their classes resulting from an inverted, interpolated 2D grid (space-domain), while mine result from spectral measurements from 1D bed elevation picks along track. The two roughness descriptions of the same ground therefore disagree, which is consistent with a gridded product not carrying the texture that a transect measures.

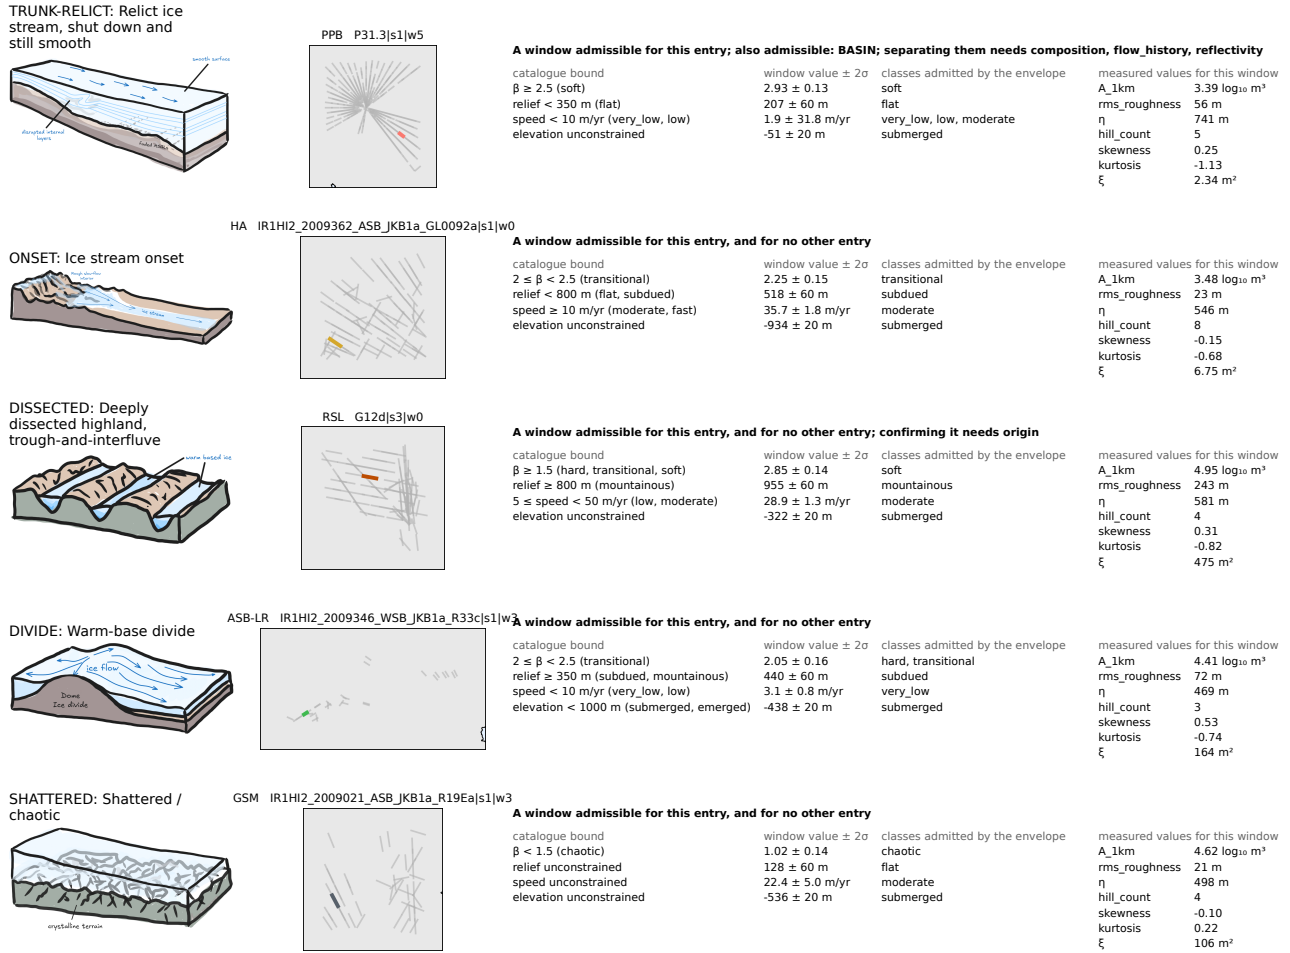


Figure 5.1: Five of the eleven catalogue entries, each paired with an admissible window, showing which entries the four classifying axes isolate and which they leave degenerate. Each row shows a window admissible for this entry, taken from the seven regions tested (Fig. 4.1). Admissibility does not claim that the archetype is correct. Left: the entry's cartoon exemplifying what that landscape may look like. Centre: the region's windows as 50 km along-track footprints in grey, and the example window in its archetype colour. The title gives the region and the window's unit ID. Right, first block: the entry's bound on each of the four classifying axes, the window's value with its envelope, and the classes admitted by that envelope. Right, second block: the window's measured values of the seven continuous descriptors. Rows with more than one admissible entry name the others. External names on a row are observables that ODSA cannot supply from the picked ice-bed interface (Table 4.3).

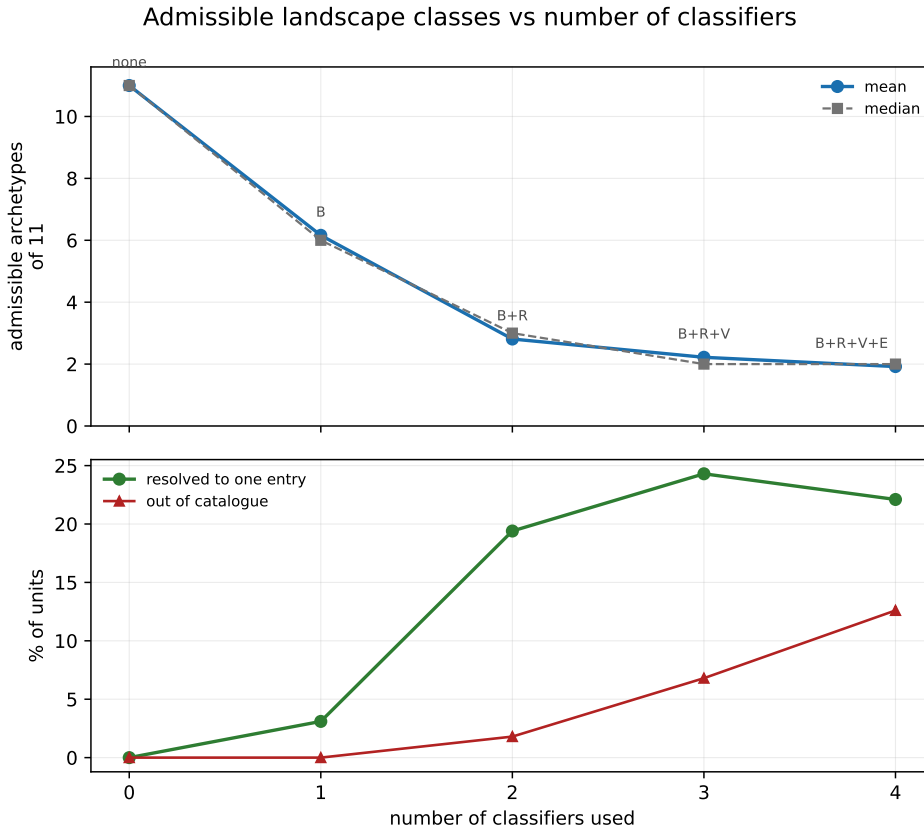


Figure 5.2: Best axis combination at each size (each unit is a window). β (B), relief (R), velocity (V), elevation (E). A window resolved to one entry has had the other ten excluded by its bounds; this is not an identification.

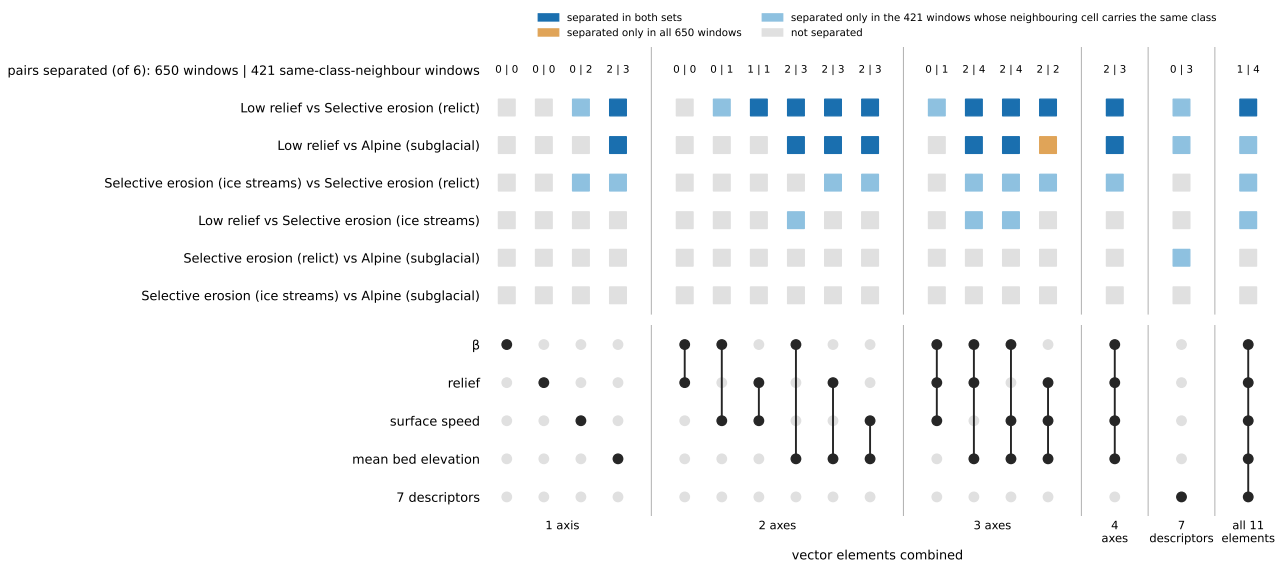


Figure 5.3: Separation of the Ockenden et al. [4] landscape classes by combinations of vector elements, over 650 analysed windows. Each column is one combination of the four classifying axes, the 7 descriptors together or all 11 elements together, and the black dots in the lower panel show the elements it uses. Square colour gives the two outcomes, and the numbers above each column are the counts of separated pairs in the two sets defined in the text (all 650 co-located windows, and the 421-window restricted set). Two classes are separated when the vector of their median differences is at least 1 pooled standard deviation long and at least a threshold number of standard errors long (depending on the number of elements in the combination), both measured with the covariance of the combined elements. Classes with fewer than 10 windows (Alpine (subaerial)) are not tested.

5.2 Thesis Progress Summary

The introduction is complete, Paper 1 (ODSA) is being written, Paper 2 (Bedrock factory) has working code, and Paper 3 (BedSAT: Antarctica) has not started. I plan to submit a “Thesis Including Published Works”. The thesis chapters will include: an introduction, the three journal articles (papers) as outlined in Ch. 1, and a synthesis of the outputs for each as a conclusion. The current status in Fig. 5.4 for each of these thesis chapters is:

- **Introduction:** complete (pending additions for papers 2 and 3)
- **Paper 1 — ODSA:** code workflow exists, paper writing started in September 2026 and is in progress.
- **Paper 2 — Bedrock factory:** code exists, paper writing has not started.
- **Paper 3 — BedSAT: Antarctica:** code workflow does not exist, paper writing has not started.
- **Conclusion:** writing has not started.

The anticipated progress in the next 12 months includes finalising the writing of **Paper 1 — ODSA**, and continuing with the next stages of **Paper 2 — Bedrock factory**. However, the next 12 months of this project will be interrupted for 8 months total by maternity leave as shown in Fig. 5.4. The study load will also potentially be reduced to part-time after maternity leave ends, which moves the pending milestones for this project.

5.3 Resources

The high performance computing resources (compute and storage) that this project requires are already available from the National Computing Infrastructure (NCI), through a Flagship between NCI and the Monash-led Australian Research Council project Securing Antarctica’s Environmental Future (SAEF).

- **HPC time** for ISSM forward models.
- **GPU time** for PhysicsNeMo training (Forward model-ML and Inverse model-ML).
- **Software:** Python, ISSM and NVIDIA PhysicsNeMo.

Already accessed for **Paper 1 — ODSA**:

- **Data:** Bedmap1 to 3 [3, 5, 6], MEaSUREs speed [10], REMA [11], and Ockenden data release [20].
- **Software:** Python.

Data Management

Data will be published adhering to FAIR principles (Findable, Accessible, Interoperable, Reusable), ensuring transparency and accessibility. The final bed topography datasets will be published at the Australian Antarctic Data Centre (ADC) under an open licence. All production model outputs will be published with unique DOIs at repositories aligned with the corresponding papers.

Model outputs will be archived to tape at National Computational Infrastructure (NCI) using existing Securing Antarctica’s Environmental Future (SAEF) resources, as well as backed up to storage available through Monash MASSIVE M3 account aligned with project supervisor Dr McCormack. All papers published through this project will be open access, and tier 1 journals will be targeted.

5.4 Timeline

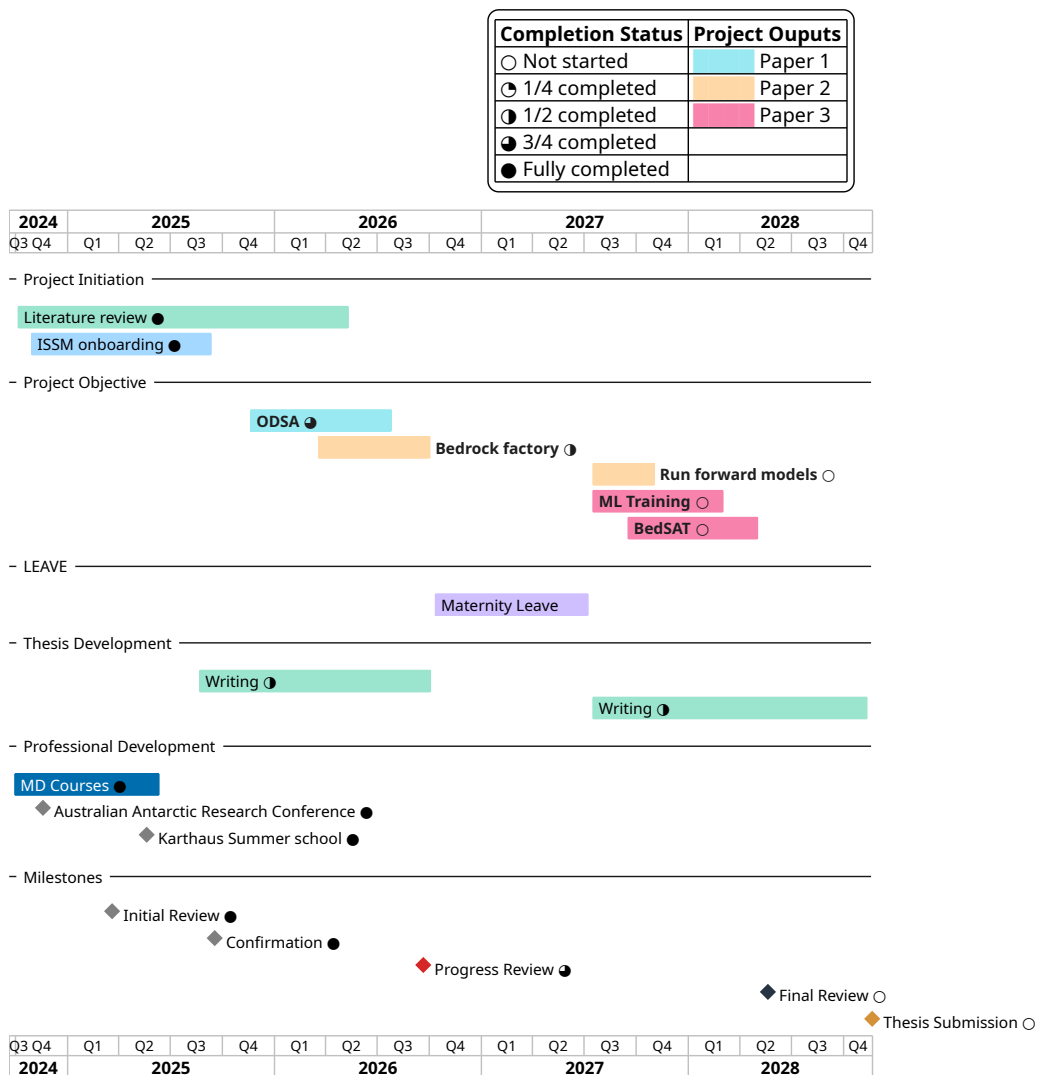


Figure 5.4: Project timeline. In the Project Objective section, the colour of each bar shows which paper the task contributes to. Completion status for each task and what it means: quarter-filled—the code workflow exists, half-filled—results pending, three-quarter—results are complete with write-up pending.

Bibliography

- [1] E. Larour, H. Seroussi, M. Morlighem, and E. Rignot. *Continental scale, high order, high spatial resolution, ice sheet modeling using the Ice Sheet System Model*, (2012). J. Geophys. Res., 117, F01022. DOI: [10.1029/2011JF002140](https://doi.org/10.1029/2011JF002140). 3
- [2] M. Morlighem, E. Rignot, T. Binder, D. Blankenship, R. Drews, G. Eagles, O. Eisen, F. Ferraccioli, R. Forsberg, P. Fretwell, V. Goel, J. S. Greenbaum, H. Gudmundsson, J. Guo, V. Helm, C. Hofstede, I. Howat, A. Humbert, W. Jokat, N. B. Karlsson, W. L. Lee, K. Matsuoka, R. Millan, J. Mouginot, J. Paden, F. Pattyn, J. Roberts, S. Rosier, A. Ruppel, H. Seroussi, E. C. Smith, D. Steinhage, B. Sun, M. R. van den Broeke, T. D. van Ommen, M. van Wessem, and D. A. Young. *Deep glacial troughs and stabilizing ridges unveiled beneath the margins of the Antarctic ice sheet*. Nature Geoscience **13**, 132 (2020). DOI: [10.1038/s41561-019-0510-8](https://doi.org/10.1038/s41561-019-0510-8). 5
- [3] H. D. Pritchard, P. T. Fretwell, A. C. Fremand, J. A. Bodart, J. D. Kirkham, A. Aitken, J. Bamber, R. Bell, C. Bianchi, R. G. Bingham, D. D. Blankenship, G. Casassa, K. Christianson, H. Conway, H. F. J. Corr, X. Cui, D. Damaske, V. Damm, B. Dorschel, R. Drews, G. Eagles, O. Eisen, H. Eisermann, F. Ferraccioli, E. Field, R. Forsberg, S. Franke, V. Goel, S. P. Gogineni, J. Greenbaum, B. Hills, R. C. A. Hindmarsh, A. O. Hoffman, N. Holschuh, J. W. Holt, A. Humbert, R. W. Jacobel, D. Jansen, A. Jenkins, W. Jokat, L. Jong, T. A. Jordan, E. C. King, J. Kohler, W. Krabill, J. Maton, M. K. Gillespie, K. Langley, J. Lee, G. Leitchenkov, C. Leuschen, B. Luyendyk, J. A. MacGregor, E. MacKie, G. Moholdt, K. Matsuoka, M. Morlighem, J. Mouginot, F. O. Nitsche, O. A. Nost, J. Paden, F. Pattyn, S. Popov, E. Rignot, D. M. Rippin, A. Rivera, J. L. Roberts, N. Ross, A. Ruppel, D. M. Schroeder, M. J. Siegert, A. M. Smith, D. Steinhage, M. Studinger, B. Sun, I. Tabacco, K. J. Tinto, S. Urbini, D. G. Vaughan, D. S. Wilson, D. A. Young, and A. Zirizzotti. *Bedmap3 updated ice bed, surface and thickness gridded datasets for Antarctica*. Scientific Data **12**, 414 (2025). DOI: [10.1038/s41597-025-04672-y](https://doi.org/10.1038/s41597-025-04672-y). 5, 8, 17
- [4] H. Ockenden, R. G. Bingham, D. Goldberg, A. Curtis, and M. Morlighem. *Complex mesoscale landscapes beneath Antarctica mapped from space*. Science **391**, 314 (2026). DOI: [10.1126/science.ady2532](https://doi.org/10.1126/science.ady2532). 5, 6, 7, 8, 12, 14, 16
- [5] M. B. Lythe and D. G. Vaughan. *BEDMAP: A new ice thickness and subglacial topographic model of Antarctica*. Journal of Geophysical Research: Solid Earth **106**, 11335 (2001). DOI: [10.1029/2000JB900449](https://doi.org/10.1029/2000JB900449). 5, 17
- [6] P. Fretwell, H. D. Pritchard, D. G. Vaughan, J. L. Bamber, N. E. Barrand, R. Bell, C. Bianchi, R. G. Bingham, D. D. Blankenship, G. Casassa, G. Catania, D. Callens, H. Conway, A. J. Cook, H. F. J. Corr, D. Damaske, V. Damm, F. Ferraccioli, R. Forsberg, S. Fujita, Y. Gim, P. Gogineni, J. A. Griggs, R. C. A. Hindmarsh, P. Holmlund, J. W. Holt, R. W. Jacobel, A. Jenkins, W. Jokat, T. Jordan, E. C. King, J. Kohler, W. Krabill, M. Riger-Kusk, K. A. Langley, G. Leitchenkov, C. Leuschen, B. P. Luyendyk, K. Matsuoka,

- J. Mouginot, F. O. Nitsche, Y. Nogi, O. A. Nost, S. V. Popov, E. Rignot, D. M. Rippin, A. Rivera, J. Roberts, N. Ross, M. J. Siegert, A. M. Smith, D. Steinhage, M. Studinger, B. Sun, B. K. Tinto, B. C. Welch, D. Wilson, D. A. Young, C. Xiangbin, and A. Zirizzotti. *Bedmap2: improved ice bed, surface and thickness datasets for Antarctica*. *The Cryosphere* **7**, 375 (2013). DOI: [10.5194/tc-7-375-2013](https://doi.org/10.5194/tc-7-375-2013). 5, 17
- [7] M. Morlighem, C. N. Williams, E. Rignot, L. An, J. E. Arndt, J. L. Bamber, G. Catania, N. Chauché, J. A. Dowdeswell, B. Dorschel, I. Fenty, K. Hogan, I. Howat, A. Hubbard, M. Jakobsson, T. M. Jordan, K. K. Kjeldsen, R. Millan, L. Mayer, J. Mouginot, B. P. Y. Noël, C. O’Cofaigh, S. Palmer, S. Rysgaard, H. Seroussi, M. J. Siegert, P. Slabon, F. Straneo, M. R. van den Broeke, W. Weinrebe, M. Wood, and K. B. Zinglensen. *BedMachine v3: Complete Bed Topography and Ocean Bathymetry Mapping of Greenland From Multibeam Echo Sounding Combined With Mass Conservation*. *Geophysical Research Letters* **44**, 11,051 (2017). DOI: [10.1002/2017GL074954](https://doi.org/10.1002/2017GL074954). 5
- [8] M. Morlighem, R. Charrassin, N. Maffezzoli, R. Millan, H. Ockenden, N.-J. Schlegel, H. Seroussi, and M. Wood. *New high-resolution subglacial bed topography and coastal bathymetry of the Antarctic and Greenland Ice Sheets*. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences* **384**, 20240538 (2026). DOI: [10.1098/rsta.2024.0538](https://doi.org/10.1098/rsta.2024.0538). 5
- [9] B. A. Castleman, N.-J. Schlegel, L. Caron, E. Larour, and A. Khazendar. *Derivation of bedrock topography measurement requirements for the reduction of uncertainty in ice-sheet model projections of Thwaites Glacier*. *The Cryosphere* **16**, 761 (2022). DOI: [10.5194/tc-16-761-2022](https://doi.org/10.5194/tc-16-761-2022). 5
- [10] E. Rignot, J. Mouginot, and B. Scheuchl. *MEaSURES InSAR-Based Antarctica Ice Velocity Map, Version 2*, (2017). DOI: [10.5067/D7GK8F5J8M8R](https://doi.org/10.5067/D7GK8F5J8M8R). 5, 9, 11, 17
- [11] I. M. Howat, C. Porter, B. E. Smith, M.-J. Noh, and P. Morin. *The Reference Elevation Model of Antarctica*. *The Cryosphere* **13**, 665 (2019). DOI: [10.5194/tc-13-665-2019](https://doi.org/10.5194/tc-13-665-2019). 5, 9, 17
- [12] E. J. MacKie, D. M. Schroeder, J. Caers, M. R. Siegfried, and C. Scheidt. *Antarctic Topographic Realizations and Geostatistical Modeling Used to Map Subglacial Lakes*. *Journal of Geophysical Research: Earth Surface* **125** (2020). DOI: [10.1029/2019JF005420](https://doi.org/10.1029/2019JF005420). 5
- [13] J. De Rydt, G. H. Gudmundsson, H. F. J. Corr, and P. Christoffersen. *Surface undulations of Antarctic ice streams tightly controlled by bedrock topography*. *The Cryosphere* **7**, 407 (2013). DOI: [10.5194/tc-7-407-2013](https://doi.org/10.5194/tc-7-407-2013). 5
- [14] F. Rabier, H. Järvinen, E. Klinker, J.-F. Mahfouf, and A. Simmons. *The ECMWF operational implementation of four-dimensional variational assimilation. I: Experimental results with simplified physics*. *Quarterly Journal of the Royal Meteorological Society* **126**, 1143 (2000). DOI: [10.1002/qj.49712656415](https://doi.org/10.1002/qj.49712656415). 5
- [15] F. Gillet-Chaulet. *Assimilation of surface observations in a transient marine ice sheet model using an ensemble Kalman filter*. *The Cryosphere* **14**, 811 (2020). DOI: [10.5194/tc-14-811-2020](https://doi.org/10.5194/tc-14-811-2020). 5
- [16] M. Morlighem and D. Goldberg. *Data Assimilation in Glaciology*, pages 93–111. Cambridge University Press (2023). DOI: [10.1017/9781009180412.007](https://doi.org/10.1017/9781009180412.007). 5

- [17] M. J. Siegert, J. Taylor, and A. J. Payne. *Spectral roughness of subglacial topography and implications for former ice-sheet dynamics in East Antarctica*. Global and Planetary Change **45**, 249 (2004). DOI: [10.1016/j.gloplacha.2004.09.008](https://doi.org/10.1016/j.gloplacha.2004.09.008). 6, 8, 11
- [18] D. M. Rippin, R. G. Bingham, T. A. Jordan, A. P. Wright, N. Ross, H. F. J. Corr, F. Ferraccioli, A. M. Le Brocq, K. C. Rose, and M. J. Siegert. *Basal roughness of the Institute and Möller Ice Streams, West Antarctica: process determination and landscape interpretation*. Geomorphology **214**, 139 (2014). DOI: [10.1016/j.geomorph.2014.01.021](https://doi.org/10.1016/j.geomorph.2014.01.021). 6, 8, 11, 12
- [19] T. M. Jordan, M. A. Cooper, D. M. Schroeder, C. N. Williams, J. D. Paden, M. J. Siegert, and J. L. Bamber. *Self-affine subglacial roughness: consequences for radar scattering and basal water discrimination in northern Greenland*. The Cryosphere **11**, 1247 (2017). DOI: [10.5194/tc-11-1247-2017](https://doi.org/10.5194/tc-11-1247-2017). 6, 8, 11, 12
- [20] H. Ockenden. *Data accompanying manuscript: Complex mesoscale landscapes beneath Antarctica mapped from space*, (2025). DOI: [10.5281/zenodo.17226363](https://doi.org/10.5281/zenodo.17226363). 6, 7, 10, 17
- [21] J. Taylor, M. J. Siegert, A. J. Payne, and B. Hubbard. *Regional-scale bed roughness beneath ice masses: measurement and analysis*. Computers & Geosciences **30**, 899 (2004). DOI: [10.1016/j.cageo.2004.06.007](https://doi.org/10.1016/j.cageo.2004.06.007). 6
- [22] D. M. Rippin. *The basal roughness of Pine Island Glacier, West Antarctica*. Journal of Glaciology **57**, 67 (2011). DOI: [10.3189/002214311795306574](https://doi.org/10.3189/002214311795306574). 6
- [23] R. G. Bingham and M. J. Siegert. *Quantifying subglacial bed roughness in Antarctica: implications for ice-sheet dynamics and history*. Quaternary Science Reviews **28**, 223 (2009). DOI: [10.1016/j.quascirev.2008.10.014](https://doi.org/10.1016/j.quascirev.2008.10.014). 6, 8
- [24] R. G. Bingham and M. J. Siegert. *Radar-derived bed roughness characterization of Institute and Möller ice streams, West Antarctica, and comparison with Siple Coast ice streams*. Geophysical Research Letters **34** (2007). DOI: [10.1029/2007GL031483](https://doi.org/10.1029/2007GL031483). 6
- [25] D. E. Sugden. *Glacial erosion by the Laurentide ice sheet*. Journal of Glaciology **20**, 367 (1978). DOI: [10.3189/S0022143000013915](https://doi.org/10.3189/S0022143000013915). 6, 11, 12
- [26] W. F. Budd. *Ice Flow Over Bedrock Perturbations*. Journal of Glaciology **9**, 29 (1970). DOI: [10.3189/S0022143000026770](https://doi.org/10.3189/S0022143000026770). 6
- [27] G. H. Gudmundsson. *Transmission of basal variability to a glacier surface*. Journal of Geophysical Research: Solid Earth **108** (2003). DOI: [10.1029/2002JB002107](https://doi.org/10.1029/2002JB002107). 6
- [28] H. Ockenden, R. G. Bingham, A. Curtis, and D. Goldberg. *Ice-flow perturbation analysis: a method to estimate ice-sheet bed topography and conditions from surface datasets*. Journal of Glaciology **69**, 1677 (2023). DOI: [10.1017/jog.2023.50](https://doi.org/10.1017/jog.2023.50). 6
- [29] B. Getraer and M. Morlighem. *Increasing the Glen–Nye power law exponent accelerates ice loss projections for the Amundsen Sea Embayment, West Antarctica*. Geophysical Research Letters (2025). DOI: [10.1029/2024GL112516](https://doi.org/10.1029/2024GL112516). 6
- [30] A. Fabela Hinojosa. *BedSAT: Antarctica*. Phd confirmation of candidature report, Monash University (2025). Unpublished. 7
- [31] NVIDIA. *NVIDIA PhysicsNeMo*. <https://developer.nvidia.com/physicsnemo>, (2025). Accessed: 2025-09-21. 7

- [32] M. Meredith, M. Sommerkorn, S. Cassotta, C. Derksen, A. Ekaykin, A. Hollowed, G. Kofinas, A. Mackintosh, J. Melbourne-Thomas, M. M. C. Muelbert, G. Ottersen, H. Pritchard, and E. A. G. Schuur. *The Ocean and Cryosphere in a changing climate*. In H.-O. Pörtner, D. C. Roberts, V. Masson-Delmotte, P. Zhai, M. Tignor, E. Poloczanska, K. Mintenbeck, A. Alegría, M. Nicolai, A. Okem, and J. Petzold (editors), *IPCC Special Report on the Ocean and Cryosphere in a Changing Climate*, pages 203–320. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA (2019). DOI: [10.1017/9781009157964.005](https://doi.org/10.1017/9781009157964.005). 8
- [33] S. S. Jacobs. *Bottom water production and its links with the thermohaline circulation*. Antarctic Science **16**, 427 (2004). DOI: [10.1017/S095410200400224X](https://doi.org/10.1017/S095410200400224X). 8
- [34] B. Fox-Kemper, H. T. Hewitt, C. Xiao, G. Aðalgeirsdóttir, S. S. Drijfhout, T. L. Edwards, N. R. Golledge, M. Hemer, R. E. Kopp, G. Krinner, A. Mix, D. Notz, S. Nowicki, I. S. Nurhati, L. Ruiz, J.-B. Sallée, A. B. A. Slangen, and Y. Yu. *Ocean, Cryosphere and Sea Level Change*. In V. Masson-Delmotte, P. Zhai, A. Pirani, S. L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M. I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J. B. R. Matthews, T. K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, and B. Zhou (editors), *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, chapter 9, pages 1211–1362. Cambridge University Press, Cambridge, UK and New York, NY, USA (2021). DOI: [10.1017/9781009157896.011](https://doi.org/10.1017/9781009157896.011). 8
- [35] RINGS Action Group. *RINGS: Collaborative international effort to map all Antarctic ice-sheet margins*. Scientific Committee on Antarctic Research (2022). DOI: [10.5281/zenodo.6638327](https://doi.org/10.5281/zenodo.6638327). 8
- [36] B. Hubbard, M. J. Siegert, and D. McCarroll. *Spectral roughness of glaciated bedrock geomorphic surfaces: implications for glacier sliding*. Journal of Geophysical Research **105**, 21295 (2000). DOI: [10.1029/2000JB900162](https://doi.org/10.1029/2000JB900162). 8
- [37] X. Li, B. Sun, M. J. Siegert, R. G. Bingham, X. Tang, D. Zhang, X. Cui, and X. Zhang. *Characterization of subglacial landscapes by a two-parameter roughness index*. Journal of Glaciology **56**, 831 (2010). DOI: [10.3189/002214310794457326](https://doi.org/10.3189/002214310794457326). 8, 12
- [38] D. A. Young, A. P. Wright, J. L. Roberts, R. C. Warner, N. W. Young, J. S. Greenbaum, D. M. Schroeder, J. W. Holt, D. E. Sugden, D. D. Blankenship, and T. D. van Ommen. *A dynamic early East Antarctic Ice Sheet suggested by ice-covered fjord landscapes*. Nature **474**, 72 (2011). DOI: [10.1038/nature10114](https://doi.org/10.1038/nature10114). 9
- [39] D. D. Blankenship, S. D. Kempf, D. A. Young, T. G. Richter, D. M. Schroeder, G. Ng, J. S. Greenbaum, T. van Ommen, R. C. Warner, J. L. Roberts, N. W. Young, E. Lemeur, and M. J. Siegert. *IceBridge HiCARS 2 L2 Geolocated Ice Thickness, Version 1*, (2012). DOI: [10.5067/9EBR2T0VXUDG](https://doi.org/10.5067/9EBR2T0VXUDG). 9
- [40] E. Rignot, J. Mouginot, and B. Scheuchl. *Ice Flow of the Antarctic Ice Sheet*. Science **333**, 1427 (2011). DOI: [10.1126/science.1208336](https://doi.org/10.1126/science.1208336). 11
- [41] B. C. Frederick, D. A. Young, D. D. Blankenship, T. G. Richter, S. D. Kempf, F. Ferraccioli, and M. J. Siegert. *Distribution of subglacial sediments across the Wilkes Subglacial Basin, East Antarctica*. Journal of Geophysical Research: Earth Surface **121**, 790 (2016). DOI: [10.1002/2015JF003760](https://doi.org/10.1002/2015JF003760). 11

- [42] M. K. Shepard, R. A. Brackett, and R. E. Arvidson. *Self-affine (fractal) topography: Surface parameterization and radar scattering*. Journal of Geophysical Research **100**, 11709 (1995). DOI: [10.1029/95JE00664](https://doi.org/10.1029/95JE00664). 12
- [43] E. C. King, J. Woodward, and A. M. Smith. *Seismic and radar observations of subglacial bed forms beneath the onset zone of Rutford Ice Stream, Antarctica*. Journal of Glaciology **53**, 665 (2007). DOI: [10.3189/002214307784409216](https://doi.org/10.3189/002214307784409216). 12
- [44] M. Spagnolo, T. C. Bartholomaus, C. D. Clark, C. R. Stokes, N. Atkinson, J. A. Dowdeswell, J. C. Ely, A. G. C. Graham, K. A. Hogan, E. C. King, R. D. Larter, S. J. Livingstone, and H. D. Pritchard. *The periodic topography of ice stream beds: insights from the Fourier spectra of mega-scale glacial lineations*. Journal of Geophysical Research: Earth Surface **122**, 1355 (2017). DOI: [10.1002/2016JF004154](https://doi.org/10.1002/2016JF004154). 12