


## Source Code


### I. HTML FILES

#### a. index.html

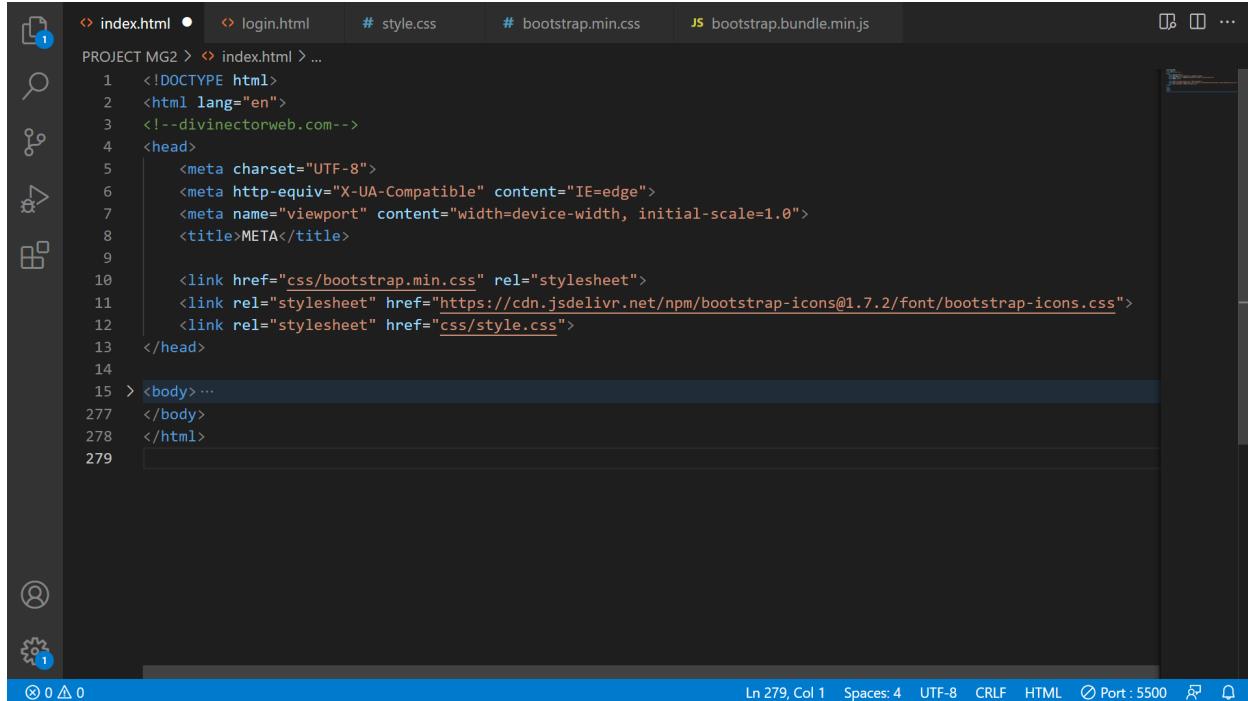

```
PROJECT MG2 > index.html
1  <!DOCTYPE html>
2  <html lang="en">
3  <!--divinectorweb.com-->
4  <head>
5      <meta charset="UTF-8">
6      <meta http-equiv="X-UA-Compatible" content="IE=edge">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>META</title>
9
10     <link href="css/bootstrap.min.css" rel="stylesheet">
11     <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.7.2/font/bootstrap-icons.css">
12     <link rel="stylesheet" href="css/style.css">
13 </head>
14
15 > <body>...
277 </body>
278 </html>
279
```

This set of code in the head contains the link of the bootstrap and css files

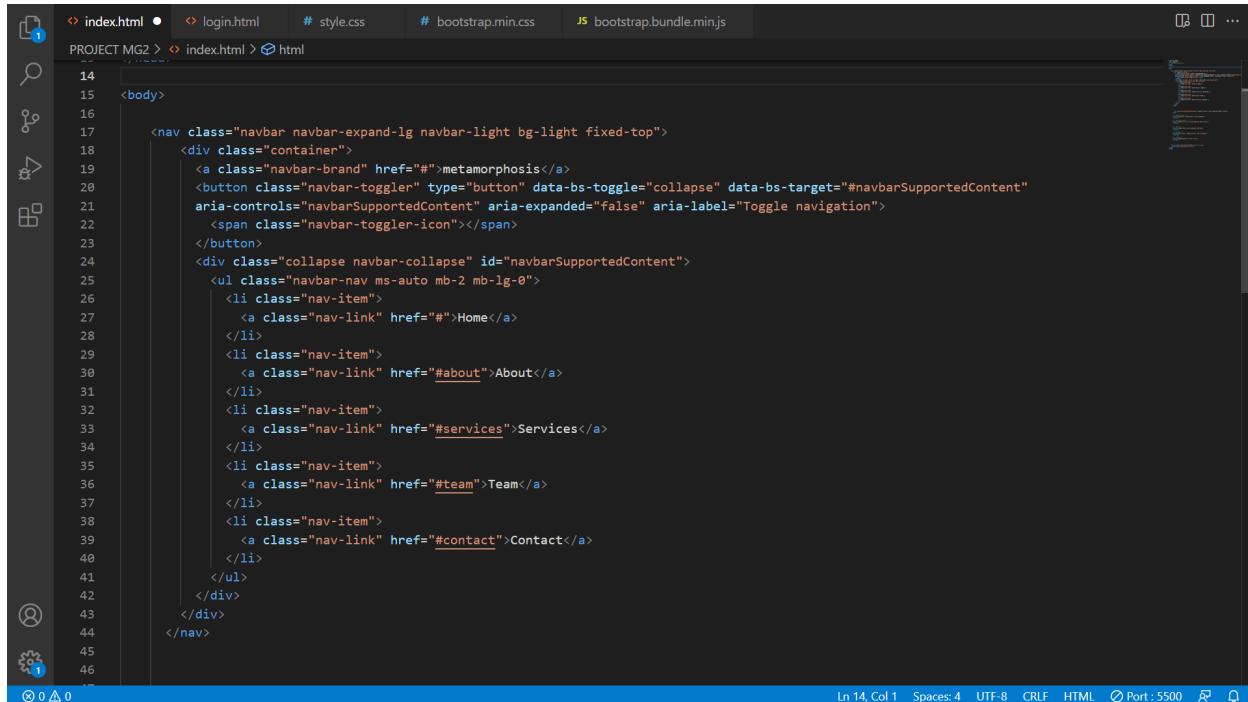

```
PROJECT MG2 > index.html > html
14
15 <body>
16
17     <nav class="navbar navbar-expand-lg navbar-light bg-light fixed-top">
18         <div class="container">
19             <a class="navbar-brand" href="#">metamorphosis</a>
20             <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent"
21                 aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
22                 <span class="navbar-toggler-icon"></span>
23             </button>
24             <div class="collapse navbar-collapse" id="navbarSupportedContent">
25                 <ul class="navbar-nav ms-auto mb-2 mb-lg-0">
26                     <li class="nav-item">
27                         <a class="nav-link" href="#">Home</a>
28                     </li>
29                     <li class="nav-item">
30                         <a class="nav-link" href="#about">About</a>
31                     </li>
32                     <li class="nav-item">
33                         <a class="nav-link" href="#services">Services</a>
34                     </li>
35                     <li class="nav-item">
36                         <a class="nav-link" href="#team">Team</a>
37                     </li>
38                     <li class="nav-item">
39                         <a class="nav-link" href="#contact">Contact</a>
40                     </li>
41                 </ul>
42             </div>
43         </nav>
```

Set of codes that contains the html of the Navigation Bar

```
index.html • login.html # style.css # bootstrap.min.css JS bootstrap.bundle.min.js

PROJECT MG2 > index.html > html
44 </nav>
45
46
47
48 <div id="carouselExampleIndicators" class="carousel slide" data-bs-ride="carousel">
49   <div class="carousel-indicators">
50     <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="0" class="active" aria-current="true" aria-label="Slide 1"></button>
51     <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="1" aria-label="Slide 2"></button>
52     <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="2" aria-label="Slide 3"></button>
53   </div>
54   <div class="carousel-inner">
55     <div class="carousel-item active">
56       
57       <div class="carousel-caption">
58         <h5>Metamorphosis</h5>
59         <p>A modern database built on the employee record as the cornerstone of information.</p>
60       </div>
61     </div>
62   </div>
63   <div class="carousel-item">
64     
65     <div class="carousel-caption">
66       <h5>Simple System</h5>
67       <p>All employee data and records are filled and stored in one place, simplifying employee record management.</p>
68     </div>
69   </div>
70 </div>
71 <div class="carousel-item">
72   
73   <div class="carousel-caption">
74     <h5>Real Time</h5>
75     <p>Updates and additions to an employee record is instantly shared across the entire platform for improved accuracy, consistency, and compliance.</p>
76   </div>
77 </div>
78 </div>
79 <button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="prev">
80   <span class="carousel-control-prev-icon" aria-hidden="true"></span>
81   <span class="visually-hidden">Previous</span>
82 </button>
83 <button class="carousel-control-next" type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="next">
84   <span class="carousel-control-next-icon" aria-hidden="true"></span>
85   <span class="visually-hidden">Next</span>
86 </button>
87 </div>
88
89 <!-- about section -->
90 <section id="about" class="about section-padding">...
91 </section>
92
93 <!-- services section -->
94
95 <!-- footer section -->
96 <div class="row justify-content-between" style="background-color: #f0f0f0; padding-top: 20px; padding-bottom: 10px">
97   <div class="col-3" style="text-align: center; margin-bottom: 20px">
98     
99     <h3>Project MG2</h3>
100    <p>A modern database built on the employee record as the cornerstone of information.</p>
101  </div>
102  <div class="col-3" style="text-align: center; margin-bottom: 20px">
103    
104    <h3>Simple System</h3>
105    <p>All employee data and records are filled and stored in one place, simplifying employee record management.</p>
106  </div>
107  <div class="col-3" style="text-align: center; margin-bottom: 20px">
108    
109    <h3>Real Time</h3>
110    <p>Updates and additions to an employee record is instantly shared across the entire platform for improved accuracy, consistency, and compliance.</p>
111  </div>
112 </div>
113 <div style="text-align: center; font-size: small; margin-top: 10px">
114   <a href="#">Privacy Policy</a> | <a href="#">Terms of Service</a> | <a href="#">Contact Us</a>
115 </div>
116 <div style="text-align: center; font-size: small; margin-top: 10px">
117   <small>Copyright © 2024 Project MG2. All rights reserved.</small>
118 </div>
119 </div>
```

Set of codes that contains the html of the Carousel Bootstrap

```
46
47
48 >     |<div id="carouselExampleIndicators" class="carousel slide" data-bs-ride="carousel">...
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90 <!-- about section -->
91 <section id="about" class="about section-padding">
92     <div class="container">
93         <div class="row">
94             <div class="col-lg-4 col-md-12 col-12">
95                 <div class="about-img">
96                     
97                 </div>
98             </div>
99             <div class="col-lg-8 col-md-12 col-12 ps-lg-5 mt-md-5">
100                 <div class="about-text">
101                     <h2>We Provide the Best Quality of our System</h2>
102                     <p>wala akong maisip na description awit.</p>
103                 </div>
104             </div>
105         </div>
106     </div>
107
108     <!-- services section -->
109 <section class="services section-padding" id="services">...
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
```

Set of codes that contains the html of the ABOUT section.

```
index.html • login.html # style.css # bootstrap.min.css bootstrap.bundle.min.js
PROJECT MG2 > index.html ② html
89 >
90 <!-- about section -->
91 <section id="about" class="about section-padding">...
92 </section>
93
94 <!-- services section -->
95 <section class="services section-padding" id="services">
96   <div class="container">
97     <div class="row">
98       <div class="col-md-12">
99         <div class="section-header text-center pb-5">
100           <h2>Our Services</h2>
101           <p>Employee record management software streamlines document access and sharing,   
 helping you create more efficient workflows.</p>
102         </div>
103       </div>
104     </div>
105     <div class="row">
106       <div class="col-12 col-md-12 col-lg-4">
107         <div class="card text-white text-center bg-dark pb-2">
108           <div class="card-body">
109             <i class="bi bi-laptop"></i>
110             <h3 class="card-title">Best Quality</h3>
111             <p class="lead">affords an individual the opportunity to save, to build the security and confidence that allows one to plan for the future, and to participate.</p>
112           </div>
113         </div>
114       </div>
115       <div class="col-12 col-md-12 col-lg-4">
116         <div class="card text-white text-center bg-dark pb-2">
117           <div class="card-body">
118             <i class="bi bi-journal"></i>
119             <h3 class="card-title">Sustainability</h3>
120             <p class="lead">The power to unite the team to create a better work culture and work-life balance, and has a great impact on customers and the world.</p>
121           </div>
122         </div>
123       </div>
124     </div>
125     <div class="col-12 col-md-12 col-lg-4">
126       <div class="card text-white text-center bg-dark pb-2">
127         <div class="card-body">
128           <i class="bi bi-globe"></i>
129           <h3 class="card-title">Integrity</h3>
130           <p class="lead">We keep high-value customers, reduce employee turnover, improve productivity, and make smart decisions.</p>
131         </div>
132       </div>
133     </div>
134   </div>
135 </div>
136
137 <!-- team -->
138 <section class="team-section-padding" id="team">...
```

Ln 14 CGT | Spaces 4 UTF-8 CDR-1F

index.html

```

151. <!-- team -->
152. <section class="team section-padding" id="team">
153.   <div class="container">
154.     <div class="row">
155.       <div class="col-md-12">
156.         <div class="section-header text-center pb-5">
157.           <h2>Our Team</h2>
158.           <p>Consist of three programmers.<br>blaaaaaaaa</p>
159.         </div>
160.       </div>
161.     </div>
162.   </div>
163.   <div class="row">
164.     <div class="col-12 col-md-6 col-lg-3">
165.       <div class="card text-center">
166.         <div class="card-body">
167.           <img src="" alt="" class="img-fluid rounded-circle">
168.           <h3 class="card-title py-2">James Garcia</h3>
169.           <p class="card-text">Desc.</p>
170.
171.           <p class="socials">
172.             <i class="bi bi-twitter text-dark mx-1"></i>
173.             <i class="bi bi-facebook text-dark mx-1"></i>
174.             <i class="bi bi-linkedin text-dark mx-1"></i>
175.             <i class="bi bi-instagram text-dark mx-1"></i>
176.           </p>
177.         </div>
178.       </div>
179.     </div>
180.     <div class="col-12 col-md-6 col-lg-3">
181.       <div class="card text-center">
182.         <div class="card-body">
183.           <img src="" alt="" class="img-fluid rounded-circle">
184.           <h3 class="card-title py-2">Anakin Letim</h3>
185.           <p class="card-text">Desc.</p>
186.           <p class="socials">
187.             <i class="bi bi-twitter text-dark mx-1"></i>
188.             <i class="bi bi-facebook text-dark mx-1"></i>
189.             <i class="bi bi-linkedin text-dark mx-1"></i>
190.             <i class="bi bi-instagram text-dark mx-1"></i>
191.           </p>
192.         </div>
193.       </div>
194.     </div>
195.   </div>
196.   <div class="col-12 col-md-6 col-lg-3">
197.     <div class="card text-center">
198.       <div class="card-body">
199.         <img src="" alt="" class="img-fluid rounded-circle">
200.         <h3 class="card-title py-2">Princess Mae Regala</h3>
201.         <p class="card-text">Desc.</p>
202.         <p class="socials">
203.           <i class="bi bi-twitter text-dark mx-1"></i>
204.           <i class="bi bi-facebook text-dark mx-1"></i>
205.           <i class="bi bi-linkedin text-dark mx-1"></i>
206.           <i class="bi bi-instagram text-dark mx-1"></i>
207.         </p>
208.       </div>
209.     </div>
210.   </div>
211.   <div class="col-12 col-md-6 col-lg-3">
212.     <div class="card text-center">
213.       <div class="card-body">
214.         <img src="" alt="" class="img-fluid rounded-circle">
215.         <h3 class="card-title py-2">Missing Member</h3>
216.         <p class="card-text">Desc.</p>
217.         <p class="socials">
218.           <i class="bi bi-twitter text-dark mx-1"></i>
219.           <i class="bi bi-facebook text-dark mx-1"></i>
220.           <i class="bi bi-linkedin text-dark mx-1"></i>
221.           <i class="bi bi-instagram text-dark mx-1"></i>
222.         </p>
223.       </div>
224.     </div>
225.   </div>
226. </div>
227. </div>
228. </div>
229. </div>

```

Ln 14, Col 1   Spaces: 4   UTF-8   CRLF   HTML   Port: 5500

Set of codes that contains the html of the TEAMS section.

index.html

```

189. <i class="bi bi-facebook text-dark mx-1"></i>
190. <i class="bi bi-linkedin text-dark mx-1"></i>
191. <i class="bi bi-instagram text-dark mx-1"></i>
192. </p>
193. </div>
194. </div>
195. <div class="col-12 col-md-6 col-lg-3">
196.   <div class="card text-center">
197.     <div class="card-body">
198.       <img src="" alt="" class="img-fluid rounded-circle">
199.       <h3 class="card-title py-2">Princess Mae Regala</h3>
200.       <p class="card-text">Desc.</p>
201.       <p class="socials">
202.         <i class="bi bi-twitter text-dark mx-1"></i>
203.         <i class="bi bi-facebook text-dark mx-1"></i>
204.         <i class="bi bi-linkedin text-dark mx-1"></i>
205.         <i class="bi bi-instagram text-dark mx-1"></i>
206.       </p>
207.     </div>
208.   </div>
209. </div>
210. <div class="col-12 col-md-6 col-lg-3">
211.   <div class="card text-center">
212.     <div class="card-body">
213.       <img src="" alt="" class="img-fluid rounded-circle">
214.       <h3 class="card-title py-2">Missing Member</h3>
215.       <p class="card-text">Desc.</p>
216.       <p class="socials">
217.         <i class="bi bi-twitter text-dark mx-1"></i>
218.         <i class="bi bi-facebook text-dark mx-1"></i>
219.         <i class="bi bi-linkedin text-dark mx-1"></i>
220.         <i class="bi bi-instagram text-dark mx-1"></i>
221.       </p>
222.     </div>
223.   </div>
224. </div>
225. </div>
226. </div>
227. </div>
228. </div>
229. </div>

```

Ln 14, Col 1   Spaces: 4   UTF-8   CRLF   HTML   Port: 5500

Set of codes that contains the html of the TEAMS section.

index.html

```

228. </section>
229.
230. <!-- Contact -->
231. <section id="contact" class="contact section-padding">
232.   <div class="container mt-5 mb-5">
233.     <div class="row">
234.       <div class="col-md-12">
235.         <div class="section-header text-center pb-5">
236.           <h2>Contact Us</h2>
237.           <p>Send us a feedback! Kindly fill up the <br>form below. Thank you!</p>
238.         </div>
239.       </div>
240.     </div>
241.     <div class="row m-0">
242.       <div class="col-md-12 p-0 pt-4 pb-4">
243.         <form action="#" class="bg-light p-4 m-auto">
244.           <div class="row">
245.             <div class="col-md-12">
246.               <div class="mb-3">
247.                 <input class="form-control" placeholder="Full Name" required="" type="text">
248.               </div>
249.             </div>
250.             <div class="col-md-12">
251.               <div class="mb-3">
252.                 <input class="form-control" placeholder="Email" required="" type="email">
253.               </div>
254.             </div>
255.             <div class="col-md-12">
256.               <div class="mb-3">
257.                 <textarea class="form-control" placeholder="Message" required="" rows="3"></textarea>
258.               </div>
259.             </div>
260.           </div>
261.           <div class="col-md-12 text-right">
262.             <button class="btn btn-warning btn-lg btn-block mt-3" type="button">Send Now</button>
263.           </div>
264.         </div>
265.       </div>
266.     </div>
267.   </div>
268. </div>
269. </div>
270. <!-- footer -->
271. <footer class="bg-dark p-2 text-center">...
272. </footer>

```

Ln 14, Col 1   Spaces: 4   UTF-8   CRLF   HTML   Port: 5500

This part of the code contains the the Contact in the Navigation Bar

A screenshot of a code editor interface, likely Visual Studio Code, displaying the file `index.html`. The code editor shows the following HTML structure:


```
230 <!-- Contact -->
231 > <section id="contact" class="contact section-padding"> ...
232 </section>
233
234 <!-- footer -->
235 <footer class="bg-dark p-2 text-center">
236   <div class="container">
237     <p class="text-white">All Right Reserved By @metamorphosis</p>
238   </div>
239 </footer>
240
241 <script src="js/bootstrap.bundle.min.js"></script>
242 <script src="js/script.js"></script>
243 </body>
244 </html>
```

The code editor has a dark theme with syntax highlighting. The sidebar on the left contains icons for file operations like Open, Save, Find, and Refresh. The status bar at the bottom shows the file path "PROJECT MG2 > index.html", line 14, column 1, and other settings like "Port: 5500".

Set of codes that contains the html of the FOOTER.


## II. CSS FILES

### a. style.css

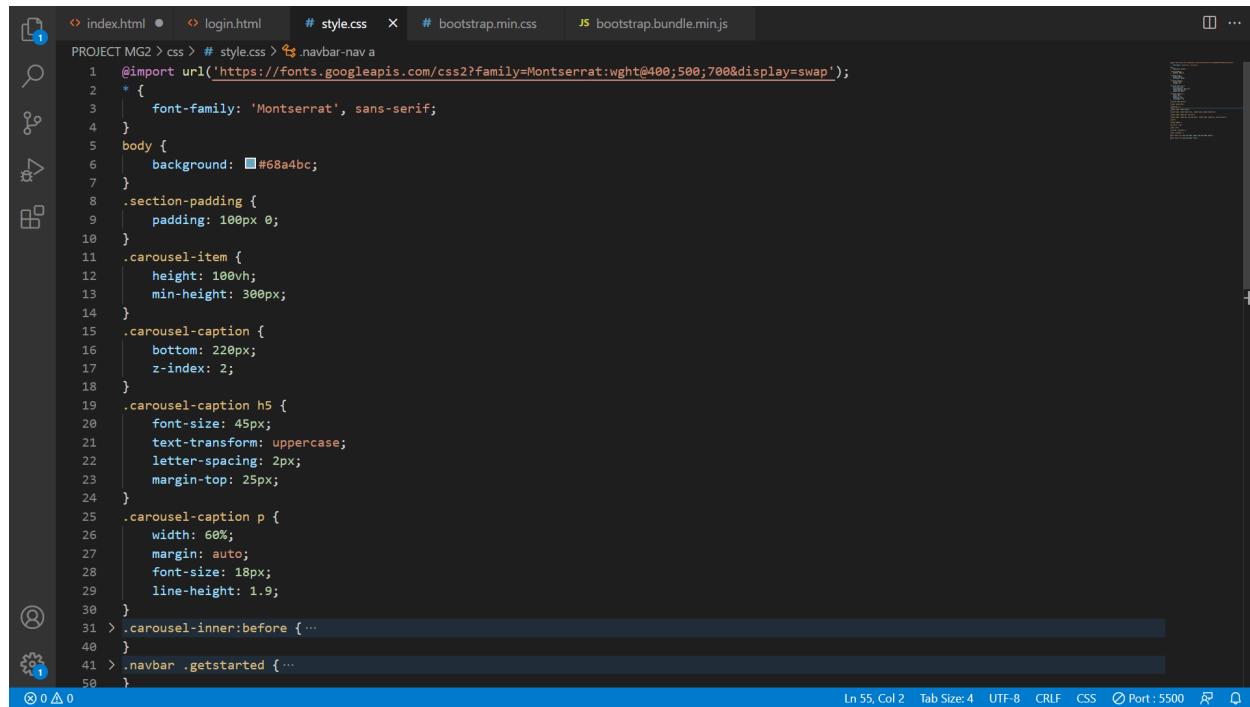

```
PROJECT MG2 > css > # style.css > .navbar-nav a
1 @import url('https://fonts.googleapis.com/css?family=Montserrat:wght@400;500;700&display=swap');
2 *
3   font-family: 'Montserrat', sans-serif;
4 }
5 body {
6   background: #68a4bc;
7 }
8 .section-padding {
9   padding: 100px 0;
10 }
11 .carousel-item {
12   height: 100vh;
13   min-height: 300px;
14 }
15 .carousel-caption {
16   bottom: 220px;
17   z-index: 2;
18 }
19 .carousel-caption h5 {
20   font-size: 45px;
21   text-transform: uppercase;
22   letter-spacing: 2px;
23   margin-top: 25px;
24 }
25 .carousel-caption p {
26   width: 60%;
27   margin: auto;
28   font-size: 18px;
29   line-height: 1.9;
30 }
31 > .carousel-inner::before { ...
32 }
33 > .navabar .getstarted { ...
34 }
35 > .navabar .getstarted { ...
36 }
37 > .navabar .getstarted { ...
38 }
39 > .navabar .getstarted { ...
40 }
41 > .navabar .getstarted { ...
42 }
43 > .navabar .getstarted { ...
44 }
45 > .navabar .getstarted { ...
46 }
47 > .navabar .getstarted { ...
48 }
49 > .navabar .getstarted { ...
50 }
51 > .navabar .getstarted { ...
52 }
53 > .navabar .getstarted { ...
54 }
55 > .navabar .getstarted { ...
56 }
57 > .navabar .getstarted { ...
58 }
59 > .navabar .getstarted { ...
60 }
61 > .navabar .getstarted { ...
62 }
```

This block of code contains the CSS design for the index.html, the body and the carousel.

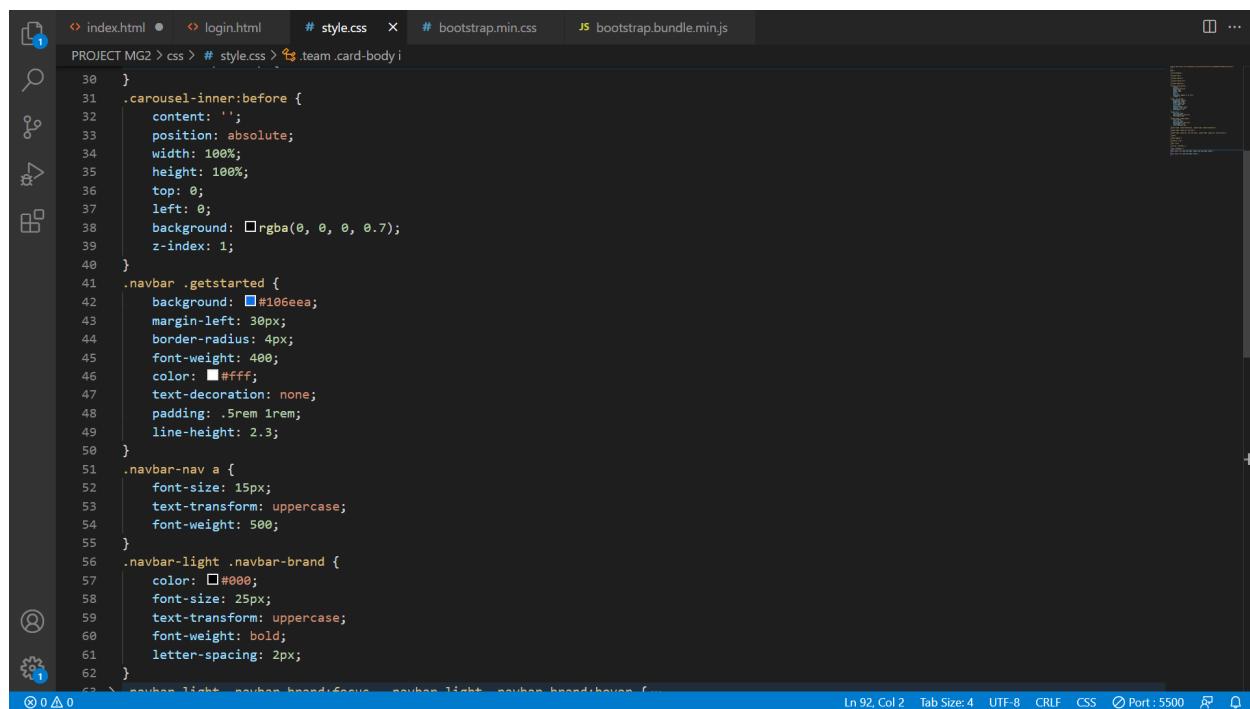

```
PROJECT MG2 > css > # style.css > .team .card-body i
30 }
31 .carousel-inner::before {
32   content: '';
33   position: absolute;
34   width: 100%;
35   height: 100%;
36   top: 0;
37   left: 0;
38   background: rgba(0, 0, 0, 0.7);
39   z-index: 1;
40 }
41 .navabar .getstarted {
42   background: #106eea;
43   margin-left: 30px;
44   border-radius: 4px;
45   font-weight: 400;
46   color: #fff;
47   text-decoration: none;
48   padding: .5rem 1rem;
49   line-height: 2.3;
50 }
51 .navabar .getstarted {
52   font-size: 15px;
53   text-transform: uppercase;
54   font-weight: 500;
55 }
56 .navabar-light .navabar-brand {
57   color: #000;
58   font-size: 25px;
59   text-transform: uppercase;
60   font-weight: bold;
61   letter-spacing: 2px;
62 }
```

This block of code contains the CSS design for the navigation bars.

This screenshot shows a code editor interface with several tabs open. The active tab is style.css, which contains the following CSS code:

```
PROJECT MG2 > css > # style.css > {} @media only screen and (max-width: 767px)
56 > .navbar-light .navbar-brand {
57 }
58 .navbar-light .navbar-brand:focus, .navbar-light .navbar-brand:hover {
59   color: #000;
60 }
61 .navbar-light .navbar-nav .nav-link {
62   color: #000;
63 }
64 .navbar-light .navbar-nav .nav-link:focus, .navbar-light .navbar-nav .nav-link:hover {
65   color: #000;
66 }
67 .w-100 {
68   height: 100vh;
69 }
70 .navbar-toggler {
71   padding: 1px 5px;
72   font-size: 18px;
73   line-height: 0.3;
74   background: #fff;
75 }
76 .portfolio .card {
77   box-shadow: 15px 15px 40px rgba(0, 0, 0, 0.15);
78 }
79 .team .card {
80   box-shadow: 15px 15px 40px rgba(0, 0, 0, 0.15);
81 }
82 .services .card-body i {
83   font-size: 50px;
84 }
85 .team .card-body i {
86   font-size: 20px;
87 }
88 @media only screen and (min-width: 768px) and (max-width: 991px) { ... }
```

This section of the code contains the Navigation Bar and Card design.

This screenshot shows a code editor interface with several tabs open. The active tab is style.css, which contains the following CSS code:

```
PROJECT MG2 > css > # style.css > {} @media only screen and (max-width: 767px)
87 > .services .card-body i { ...
88 }
89 > .team .card-body i { ...
90 }
91 @media only screen and (min-width: 768px) and (max-width: 991px) {
92   .carousel-caption {
93     bottom: 370px;
94   }
95   .carousel-caption p {
96     width: 100%;
97   }
98   .card {
99     margin-bottom: 30px;
100  }
101  .img-area img {
102    width: 100%;
103  }
104  }
105  }
106  }
107 > @media only screen and (max-width: 767px) { ...
108 }
109 }
110 }
111 }
112 }
113 }
114 }
115 }
116 }
117 }
118 }
119 }
120 }
121 }
122 }
123 }
124 }
125 }
126 }
127 }
128 }
129 }
130 }
131 }
132 }
```


This block of code contains the sizes of the Carousel and images per section as it changes screen sizes.

This screenshot shows a code editor interface with several tabs open. The active tab is style.css, which contains the following CSS code:

```
PROJECT MG2 > css > # style.css > {} @media only screen and (max-width: 767px)
90 > .team .card-body i { ...
91 }
92 @media only screen and (min-width: 768px) and (max-width: 991px) {
93   .navbar-nav {
94     text-align: center;
95   }
96   .carousel-caption {
97     bottom: 125px;
98   }
99   .carousel-caption h5 {
100    font-size: 17px;
101  }
102   .carousel-caption a {
103    padding: 10px 15px;
104    font-size: 15px;
105  }
106   .carousel-caption p {
107    width: 100%;
108    line-height: 1.6;
109    font-size: 12px;
110  }
111   .about-text {
112    padding-top: 50px;
113  }
114   .card {
115    margin-bottom: 30px;
116  }
117  }
118  }
119  }
120  }
121  }
122  }
123  }
124  }
125  }
126  }
127  }
128  }
129  }
130  }
131  }
132 }
```

This block of code contains the sizes of the Carousel and images per section as it changes screen sizes.


## page.html

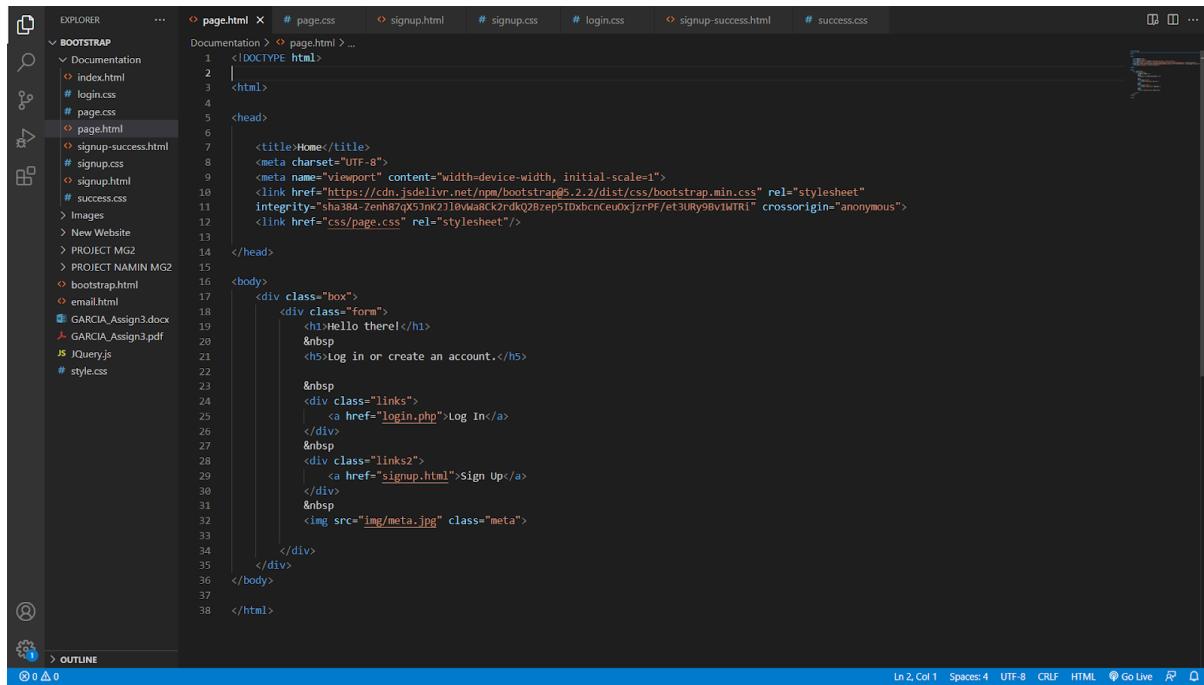

```
<!DOCTYPE html>
<html>
<head>
<title>Home</title>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-zYM8Z-zen87qX5mK2J0vWaCk2rQ2BzeP5IDxbnCeUxjzrPF/et3URy9BvIwTRi" crossorigin="anonymous">
<link href="css/page.css" rel="stylesheet"/>
</head>
<body>
<div class="box">
<div class="form">
<h1>Hello there!</h1>
<br>
<h5>Log in or create an account.</h5>
<br>
<div class="links">
| <a href="login.php">Log In</a>
</div>
<br>
<div class="links2">
| <a href="signup.html">Sign Up</a>
</div>
<br>

</div>
</div>
</body>
</html>
```

## page.css

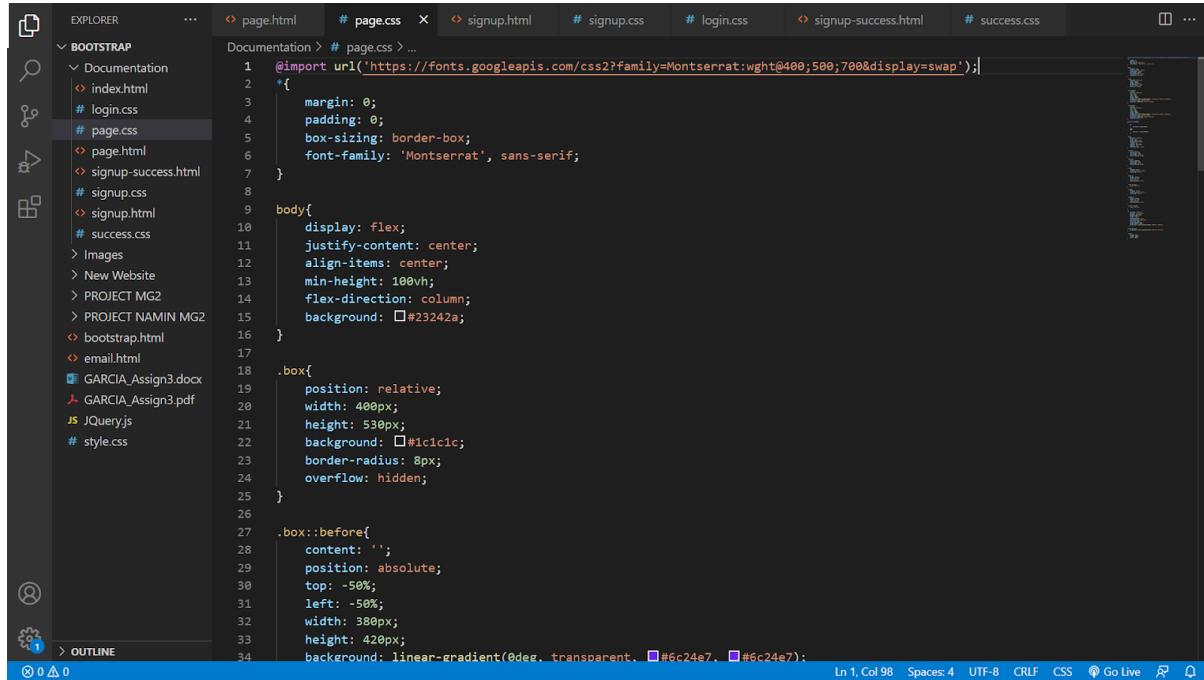

```
@import url('https://fonts.googleapis.com/css2?family=Montserrat:wght@400;500;700&display=swap');
*{
    margin: 0;
    padding: 0;
    box-sizing: border-box;
    font-family: 'Montserrat', sans-serif;
}
body{
    display: flex;
    justify-content: center;
    align-items: center;
    min-height: 100vh;
    flex-direction: column;
    background: #23242a;
}
.box{
    position: relative;
    width: 400px;
    height: 530px;
    background: #1c1c1c;
    border-radius: 8px;
    overflow: hidden;
}
.box::before{
    content: '';
    position: absolute;
    top: -50%;
    left: -50%;
    width: 380px;
    height: 420px;
    background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
```

EXPLORER    Documentation    page.html    # page.css    signup.html    # signup.css    # login.css    # signup-success.html    # success.css

```
Documentation > # page.css > ...
  23   border-radius: 8px;
  24   overflow: hidden;
  25 }

  26 .box::before{
  27   content: '';
  28   position: absolute;
  29   top: -50%;
  30   left: -50%;
  31   width: 380px;
  32   height: 420px;
  33   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
  34   transform-origin: bottom right;
  35   animation: animate 6s linear infinite;
  36 }

  37 .box::after{
  38   content: '';
  39   position: absolute;
  40   top: -50%;
  41   left: -50%;
  42   width: 380px;
  43   height: 420px;
  44   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
  45   transform-origin: bottom right;
  46   animation: animate 6s linear infinite;
  47   animation-delay: -3s;
  48 }

  49 @keyframes animate
  50 {
  51   0%
  52   {
  53     transform: rotate(0deg);
  54   }
  55   100%
  56   {
  57     transform: rotate(360deg);
  58   }
  59 }

  60 .form{
  61   position: absolute;
  62   inset: 2px;
  63   border-radius: 8px;
  64   background: #e7cff6;
  65   z-index: 10;
  66   padding: 50px 40px;
  67   display: flex;
  68   flex-direction: column;
  69 }

  70 .form h1{
  71   color: #8a4fff;
  72   font-weight: 700;
  73   text-align: center;
  74   letter-spacing: 0.1em;
  75 }

  76 .form h5{
  77   color: #000000;
  78   font-weight: 500;
  79   text-align: center;
  80   letter-spacing: 0.1em;
  81 }

  82 .form h5{
```

Ln 1, Col 98   Spaces: 4   UTF-8   CRLF   CSS   Go Live

EXPLORER    Documentation    page.html    # page.css    signup.html    # signup.css    # login.css    # signup-success.html    # success.css

```
  83   letter-spacing: 0.1em;
  84 }

  85 .form h5{
  86   color: #000000;
  87   font-weight: 500;
  88   text-align: center;
  89   letter-spacing: 0.1em;
  90 }

  91 .links{
  92   display: inline;
  93   justify-content: center;
  94   text-align: center;
  95 }

  96 .links a{
  97   margin: 10px 0;
  98   font-size: 1em;
  99   color: black;
 100  text-decoration: none;
 101 }

 102 .links a:hover{
 103   color: #e7cff6;
 104 }

 105 .links2{
 106   display: inline;
 107   justify-content: center;
 108   text-align: center;
 109 }

 110 .links2 a{
```

Ln 1, Col 98   Spaces: 4   UTF-8   CRLF   CSS   Go Live

EXPLORER    Documentation    page.html    # page.css    signup.html    # signup.css    # login.css    # signup-success.html    # success.css

```
 111   letter-spacing: 0.1em;
 112 }
```

Ln 1, Col 98   Spaces: 4   UTF-8   CRLF   CSS   Go Live

The screenshot shows the Visual Studio Code interface with the following details:

- Explorer View:** Shows a tree structure of files and folders. Under the **BOOTSTRAP** folder, **Documentation** is expanded, showing **index.html**, **#login.css**, **#page.css**, **page.html**, **signup-success.html**, **#signup.css**, **signup.html**, and **#success.css**. Other items include **Images**, **New Website**, **PROJECT MG2**, **PROJECT NAMIN MG2**, **bootstrap.html**, **email.html**, **GARCIA\_Assign3.docx**, **JQuery.js**, and **style.css**.
- Code Editor:** The active tab is **#page.css**. The code defines styles for **.links2** and **a** elements, including gradients for the background.
- Status Bar:** Shows "Ln 1, Col 98" and "Spaces: 4" along with other standard status bar icons.


```
Documentation > # page.css > ...
106     justify-content: center;
107   }
108 }
109 .links2 a{
110   margin: 10px 0;
111   font-size: 1em;
112   color: black;
113   text-decoration: none;
114 }
115 .links2 a:hover{
116   color: #e7cff6;
117 }
118 a{
119   position: relative;
120   display: inline-block;
121   padding: 12px 36px;
122   margin: 10px 0;
123   color: black;
124   text-decoration: none;
125   text-transform: uppercase;
126   font-size: 18px;
127   letter-spacing: 2px;
128   border-radius: 40px;
129   background: linear-gradient(90deg, #A084CF, #624F82);
130 }
131 a:nth-child(2){
132   background: linear-gradient(90deg, #A084CF, #624F82);
133 }
134 .meta{
```

This screenshot shows the same Visual Studio Code environment as the first one, but with a different set of CSS rules applied to the **#page.css** file.


- Code Editor:** The active tab is **#page.css**. The code now includes a style for the **.meta** class, which sets **margin: auto;**, **height: 200px;**, and **width: 200px;**.
- Status Bar:** Shows "Ln 1, Col 98" and "Spaces: 4" along with other standard status bar icons.

```
Documentation > # page.css > ...
127   margin: 10px 0;
128   color: black;
129   text-decoration: none;
130   text-transform: uppercase;
131   font-size: 18px;
132   letter-spacing: 2px;
133   border-radius: 40px;
134   background: linear-gradient(90deg, #A084CF, #624F82);
135 }
136 a:nth-child(2){
137   background: linear-gradient(90deg, #A084CF, #624F82);
138 }
139 .meta{
140   margin: auto;
141   height: 200px;
142   width: 200px;
143 }
```

## signup.html

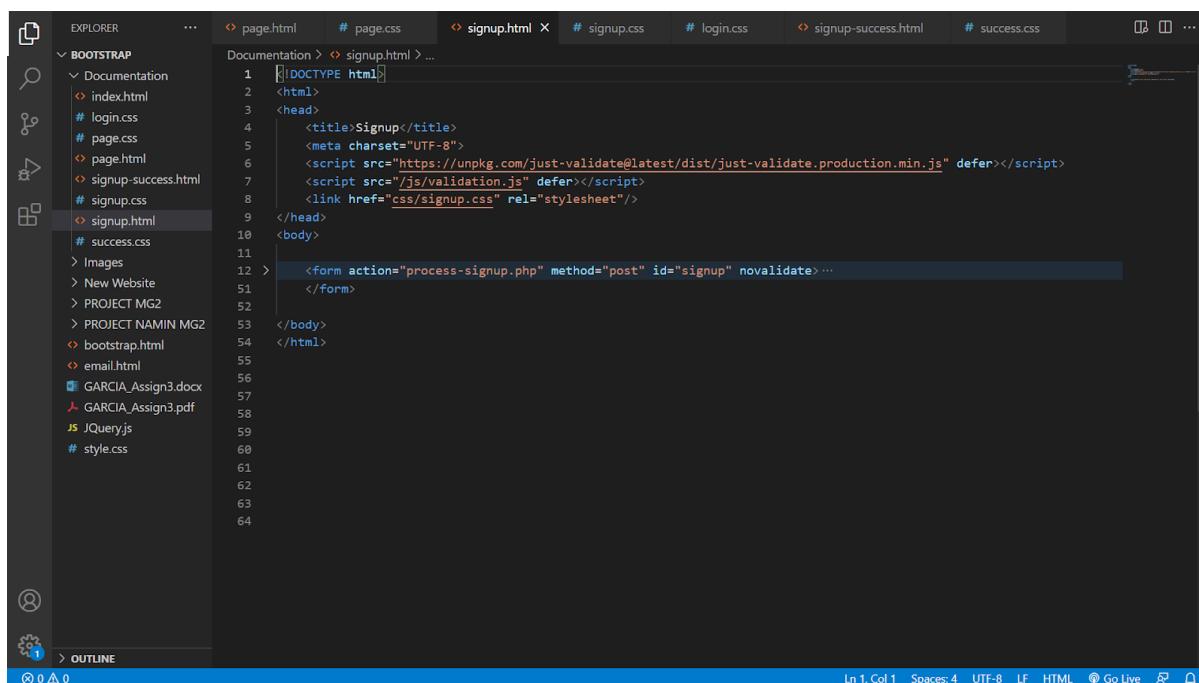

```
<!DOCTYPE html>
<html>
<head>
    <title>Signup</title>
    <meta charset="UTF-8">
    <script src="https://unpkg.com/just-validate@latest/dist/just-validate.production.min.js" defer></script>
    <script src="/js/validation.js" defer></script>
    <link href="css/signup.css" rel="stylesheet"/>
</head>
<body>
    <form action="process-signup.php" method="post" id="signup" novalidate> ...
</body>
</html>
```

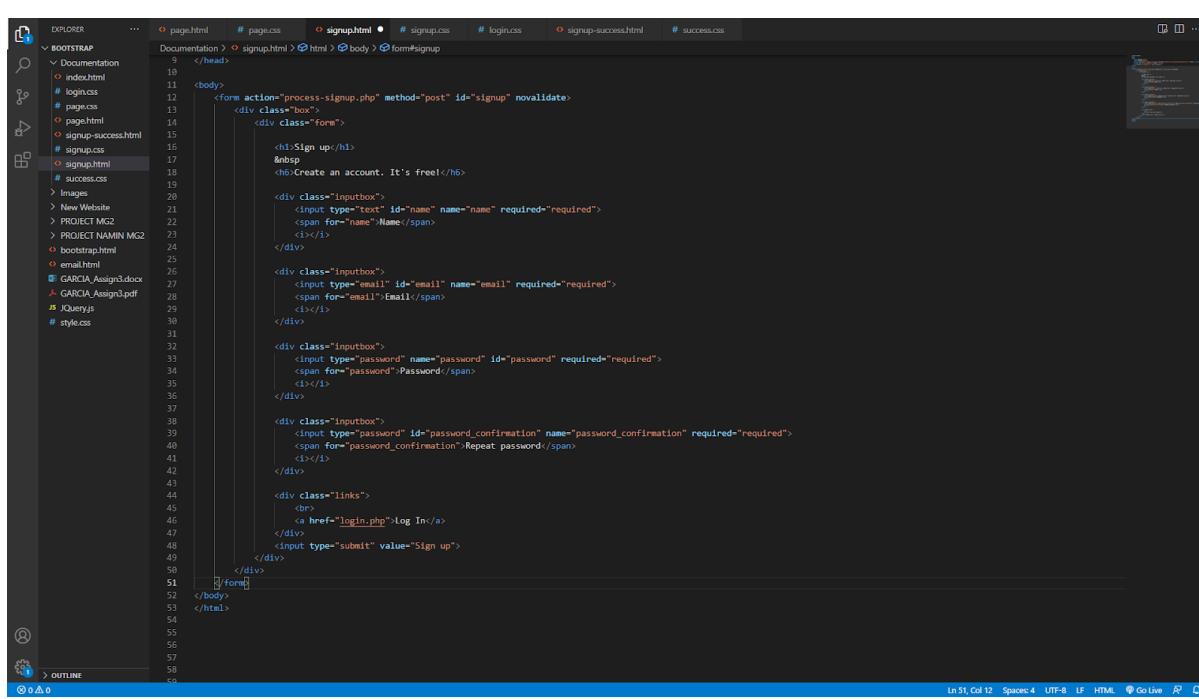

```
9     </head>
10    <body>
11        <form action="process-signup.php" method="post" id="signup" novalidate>
12            <div class="box">
13                <div class="form">
14                    <h1>Sign up</h1>
15                    <h2>Create an account. It's free!</h2>
16
17                    <div class="inputbox">
18                        <input type="text" id="name" name="name" required="required">
19                        <span for="name">Name</span>
20                        <i></i>
21                    </div>
22
23                    <div class="inputbox">
24                        <input type="email" id="email" name="email" required="required">
25                        <span for="email">Email</span>
26                        <i></i>
27                    </div>
28
29                    <div class="inputbox">
30                        <input type="password" name="password" id="password" required="required">
31                        <span for="password">Password</span>
32                        <i></i>
33                    </div>
34
35                    <div class="inputbox">
36                        <input type="password" id="password_confirmation" name="password_confirmation" required="required">
37                        <span for="password_confirmation">Repeat password</span>
38                        <i></i>
39                    </div>
40
41                    <div class="links">
42                        <br>
43                        <a href="login.php">Log In</a>
44                    </div>
45
46                    <input type="submit" value="Sign up">
47                </div>
48            </div>
49        </form>
50    </body>
51 </html>
```

## signup.css

```
1 @import url('https://fonts.googleapis.com/css2?family=Montserrat:wght@400;500;700&display=swap');
2 *
3   margin: 0;
4   padding: 0;
5   box-sizing: border-box;
6   font-family: 'Montserrat', sans-serif;
7 }
8
9 body{
10   display: flex;
11   justify-content: center;
12   align-items: center;
13   min-height: 100vh;
14   background: #23242a;
15 }
16
17 .box{
18   position: relative;
19   width: 380px;
20   height: 600px;
21   background: #1c1c1c;
22   border-radius: 8px;
23   overflow: hidden;
24 }
25
26 .box::before{
27   content: '';
28   position: absolute;
29   top: -50%;
30   left: -50%;
31   width: 380px;
32   height: 600px;
33   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
34   transform-origin: bottom right;
35 }
36
37 .box::after{
38   content: '';
39   position: absolute;
40   top: -50%;
41   left: -50%;
42   width: 380px;
43   height: 600px;
44   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
45   transform-origin: bottom right;
46   animation: animate 6s linear infinite;
47   animation-delay: -3s;
48 }
49
50 @keyframes animate
51 {
52   0%
53   {
54     transform: rotate(0deg);
55   }
56 }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
22   border-radius: 8px;
23   overflow: hidden;
24 }
25
26 .box::before{
27   content: '';
28   position: absolute;
29   top: -50%;
30   left: -50%;
31   width: 380px;
32   height: 600px;
33   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
34   transform-origin: bottom right;
35   animation: animate 6s linear infinite;
36 }
37
38 .box::after{
39   content: '';
40   position: absolute;
41   top: -50%;
42   left: -50%;
43   width: 380px;
44   height: 600px;
45   background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
46   transform-origin: bottom right;
47   animation: animate 6s linear infinite;
48   animation-delay: -3s;
49 }
50
51 @keyframes animate
52 {
53   0%
54   {
55     transform: rotate(0deg);
56   }
57   100%
58   {
59     transform: rotate(360deg);
60   }
61 }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
49 }
50
51 @keyframes animate
52 {
53   0%
54   {
55     transform: rotate(0deg);
56   }
57   100%
58   {
59     transform: rotate(360deg);
60   }
61 }
62
63 .form{
64   position: absolute;
65   inset: 2px;
66   border-radius: 8px;
67   background: #e7cff6;
68   z-index: 10;
69   padding: 50px 40px;
70   display: flex;
71   flex-direction: column;
72 }
73
74 .form h1{
75   color: #8a4fff;
76   font-weight: 700;
77   text-align: center;
78   letter-spacing: 0.1em;
79 }
80 .form h6{
81   color: #000000;
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

The screenshot shows a code editor interface with several tabs open at the top: page.html, # page.css, signup.html, # signup.css (which is the active tab), # login.css, # signup-success.html, and # success.css. The left sidebar shows a project structure under 'BOOTSTRAP' with files like Documentation, index.html, login.css, page.css, page.html, signup-success.html, signup.css, signup.html, success.css, and style.css. The right pane displays the CSS code for the '# signup.css' file, which styles a sign-up form. The code includes rules for 'h6', '.inputbox', '.inputbox input', and 'span' elements.


```
Documentation > # signup.css > ...
77     text-align: center;
78     letter-spacing: 0.1em;
79   }
80   .form h6{
81     color: #000000;
82     font-weight: 500;
83     text-align: center;
84     letter-spacing: 0.1em;
85   }
86   .inputbox{
87     position: relative;
88     width: 300px;
89     margin-top: 35px;
90   }
91
92   .inputbox input{
93     position: relative;
94     width: 100%;
95     padding: 20px 10px 10px;
96     background: transparent;
97     border: none;
98     outline: none;
99     color: #23242a;
100    font-size: 1em;
101    letter-spacing: 0.05em;
102    z-index: 10;
103  }
104
105  span{
106    position: absolute;
107    left: 0;
108    padding: 20px 0px 10px;
109    font-size: 1em;
110  }
```

The screenshot shows a code editor interface with several tabs open at the top: page.html, # page.css, signup.html, # signup.css (active), # login.css, # signup-success.html, and # success.css. The left sidebar shows a project structure under 'BOOTSTRAP' with files like Documentation, index.html, login.css, page.css, page.html, signup-success.html, signup.css, signup.html, success.css, and style.css. The right pane displays the CSS code for the '# signup.css' file, which continues styling the sign-up form. It includes rules for 'span' and '.inputbox' elements.

```
Documentation > # signup.css > ...
183 }
184
185 span{
186   position: absolute;
187   left: 0;
188   padding: 20px 0px 10px;
189   font-size: 1em;
190   color: #0f0f0f;
191   pointer-events: none;
192   letter-spacing: 0.05em;
193   transform: 0.5s;
194 }
195
196 .inputbox input:valid ~ span,
197 .inputbox input:focus ~ span{
198   color: #5e02fdcc;
199   transform: translateX(0px) translateY(-34px);
200   font-size: 0.75em;
201 }
202
203 .inputbox i{
204   position: absolute;
205   left: 0;
206   bottom: 0;
207   width: 100%;
208   height: 2px;
209   background: #A084CF;
210   border-radius: 4px;
211   transition: 0.5s;
212   pointer-events: none;
213   z-index: 9;
214 }
215
216 .inputbox input:valid ~ i,
217 .inputbox input:focus ~ i{
218   height: 44px;
219 }
220
221 .links{
222   display: flex;
223   justify-content: space-between;
224 }
225
226 .links a{
227   margin: 10px 0;
228   font-size: 0.74em;
229   color: #0f0f0f;
230   text-decoration: none;
231 }
232
233 .links a:hover,
234 .links a:nth-child(2){
235   color: #6b04b4c3;
236 }
237
238 input[type="submit"]{
239   border: none;
240   outline: none;
241   background: #A084CF;
242   padding: 11px 25px;
243   width: 100px;
244 }
```


The screenshot shows a code editor interface with several tabs open at the top: page.html, # page.css, signup.html, # signup.css (active), # login.css, # signup-success.html, and # success.css. The left sidebar shows a project structure under 'BOOTSTRAP' with files like Documentation, index.html, login.css, page.css, page.html, signup-success.html, signup.css, signup.html, success.css, and style.css. The right pane displays the CSS code for the '# signup.css' file, which continues styling the sign-up form. It includes rules for '.links' and 'input' elements.

```
Documentation > # signup.css > ...
130   border-radius: 4px;
131   transition: 0.5s;
132   pointer-events: none;
133   z-index: 9;
134 }
135
136 .inputbox input:valid ~ i,
137 .inputbox input:focus ~ i{
138   height: 44px;
139 }
140
141 .links{
142   display: flex;
143   justify-content: space-between;
144 }
145
146 .links a{
147   margin: 10px 0;
148   font-size: 0.74em;
149   color: #0f0f0f;
150   text-decoration: none;
151 }
152
153 .links a:hover,
154 .links a:nth-child(2){
155   color: #6b04b4c3;
156 }
157
158 input[type="submit"]{
159   border: none;
160   outline: none;
161   background: #A084CF;
162   padding: 11px 25px;
163   width: 100px;
164 }
```

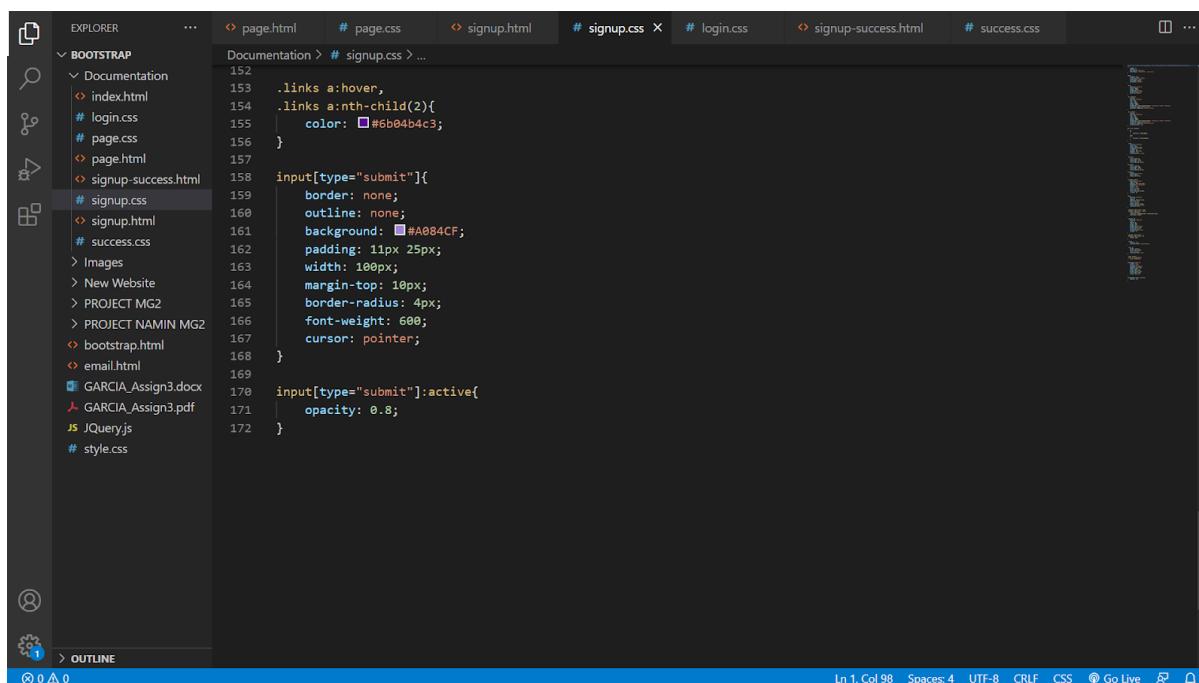

```
Documentation > # signup.css > ...
152     .links a:hover,
153     .links a:nth-child(2){
154         color: #6b04b4c3;
155     }
156
157     input[type="submit"]{
158         border: none;
159         outline: none;
160         background: #A084CF;
161         padding: 11px 25px;
162         width: 180px;
163         margin-top: 10px;
164         border-radius: 4px;
165         font-weight: 600;
166         cursor: pointer;
167     }
168
169     input[type="submit"]:active{
170         opacity: 0.8;
171     }
172 }
```

## login.css

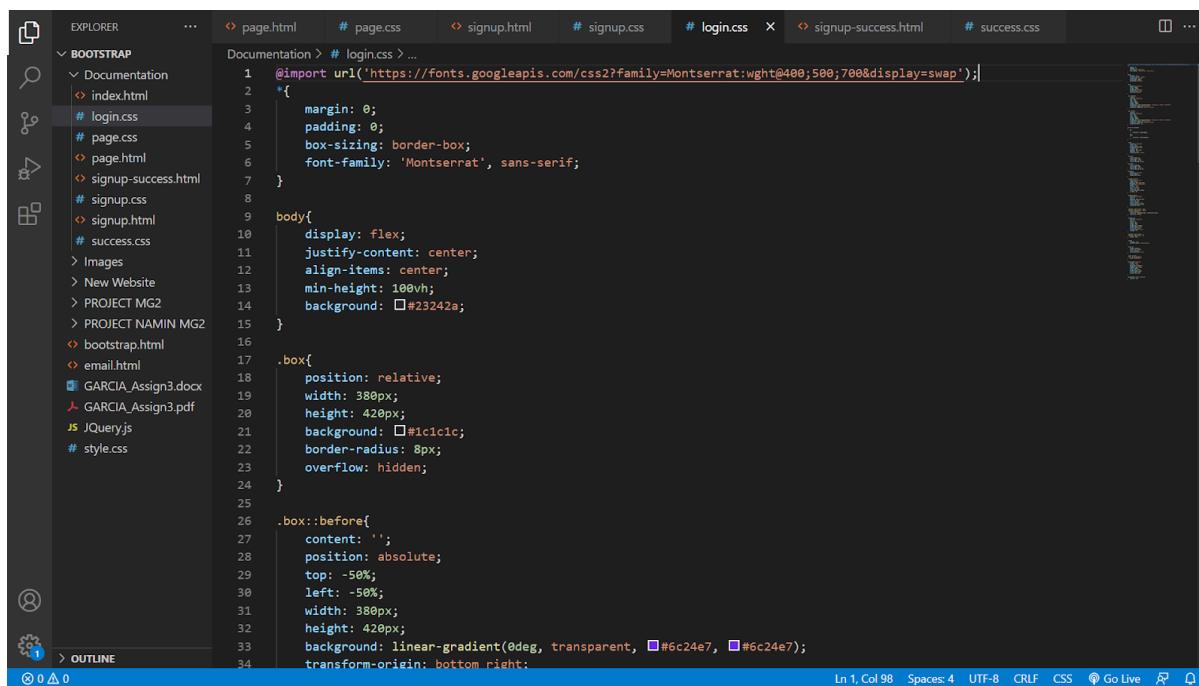

```
Documentation > # login.css > ...
1     @import url('https://fonts.googleapis.com/css2?family=Montserrat:wght@400;500;700&display=swap');
2
3     *{
4         margin: 0;
5         padding: 0;
6         box-sizing: border-box;
7         font-family: 'Montserrat', sans-serif;
8     }
9
10    body{
11        display: flex;
12        justify-content: center;
13        align-items: center;
14        min-height: 100vh;
15        background: #23242a;
16    }
17
18    .box{
19        position: relative;
20        width: 380px;
21        height: 420px;
22        background: #1c1c1c;
23        border-radius: 8px;
24        overflow: hidden;
25    }
26
27    .box::before{
28        content: '';
29        position: absolute;
30        top: -50%;
31        left: -50%;
32        width: 380px;
33        height: 420px;
34        background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
35        transform-origin: bottom right;
36    }
```

VS Code interface showing the Explorer, Editor, and Status bar. The Editor tab for `# login.css` contains the following CSS:

```
Documentation > # login.css > ...
23     overflow: hidden;
24 }
25 .box::before{
26     content: '';
27     position: absolute;
28     top: -50%;
29     left: -50%;
30     width: 380px;
31     height: 380px;
32     background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
33     transform-origin: bottom right;
34     animation: animate 6s linear infinite;
35 }
36 }
37 .box::after{
38     content: '';
39     position: absolute;
40     top: -50%;
41     left: -50%;
42     width: 380px;
43     height: 420px;
44     background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
45     transform-origin: bottom right;
46     animation: animate 6s linear infinite;
47     animation-delay: -3s;
48 }
49 }
50 @keyframes animate
51 {
52     0%
53     {
54         transform: rotate(0deg);
55     }
56     100%
57     {
58         transform: rotate(360deg);
59     }
60 }
```

The Status bar at the bottom shows: Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

VS Code interface showing the Explorer, Editor, and Status bar. The Editor tab for `# login.css` contains the following CSS:

```
Documentation > # login.css > ...
48     animation-delay: -3s;
49 }
50 @keyframes animate
51 {
52     0%
53     {
54         transform: rotate(0deg);
55     }
56     100%
57     {
58         transform: rotate(360deg);
59     }
60 }
61 .form{
62     position: absolute;
63     inset: 2px;
64     border-radius: 8px;
65     background: #e7cff6;
66     z-index: 10;
67     padding: 50px 40px;
68     display: flex;
69     flex-direction: column;
70 }
71 .form h1{
72     color: #8a4fff;
73     font-weight: 700;
74     text-align: center;
75     letter-spacing: 0.1em;
76 }
77 .form h6{
78 }
```

The Status bar at the bottom shows: Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

VS Code interface showing the Explorer, Editor, and Status bar. The Editor tab for `# login.css` contains the following CSS:

```
Documentation > # login.css > ...
75     color: #8a4fff;
76     font-weight: 700;
77     text-align: center;
78     letter-spacing: 0.1em;
79 }
80 .form h6{
81     color: #000000;
82     font-weight: 500;
83     text-align: center;
84     letter-spacing: 0.1em;
85 }
86 .inputbox{
87     position: relative;
88     width: 300px;
89     margin-top: 35px;
90 }
91 .inputbox input{
92     position: relative;
93     width: 100%;
94     padding: 20px 10px 10px;
95     background: transparent;
96     border: none;
97     outline: none;
98     color: #23242a;
99     font-size: 1em;
100    letter-spacing: 0.05em;
101   z-index: 10;
102 }
103 .inputbox span{
104     position: absolute;
105     left: 0;
106     padding: 20px 0px 10px;
107 }
```

The Status bar at the bottom shows: Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
Documentation > # login.css > ...
103 }
104 .inputbox span{
105     position: absolute;
106     left: 0;
107     padding: 20px 0px 10px;
108     font-size: 1em;
109     color: #8f8fbf;
110     pointer-events: none;
111     letter-spacing: 0.05em;
112     transform: rotate(0.5deg);
113 }
114 }
115 .inputbox input:valid ~ span,
116 .inputbox input:focus ~ span{
117     color: #5e02fdcc;
118     transform: translateX(0px) translateY(-34px);
119     font-size: 0.75em;
120 }
121 }
122 .inputbox i{
123     position: absolute;
124     left: 0;
125     bottom: 0;
126     width: 100%;
127     height: 2px;
128     background: #A084CF;
129     border-radius: 4px;
130     transition: 0.5s;
131     pointer-events: none;
132     z-index: 9;
133 }
134 }
135 .inputbox input:valid ~ i,
136 .inputbox input:focus ~ i,
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live


```
Documentation > # login.css > ...
131     transition: 0.5s;
132     pointer-events: none;
133     z-index: 9;
134 }
135
136 .inputbox input:valid ~ i,
137 .inputbox input:focus ~ i{
138     height: 44px;
139 }
140
141 .links{
142     display: flex;
143     justify-content: space-between;
144 }
145
146 .links a{
147     margin: 10px 0;
148     font-size: 0.74em;
149     color: #8f8fbf;
150     text-decoration: none;
151 }
152
153 .links a:hover,
154 .links a:nth-child(2){
155     color: #6b04b4c3;
156 }
157
158 input[type="submit"]{
159     border: none;
160     outline: none;
161     background: #A084CF;
162     padding: 11px 25px;
163     width: 100px;
164     margin-top: 10px;
165 }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
Documentation > # login.css > ...
149     color: #8f8fbf;
150     text-decoration: none;
151 }
152
153 .links a:hover,
154 .links a:nth-child(2){
155     color: #6b04b4c3;
156 }
157
158 input[type="submit"]{
159     border: none;
160     outline: none;
161     background: #A084CF;
162     padding: 11px 25px;
163     width: 100px;
164     margin-top: 10px;
165     border-radius: 4px;
166     font-weight: 600;
167     cursor: pointer;
168 }
169
170 input[type="submit"]:active{
171     opacity: 0.8;
172 }
```


Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

## signup-success.html

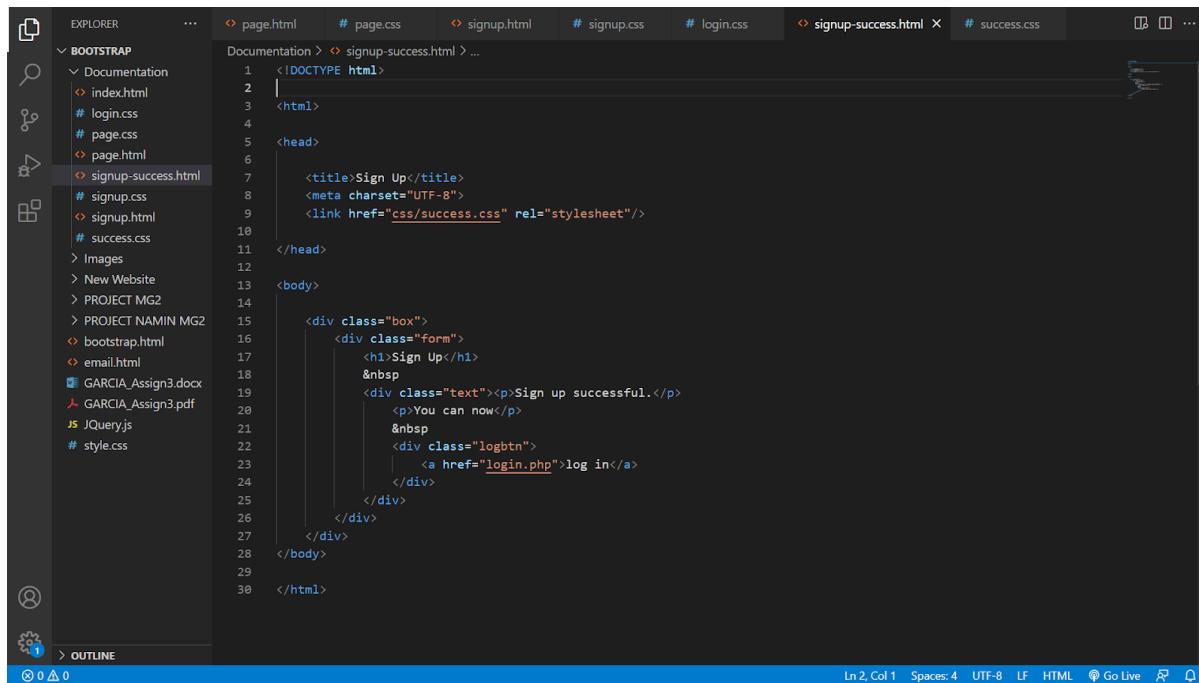

```
<!DOCTYPE html>
<html>
  <head>
    <title>Sign Up</title>
    <meta charset="UTF-8">
    <link href="css/success.css" rel="stylesheet"/>
  </head>
  <body>
    <div class="box">
      <div class="form">
        <h1>Sign Up</h1>
        &nbsp
        <div class="text"><p>Sign up successful.</p>
          <p>You can now:</p>
          &nbsp
          <div class="logbtn">
            <a href="login.php">log in</a>
          </div>
        </div>
      </div>
    </div>
  </body>
</html>
```

## SUCCESS.CSS

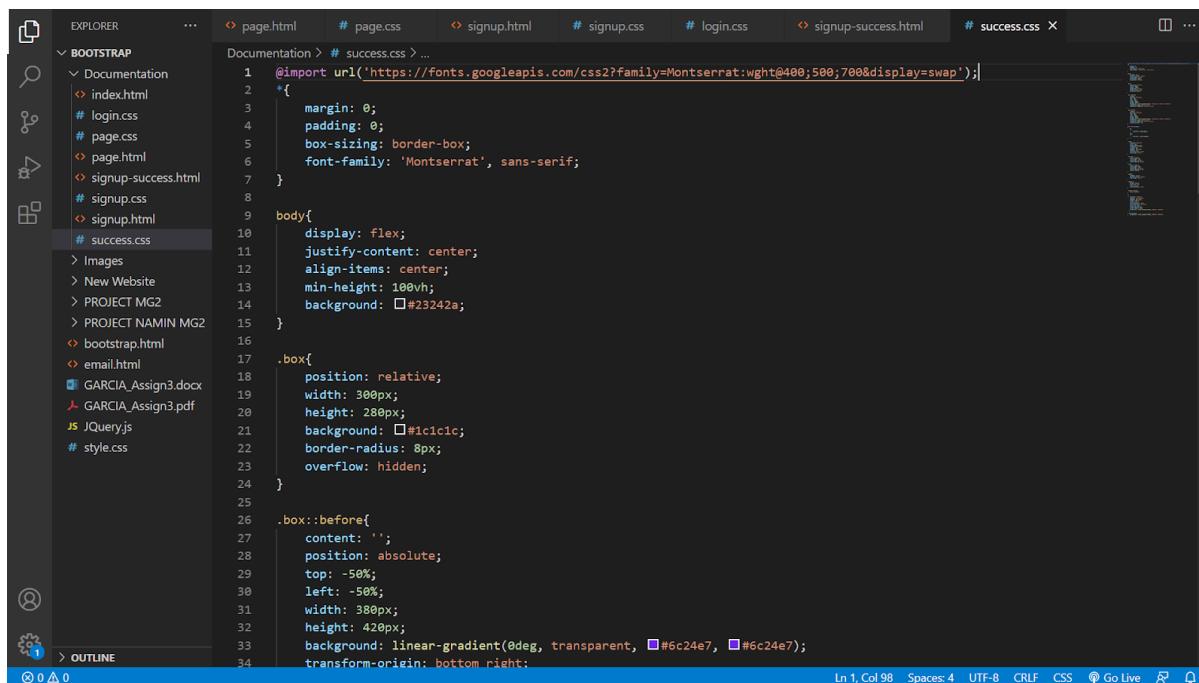

```
@import url('https://fonts.googleapis.com/css2?family=Montserrat:wght@400;500;700&display=swap');
body{
  margin: 0;
  padding: 0;
  box-sizing: border-box;
  font-family: 'Montserrat', sans-serif;
}
body{
  display: flex;
  justify-content: center;
  align-items: center;
  min-height: 100vh;
  background: #23242a;
}
.box{
  position: relative;
  width: 300px;
  height: 280px;
  background: #1c1c1c;
  border-radius: 8px;
  overflow: hidden;
}
.box::before{
  content: '';
  position: absolute;
  top: -50%;
  left: -50%;
  width: 380px;
  height: 420px;
  background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
  transform-origin: bottom right;
```

```
Documentation > # success.css > ...
22     border-radius: 8px;
23     overflow: hidden;
24   }
25
26   .box::before{
27     content: '';
28     position: absolute;
29     top: -50%;
30     left: -50%;
31     width: 380px;
32     height: 420px;
33     background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
34     transform-origin: bottom right;
35     animation: animate 6s linear infinite;
36   }
37
38   .box::after{
39     content: '';
40     position: absolute;
41     top: -50%;
42     left: -50%;
43     width: 380px;
44     height: 420px;
45     background: linear-gradient(0deg, transparent, #6c24e7, #6c24e7);
46     transform-origin: bottom right;
47     animation: animate 6s linear infinite;
48     animation-delay: -3s;
49   }
50
51   @keyframes animate
52   {
53     0%
54     {
55       transform: rotate(0deg);
56     }
57     100%
58     {
59       transform: rotate(360deg);
60     }
61   }
62
63   .form{
64     position: absolute;
65     inset: 2px;
66     border-radius: 8px;
67     background: #e7cff6;
68     z-index: 10;
69     padding: 50px 40px;
70     display: flex;
71     flex-direction: column;
72     text-align: center;
73   }
74
75   .form h1{
76     color: #A084CF;
77     font-weight: 700;
78     text-align: center;
79     letter-spacing: 0.1em;
80   }
81   .text{
82     color: #A084CF;
83   }
84
85   .logbtn{
86     display: inline;
87     justify-content: center;
88     text-align: center;
89   }
90
91   .logbtn a{
92     margin: 30px 0;
93     font-size: 1em;
94     color: black;
95     text-decoration: none;
96   }
97
98   .logbtn a:hover{
99     color: #A084CF;
100  }
101
102  a{
103    position: relative;
104    display: inline-block;
105    padding: 12px 36px;
106    margin: 10px 0;
107  }
108
109  .logbtn a:active{
110    color: #A084CF;
111  }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
Documentation > # success.css > ...
49   }
50
51   @keyframes animate
52   {
53     0%
54     {
55       transform: rotate(0deg);
56     }
57     100%
58     {
59       transform: rotate(360deg);
60     }
61   }
62
63   .form{
64     position: absolute;
65     inset: 2px;
66     border-radius: 8px;
67     background: #e7cff6;
68     z-index: 10;
69     padding: 50px 40px;
70     display: flex;
71     flex-direction: column;
72     text-align: center;
73   }
74
75   .form h1{
76     color: #A084CF;
77     font-weight: 700;
78     text-align: center;
79     letter-spacing: 0.1em;
80   }
81   .text{
82     color: #A084CF;
83   }
84
85   .logbtn{
86     display: inline;
87     justify-content: center;
88     text-align: center;
89   }
90
91   .logbtn a{
92     margin: 30px 0;
93     font-size: 1em;
94     color: black;
95     text-decoration: none;
96   }
97
98   .logbtn a:hover{
99     color: #A084CF;
100  }
101
102  a{
103    position: relative;
104    display: inline-block;
105    padding: 12px 36px;
106    margin: 10px 0;
107  }
108
109  .logbtn a:active{
110    color: #A084CF;
111  }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```
Documentation > # success.css > ...
77     font-weight: 700;
78     text-align: center;
79     letter-spacing: 0.1em;
80   }
81   .text{
82     color: #A084CF;
83     font-weight: 500;
84     text-align: center;
85     letter-spacing: 0.1em;
86     margin: 20px 0;
87   }
88
89   .logbtn{
90     display: inline;
91     justify-content: center;
92     text-align: center;
93   }
94
95   .logbtn a{
96     margin: 30px 0;
97     font-size: 1em;
98     color: black;
99     text-decoration: none;
100  }
101
102  .logbtn a:hover{
103    color: #A084CF;
104  }
105
106  a{
107    position: relative;
108    display: inline-block;
109    padding: 12px 36px;
110    margin: 10px 0;
111  }
112
113  .logbtn a:active{
114    color: #A084CF;
115  }
```

Ln 1, Col 98 Spaces: 4 UTF-8 CRLF CSS Go Live

```

    Documentation > #_success.css > ...
    99     text-decoration: none;
100   }
101   .logbtn a:hover{
102     color: #A084CF;
103   }
104   a{
105     position: relative;
106     display: inline-block;
107     padding: 12px 36px;
108     margin: 10px 0;
109     color: black;
110     text-decoration: none;
111     text-transform: uppercase;
112     font-size: 18px;
113     letter-spacing: 2px;
114     border-radius: 40px;
115     background: linear-gradient(90deg, #A084CF, #624F82);
116   }
117   a:nth-child(2){
118     background: linear-gradient(90deg, #A084CF, #624F82);
119   }
120   a:nth-child(2){
121     background: linear-gradient(90deg, #A084CF, #624F82);
122   }

```

### III. PHP FILES

#### a. employee-index.php

```

php > meta_ > employee-index.php
1  <?php
2    session_start();
3    require 'dbcon.php';
4  ?>
5  <!doctype html>
6  <html lang="en">
7    <head>
8      
9      <meta charset="utf-8">
10     <meta name="viewport" content="width=device-width, initial-scale=1">
11
12     
13     <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet">
14
15     <title>Employee Info</title>
16   </head>
17   <body>
18     <div class="container mt-4">
19
20       <?php include('message.php'); ?>
21
22       <div class="row">
23         <div class="col-md-12">
24           <div class="card">
25             <div class="card-header">
26               <h4>Employee Details
27               <a href="employee-create.php" class="btn btn-primary float-end">Add Employees</a>
28             </div>
29           </div>

```

This block of codes contains the connecting php file/database, head section and the upper body of the webpage that conclude the title section and the corresponding button that add employees.

```
employee-index.php ● employee-create.php ● employee-edit.php ● employee-view.php  
php > meta_ > employee-index.php  
51 |<table class="table table-bordered table-striped">  
52 |<thead>  
53 |<tr>  
54 |<th>ID</th>  
55 |<th>Employee Name</th>  
56 |<th>Email</th>  
57 |<th>Address</th>  
58 |<th>Birthday</th>  
59 |<th>Phone</th>  
60 |<th>Position</th>  
61 |<th>Action</th>  
62 |</tr>  
63 |</thead>  
64 |<tbody>
```

This block of codes contains the table category.

```
employee-index.php ● employee-create.php ● employee-edit.php ● employee-view.php  
php > meta_ > employee-index.php  
46 <?php  
47     $query = "SELECT * FROM employee";  
48     $query_run = mysqli_query($con, $query);  
49     if(mysqli_num_rows($query_run) > 0)  
50     {  
51         foreach($query_run as $employee)  
52         {?><tr>  
53             <td><?= $employee['id']; ?></td>  
54             <td><?= $employee['name']; ?></td>  
55             <td><?= $employee['email']; ?></td>  
56             <td><?= $employee['address']; ?></td>  
57             <td><?= $employee['birthday']; ?></td>  
58             <td><?= $employee['phone']; ?></td>  
59             <td><?= $employee['position']; ?></td>  
60             <td>  
61                 <a href="employee-view.php?id=<?= $employee['id']; ?>" class="btn btn-info btn-sm">View</a>  
62                 <a href="employee-edit.php?id=<?= $employee['id']; ?>" class="btn btn-success btn-sm">Edit</a>  
63                 <form action="code.php" method="POST" class="d-inline">  
64                     <button type="submit" name="delete_employee" value="<?=$employee['id'];?>"  
65                         class="btn btn-danger btn-sm">Delete</button>  
66             </td>  
67         </tr>  
68     }<?php}  
69 }<?php  
70 }else  
71 {  
72     echo "<h5> No Record Found </h5>";  
73 }?>
```

This block contains the php to collect data from the database that the user can view here.

b. employee-create.php

The screenshot shows a code editor with three tabs at the top: 'Employee Create' (selected), 'Employee Edit', and 'Employee View'. The code in the 'Employee Create' tab is as follows:

```
1 <?php
2 session_start();
3 ?>
4 <!doctype html>
5 <html lang="en">
6   <head>
7     <meta charset="utf-8">
8     <meta name="viewport" content="width=device-width, initial-scale=1">
9     <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet">
10    <title>Employee Create</title>
11  </head>
12  <body>
13    <div class="container mt-5">
14      <?php include('message.php'); ?>
15      <div class="row">
16        <div class="col-md-12">
17          <div class="card">
18            <div class="card-header">
19              <h4>Employee Add</h4>
20              <a href="employee-index.php" class="btn btn-danger float-end">BACK</a>
21            </div>
22            <div class="card-body">
23              <form action="code.php" method="POST">
24                <div class="mb-3">
25                  <label>Name</label>
26                  <input type="text" name="name" class="form-control">
27                </div>
```

This block of codes contains the connecting php file/database, head section and the upper body of the webpage that conclude the title section, the back button and the form where the user will fill up.

The screenshot shows a code editor with three tabs at the top: 'Employee Create' (selected), 'Employee Edit', and 'Employee View'. The code in the 'Employee Create' tab continues from the previous snippet:

```
29      <div class="mb-3">
30        <label>Email</label>
31        <input type="email" name="email" class="form-control">
32      </div>
33      <div class="mb-3">
34        <label>Address</label>
35        <input type="text" name="address" class="form-control">
36      </div>
37      <div class="mb-3">
38        <label>Birthday</label>
39        <input type="text" name="birthday" class="form-control">
40      </div>
41      <div class="mb-3">
42        <label>Phone</label>
43        <input type="text" name="phone" class="form-control">
44      </div>
45      <div class="mb-3">
46        <label>Position</label>
47        <input type="text" name="position" class="form-control">
48      </div>
49      <div class="mb-3">
50        <button type="submit" name="save_employee" class="btn btn-primary">Save Employee</button>
51      </div>
52    </div>
53  </div>
54  </div>
55  </div>
56  </div>
57  </div>
```

This block of codes is the continuation of the form and a button where the user can save employee information.

### c. employee-edit.php

```

employee-edit.php ● employee-view.php
php > meta_ > employee-edit.php
1   <?php
2   session_start();
3   require 'dbcon.php';
4   ?>
5
6   <!doctype html>
7   <html lang="en">
8     <head>
9       <meta charset="utf-8">
10      <meta name="viewport" content="width=device-width, initial-scale=1">
11      <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet">
12
13      <title>Employee Edit</title>
14    </head>
15    <body>
16      <div class="container mt-5">
17        <?php include('message.php'); ?>
18        <div class="row">
19          <div class="col-md-12">
20            <div class="card">
21              <div class="card-header">
22                <h4>Employee Edit
23                <a href="employee-index.php" class="btn btn-danger float-end">BACK</a>
24              </h4>
25              <div class="card-body">
26

```

This block of codes contains the connecting php file/database, head section and the upper body of the webpage that conclude the title section and the back button.

```

<?php
if(isset($_GET['id']))
{
    $employee_id = mysqli_real_escape_string($con, $_GET['id']);
    $query = "SELECT * FROM employee WHERE id='$employee_id' ";
    $query_run = mysqli_query($con, $query);

    if(mysqli_num_rows($query_run) > 0)
    {
        $employee = mysqli_fetch_array($query_run);
        ?>
        <form action="code.php" method="POST">
            <input type="hidden" name="employee_id" value="<?= $employee['id']; ?>">

            <div class="mb-3">
                <label>Name</label>
                <input type="text" name="name" value="<?=$employee['name'];?>" class="form-control">
            </div>
            <div class="mb-3">
                <label>Email</label>
                <input type="email" name="email" value="<?=$employee['email'];?>" class="form-control">
            </div>
            <div class="mb-3">
                <label>Address</label>
                <input type="text" name="address" value="<?=$employee['address'];?>" class="form-control">
            </div>
            <div class="mb-3">
                <label>Birthday</label>
                <input type="text" name="birthday" value="<?=$employee['birthday'];?>" class="form-control">

```

This section contains mixed php code and bootstrap form to edit the information in its designated table.

```

employee-edit.php ● employee-view.php
php > meta_ > employee-edit.php
58   <div class="mb-3">
59     <label>Phone</label>
60     <input type="text" name="phone" value="= $employee['phone']; ?" class="form-control">
61   </div>
62   <div class="mb-3">
63     <label>Position</label>
64     <input type="text" name="position" value="= $employee['position']; ?" class="form-control">
65   </div>
66   <div class="mb-3">
67     <button type="submit" name="update_employee" class="btn btn-primary">
68       Update Employee
69     </button>
70   </div>
71 
72   </form>
73   <?php
74   } else {
75   {
76     echo "<h4>No Such Id Found</h4>";
77   }
78   }
79   ?>
80   </div>
81 </div>
82 </div>
83 </div>
84 </div>
85 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js"></script>
86
87 </body>

```

This section contains the continuation of mixed php code and bootstrap form to edit the information in its designated table.

#### d. employee-view.php

```

employee-view.php X
php > meta_ > employee-view.php
1  <?php
2  require 'dbcon.php';
3  ?>
4  <!doctype html>
5  <html Lang="en">
6    <head>
7      <meta charset="utf-8">
8      <meta name="viewport" content="width=device-width, initial-scale=1">
9      <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet">
10
11    <title>Employee View</title>
12  </head>
13  <body>
14    <div class="container mt-5">
15      <div class="row">
16        <div class="col-md-12">
17          <div class="card">
18            <div class="card-header">
19              <h4>Employee View Details
20              <a href="employee-index.php" class="btn btn-danger float-end">BACK</a>
21            </h4>
22          </div>

```

This block of codes contains the connecting php file/database, head section and the upper body of the webpage that conclude the title section and the back button.


```
employee-view.php ●
php > meta_ > employee-view.php
23 |     <div class="card-body">
24 |         <?php
25 |             if(isset($_GET['id']))
26 |             {
27 |                 $employee_id = mysqli_real_escape_string($con, $_GET['id']);
28 |                 $query = "SELECT * FROM employee WHERE id='$employee_id' ";
29 |                 $query_run = mysqli_query($con, $query);
30 |
31 |                 if(mysqli_num_rows($query_run) > 0)
32 |                 {
33 |                     $employee = mysqli_fetch_array($query_run);
34 |                 }
35 |
36 |                     <div class="mb-3">
37 |                         <label>Name</label>
38 |                         <p class="form-control">
39 |                             <?=$employee['name'];?>
40 |                         </p>
41 |                     </div>
42 |                     <div class="mb-3">
43 |                         <label>Email</label>
44 |                         <p class="form-control">
45 |                             <?=$employee['email'];?>
46 |                         </p>
47 |                     </div>
48 |                     <div class="mb-3">
49 |                         <label>Address</label>
50 |                         <p class="form-control">
51 |                             <?=$employee['address'];?>
```

This section contains mixed php code and bootstrap form to view the data inputted by the user.

```
employee-view.php ●
php > meta_ > employee-view.php
54 |             <div class="mb-3">
55 |                 <label>Birthday</label>
56 |                 <p class="form-control">
57 |                     <?=$employee['birthday'];?>
58 |                 </p>
59 |             </div>
60 |             <div class="mb-3">
61 |                 <label>Phone</label>
62 |                 <p class="form-control">
63 |                     <?=$employee['phone'];?>
64 |                 </p>
65 |             </div>
66 |             <div class="mb-3">
67 |                 <label>Position</label>
68 |                 <p class="form-control">
69 |                     <?=$employee['position'];?>
70 |                 </p>
71 |             </div><?php
72 |         }else
73 |         {
74 |             echo "<h4>No Such Id Found</h4>";
75 |         }
76 |     }?
77 |     </div>
78 |   </div>
79 | </div>
80 | </div>
81 | <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js"></script>
```


This section contains the continuation of mixed php code and bootstrap form to view the data inputted by the user.

## e. code.php

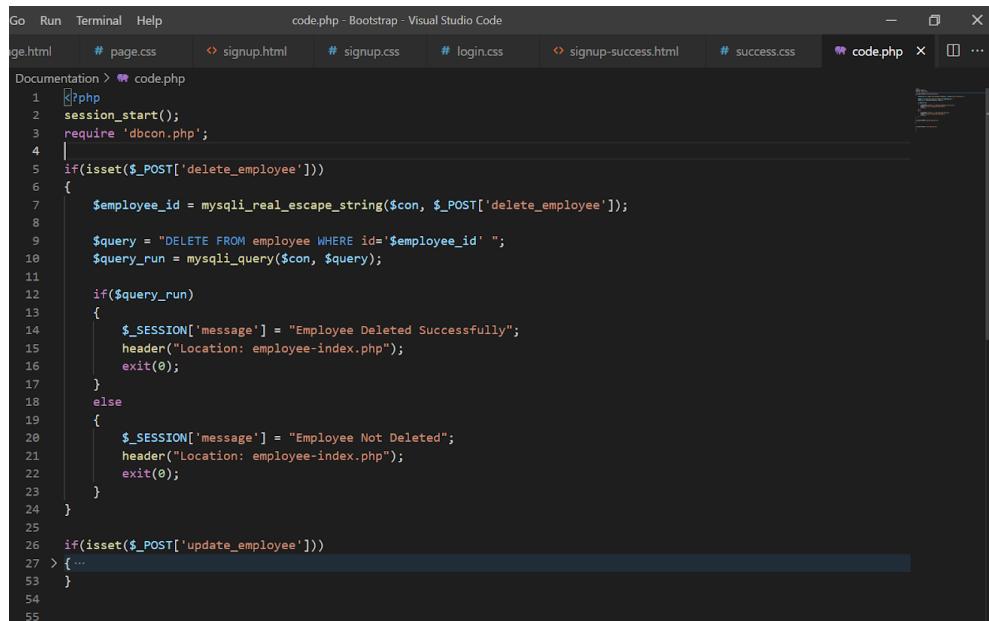


```
code.php - Bootstrap - Visual Studio Code
Documentation > code.php
1 <?php
2 session_start();
3 require 'dbcon.php';
4 |
5 if(isset($_POST['delete_employee']))
6 {
7     $employee_id = mysqli_real_escape_string($con, $_POST['delete_employee']);
8
9     $query = "DELETE FROM employee WHERE id='$employee_id'";
10    $query_run = mysqli_query($con, $query);
11
12    if($query_run)
13    {
14        $_SESSION['message'] = "Employee Deleted Successfully";
15        header("Location: employee-index.php");
16        exit(0);
17    }
18    else
19    {
20        $_SESSION['message'] = "Employee Not Deleted";
21        header("Location: employee-index.php");
22        exit(0);
23    }
24 }
25
26 if(isset($_POST['update_employee']))
27 > { ...
53 }
54
55
```

This first part of the code contains the Delete feature of the php to delete the inputted information

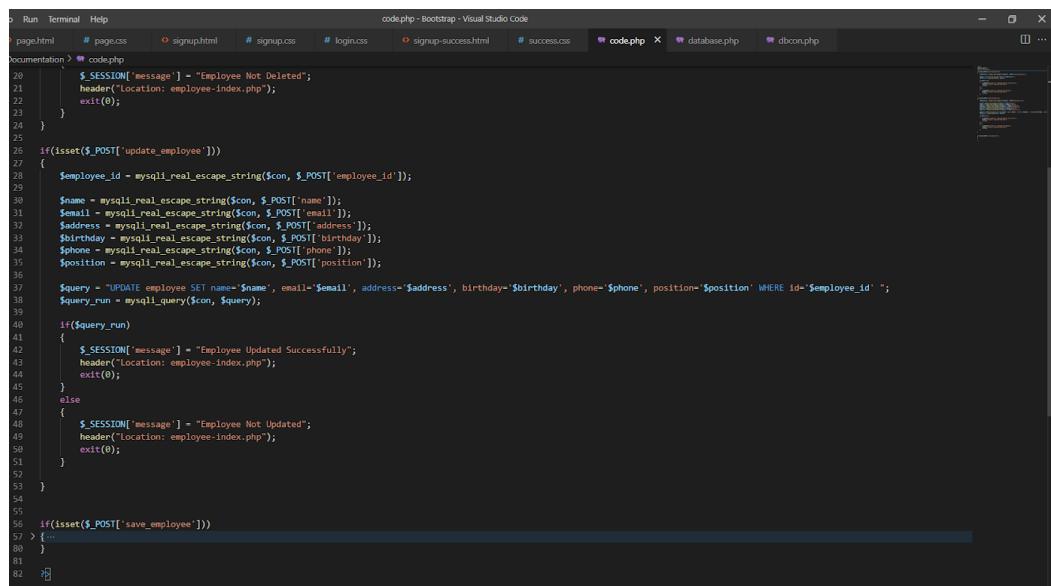

```
code.php - Bootstrap - Visual Studio Code
Documentation > code.php
20     $_SESSION['message'] = "Employee Not Deleted";
21     header("Location: employee-index.php");
22     exit(0);
23 }
24
25 if(isset($_POST['update_employee']))
26 {
27     $employee_id = mysqli_real_escape_string($con, $_POST['employee_id']);
28
29     $name = mysqli_real_escape_string($con, $_POST['name']);
30     $email = mysqli_real_escape_string($con, $_POST['email']);
31     $address = mysqli_real_escape_string($con, $_POST['address']);
32     $birthday = mysqli_real_escape_string($con, $_POST['birthday']);
33     $phone = mysqli_real_escape_string($con, $_POST['phone']);
34     $position = mysqli_real_escape_string($con, $_POST['position']);
35
36     $query = "UPDATE employee SET name='$name', email='$email', address='$address', birthday='$birthday', phone='$phone', position='$position' WHERE id= '$employee_id' ";
37     $query_run = mysqli_query($con, $query);
38
39     if($query_run)
40     {
41         $_SESSION['message'] = "Employee Updated Successfully";
42         header("Location: employee-index.php");
43         exit(0);
44     }
45     else
46     {
47         $_SESSION['message'] = "Employee Not Updated";
48         header("Location: employee-index.php");
49         exit(0);
50     }
51 }
52
53
54 if(isset($_POST['save_employee']))
55 > { ...
80 }
81
82 ?>
```

The part of the code contains the Update features in the php to change the inputted information

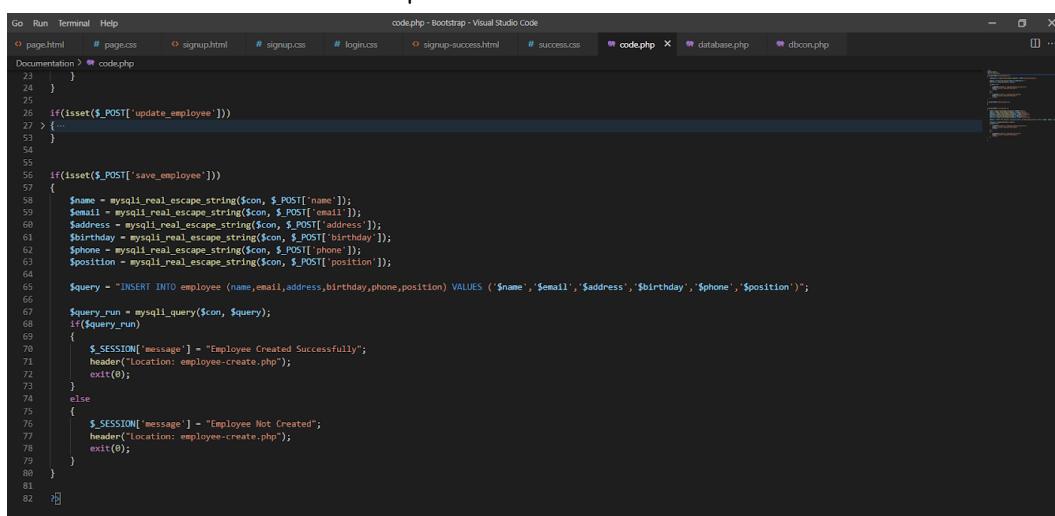

```
code.php - Bootstrap - Visual Studio Code
Documentation > code.php
22 }
23
24 if(isset($_POST['update_employee']))
25 > { ...
53 }
54
55 if(isset($_POST['save_employee']))
56 {
57     $name = mysqli_real_escape_string($con, $_POST['name']);
58     $email = mysqli_real_escape_string($con, $_POST['email']);
59     $address = mysqli_real_escape_string($con, $_POST['address']);
60     $birthday = mysqli_real_escape_string($con, $_POST['birthday']);
61     $phone = mysqli_real_escape_string($con, $_POST['phone']);
62     $position = mysqli_real_escape_string($con, $_POST['position']);
63
64     $query = "INSERT INTO employee (name,email,address,birthday,phone,position) VALUES ('$name','$email','$address','$birthday','$phone','$position')";
65
66     $query_run = mysqli_query($con, $query);
67     if($query_run)
68     {
69         $_SESSION['message'] = "Employee Created Successfully";
70         header("Location: employee-create.php");
71         exit(0);
72     }
73     else
74     {
75         $_SESSION['message'] = "Employee Not Created";
76         header("Location: employee-create.php");
77         exit(0);
78     }
79 }
80
81 ?>
```

This last part of the code contains the Save features in the php to save the inputted features in the system

## f. database.php

```

e.css      signup.html    # signup.css    # login.css    signup-success.html    # success.css    code.php    database.php    ...
Documentation > database.php
1  <?php
2
3  $host = "localhost";
4  $dbname = "Login_db";
5  $username = "root";
6  $password = "";
7  //to connect to db
8  $mysqli = new mysqli($host,
9                  $username,
10                 $password,
11                 $dbname);
12
13 if ($mysqli->connect_errno) {
14     die("Connection error: " . $mysqli->connect_error);
15 }
16
17 return $mysqli;

```

This block of php codes connect the website to the database that contains all the user information.

### g. dbcon.php

```

EXPLORER      ... # login.css    signup-success.html    # success.css    code.php    database.php    dbcon.php    ...
BOOTSTRAP
Documentation
code.php
database.php
dbcon.php
index.html
# login.css
# page.css
page.html
signup-success.html
# signup.css
# signup.html
# success.css
Images
New Website
PROJECT MG2
PROJECT NAMIN MG2
bootstrap.html
email.html
GARCIA_Assign3.docx
GARCIA_Assign3.pdf
JS JQuery.js
# style.css
OUTLINE
Ln 2, Col 1  Spaces: 4  UTF-8  CRLF  PHP  Go Live  ⚡  🔍

```

```

Documentation > dbcon.php
1  <?php
2
3  $con = mysqli_connect("localhost", "root", "", "employee");
4
5  if (!$con) {
6      die('Connection Failed'. mysqli_connect_error());
7  }
8
9  ?>

```

This block of php codes connect the website to the database

### h. process-signup.php

```

login.php    logout.php    message.php    process-signup.php    validate.php
process-signup.php
1  <?php
2
3  if (empty($_POST["name"])) {
4      die("Name is required");
5  }
6
7  if (!filter_var($_POST["email"], FILTER_VALIDATE_EMAIL)) {
8      die("Valid email is required");
9  }
10
11 if (strlen($_POST["password"]) < 14) {
12     die("Password must be at least 14 characters");
13 }
14
15 if (!preg_match("/[a-z]/i", $_POST["password"])) {
16     die("Password must contain at least one letter");
17 }
18
19 if (!preg_match("/[0-9]/", $_POST["password"])) {
20     die("Password must contain at least one number");
21 }
22
23 if ($_POST["password"] !== $_POST["password_confirmation"]) {
24     die("Passwords must match");
25 }
26
27 $password_hash = password_hash($_POST["password"], PASSWORD_DEFAULT);
28
29 $mysqli = require __DIR__ . "/database.php";

```


```

login.php    logout.php    message.php    process-signup.php
process-signup.php
30
31 $sql = "INSERT INTO user (name, email, password_hash)
32 |   VALUES (?, ?, ?)";
33
34 $stmt = $mysqli->stmt_init();
35
36 if ( ! $stmt->prepare($sql)) {
37     die("SQL error: " . $mysqli->error);
38 }
39
40 $stmt->bind_param("sss",
41 |   $_POST["name"],
42 |   $_POST["email"],
43 |   $password_hash);
44
45 if ($stmt->execute()) {
46
47     header("Location: signup-success.html");
48     exit;
49 }
50 } else {
51
52     if ($mysqli->errno === 1062) {
53         die("email already taken");
54     } else {
55         die($mysqli->error . " " . $mysqli->errno);
56     }
57 }

```

This contains the php to enable users and organizations to independently register and gain access to the system.

### i. login.php

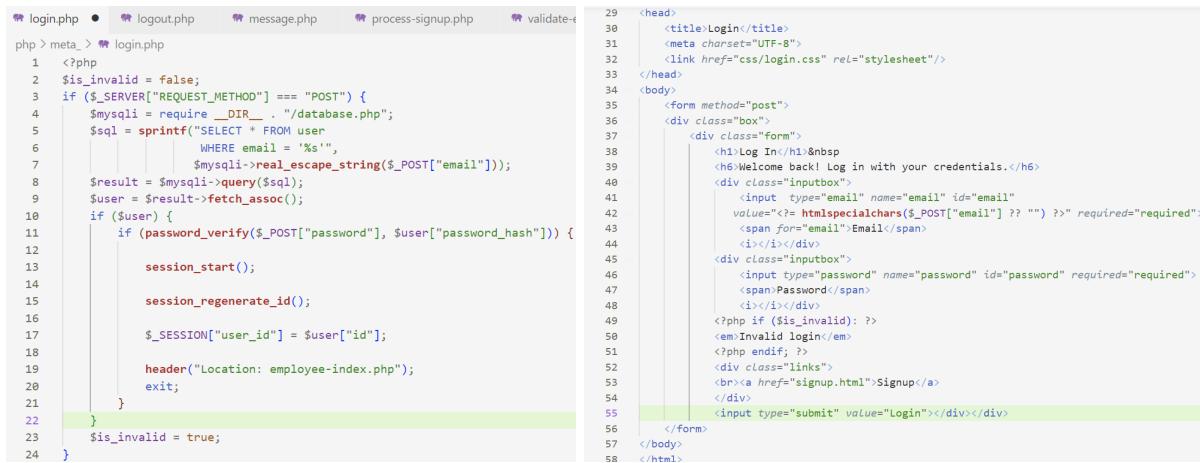


```

1 <?php
2 $is_invalid = false;
3 if ($_SERVER["REQUEST_METHOD"] == "POST") {
4     $mysqli = require __DIR__ . "/database.php";
5     $sql = sprintf("SELECT * FROM user
6         WHERE email = '%s'",
7             $mysqli->real_escape_string($_POST["email"]));
8     $result = $mysqli->query($sql);
9     $user = $result->fetch_assoc();
10    if ($user) {
11        if (password_verify($_POST["password"], $user["password_hash"])) {
12            session_start();
13            session_regenerate_id();
14            $_SESSION["user_id"] = $user["id"];
15            header("Location: employee-index.php");
16            exit;
17        }
18    }
19    $is_invalid = true;
20 }
21
22
23
24

```

This block of codes contains the login page that will take the credentials of the user.

#### j. logout.php

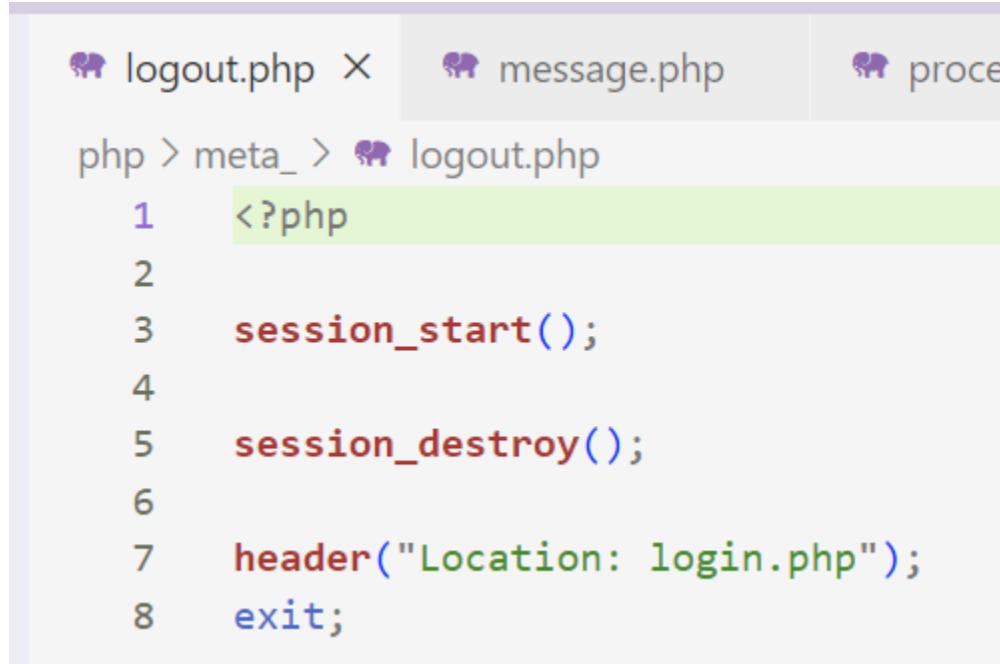

```

1 <?php
2
3 session_start();
4
5 session_destroy();
6
7 header("Location: login.php");
8 exit;

```

This block contains the php that logoff the user; that the current user wishes to end the login session.

#### k. message.php



```

1 <?php
2     if(isset($_SESSION['message'])) :
3 ?>
4
5     <div class="alert alert-warning alert-dismissible fade show" role="alert">
6         <strong>Hey!</strong> <?= $_SESSION['message']; ?>
7         <button type="button" class="btn-close" data-bs-dismiss="alert" aria-label="Close"></button>
8     </div>
9
10    <?php
11        unset($_SESSION['message']);
12    endif;
13 ?>

```


This block contains the php that includes a welcoming message for users.


#### l. validate-email.php

```
logout.php message.php process-signup.php validate-email.php X
php > meta_ > validate-email.php
1  <?php
2
3  $mysqli = require __DIR__ . "/database.php";
4
5  $sql = sprintf("SELECT * FROM user
6  | WHERE email = '%s',
7  | $mysqli->real_escape_string($_GET["email"]);");
8
9  $result = $mysqli->query($sql);
10
11 $is_available = $result->num_rows === 0;
12
13 header("Content-Type: application/json");
14
15 echo json_encode(["available" => $is_available]);
```

This block contains a verification email template that sends to a user after they have taken a certain action.

## Output:

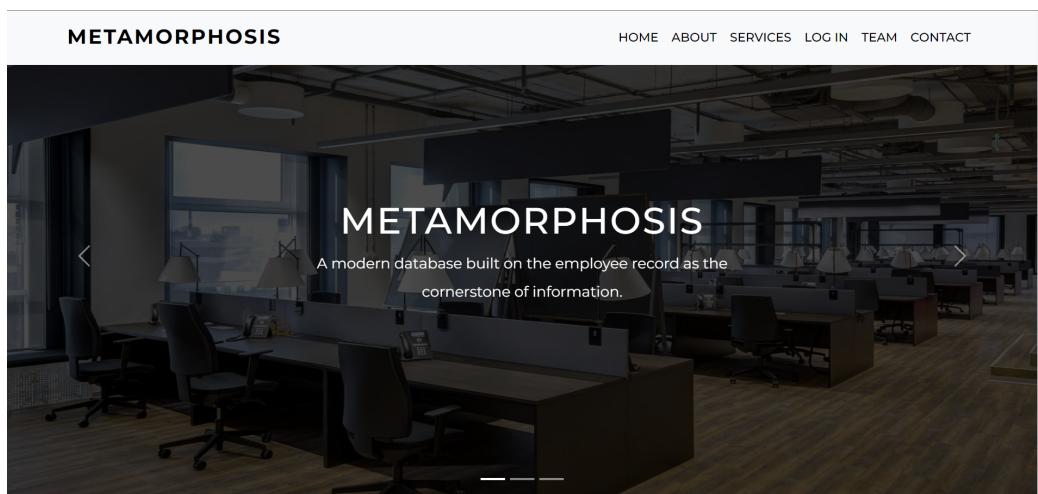

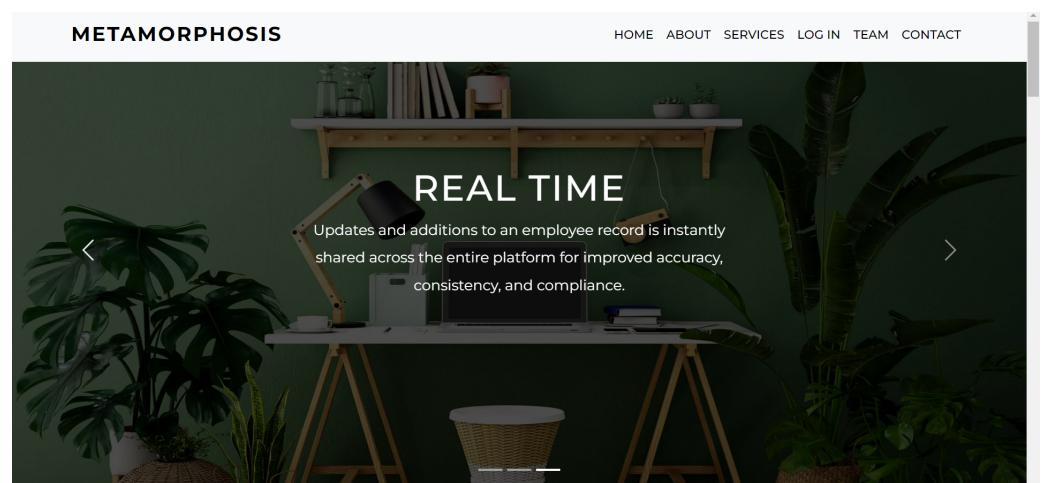

The first three photos are the output of the Home Section, a carousel of the description of the website.

**METAMORPHOSIS**

HOME ABOUT SERVICES TEAM CONTACT

We Provide the Best Quality of our System

You can work in a way that is different from how you have ever worked before at METAMORPHOSIS. We like creating excellent EMR software. It brings us joy knowing that our software improves the lives of our clients. We think that greatness should have a place in the workplace. Everyone benefits if we can give you more time to produce excellent work.

Join Us!

This photo is the ABOUT section of the website and shows a button where.

## Our Services

Employee record management software streamlines document access and sharing, helping you create more efficient workflows.



### Best Quality

affords an individual the opportunity to save, to build the security and confidence that allows one to plan for the future, and to participate.



### Sustainability

The power to unite the team to create a better work culture and work-life balance, and has a great impact on customers and the world.



### Integrity

We keep high-value customers, reduce employee turnover, improve productivity, and make smart decisions.

This photo is the SERVICES section of the website.

## Our Team

Consist of three programmers as of the moment.  
We are looking forward to recruit another member.

**James Garcia**

I am a motivated and hardworking person that doesn't back down from a challenge.

**Anakin Letim**

I have a lot of ambition and desire. I regularly establish objectives for myself.

**Princess Mae Regala**

I consider myself to be

**Missing Member**

Desc

This photo is the TEAMS section of the website.


## Hello there!

Log in or create an account.


**LOG IN****SIGN UP**

METAMORPHOSIS


Upon clicking the Join us button in ABOUT section of the website it will direct the user to the a page where they can choose to LOG IN or SIGN UP.

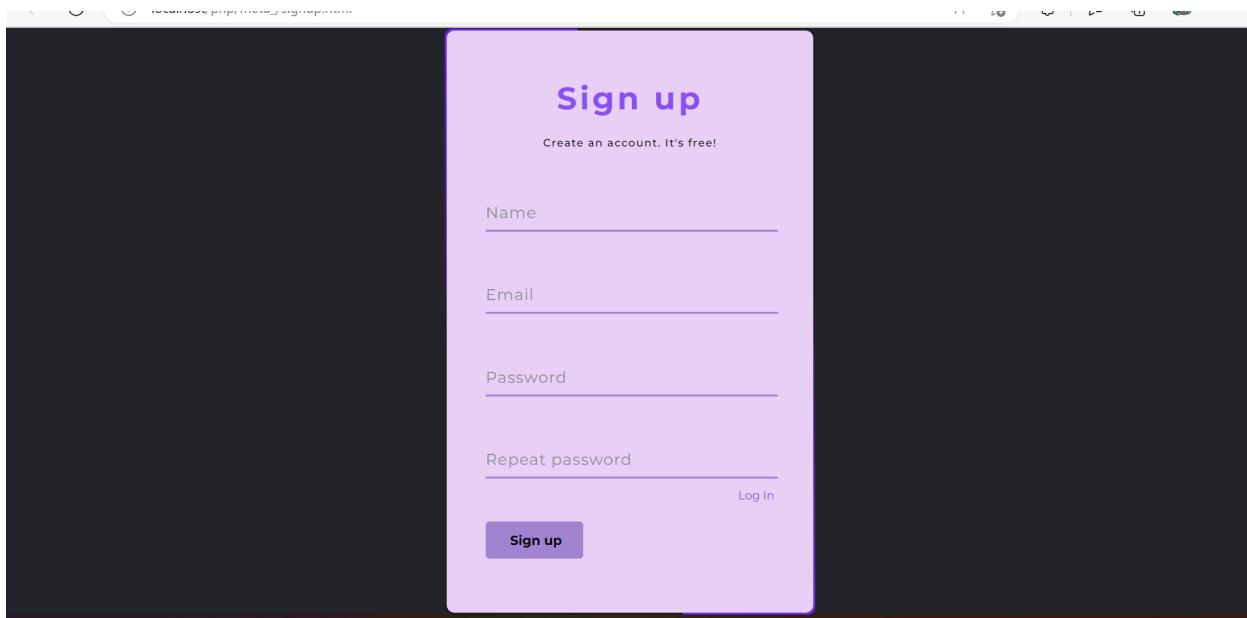


If the user chose to sign up, it will ask the user to fill up a form in order to access the system.

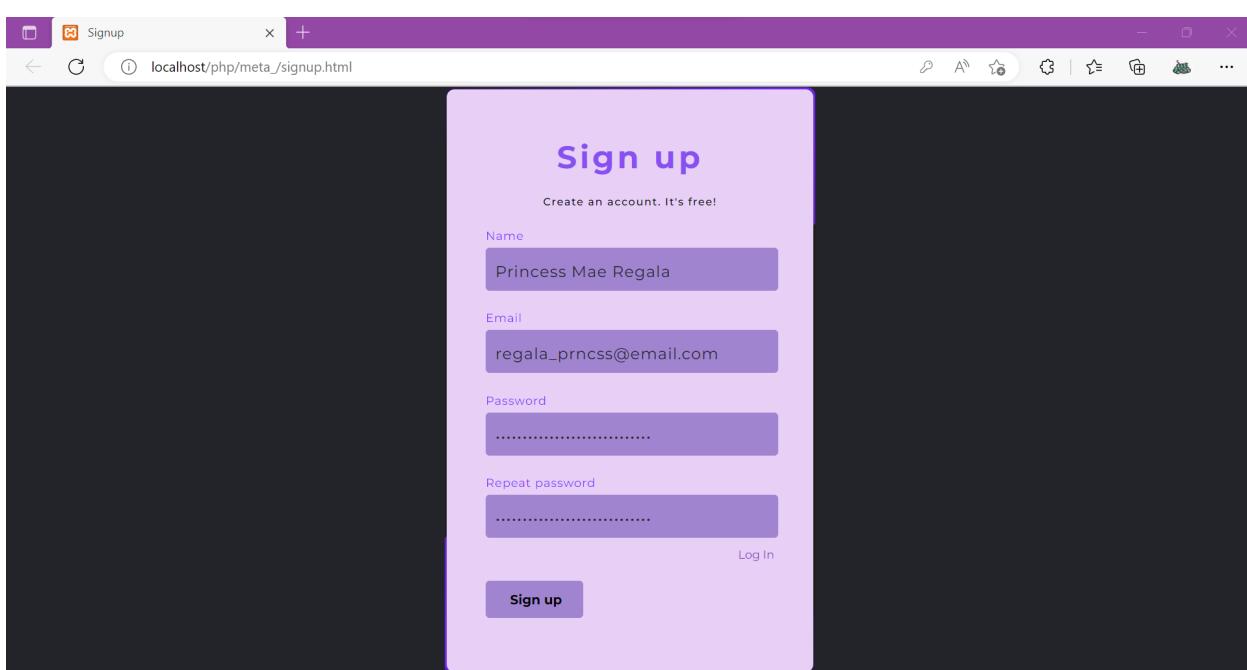

An example is shown above.

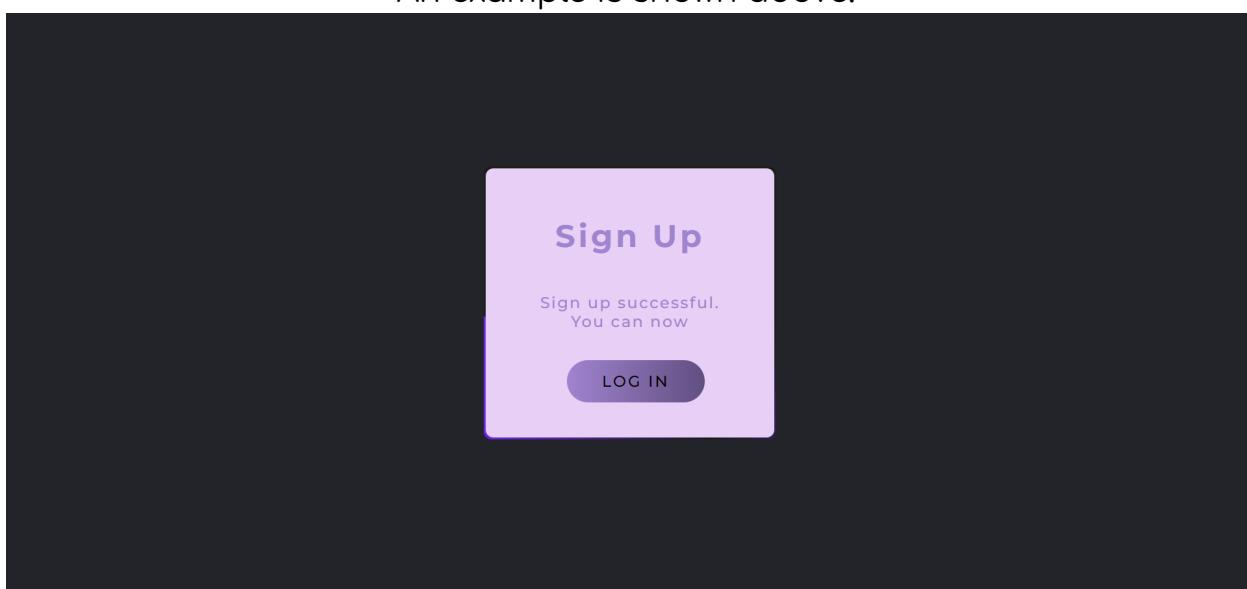

Upon clicking the SIGN UP button it will verify the user with `signup-success.html` and show the LOG IN button.

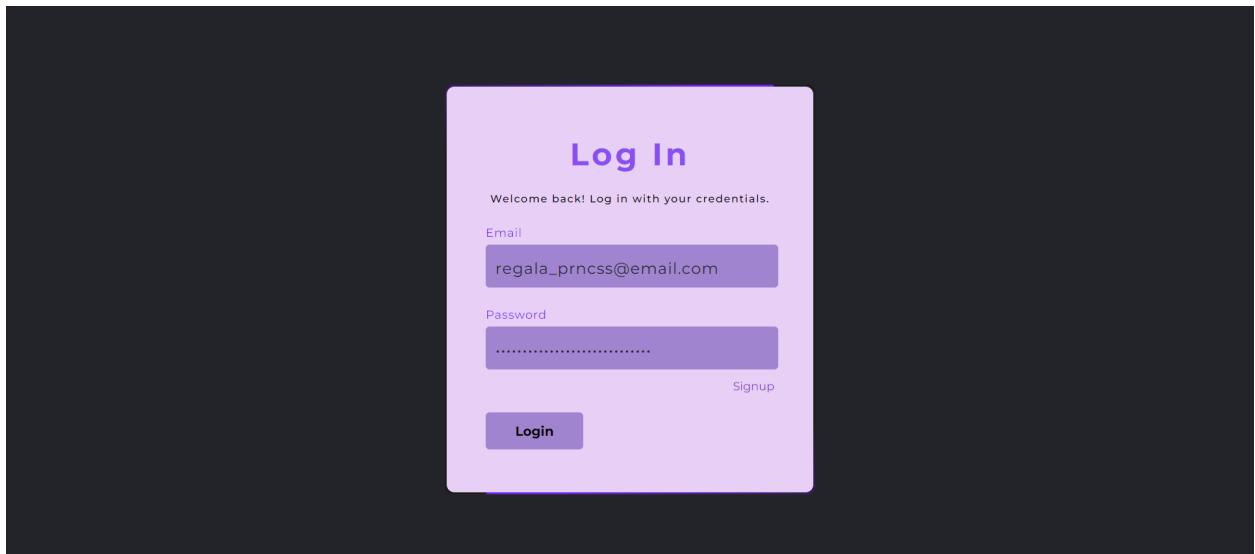

Now the user can input their credentials to access the system.

Employee Details								Add Employees
ID	Employee Name	Email	Address	Birthday	Phone	Position	Action	
6	Princess Mae Regala	regala_prncss@email.com	Caloocan	September 7 2002	09999999999	Web Developer	<button>View</button> <button>Edit</button> <button>Delete</button>	
7	Anakin Albert Letim	letim_a@email.com	Manila				<button>View</button> <button>Edit</button> <button>Delete</button>	
8	James Garcia	jamesg@email.com	Manila	June 26 2002	09090909009	Support Specialist	<button>View</button> <button>Edit</button> <button>Delete</button>	

Once the user has logged in, the website will display all the basic employee details, where you can add, view, edit and delete information.

Employee Add

BACK

Name

Email

Address

Birthday

Phone

Position

Save Employee

**Employee Add**

**BACK**

Name	James Garcia
Email	jamesg@email.com
Address	Manila
Birthday	June 26 2002
Phone	09090909009
Position	Support Specialist
<b>Save Employee</b>	

**Hey! Employee Created Successfully**

**X**

**Employee Add**

**BACK**

Name	
Email	
Address	
Birthday	
Phone	
Position	
<b>Save Employee</b>	

The three photos above shows how the ADD EMPLOYEE button works

**Employee View Details**

**BACK**

Name	James Garcia
Email	jamesg@email.com
Address	Manila
Birthday	June 26 2002
Phone	0999099099
Position	Support Specialist

This photo above shows the function of the VIEW button.

**Employee Edit**

[BACK](#)

Name	James Garcia
Email	jamesg@email.com
Address	Manila
Birthday	June 26 2002
Phone	0999099099
Position	Support Specialist
<a href="#">Update Employee</a>	

**Employee Edit**

[BACK](#)

Name	James Garcia
Email	jamesg@email.com
Address	Manila
Birthday	June 26 2002
Phone	0999099099
Position	Computer Developer
<a href="#">Update Employee</a>	

**Hey! Employee Updated Successfully** ×

**Employee Details** [Add Employees](#)

ID	Employee Name	Email	Address	Birthday	Phone	Position	Action
5	James Garcia	jamesg@email.com	Manila	June 26 2002	0999099099	Computer Developer	<a href="#">View</a> <a href="#">Edit</a> <a href="#">Delete</a>
6	Princess Mae Regala	regala_prncss@email.com	Caloocan	September 7 2002	0999999999	Web Developer	<a href="#">View</a> <a href="#">Edit</a> <a href="#">Delete</a>
7	Anakin Albert Letim	letim_a@email.com	Manila				<a href="#">View</a> <a href="#">Edit</a> <a href="#">Delete</a>

The three photos above show how the EDIT button works.

**Hey! Employee Deleted Successfully** ×

**Employee Details** [Add Employees](#)

ID	Employee Name	Email	Address	Birthday	Phone	Position	Action
6	Princess Mae Regala	regala_prncss@email.com	Caloocan	September 7 2002	0999999999	Web Developer	<a href="#">View</a> <a href="#">Edit</a> <a href="#">Delete</a>
7	Anakin Albert Letim	letim_a@email.com	Manila				<a href="#">View</a> <a href="#">Edit</a> <a href="#">Delete</a>

This photo above shows the function of the DELETE button.



## myPHPAdmin Page

The screenshot shows the phpMyAdmin interface for the 'user' table in the 'login\_db' database. The table has columns: id, name, email, and password\_hash. There are 7 rows of data:

	id	name	email	password_hash
<input type="checkbox"/>	1	Princess	maem@email.com	\$2y\$10\$VNZbSZX7oweFP2NBGc6fO2bzVQNb3DZ4sS8COWqMr...
<input type="checkbox"/>	3	Princess Mae	mpm@email.com	\$2y\$10\$eXKBb/Rm4djbVqe4EXYpEeEfQjZnU6VhjOLsCtdFrZ...
<input type="checkbox"/>	4	James Garcia	jamesg@email.com	\$2y\$10\$mGpvkDAuObkPAEB2ygTQg.XxrjYFIPHEGCpsya8yVq...
<input type="checkbox"/>	5	Tony Stark	tonys@ymail.com	\$2y\$10\$RkkSVY8M2r6XurqjyZjRmeTb9MorTsIwdGd.TsGieJV...
<input type="checkbox"/>	6	Nigel Francisco	francisngl@email.com	\$2y\$10\$YlxqXGBkoBNN0oSKQVcwq.MLT0baUCY3TqGUbiom7da...
<input type="checkbox"/>	7	Princess Mae Regala	regala_pncss@email.com	\$2y\$10\$nxWs4bdPnAPIWRzwhek5T.ZRRIKsFcMpIc9MHM.sluR...

The photo above shows the database for users.

The screenshot shows the phpMyAdmin interface for the 'employee' table in the 'employee' database. The table has columns: id, name, email, address, birthday, phone, and position. There are 3 rows of data:

	id	name	email	address	birthday	phone	position
<input type="checkbox"/>	5	James Garcia	jamesg@email.com	Manila	June 26 2002	0999099099	Support Specialist
<input type="checkbox"/>	6	Princess Mae Regala	regala_pncss@email.com	Caloocan	September 7 2002	0999999999	Web Developer
<input type="checkbox"/>	7	Anakin Albert Letim	letim_a@email.com	Manila			

The photo above shows the database for employee information.

## Summary of Assigned Tasks

Name (SN, FN, MI.)	Picture	Detailed Contributions/Assigned Tasks:
Leader's Name: Garcia, James	 A selfie of James Garcia, a young man with glasses and a white shirt, taking a photo in a hallway.	<ul style="list-style-type: none"><li>● Planning the content of the website.</li><li>● Conceptualization of the HTML forms.</li><li>● Designing the website.</li></ul>
Member 1: Letim, Anakin	 A portrait of Anakin Letim, a young man in a school uniform (white shirt, red tie, grey vest) standing against a plain wall.	<ul style="list-style-type: none"><li>● Layout of the HTML contents.</li><li>● Filling up descriptions of each section.</li><li>● Finalization of the documentation.</li></ul>
Member 2: Regala, Princess Mae	 A portrait of Princess Mae Regala, a young woman with long dark hair wearing a green top and a blue hijab, smiling at the camera.	<ul style="list-style-type: none"><li>● PHP coding and Database Creation.</li></ul>

## References:

## **File Maintenance using PHP and MYSQL part1a and part2b videos**

**Video Link:**    Part1a <https://youtu.be/nUTpOSDhxEQ>  
                    Part1b <https://youtu.be/eZQcVrSGR1s>