

# Class 11: AlphaFold

Anyoleth Alarcon A17347293

## Table of contents

Predicted Alignment Error for Domains . . . . . 3

**Score Residue Conservation from alignment file 6**

Here we read the results from AlphaFold and try to interpret all the models and quality score metrics:

```
library(bio3d)
pth <- "dimer_23119"
pdb.files <- list.files(path = pth, full.names = TRUE, pattern = ".pdb")
```

Align and superpose all these models

```
file.exists(pdb.files)
```

```
[1] TRUE TRUE TRUE TRUE TRUE
```

```
pdbbs <- pdbaln(pdb.files, fit = TRUE, exefile="msa")
```

Reading PDB files:

```
dimer_23119/dimer_23119_unrelaxed_rank_001_alphafold2_multimer_v3_model_2_seed_000.pdb
dimer_23119/dimer_23119_unrelaxed_rank_002_alphafold2_multimer_v3_model_5_seed_000.pdb
dimer_23119/dimer_23119_unrelaxed_rank_003_alphafold2_multimer_v3_model_4_seed_000.pdb
dimer_23119/dimer_23119_unrelaxed_rank_004_alphafold2_multimer_v3_model_1_seed_000.pdb
dimer_23119/dimer_23119_unrelaxed_rank_005_alphafold2_multimer_v3_model_3_seed_000.pdb
.....
```

Extracting sequences

```


pdb/seq: 1   name: dimer_23119/dimer_23119_unrelaxed_rank_001_alphafold2_multimer_v3_model_2
pdb/seq: 2   name: dimer_23119/dimer_23119_unrelaxed_rank_002_alphafold2_multimer_v3_model_5
pdb/seq: 3   name: dimer_23119/dimer_23119_unrelaxed_rank_003_alphafold2_multimer_v3_model_4
pdb/seq: 4   name: dimer_23119/dimer_23119_unrelaxed_rank_004_alphafold2_multimer_v3_model_1
pdb/seq: 5   name: dimer_23119/dimer_23119_unrelaxed_rank_005_alphafold2_multimer_v3_model_3

```

```

plot(pdb$b[1,], typ="l", ylim=c(0,100), ylab="pLDDT score")
lines(pdb$b[2,], typ="l", col="blue")
lines(pdb$b[3,], typ="l", col="green")
lines(pdb$b[4,], typ="l", col="orange")
lines(pdb$b[5,], typ="l", col="red")

```

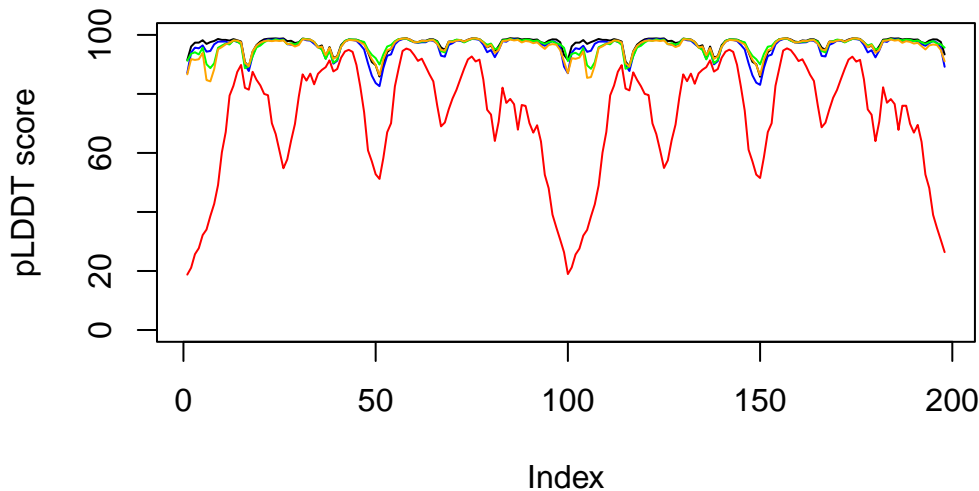

```
rd <- rmsd(pdb, fit=T)
```


Warning in rmsd(pdb, fit = T): No indices provided, using the 198 non NA positions

```

library(pheatmap)

colnames(rd) <- paste0("m",1:5)
rownames(rd) <- paste0("m",1:5)
pheatmap(rd)

```

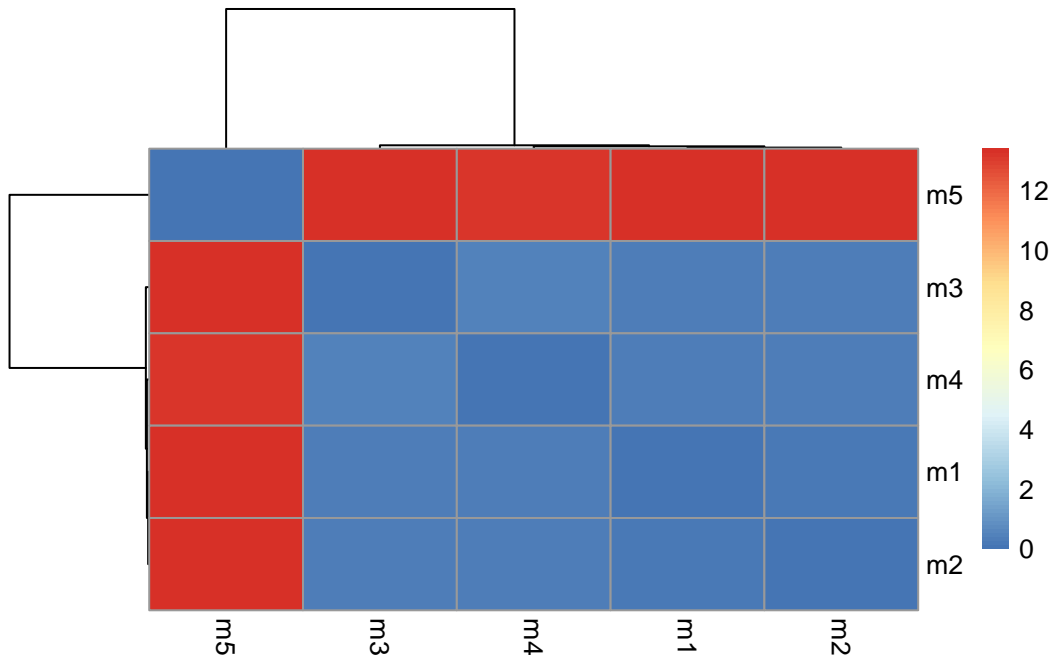

## Predicted Alignment Error for Domains

```
library(jsonlite)

# Listing of all PAE JSON files
pae_files <- list.files(path=pth,
                        pattern=".*model.*\\.json",
                        full.names = TRUE)

pae1 <- read_json(pae_files[1],simplifyVector = TRUE)
pae2 <- read_json(pae_files[2],simplifyVector = TRUE)
pae3 <- read_json(pae_files[3],simplifyVector = TRUE)
pae4 <- read_json(pae_files[4],simplifyVector = TRUE)
pae5 <- read_json(pae_files[5],simplifyVector = TRUE)

attributes(pae1)
```

```
$names
[1] "plddt" "max_pae" "pae" "ptm" "iptm"
```

```
head(pae1$plddt)
```

```
[1] 91.44 96.06 97.38 97.38 98.19 96.94
```

```
pae1$max_pae
```

```
[1] 13.57812
```

```
pae3$max_pae
```


```
[1] 12.41406
```

```
pae5$max_pae
```


```
[1] 29.85938
```

We can plot the N by N PAE scores


```
plot.dmat(pae1$pae,  
          xlab="Residue Position (i)",  
          ylab="Residue Position (j)")
```

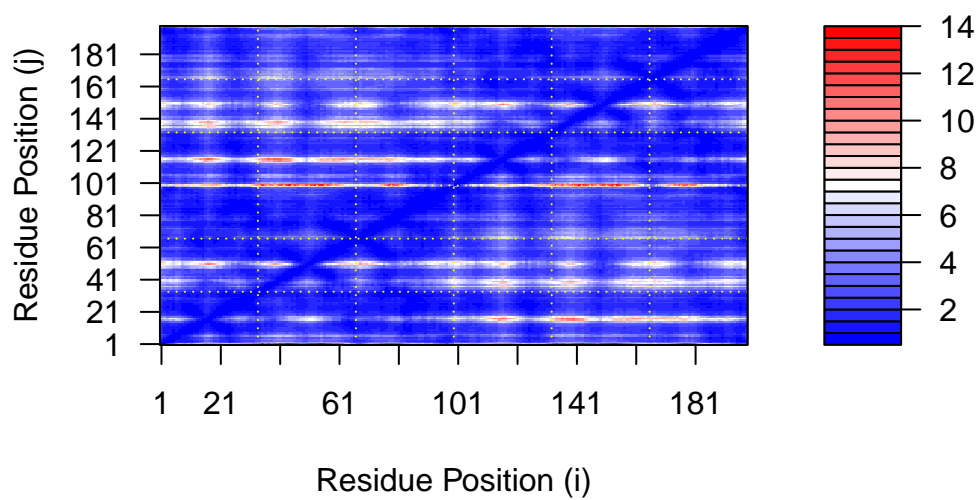

```
plot.dmat(pae5$pae,
          xlab="Residue Position (i)",
          ylab="Residue Position (j)",
          grid.col = "black",
          zlim=c(0,30))
```

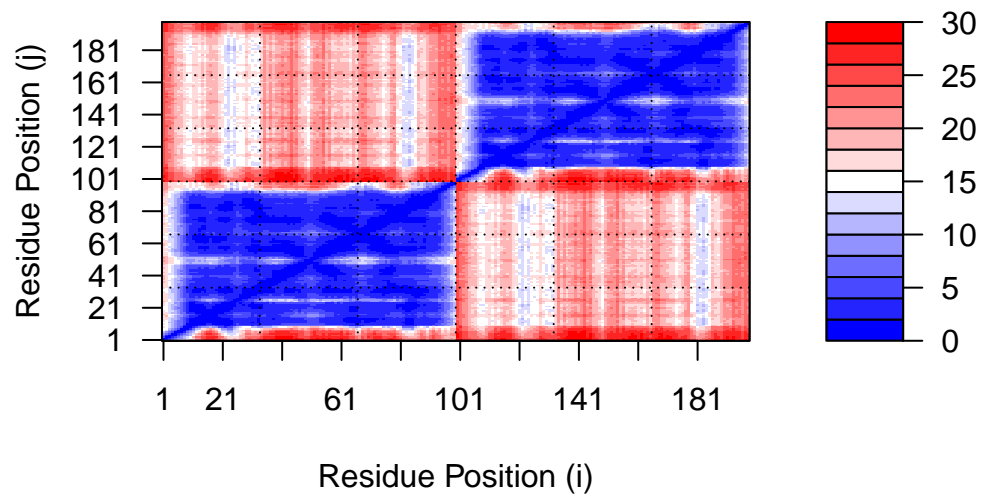

```
plot.dmat(pae1$pae,
          xlab="Residue Position (i)",
          ylab="Residue Position (j)",
          grid.col = "black",
          zlim=c(0,30))
```

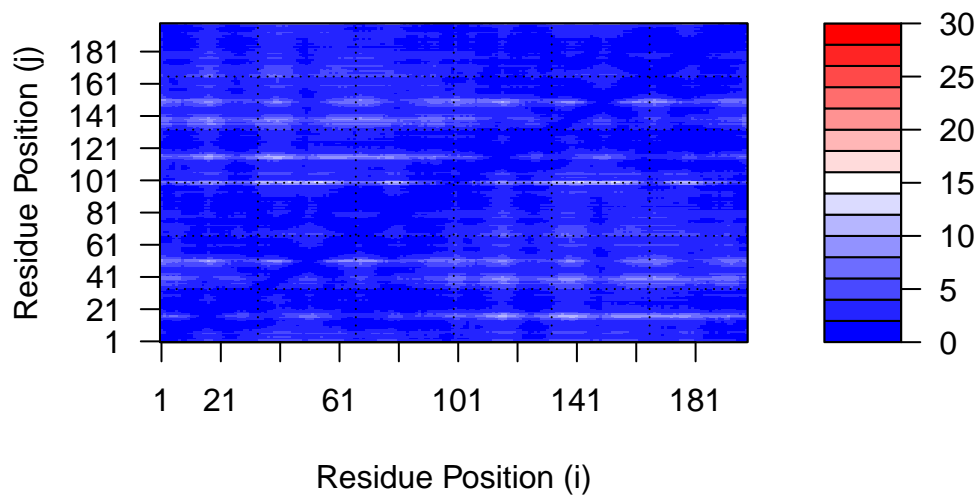

## Score Residue Conservation from alignment file

AlphaFold returns it's large alignment file used for analysis Here we read this file and score conservation per position

```
aln_file <- list.files(path=pth,
                      pattern=".a3m$",
                      full.names = TRUE)
aln_file
```

```
[1] "dimer_23119/dimer_23119.a3m"
```

```
aln <- read.fasta(aln_file[1], to.upper = TRUE)
```


```
[1] " ** Duplicated sequence id's: 101 **"
[2] " ** Duplicated sequence id's: 101 **"
```

```
dim(aln$ali)
```

```
[1] 5378 132
```

```
sim <- conserv(aln)
```

```
plotb3(sim[1:99],  
       ylab="Conservation Score")
```

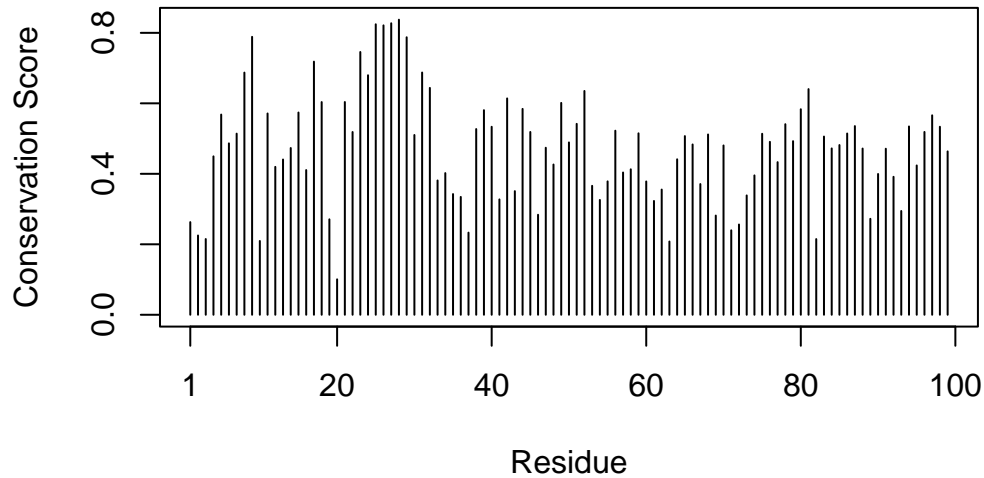

Find the consensus sequence at a very high cut-off to find invariant values

```
con <- consensus(aln, cutoff = 0.9)  
con$seq
```

```
[1] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[19] "-" "-" "-" "-" "-" "-" "D" "T" "G" "A" "-" "-" "-" "-" "-" "-" "-"  
[37] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[55] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[73] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[91] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[109] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"  
[127] "-" "-" "-" "-" "-" "-"
```