

Link options

Link options

In which window to open the link document

In which window to open the link document is specified by **the target attribute**.

If you would like to open new window, you should use "_blank" for value of the target attribute.

```
<a href="http://www.csail.mit.edu/_(http://www.csail.mit.edu/)" target="_blank">MIT</a>
```

- `_blank`: Open the new window.
- `_self`: Open the current one.
- `_parent`: Open the parent browsing context of the current one.
- `_top`: Open the most top-level browsing context of the current one.

Link that specifies position of Web page

Link that specifies position of Web page is specified by **the id attribute**.

The id attribute specifies that its a element is a named hyperlink, with the name given by the value of this attribute.

1. Specifies the id attribute.

```
<h2 id="top">Top</h2>
```

note: The id attribute can be specified for any tag.

2. The a element with the href attribute. Value of the href attribute is a named hyperlink that you would like to link.

```
<a href="#top">Go back top</a>
```


Example: Specifies the name linked anchor by the id attribute.

[menu.html]

```
<h2 id="food">Food</h2>  
<h2 id="drink">Drink</h2>
```

Example: Specifies the link text by <a>[menu.html]

```
<p><a href="#food">Food</a> | <a href="#drink">Drink</a>
```

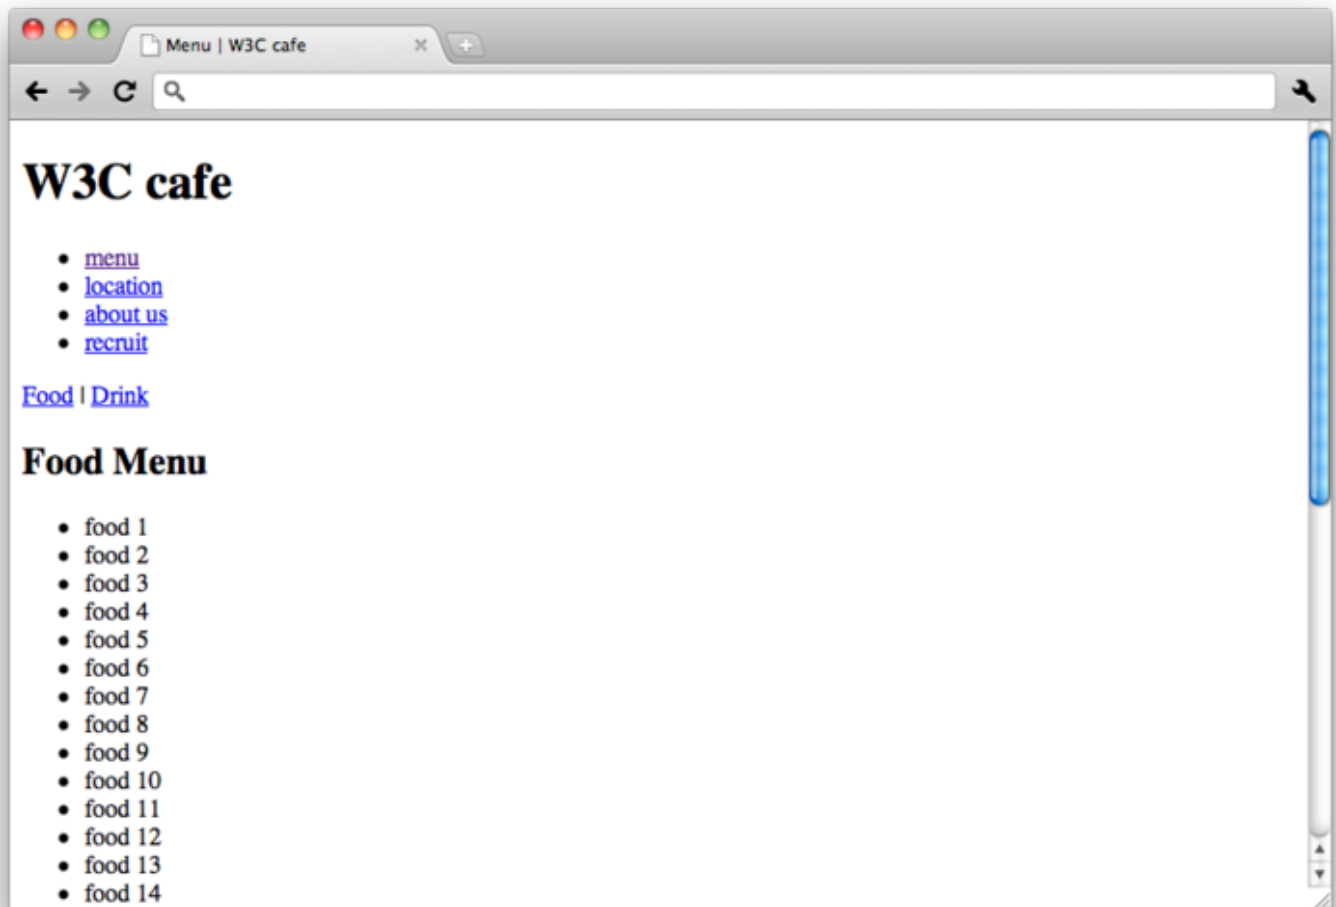

[_\(https://www.w3.org/community/webed/wiki/File:Hyperlink02.png\)_](https://www.w3.org/community/webed/wiki/File:Hyperlink02.png)