

# Cucumber Report

13-Jun-2024, 3:02:32 pm

Start : Jun 13, 3:02:27.486 pm

End : Jun 13, 3:02:31.303 pm

Duration : 3.817 s

Features


Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 3

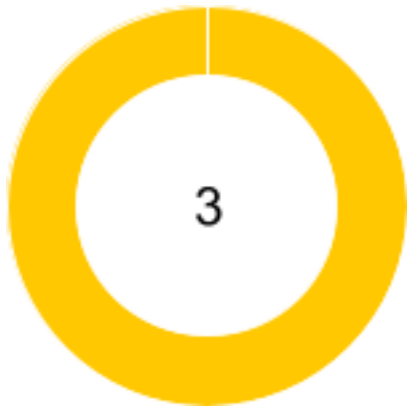


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>As a admin , user is able to login</u>	3.817 s	1	0	1	0	3	0	0	3

#	Feature Name	Scenario Name
1	<u>As a admin , user is able to login</u>	<u>Admin can login with credentials</u>



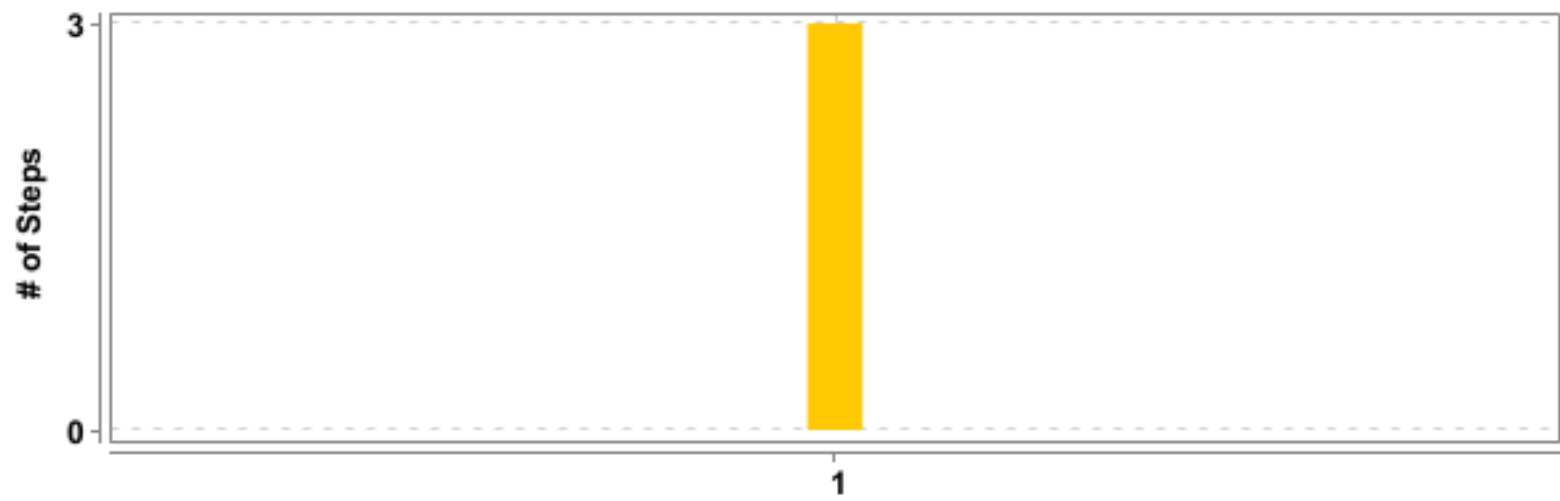

#	Feature Name	T	P	F	S	Duration
1	<u>As a admin , user is able to login</u>	1	0	1	0	3.817 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>As a admin , user is able to login</u>	<u>Admin can login with credentials</u>	3	0	0	3	3.814 s

## As a admin , user is able to login

<b>FAILED</b>	<b>DURATION - 3.817 s</b>	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 3 Pass - 0 Fail - 0 Skip - 3	
/ 3:02:27.486 pm // 3:02:31.303 pm /					

## Admin can login with credentials
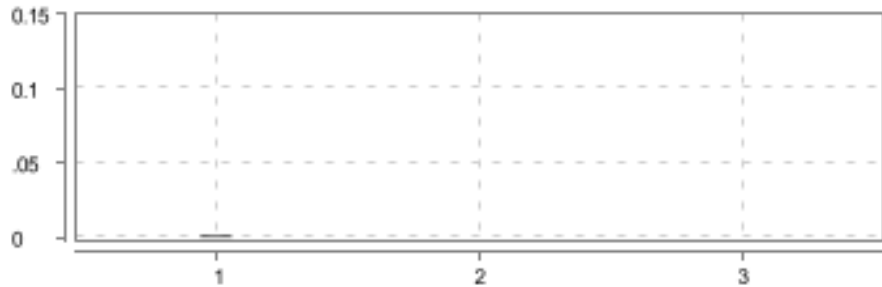
<div>FAILED</div> <div>DURATION - 3.814 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div>	<div></div>
/ 3:02:27.489 pm // 3:02:31.303 pm /				
As a admin , user is able to login				

#	Step / Hook Details	Status	Duration
	<b>BEFORE - hooks.Hook.startBrowser()</b> org.openqa.selenium.remote.NoSuchDriverException: Unable to obtain: Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], extensions: []}} at org.openqa.selenium.remote.service.DriverFinder.getPath(DriverFinder.java:29) at org.openqa.selenium.chrome.ChromeDriver.generateExecutor(ChromeDriver.java:98) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:87) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:71) at factory.BrowserFactory.startBrowser(BrowserFactory.java:39) at hooks.Hook.startBrowser(Hook.java:19) Caused by: org.openqa.selenium.WebDriverException: Unsuccessful command executed: [C:\Users\91966\AppData\Local\Temp\selenium-manager681477398839997126824452562966182\selenium-manager.exe, --browser, chrome, --output, json] The chromedriver version cannot be discovered Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: driver.version: ChromeDriver at org.openqa.selenium.manager.SeleniumManager.runCommand(SeleniumManager.java:130) at org.openqa.selenium.manager.SeleniumManager.getDriverPath(SeleniumManager.java:251) at org.openqa.selenium.remote.service.DriverFinder.getPath(DriverFinder.java:27) at org.openqa.selenium.chrome.ChromeDriver.generateExecutor(ChromeDriver.java:98)	<b>FAILED</b>	3.796 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:87) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:71) at factory.BrowserFactory.startBrowser(BrowserFactory.java:39) at hooks.Hook.startBrowser(Hook.java:19) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:130) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:107) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:88) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:54) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:67) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:52) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:114) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:86) at org.junit.platform.launcher.core.DefaultLauncherSession\$DelegatingLauncher.execute(DefaultLauncherSession.java:86) at org.apache.maven.surefire.junitplatform.LazyLauncher.execute(LazyLauncher.java:56) at org.apache.maven.surefire.junitplatform.JUnitPlatformProvider.execute(JUnitPlatformProvider.java:184) at org.apache.maven.surefire.junitplatform.JUnitPlatformProvider.invokeAllTests(JUnitPlatformProvider.java:148) at org.apache.maven.surefire.junitplatform.JUnitPlatformProvider.invoke(JUnitPlatformProvider.java:122) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495)		
1	Given user is able to load the application	SKIPPED	0.001 s
2	And user enters the application with username as "admin@email.com" and password as "admin@123" and submit .	SKIPPED	0.000 s
3	Then verify user is able to login.	SKIPPED	0.000 s
	AFTER - hooks.Hook.closeBrowser()	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at hooks.Hook.closeBrowser(Hook.java:25)		