

```
In [1]: # Import Libraries
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

```
In [2]: # Load the dataset
titanic_df = pd.read_csv("C:\\Users\\tarak\\Desktop\\jupyter\\train.csv")
```

```
In [3]: titanic_df
```

```
Out[3]:
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	NaN	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C85	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	NaN	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C123	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	NaN	S
...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.0000	NaN	S
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.0000	B42	S
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.4500	NaN	S
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.0000	C148	C
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.7500	NaN	Q

891 rows × 12 columns

```
In [5]: ▶ titanic_df.shape
```

```
Out[5]: (891, 12)
```

```
In [6]: ▶ # Check for missing values  
print(titanic_df.isnull().sum())
```

```
PassengerId      0  
Survived          0  
Pclass           0  
Name             0  
Sex              0  
Age             177  
SibSp            0  
Parch            0  
Ticket           0  
Fare             0  
Cabin           687  
Embarked         2  
dtype: int64
```

```
In [9]: ▶ titanic_df.describe()
```

```
Out[9]:
```

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Fare
count	891.000000	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008	0.381594	32.204208
std	257.353842	0.486592	0.836071	14.526497	1.102743	0.806057	49.693429
min	1.000000	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000	0.000000	7.910400
50%	446.000000	0.000000	3.000000	28.000000	0.000000	0.000000	14.454200
75%	668.500000	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000	6.000000	512.329200

```
In [10]: ► titanic_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
RangeIndex: 891 entries, 0 to 890  
Data columns (total 12 columns):  
#   Column      Non-Null Count  Dtype  
---  -  
0   PassengerId  891 non-null    int64  
1   Survived     891 non-null    int64  
2   Pclass       891 non-null    int64  
3   Name         891 non-null    object  
4   Sex          891 non-null    object  
5   Age         714 non-null    float64  
6   SibSp        891 non-null    int64  
7   Parch        891 non-null    int64  
8   Ticket       891 non-null    object  
9   Fare         891 non-null    float64  
10  Cabin        204 non-null    object  
11  Embarked     889 non-null    object  
dtypes: float64(2), int64(5), object(5)  
memory usage: 83.7+ KB
```

```
In [13]: ► titanic_df.dtypes
```

```
Out[13]: PassengerId    int64  
Survived              int64  
Pclass                int64  
Name                  object  
Sex                   object  
Age                   float64  
SibSp                 int64  
Parch                 int64  
Ticket                object  
Fare                  float64  
Cabin                 object  
Embarked              object  
dtype: object
```


```
In [14]: # Preview the dataset  
print(titanic_df.head())
```

	PassengerId	Survived	Pclass	\
0	1	0	3	
1	2	1	1	
2	3	1	3	
3	4	1	1	
4	5	0	3	


	Name	Sex	Age	SibSp	\
0	Braund, Mr. Owen Harris	male	22.0	1	
1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	
2	Heikkinen, Miss. Laina	female	26.0	0	
3	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	
4	Allen, Mr. William Henry	male	35.0	0	

	Parch	Ticket	Fare	Cabin	Embarked
0	0	A/5 21171	7.2500	NaN	S
1	0	PC 17599	71.2833	C85	C
2	0	STON/O2. 3101282	7.9250	NaN	S
3	0	113803	53.1000	C123	S
4	0	373450	8.0500	NaN	S


```
In [15]: ▶ # Explore the distribution of the target variable  
sns.countplot(x='Survived', data=titanic_df)  
plt.show()
```

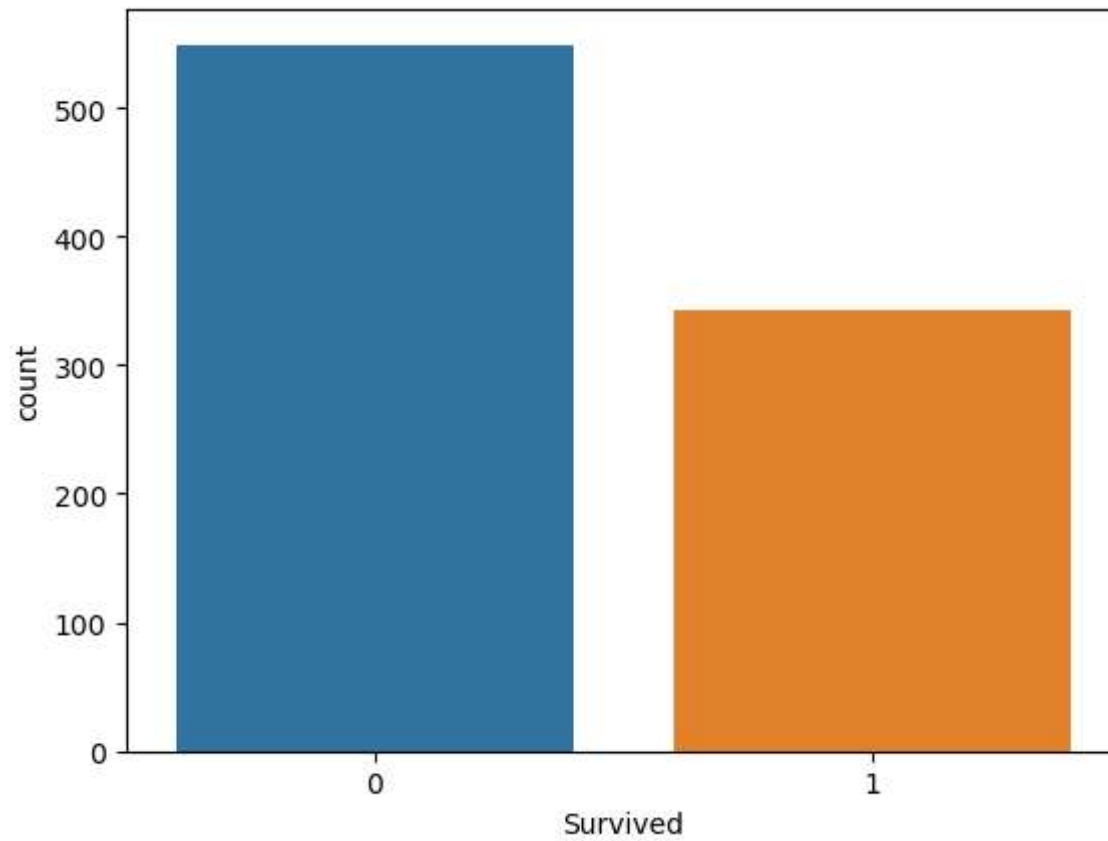


```
In [16]: ▶ # Explore the relationship between survival and gender
sns.countplot(x='Survived', hue='Sex', data=titanic_df)
plt.show()
```

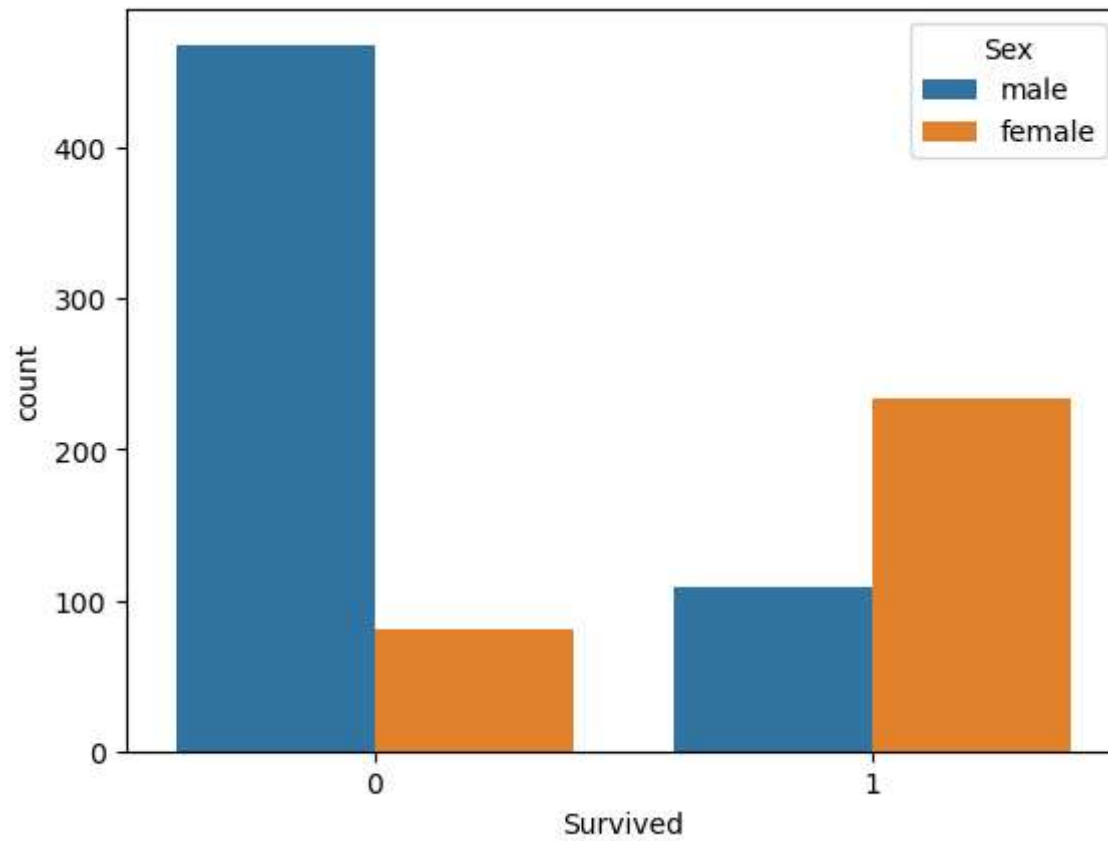


```
In [17]: ▶ # Explore the relationship between survival and passenger class
sns.countplot(x='Survived', hue='Pclass', data=titanic_df)
plt.show()
```

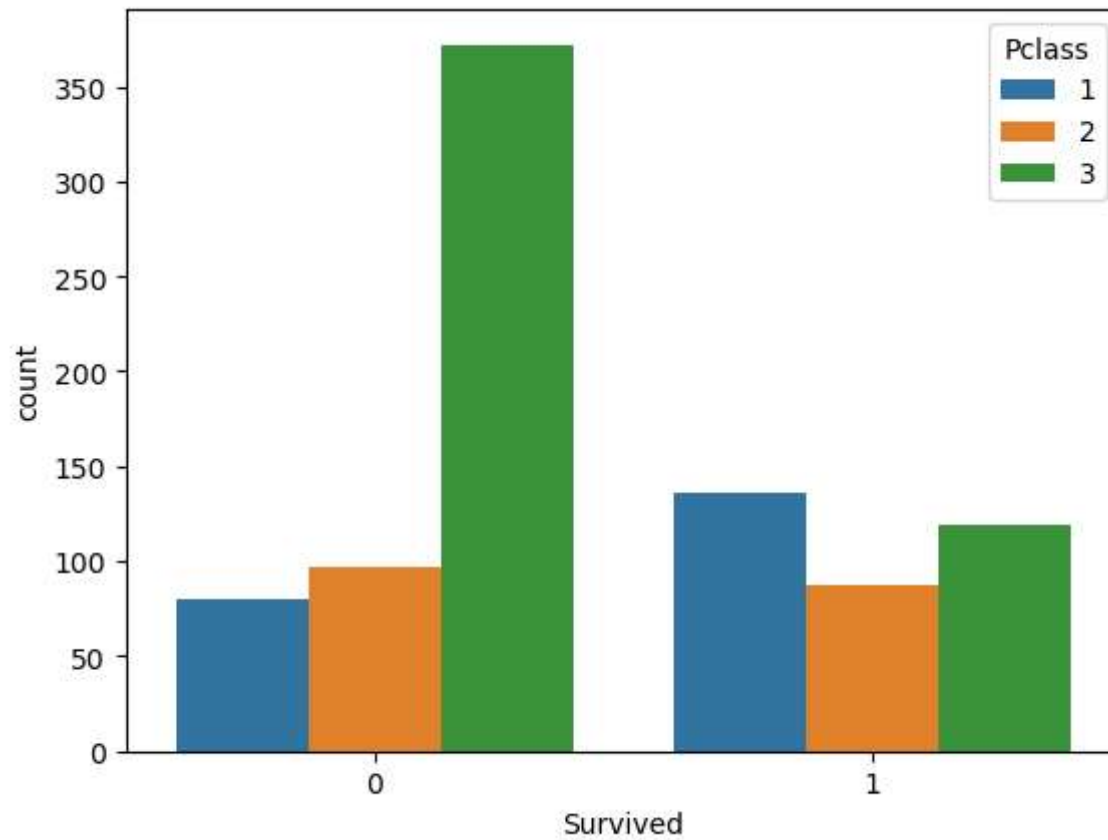

```
In [18]: ▶ # Explore the distribution of age
sns.histplot(x='Age', data=titanic_df)
plt.show()
```

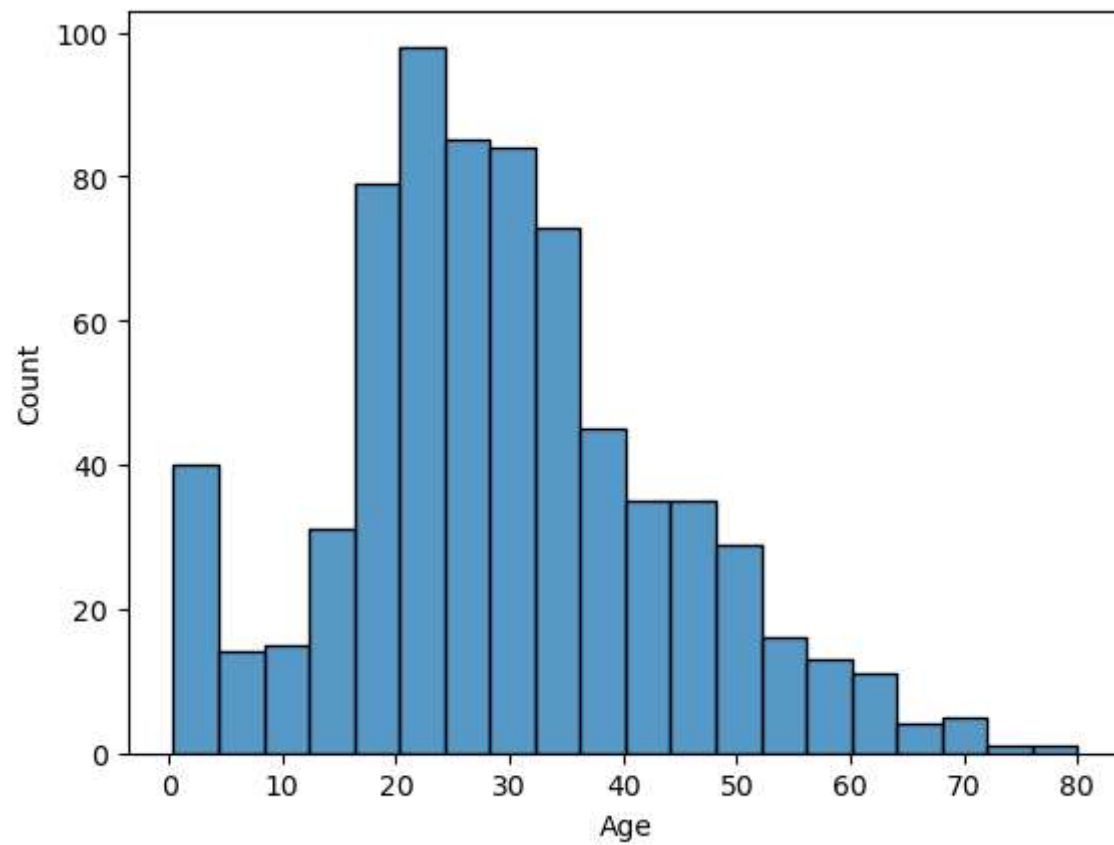


```
In [19]: ▶ # Explore the distribution of fares
sns.histplot(x='Fare', data=titanic_df)
plt.show()
```

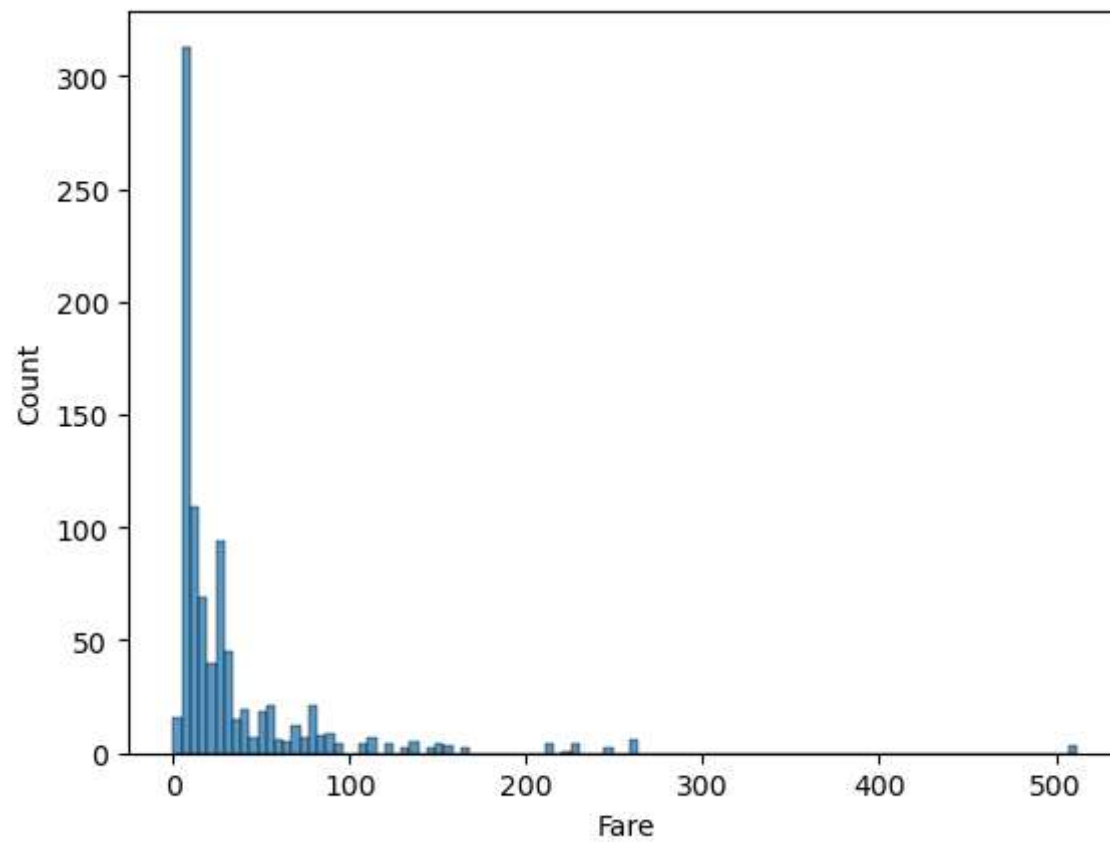

```
In [24]: ▶ # saving the dataframe
titanic_df.to_csv("C:\\Users\\tarak\\Desktop\\jupyter\\.csv")
```

```
In [ ]: ▶
```

