

MULTITHREADING – continued – Matrix Multiplication

```
#include <pthread.h>

#include <stdio.h>

#include <stdlib.h>

#define M 3 #define K 2 #define N 3

#define NUM_THREADS 10


int A [M][K] = { {2,2}, {2,2}, {3,6} };

int B [K][N] = { {8,7,6}, {5,4,3} };


int C [M][N];

struct v { int i; /* row */ int j; /* column */ };

void *runner(void *param); /* the thread */
```

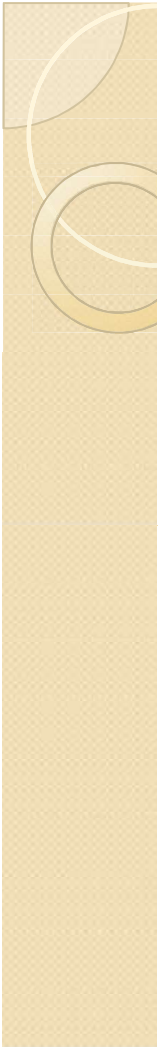

```
int main(int argc, char *argv[])
{
    int i,j, count = 0;
    for(i = 0; i < M; i++)
    {
        for(j = 0; j < N; j++)
        {
            //Assign a row and column for each thread
            struct v *data = (struct v *) malloc(sizeof(struct v));
            data->i = i; data->j = j;
            /* Now create the thread passing it data as a parameter */
            pthread_t tid; //Thread ID
            pthread_attr_t attr; //Set of thread attributes
            //Get the default attributes pthread_attr_init(&attr); //Create
            the thread
            pthread_create(&tid,&attr,runner,data);
            //Make sure the parent waits for all thread to complete
            pthread_join(tid, NULL);
        }
    }
}
```

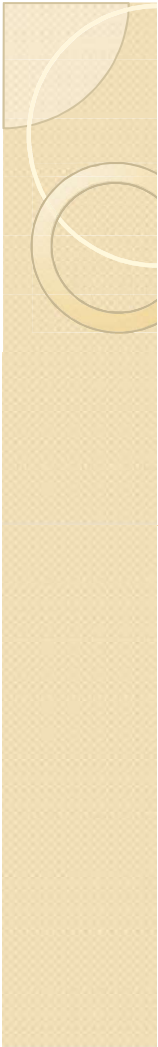

```
//Print out the resulting matrix
for(i = 0; i < M; i++) { for(j = 0; j < N; j++)
{ printf("%d ", C[i][j]); } printf("\n"); }
}

//The thread will begin control in this function
void *runner(void *param)
{ struct v *data = param; // the structure that holds our data
  int n, sum = 0; //the counter and sum

  //Row multiplied by column
  for(n = 0; n < K; n++)
  { sum += A[data->i][n] * B[n][data->j]; }
  //assign the sum to its coordinate
  C[data->i][data->j] = sum;
  //Exit the thread
  pthread_exit(0); }
```