

RVCD

DATASHEET

PRODUCT INFO

PROCESSOR

MediaTek MT7621, 512MB DDR RAM, 32MB Flash

INTERFACE

5 x WAN/LAN 10/100/1000, 1X USB-3.0

POWER

12V DC IN

OPERATING SYSTEM

Open-WRT Linux



Hardware Specification

CPU	MediaTek MT7621
RAM	512MB
FLASH	32MB
WAN	1x 10/100/1000 Mbps
LAN	4x 10/100/1000 Mbps
Interface	USB 3.0/2.0 HOST (Optional)
Reset	Pinhole Reset Button
Status LED	1x Power , 1x Sys, 5x Ethernet
Power Connector	DC Jack
Input Voltage Range	12 Vdc
Power Adapter	YES
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	110 x 26 x 95 mm (W x H x D)
Weight	200 gm
Other	Grounding Screw, Kensington lock

Operational & Environmental

Storage Temperature	-20 ~ 60 °C
Operating Temperature	0~ 50 °C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE SPECIFICATIONS

Firewall & Networking

Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Connection Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
Attack Prevention	SYN Flood Protection, Drop Invalid Packets
DHCP	Static and Dynamic
Multi-WAN Configuration	Failover , Load balancing (Wired WAN)
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPsec Tunnel
Open VPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
IPsec Encryption	3DES, AES128, AES192, AES256
IPsec Authentication	SHA1, MD5, SHA256, SHA384, SHA512
IPsec DH Group	MODP768, MODP1024, MODP1536, MODP2048, MODP3072, MODP4096
PPTP/L2TP	Server & Client with/without MPPE Encryption
Monitoring Application	Modem Monitoring with ICMP Echo, Router Monitoring with ICMP Echo
Time Synchronization	NTP Client, RTC, Manual
Diagnostic	Ping, Traceroute, Modem Debug Info, Iperf, Download Logs
Other Features	MAC binding, Connection Diagnostics, URL Filtering, Router Health Monitoring, Package Manager

Remote Management

NMS	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
TR069	TR069 Client for CPE Management
SMS Commands	NA


Operating System

Operating System	Open-WRT based Linux OS
Supported Languages	Shell scripting, C, C++
Development tools	SDK package with built environment provided (Optional)

Standard Packaging

RVCD Cellular Router with Sheet Metal Housing , Power Adapter, 01-meter Ethernet cable.

SPATIAL MEASUREMENT:

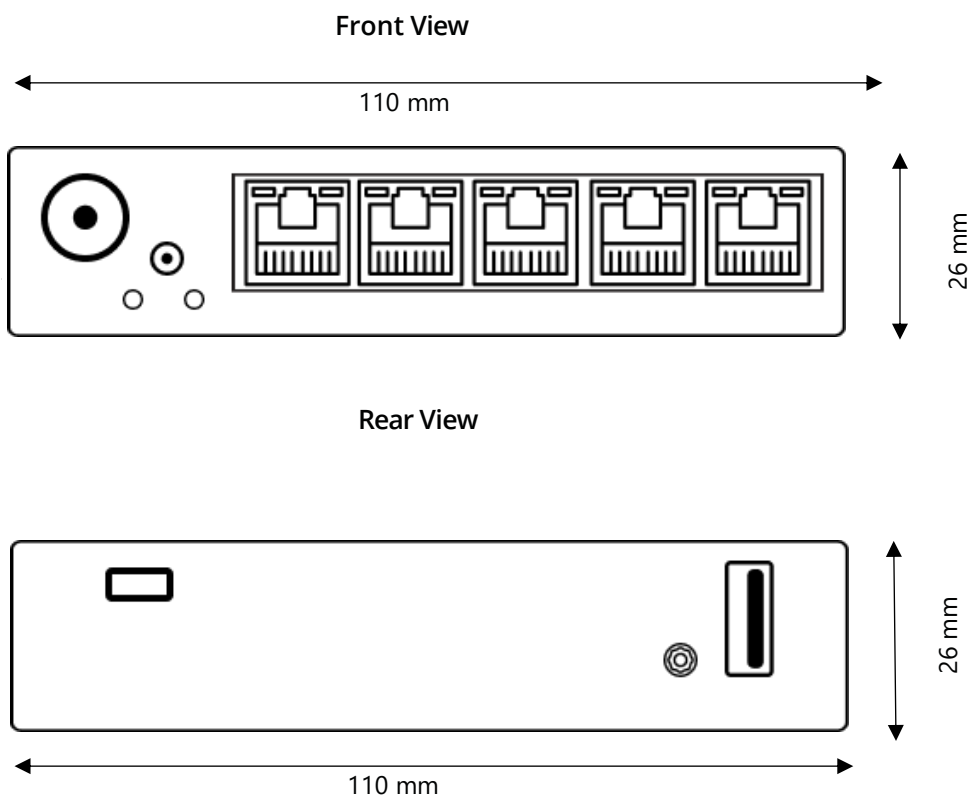

*All rights reserved, subject to change without prior notice.

Get in touch:



sales@invendis.com



www.silbonetworks.com



Invendis Technologies India Private Limited

No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068

