


Quiz 1A Answers – Quiz based on 10 points

1. The `IDinner` interface has a `howMuch()` method, meaning that any class that implements `IDinner` must have a `howMuch()` method. However, the `Fishsticks` class does not implement this method.

Grading:

correctly identifies problem: 2 points

correctly identifies solution: 2 points

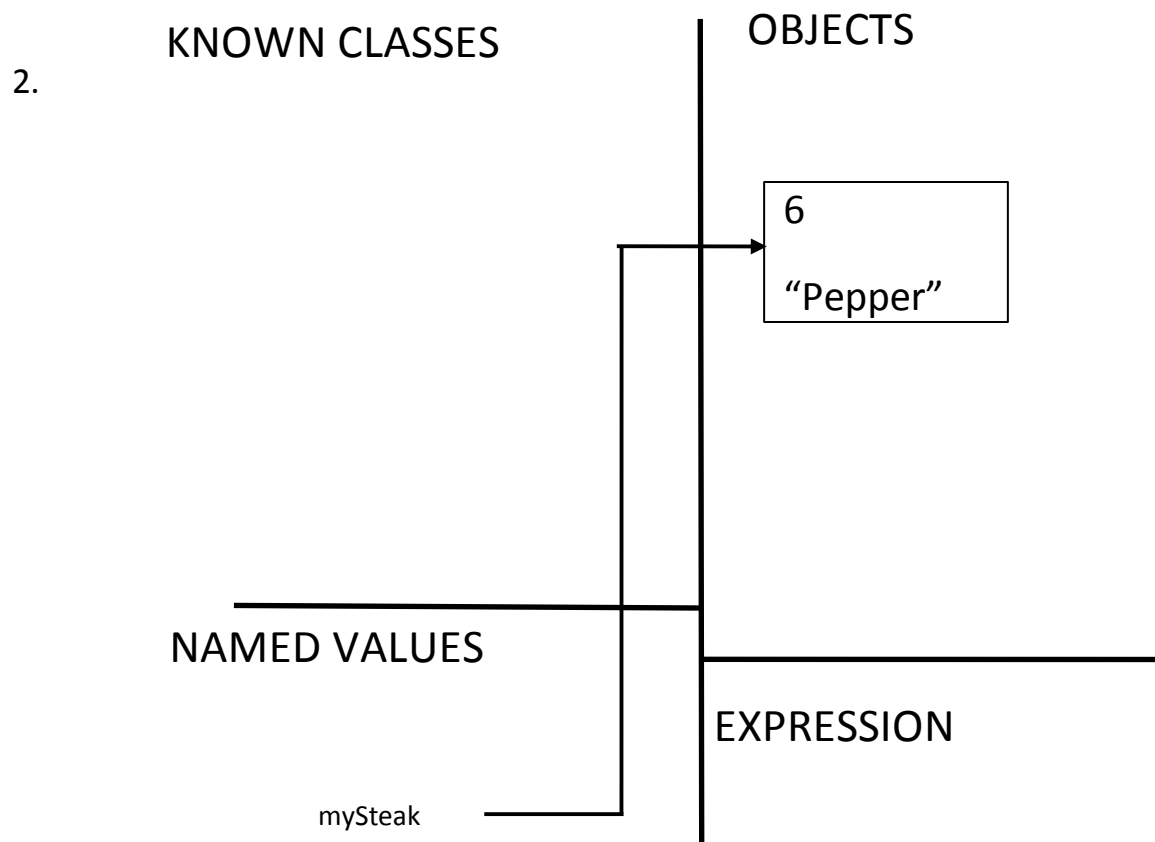

Grading:

- variable name in Named Values: 1 point
- arrow pointing to object in Objects: 1 point
- object in Objects with correct parameters: 1 point

3.

```
@Test
public void testHowMuch() {
    assertEquals(mySteak.howMuch(), 6);
}
```

Grading:

- method activated with activating object: 1 point
- uses `assertEquals()`: 1 point
- second parameter matches return value of `howMuch()`: 1 point