


Short Quiz 09**Score distribution**

199 submitted — mean 3.3, median 3.5, range 0–6 (out of 6)

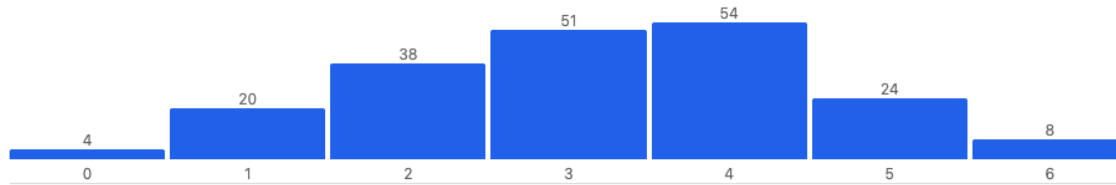

Marks on this session use partial credit, so scores can be fractional — bars group scores into whole-mark bands: the bar labeled "8" covers every score from 8 up to, but not including, 9.

Per-question breakdown

Question	% Correct	Mean Credit	Correct	Option breakdown
Q1. What triggers the scheduler when a running process is NOT blocking?	75% (149/199)	0.75	B	A: 30 — Software interrupt B ✓: 164 — Timer interrupt C: 6 — fork() D: 18 — Voluntary exit()
Q2. Why one shared process table (not per-CPU)?	73% (143/195)	0.73	B	A: 16 — Only CPU-0 schedules B ✓: 161 — Per-CPU copies risk inconsistent/duplicate scheduling C: 26 — PCBs are tied to a CPU's cache D: 14 — Locks aren't needed if shared
Q3. What is TRUE about FCFS?	61% (122/199)	0.69	A,B	A ✓: 130 — Non-preemptive B ✓: 178 — Runs in arrival order C: 43 — Preemptive D: 11 — Runs in order of shorter jobs
Q4. Which of these are valid scheduling points during process execution?	17% (34/199)	0.31	A,B	A ✓: 100 — sleep() B ✓: 129 — yield() C: 106 — sem_post on semaphore whose value=0 D: 87 — sem_wait on semaphore whose value=1
Q5. FCFS, arrival order P1(5), P2(2), P3(10). Average waiting time?	31% (61/198)	0.31	A	A ✓: 65 — 4 B: 90 — 5.67 C: 33 — 6 D: 15 — 3
Q6. FCFS, arrival order P1(4), P2(6). Average completion time?	58% (114/198)	0.58	B	A: 70 — 5 B ✓: 114 — 7 C: 12 — 10 D: 2 — 4