



Out of Bag Evaluation in Random Forest

→ In random forest, subsets are created from dataset using row sampling and feature sampling with replacement technique. However, there are some datapoints that are not selected in any subset/sample are referred as 'out of Bag'.

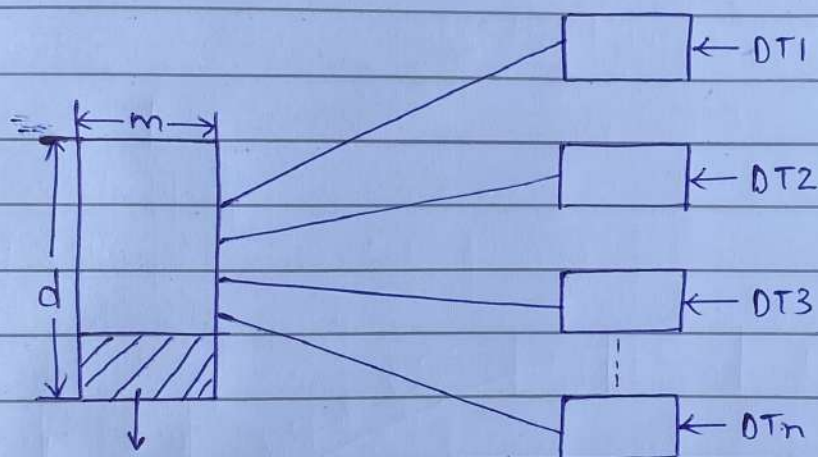

out of Bag → validation

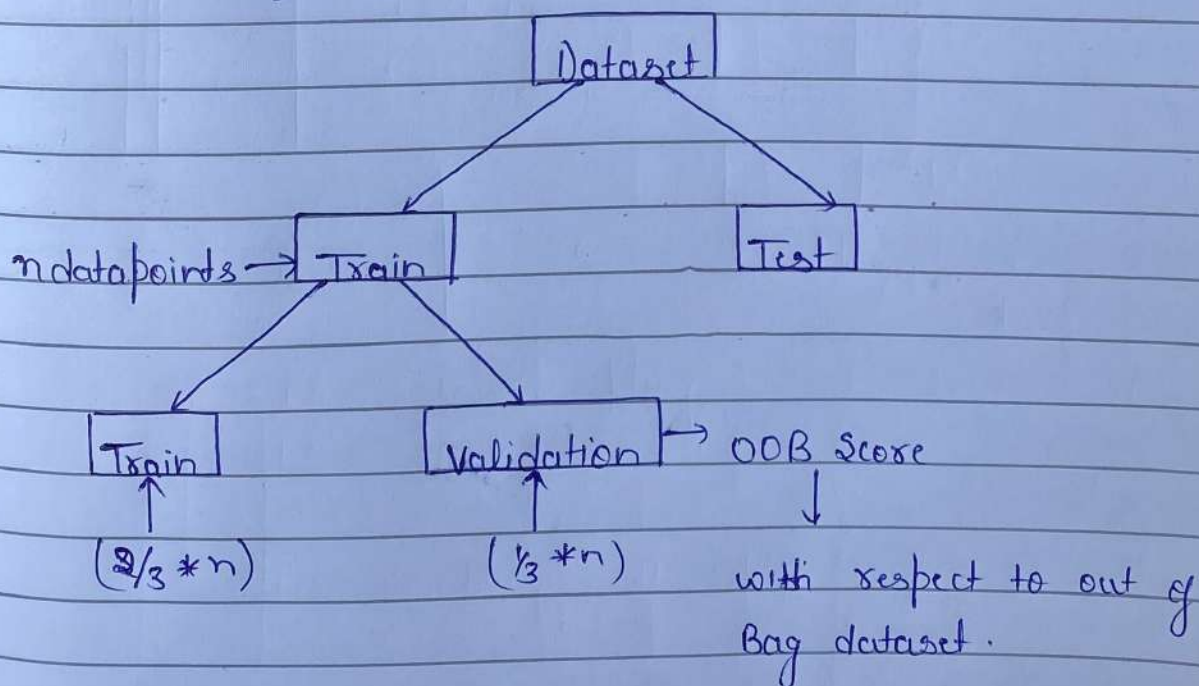

Note: To use these out of bag datapoints as validation dataset, set the parameter $OOB = True$.