

note:
black & white




Recap – Image Classification with Bags of Local Features

- Bag of Feature models were the state of the art for image classification for a decade
- BoF may still be the state of the art for instance retrieval
- We saw numerous strategies to fight back against lost spatial information (spatial pyramid) and lost feature detail due to quantization.
- Food for thought, doesn't the spatial pyramid seem kind of recursive / hierarchical? Like a SIFT feature on top of SIFT features?


SIFT vector formation

- 4x4 array of gradient orientation histogram weighted by magnitude
- 8 orientations x 4x4 array = 128 dimensions
- Motivation: some sensitivity to spatial layout, but not too much.

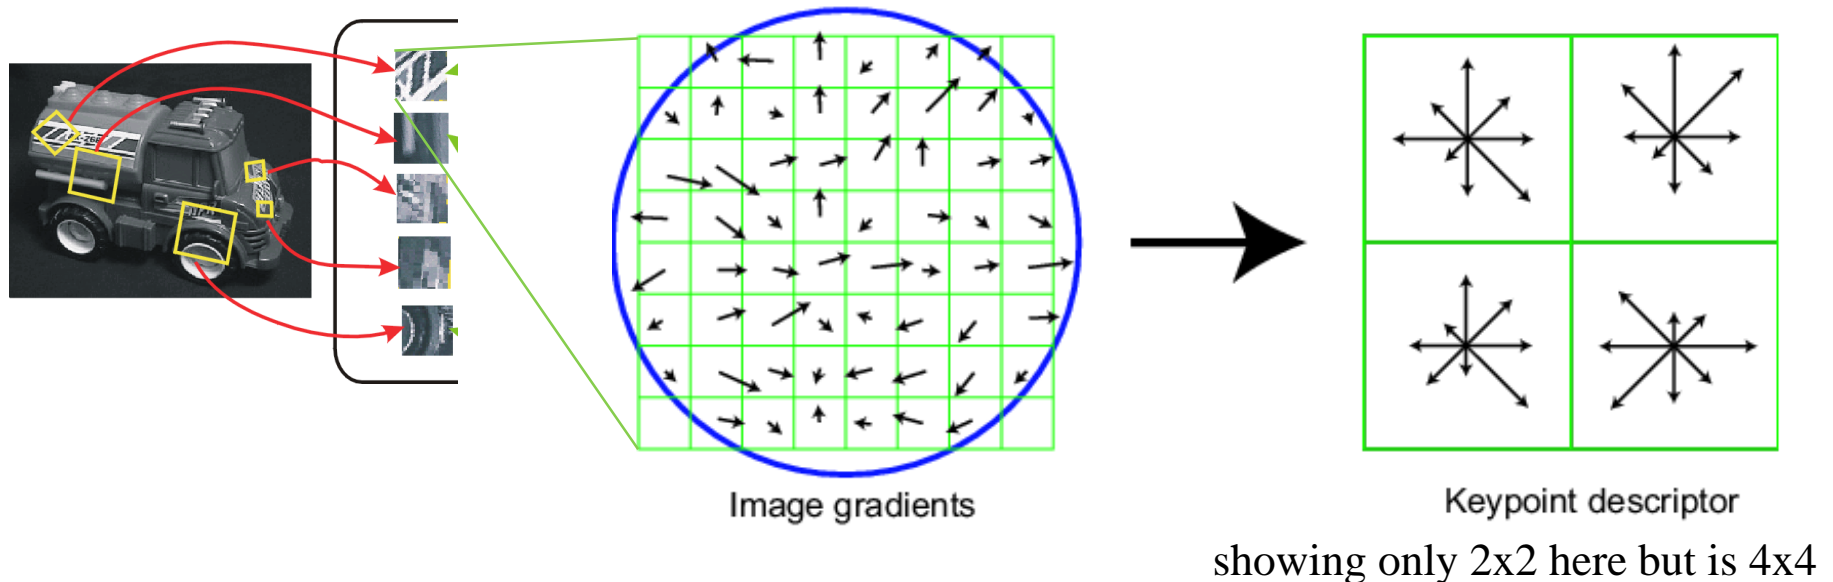

Spatial pyramid representation

- Extension of a bag of features
- Locally orderless representation at several levels of resolution

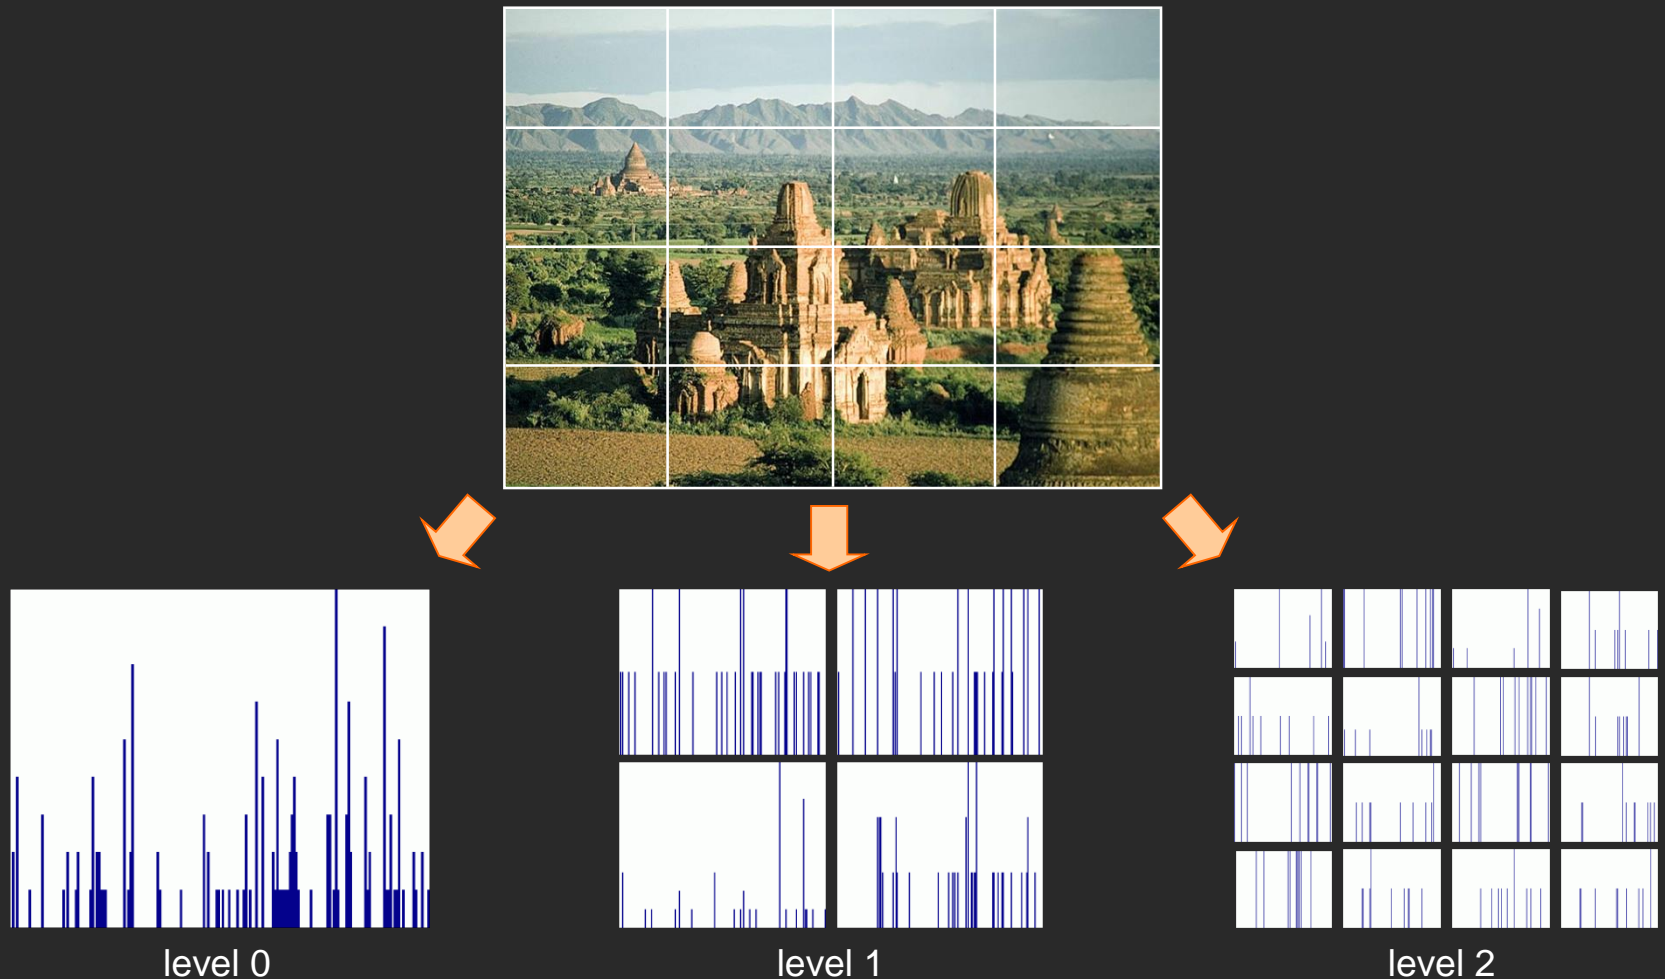

Recap – Image Classification with Bags of Local Features

- Food for thought, doesn't the spatial pyramid seem kind of recursive / hierarchical? Like a SIFT feature on top of SIFT features?
- Seems like there is a tendency for features to involve convolution, spatial pooling, and non-linearities.

Object Detection

- Overview
- Viola-Jones
- Dalal-Triggs
- Later classes:
 - Deformable models
 - Deep learning

Person detection with HoG's & linear SVM's




- Histograms of Oriented Gradients for Human Detection, [Navneet Dalal](#), [Bill Triggs](#), International Conference on Computer Vision & Pattern Recognition - June 2005
- <http://lear.inrialpes.fr/pubs/2005/DT05/>

Object detection vs Scene Recognition

- What's the difference?
- Objects (even if deformable and articulated) probably have more consistent shapes than scenes.
- Scenes can be defined by distribution of “stuff” – materials and surfaces with arbitrary shape.
- Objects are “things” that own their boundaries
- Bag of words models were less popular for object detection because they throw away shape info.

Object Category Detection

- Focus on object search: “Where is it?”
- Build templates that quickly differentiate object patch from background patch

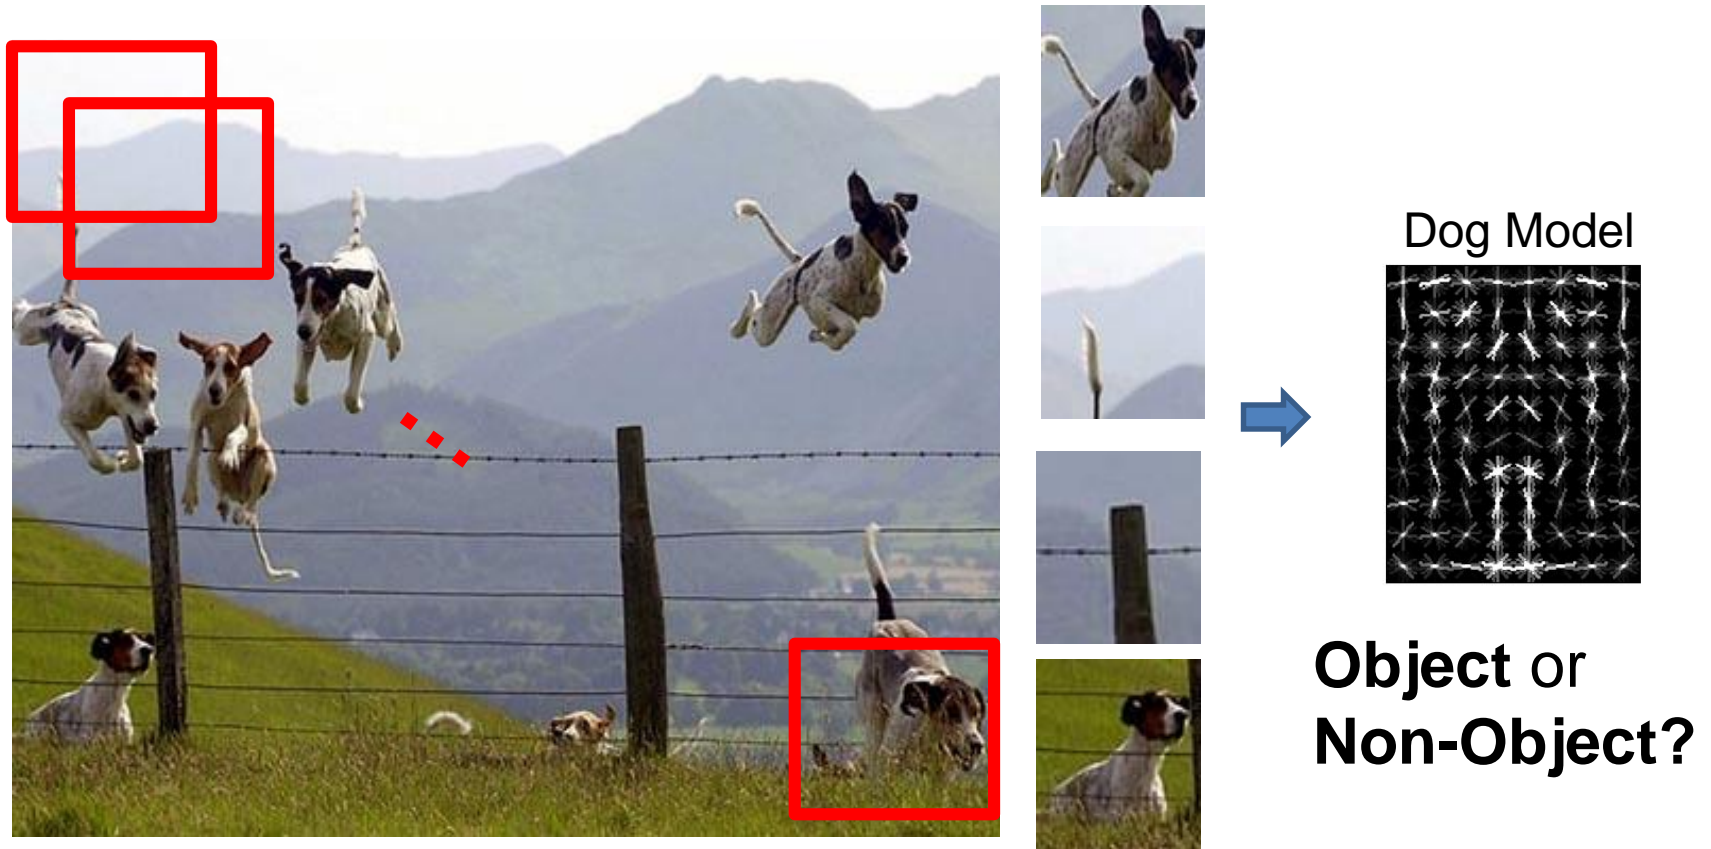

Challenges in modeling the object class



Illumination



Object pose



Clutter



Occlusions



Intra-class
appearance




Viewpoint

Challenges in modeling the non-object class


True
Detections



Bad
Localization

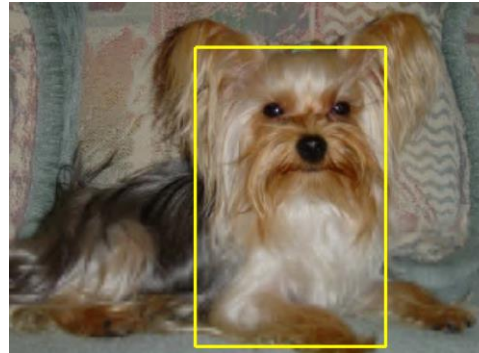

Confused with
Similar Object

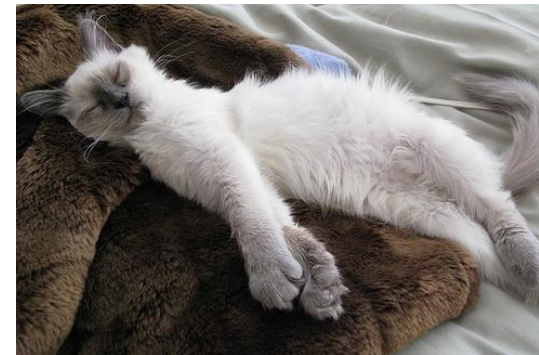


Misc. Background



Confused with
Dissimilar Objects



General Process of Object Recognition

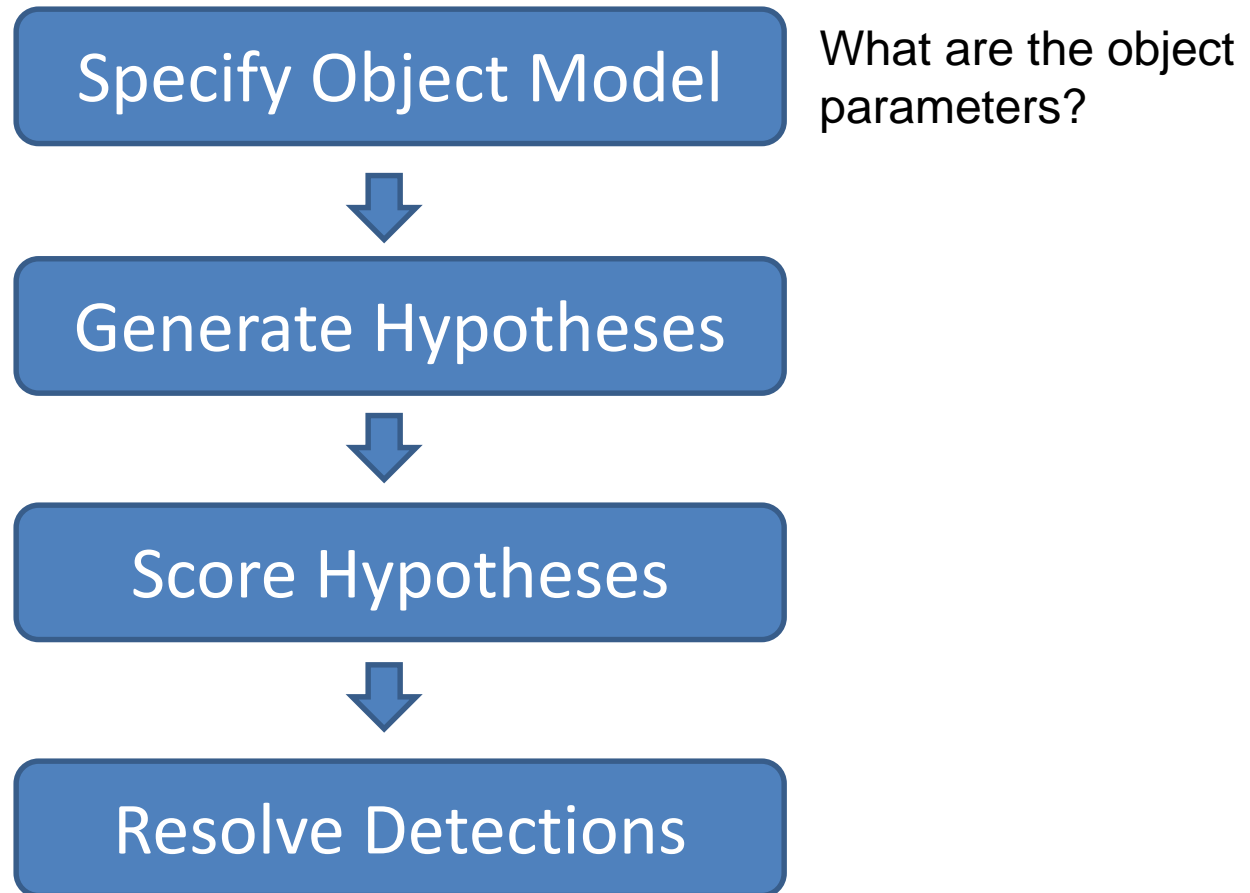


Specifying an object model

1. Statistical Template in Bounding Box

- Object is some (x,y,w,h) in image
- Features defined wrt bounding box coordinates



Image


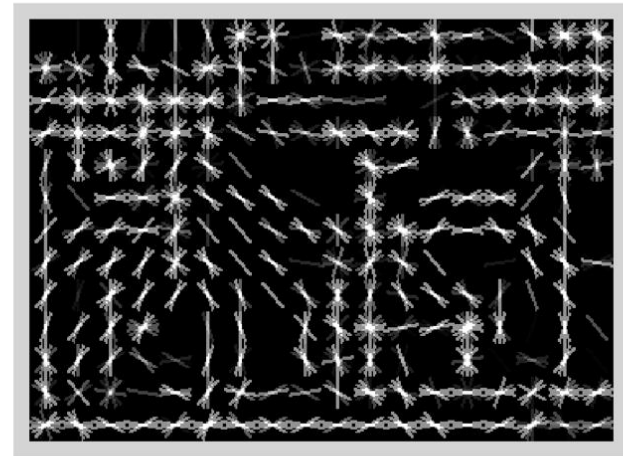


Template Visualization

Specifying an object model

2. Articulated parts model








- Object is configuration of parts
- Each part is detectable

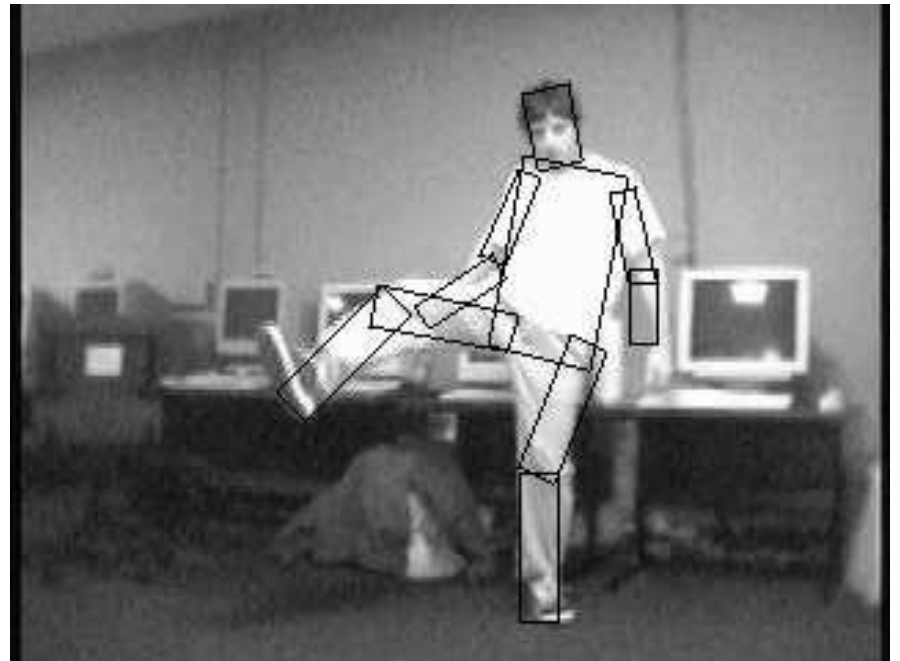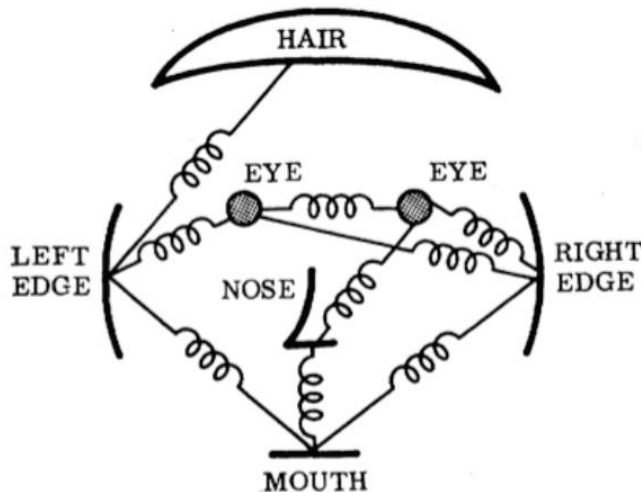

Specifying an object model

3. Hybrid template/parts model

Detections

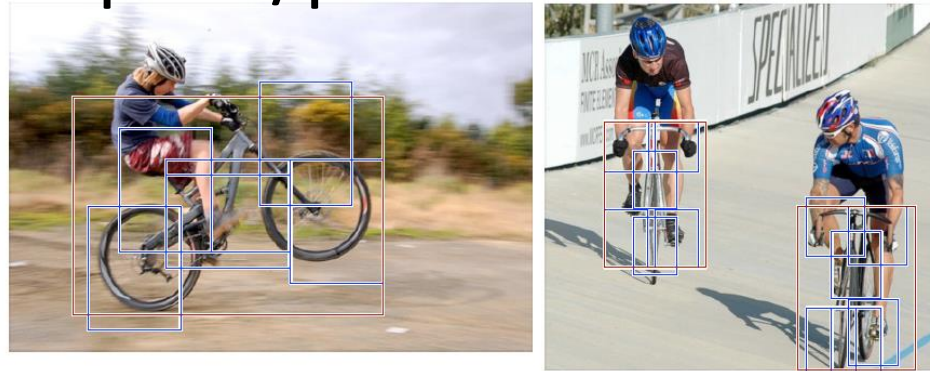

Template Visualization

root filters
coarse resolution


part filters
finer resolution

deformation
models

Specifying an object model

4. 3D-ish model

- Object is collection of 3D planar patches under affine transformation

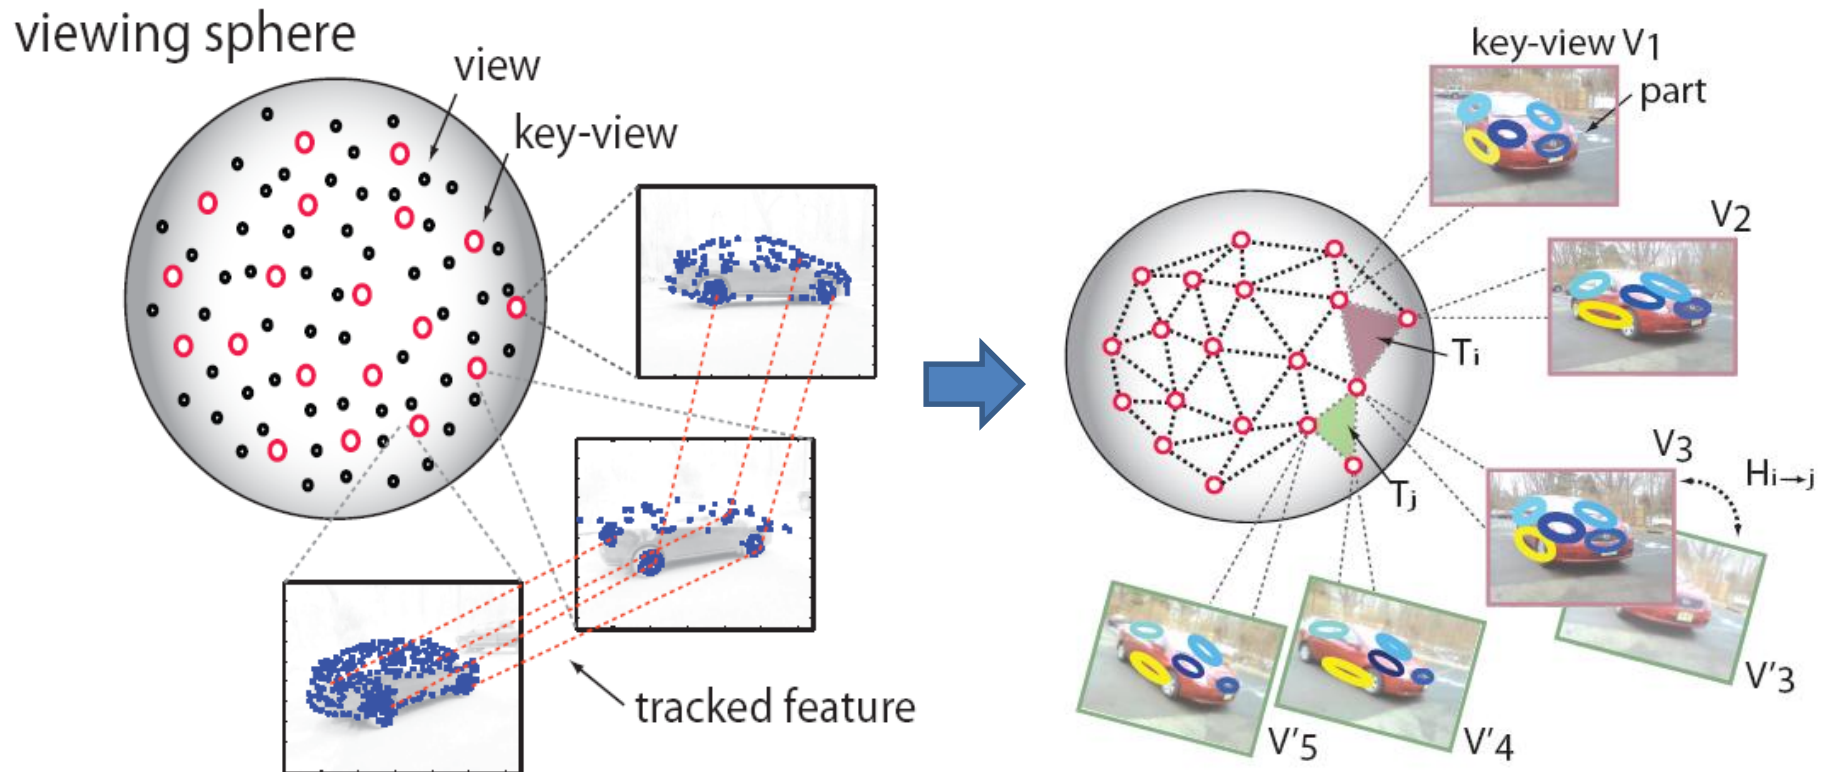

General Process of Object Recognition

Specify Object Model



Generate Hypotheses

Propose an alignment of the model to the image



Score Hypotheses



Resolve Detections

Generating hypotheses

1. Sliding window

- Test patch at each location and scale



Generating hypotheses

1. Sliding window

- Test patch at each location and scale




Note – Template did not change size

Each window is separately classified







Generating hypotheses

2. Voting from patches/keypoints

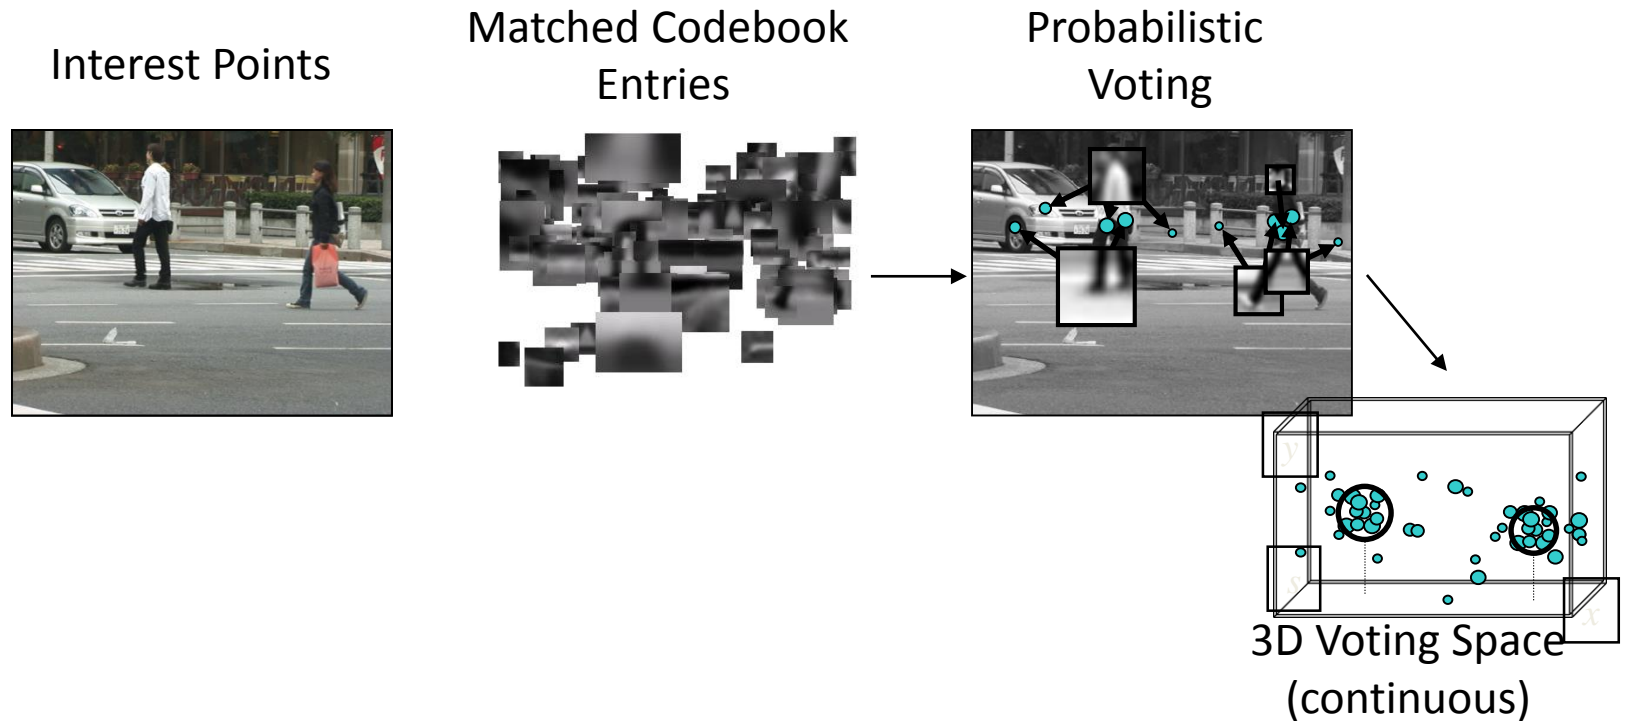


Generating hypotheses

3. Region-based proposal

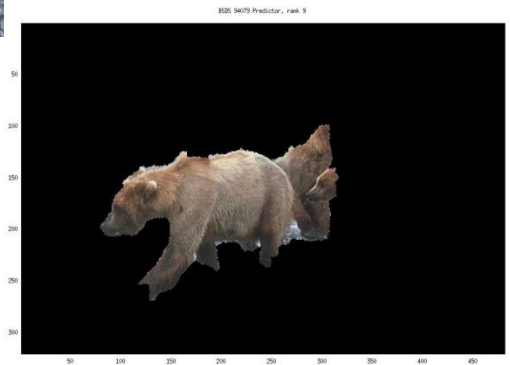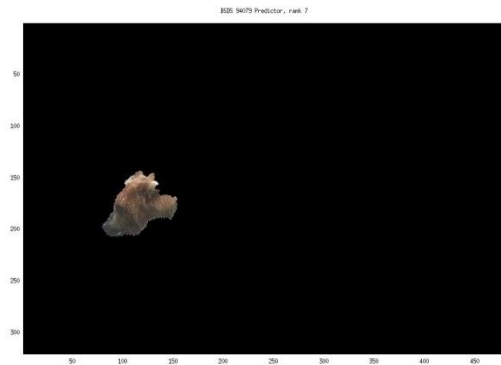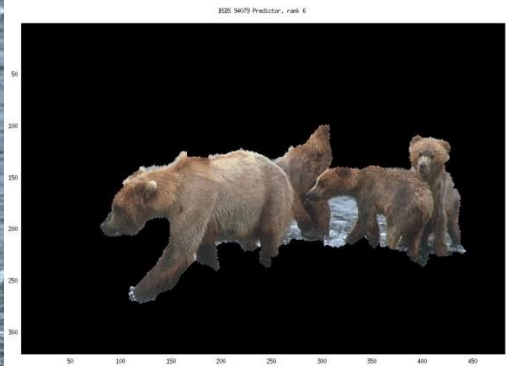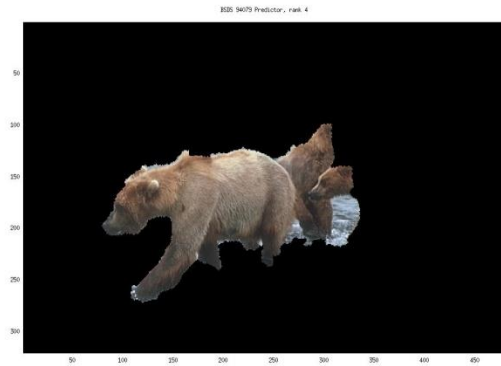

General Process of Object Recognition

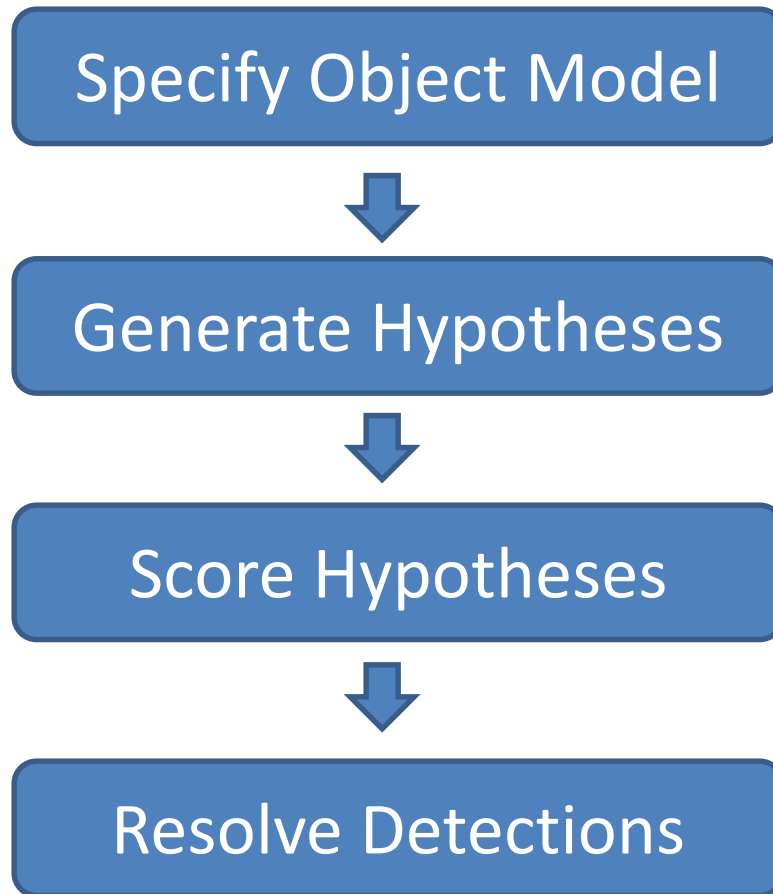

Mainly-gradient based features, usually based on summary representation, many classifiers

General Process of Object Recognition

Specify Object Model



Generate Hypotheses



Score Hypotheses




Resolve Detections

Rescore each proposed
object based on whole set


Resolving detection scores

1. Non-max suppression

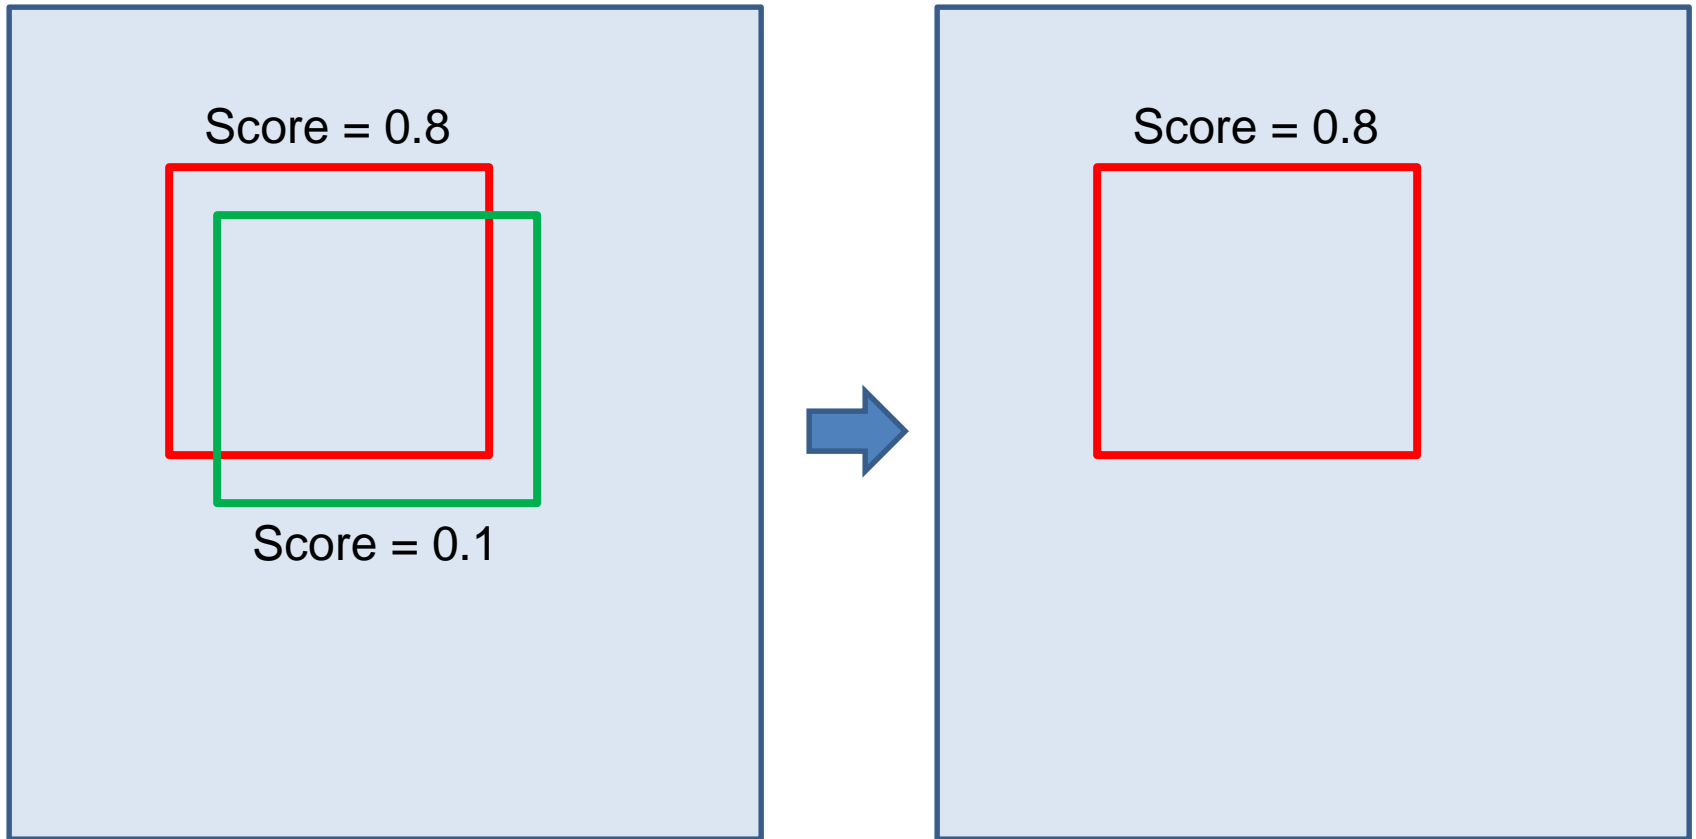

Resolving detection scores


1. Non-max suppression

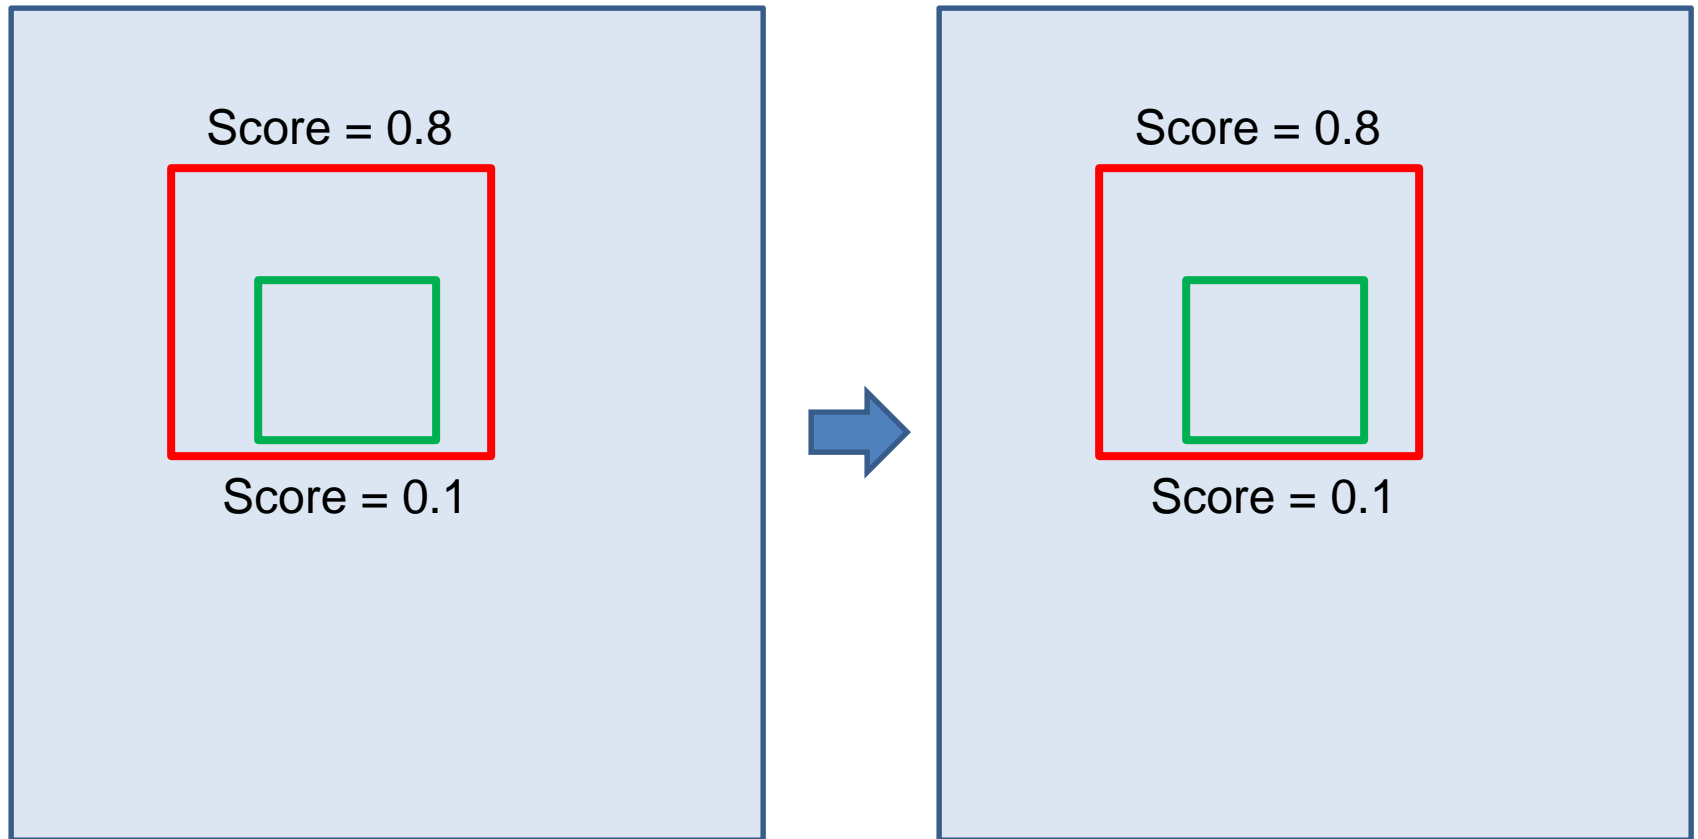

“Overlap” score is below some threshold

Resolving detection scores


2. Context/reasoning

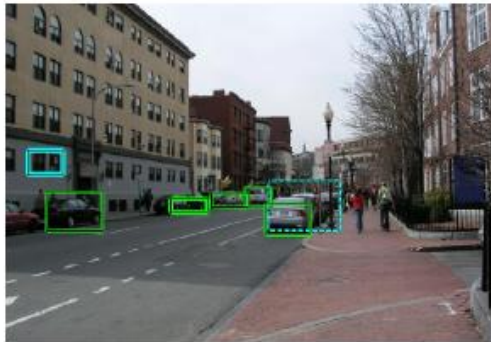

(g) Car Detections: Local



(h) Ped Detections: Local

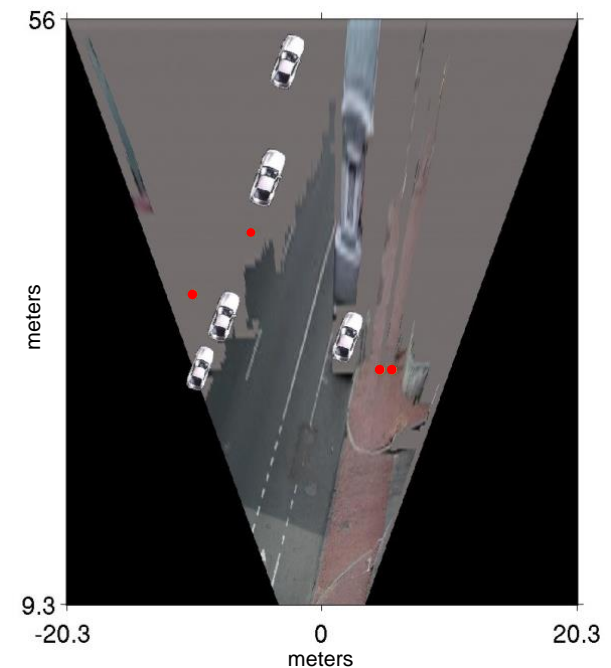

Influential Works in Detection

- Sung-Poggio (1994, 1998) : ~2000 citations
 - Basic idea of statistical template detection, bootstrapping to get “face-like” negative examples, multiple whole-face prototypes (in 1994)
- Rowley-Baluja-Kanade (1996-1998) : ~3600 citations
 - “Parts” at fixed position, non-maxima suppression, simple cascade, rotation, pretty good accuracy, fast
- Schneiderman-Kanade (1998-2000,2004) : ~1700 citations
 - Careful feature engineering, excellent results, cascade
- Viola-Jones (2001, 2004) : ~18,000 citations
 - Haar-like features, Adaboost as feature selection, hyper-cascade, very fast
- Dalal-Triggs (2005) : ~24,000 citations
 - Careful feature engineering, excellent results, HOG feature, easy to implement
- Felzenszwalb-McAllester-Ramanan (2008): ~7,300 citations
 - Template/parts-based blend
- Girshick et al. (2013): ~6500 citations
 - R-CNN / Fast R-CNN / Faster R-CNN. Deep learned models on object proposals.



Sliding Window Face Detection with Viola-Jones

Face detection and recognition



Detection



Recognition

"Sally"


Consumer application: Apple iPhoto



<http://www.apple.com/ilife/iphoto/>

Consumer application: Apple iPhoto

Can be trained to recognize pets!

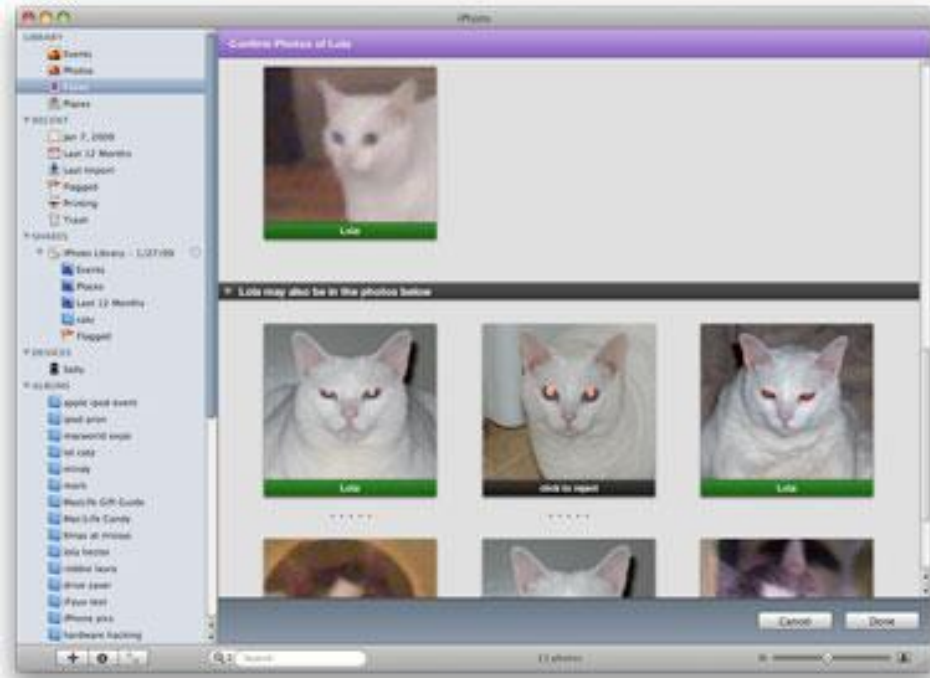

http://www.maclife.com/article/news/iphotos_faces_recognizes_cats

Consumer application: Apple iPhoto

Things iPhoto thinks are faces




Funny Nikon ads

"The Nikon S60 detects up to 12 faces."



Funny Nikon ads

"The Nikon S60 detects up to 12 faces."

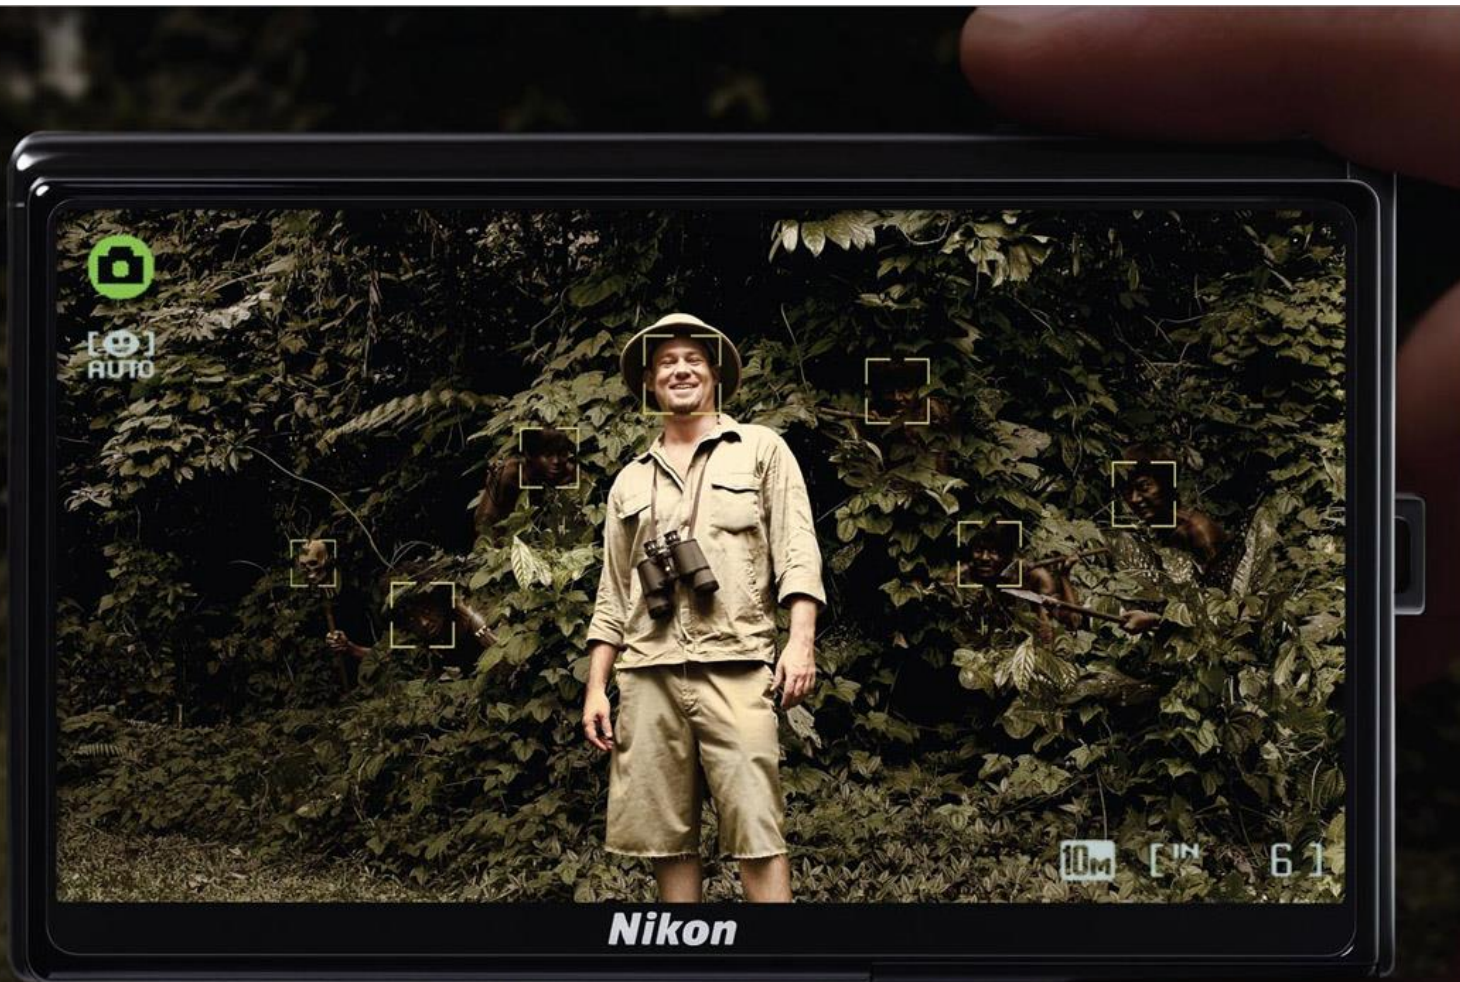

The Nikon S60. Detects up to 12 faces.

Challenges of face detection

- Sliding window detector must evaluate tens of thousands of location/scale combinations
- Faces are rare: 0–10 per image
 - For computational efficiency, we should try to spend as little time as possible on the non-face windows
 - A megapixel image has $\sim 10^6$ pixels and a comparable number of candidate face locations
 - To avoid having a false positive in every image image, our false positive rate has to be less than 10^{-6}

The Viola/Jones Face Detector



- A seminal approach to real-time object detection
- Training is slow, but detection is very fast
- Key ideas
 - *Integral images* for fast feature evaluation
 - *Boosting* for feature selection
 - *Attentional cascade* for fast rejection of non-face windows

P. Viola and M. Jones. [Rapid object detection using a boosted cascade of simple features.](#) CVPR 2001.

P. Viola and M. Jones. [Robust real-time face detection.](#) IJCV 57(2), 2004.

Image Features


“Rectangle filters”

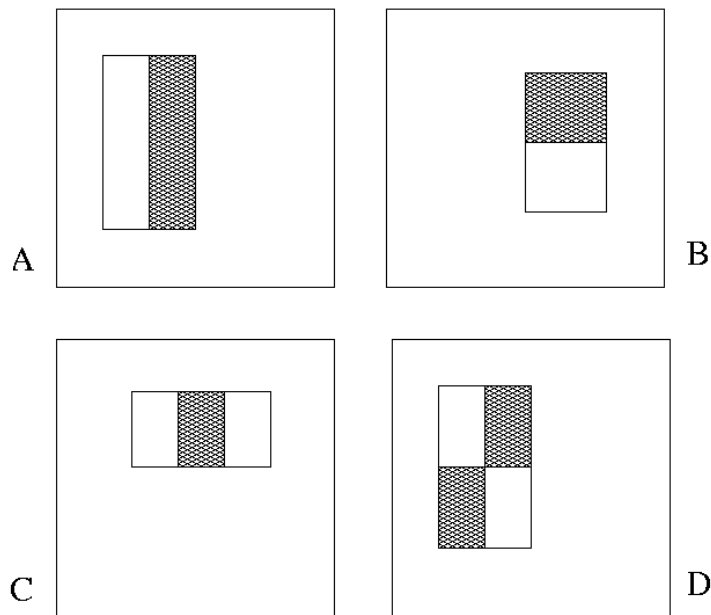

Value =

$$\sum (\text{pixels in white area}) - \sum (\text{pixels in black area})$$


Example

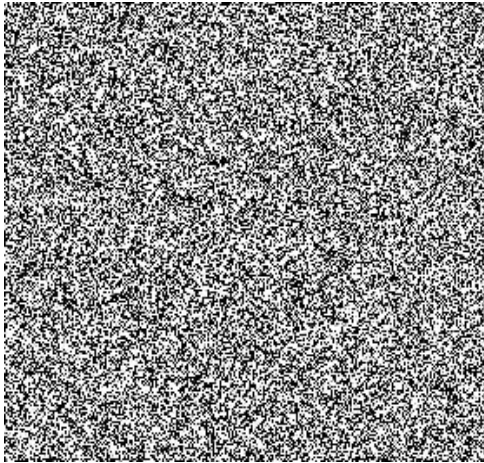

Source




Result

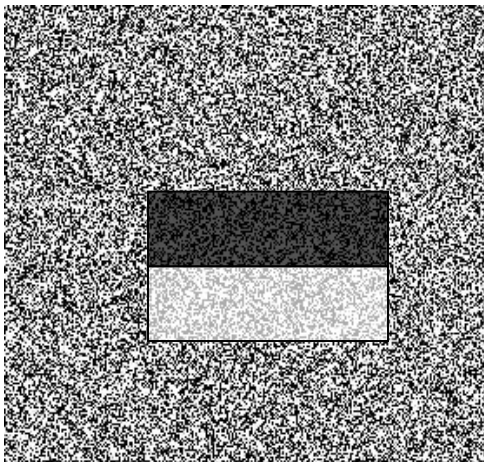


Fast computation with integral images


- The *integral image* computes a value at each pixel (x,y) that is the sum of the pixel values above and to the left of (x,y) , inclusive
- This can quickly be computed in one pass through the image

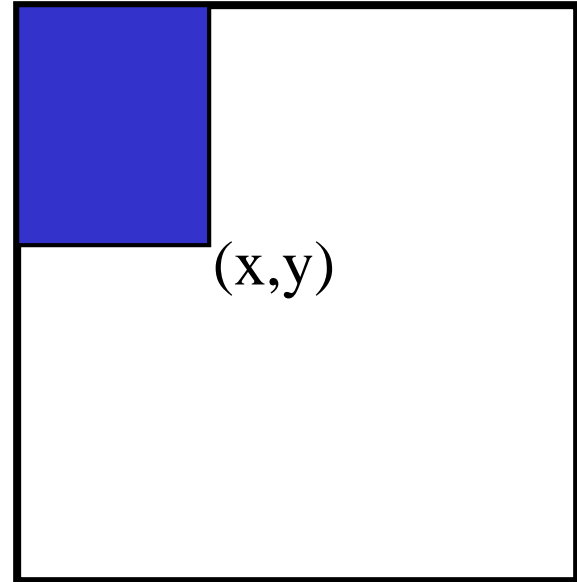

Computing the integral image



Computing the integral image

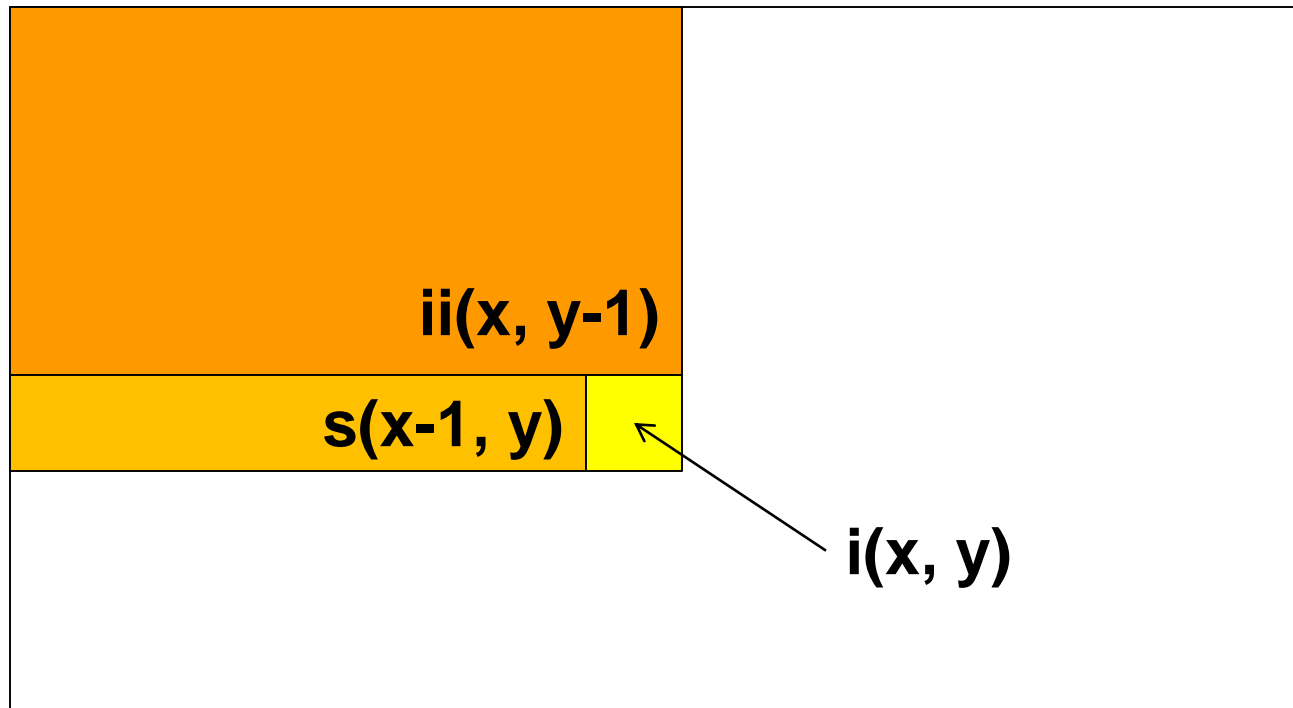

Cumulative row sum: $s(x, y) = s(x-1, y) + i(x, y)$

Integral image: $ii(x, y) = ii(x, y-1) + s(x, y)$


MATLAB: `ii = cumsum(cumsum(double(i)), 2);`

Computing sum within a rectangle


- Let A,B,C,D be the values of the integral image at the corners of a rectangle
- Then the sum of original image values within the rectangle can be computed as:

$$\text{sum} = A - B - C + D$$

- Only 3 additions are required for any size of rectangle!

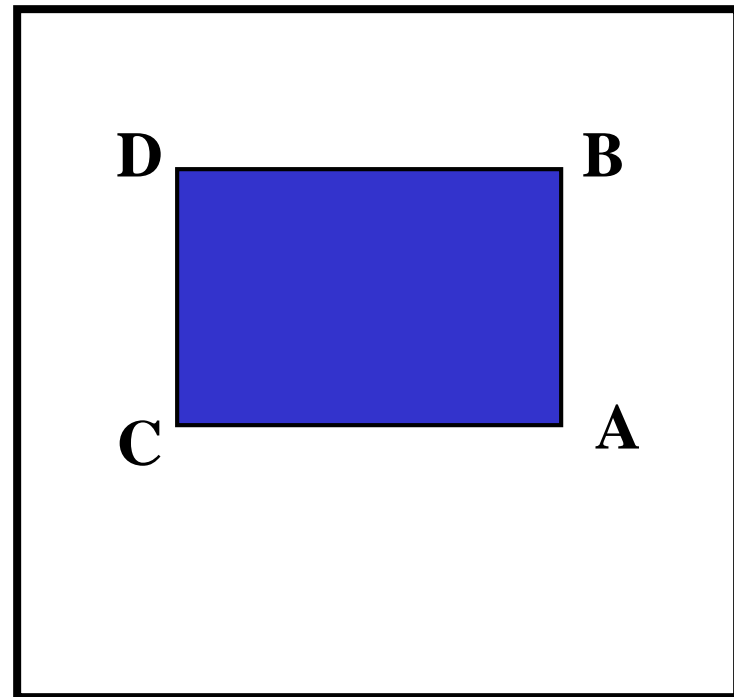


Computing a rectangle feature

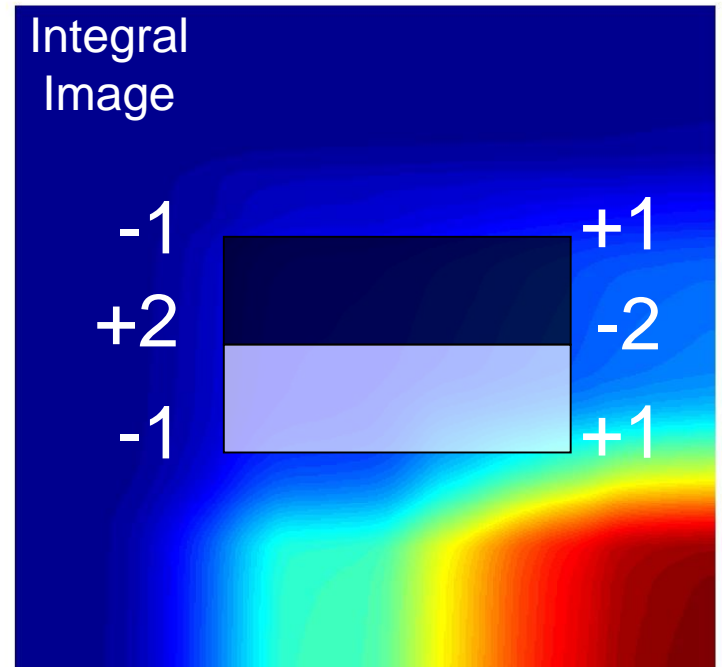

Feature selection

- For a 24x24 detection region, the number of possible rectangle features is ~160,000!

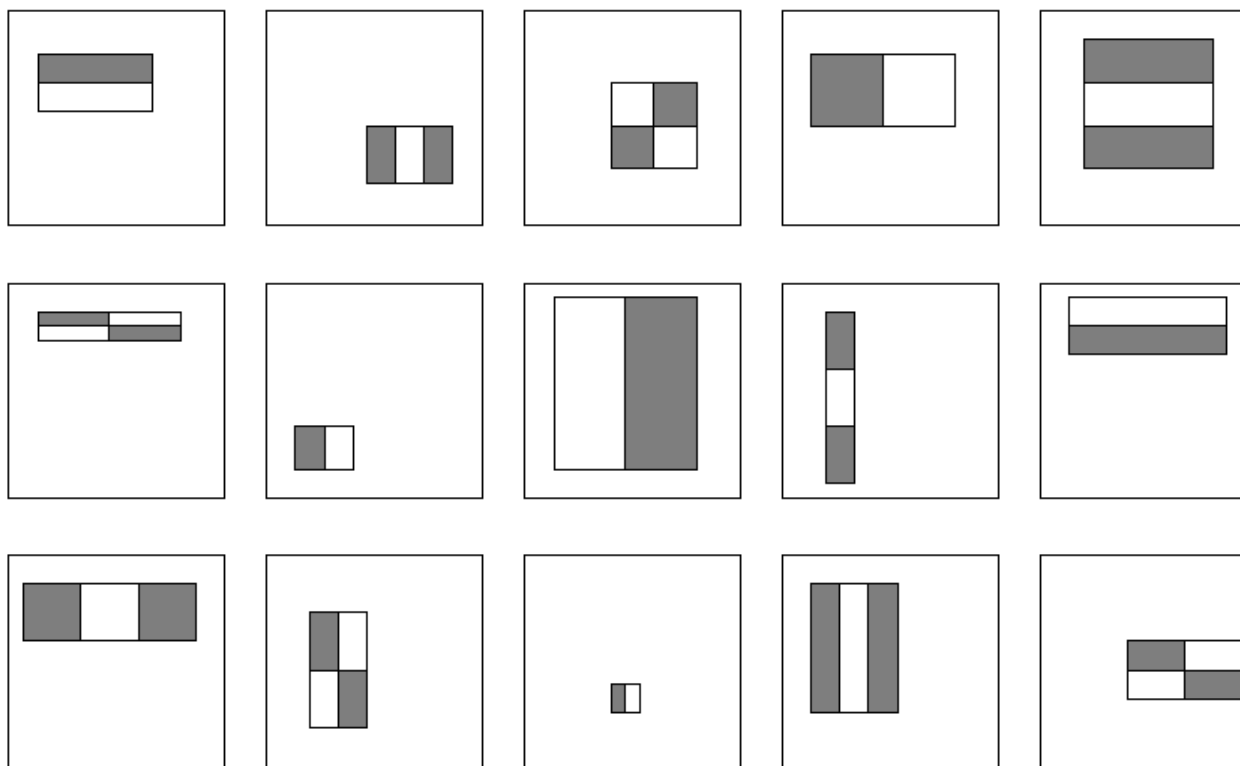

Feature selection

- For a 24x24 detection region, the number of possible rectangle features is ~160,000!
- At test time, it is impractical to evaluate the entire feature set
- Can we create a good classifier using just a small subset of all possible features?
- How to select such a subset?

Boosting

- *Boosting* is a learning scheme that combines *weak learners* into a more accurate *ensemble classifier*
- Weak learners based on rectangle filters:

$$h_t(x) = \begin{cases} 1 & \text{if } p_t f_t(x) > p_t \theta_t \\ 0 & \text{otherwise} \end{cases}$$

Diagram annotations for the weak classifier equation:

- $h_t(x)$: window
- $f_t(x)$: value of rectangle feature
- p_t : parity
- θ_t : threshold

- Ensemble classification function:

$$C(x) = \begin{cases} 1 & \text{if } \sum_{t=1}^T \alpha_t h_t(x) > \frac{1}{2} \sum_{t=1}^T \alpha_t \\ 0 & \text{otherwise} \end{cases}$$

Diagram annotations for the ensemble classification function:

- α_t : learned weights


Training procedure

- Initially, weight each training example equally
- In each boosting round:
 - Find the weak learner that achieves the lowest *weighted* training error
 - Raise the weights of training examples misclassified by current weak learner
- Compute final classifier as linear combination of all weak learners (weight of each learner is directly proportional to its accuracy)
 - Exact formulas for re-weighting and combining weak learners depend on the particular boosting scheme (e.g., AdaBoost)


Y. Freund and R. Schapire, [A short introduction to boosting](#), *Journal of Japanese Society for Artificial Intelligence*, 14(5):771-780, September, 1999.

Boosting intuition


**Weak
Classifier 1**

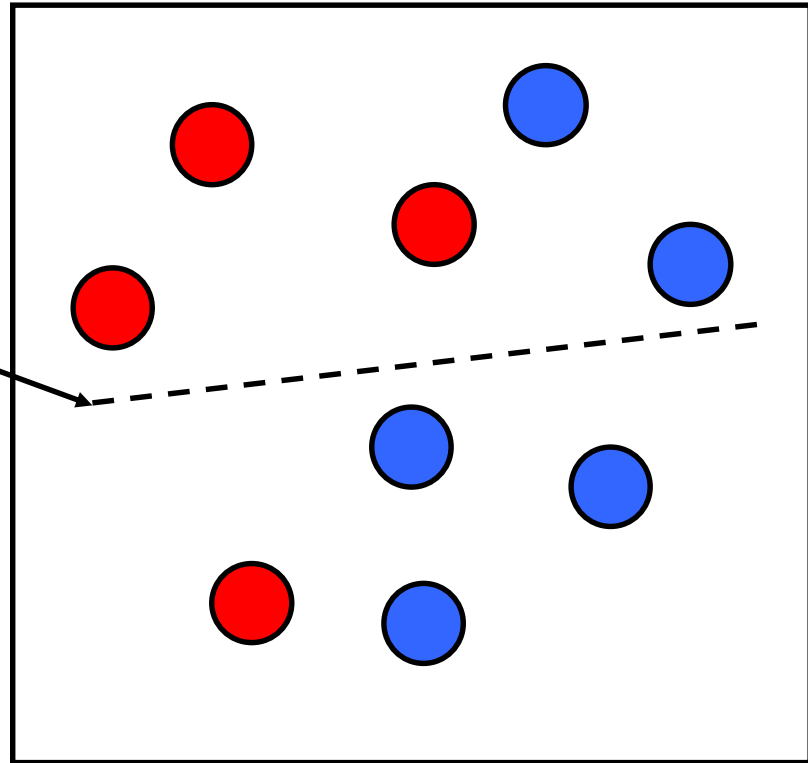

Boosting illustration

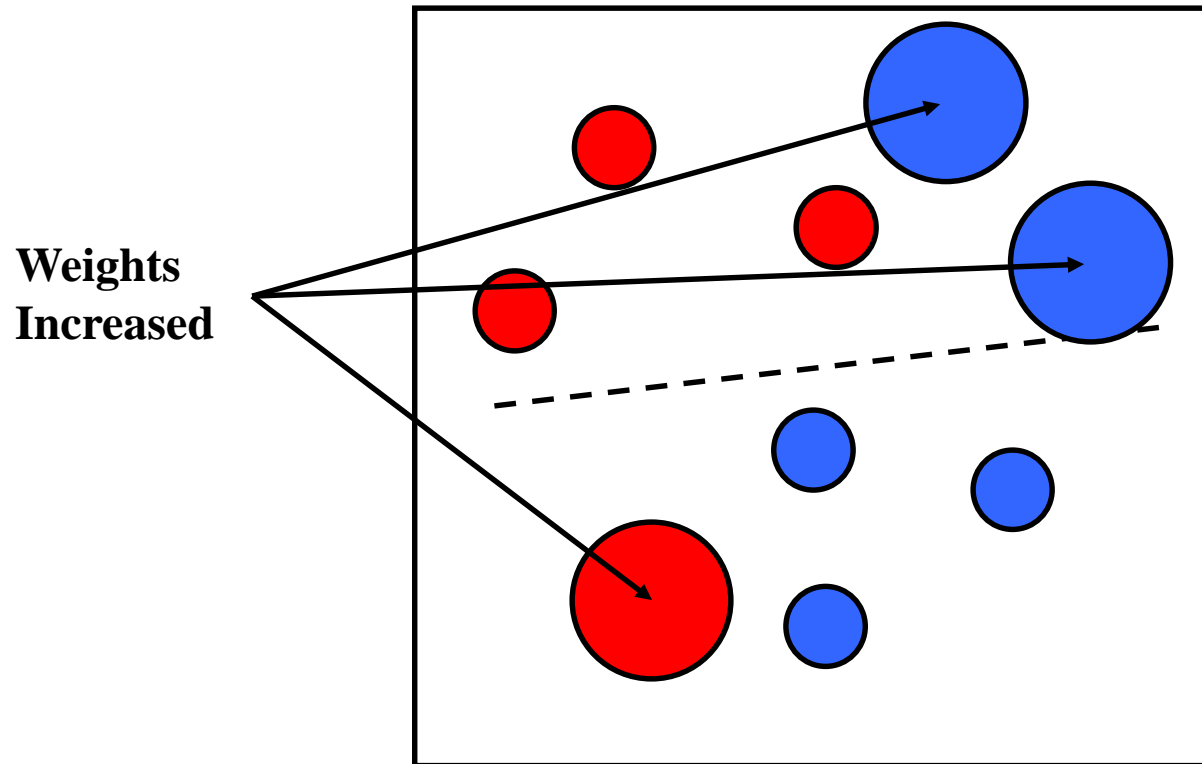


Boosting illustration

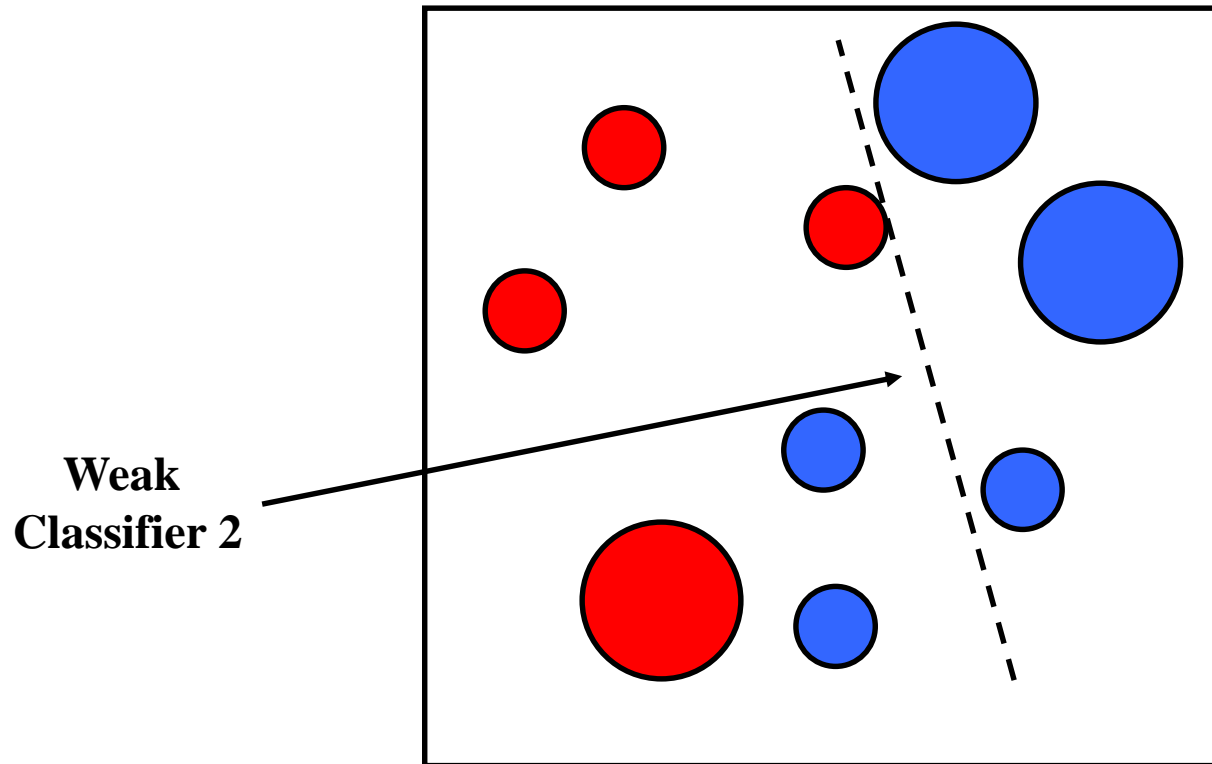


Boosting illustration

**Weights
Increased**

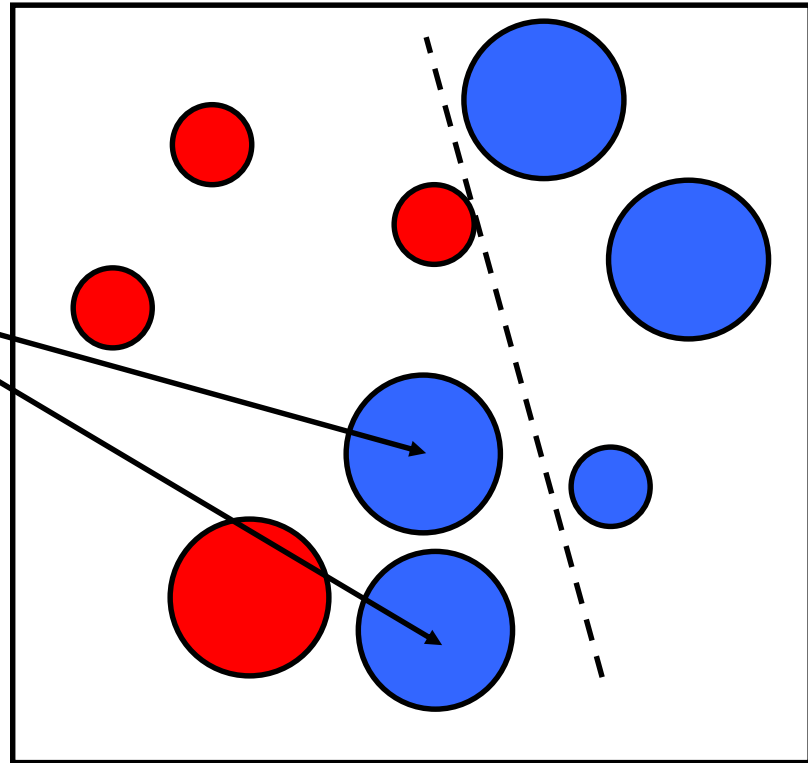


Boosting illustration

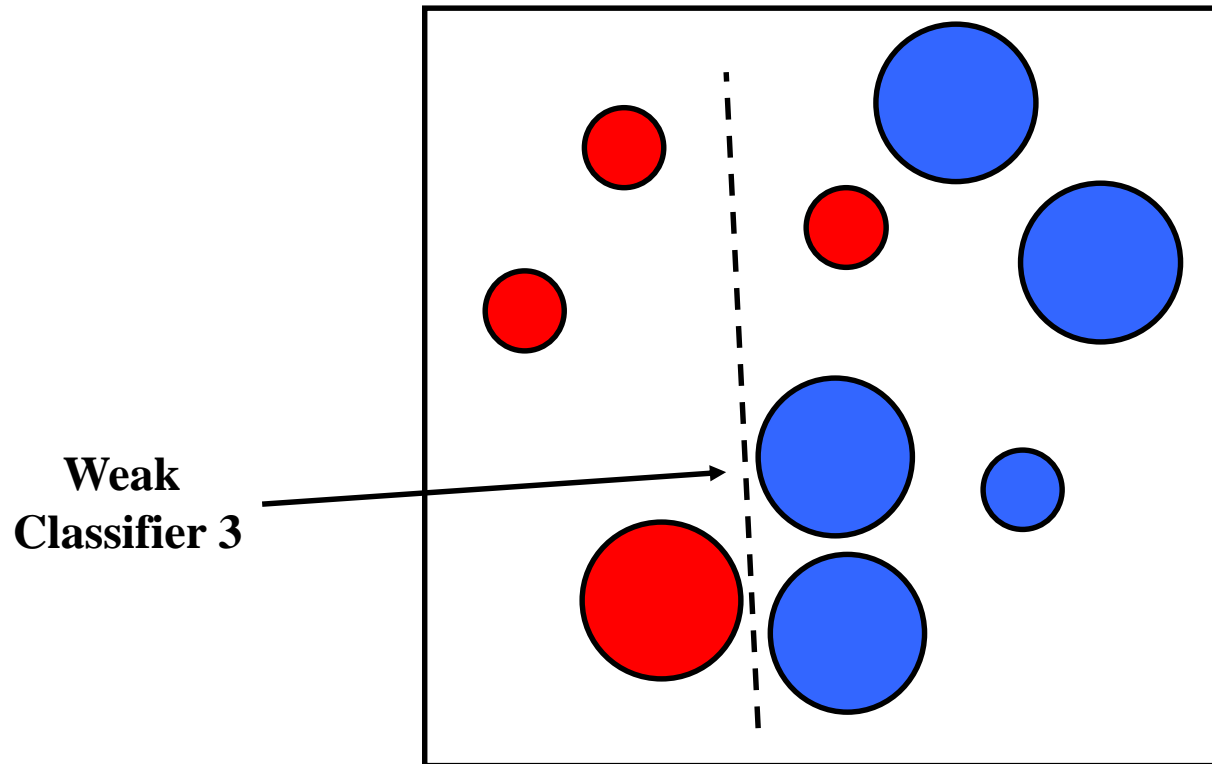


Boosting illustration

**Final classifier is
a combination of weak
classifiers**

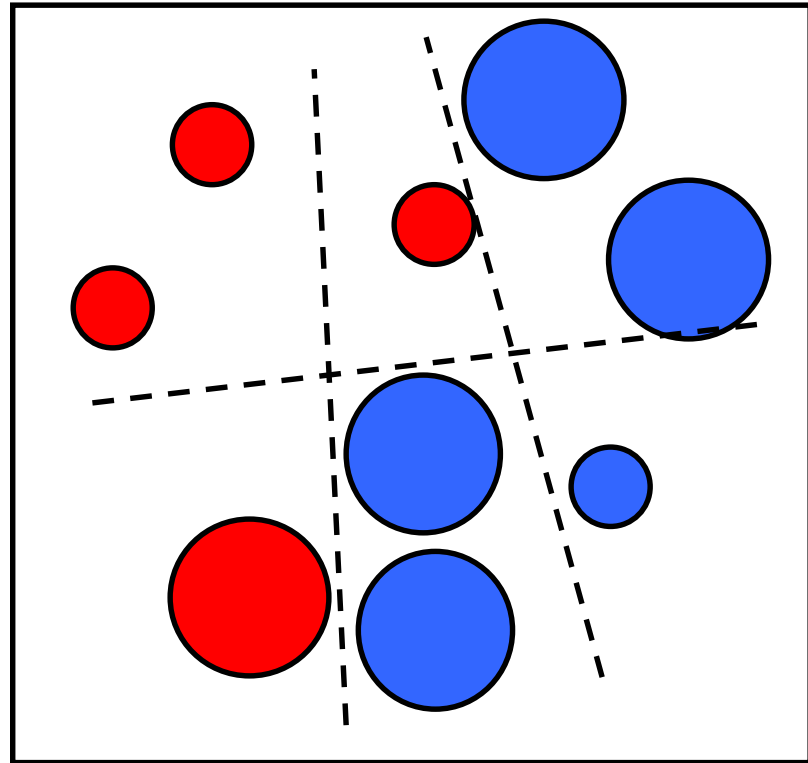

Boosting for face detection


- First two features selected by boosting:

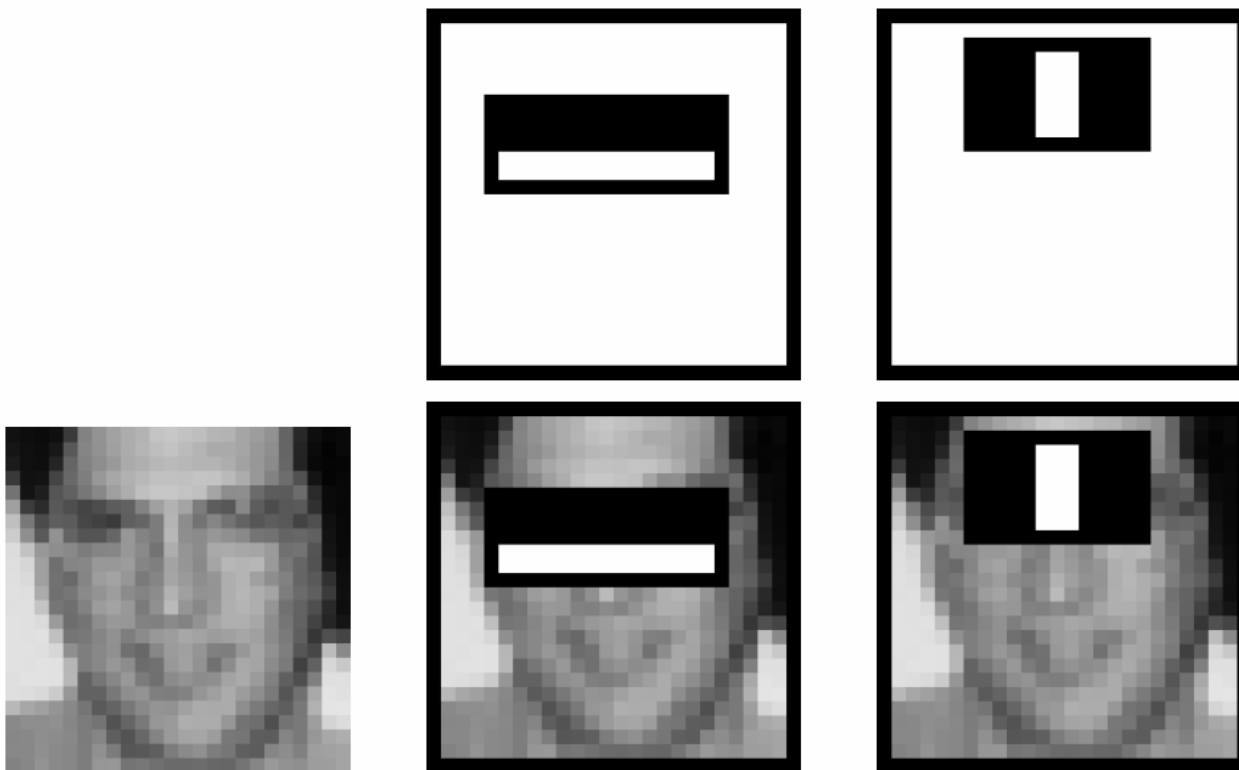

This feature combination can yield 100% recall and 50% false positive rate

Boosting for face detection


- A 200-feature classifier can yield 95% detection rate and a false positive rate of 1 in 14084

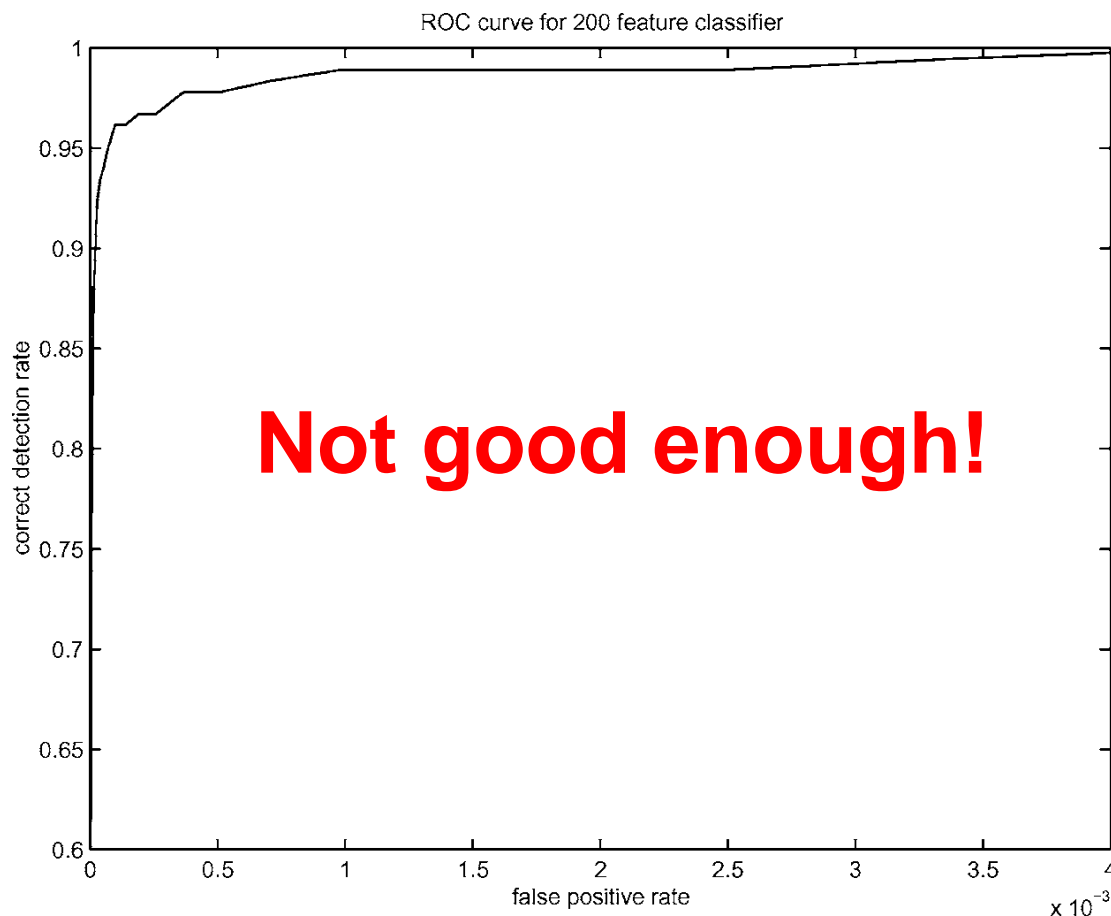

Receiver operating characteristic (ROC) curve


Attentional cascade

- We start with simple classifiers which reject many of the negative sub-windows while detecting almost all positive sub-windows
- Positive response from the first classifier triggers the evaluation of a second (more complex) classifier, and so on
- A negative outcome at any point leads to the immediate rejection of the sub-window


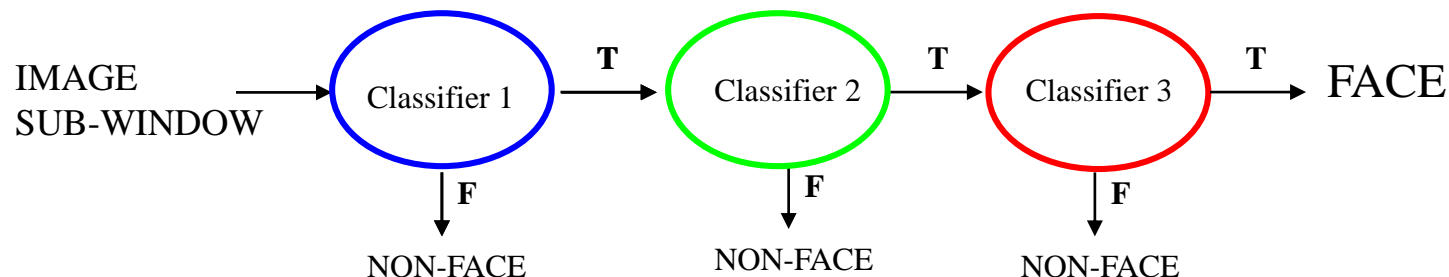


Attentional cascade

- Chain classifiers that are progressively more complex and have lower false positive rates:

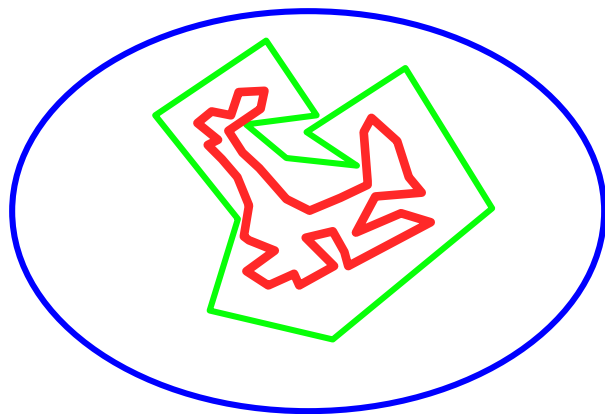


Receiver operating characteristic

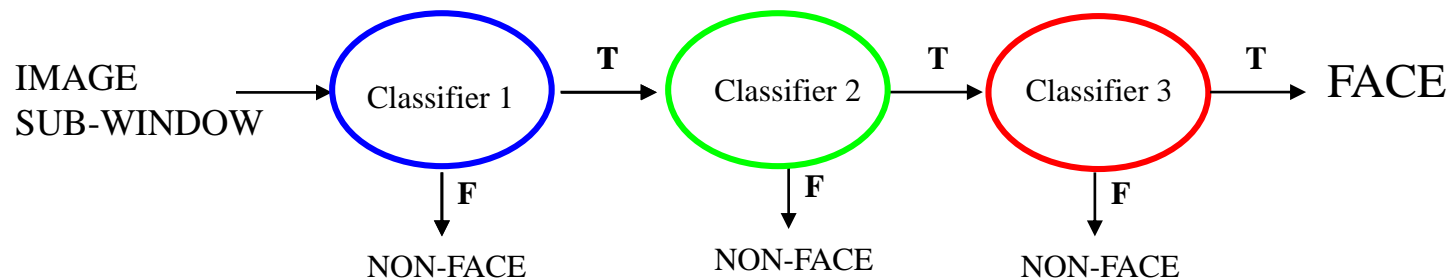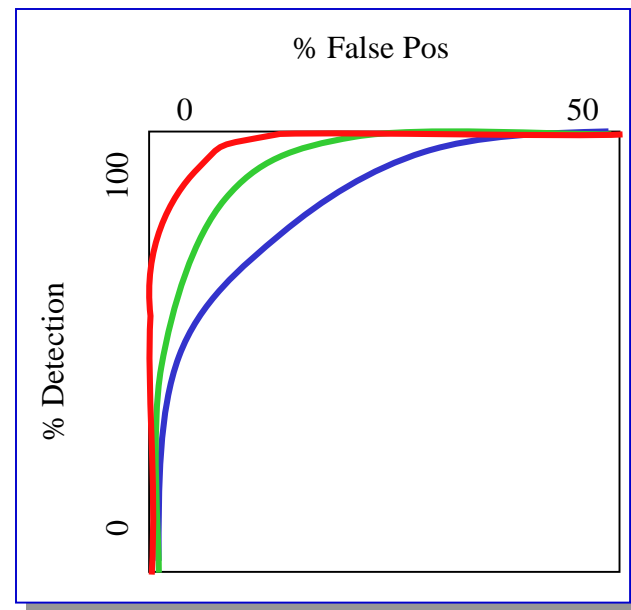

Attentional cascade

- The detection rate and the false positive rate of the cascade are found by multiplying the respective rates of the individual stages
- A detection rate of 0.9 and a false positive rate on the order of 10^{-6} can be achieved by a 10-stage cascade if each stage has a detection rate of 0.99 ($0.99^{10} \approx 0.9$) and a false positive rate of about 0.30 ($0.3^{10} \approx 6 \times 10^{-6}$)

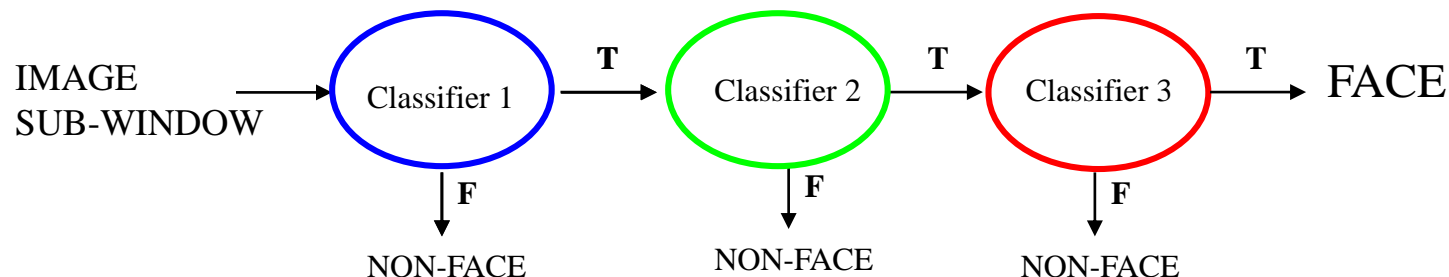

Training the cascade

- Set target detection and false positive rates for each stage
- Keep adding features to the current stage until its target rates have been met
 - Need to lower AdaBoost threshold to maximize detection (as opposed to minimizing total classification error)
 - Test on a *validation set*
- If the overall false positive rate is not low enough, then add another stage
- Use false positives from current stage as the negative training examples for the next stage

The implemented system





- Training Data
 - 5000 faces
 - All frontal, rescaled to 24x24 pixels
 - 300 million non-faces
 - 9500 non-face images
 - Faces are normalized
 - Scale, translation
- Many variations
 - Across individuals
 - Illumination
 - Pose



System performance

- Training time: “weeks” on 466 MHz Sun workstation
- 38 layers, total of 6061 features
- Average of 10 features evaluated per window on test set
- “On a 700 Mhz Pentium III processor, the face detector can process a 384 by 288 pixel image in about .067 seconds”
 - 15 Hz
 - 15 times faster than previous detector of comparable accuracy (Rowley et al., 1998)


Output of Face Detector on Test Images

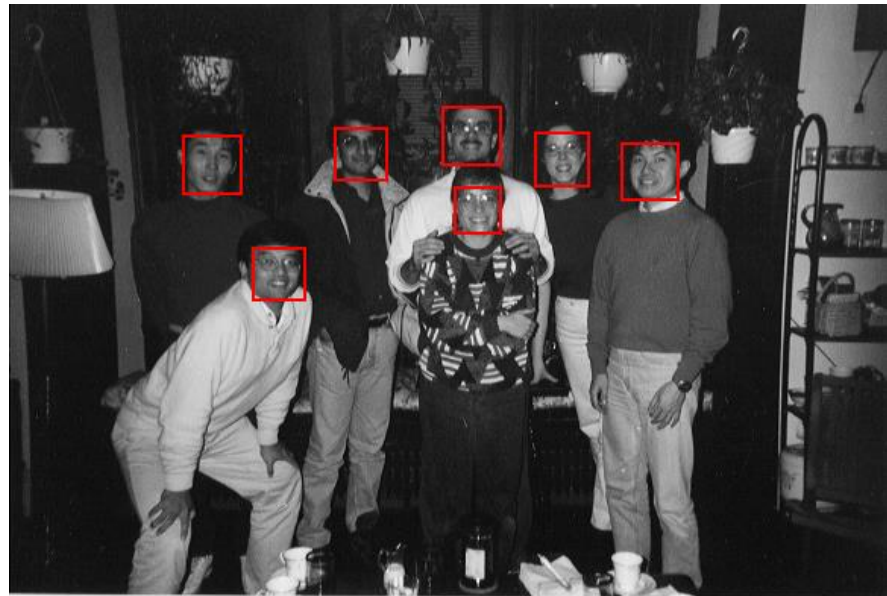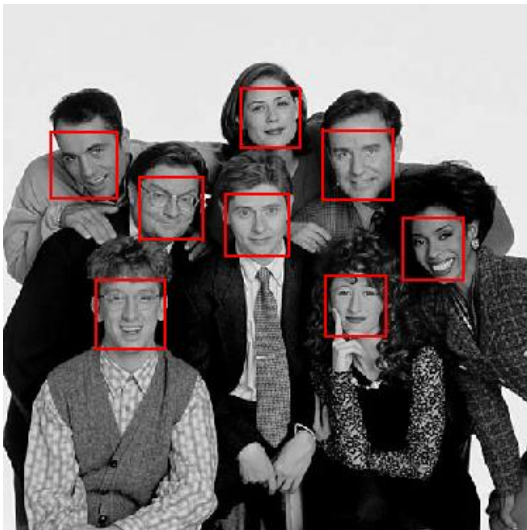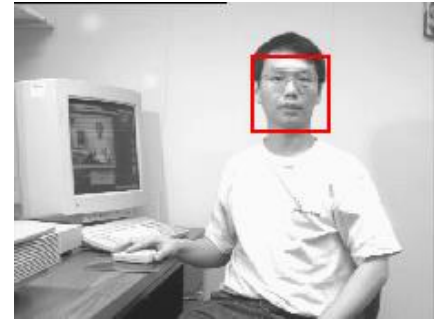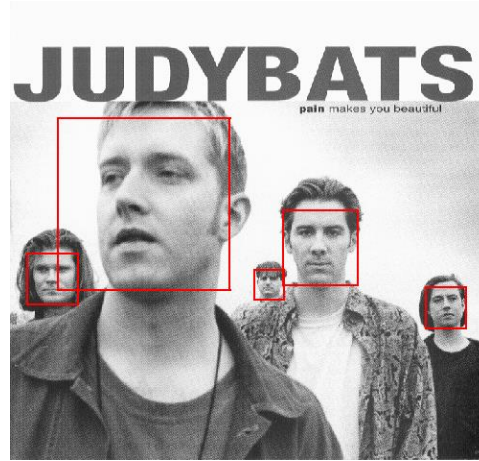

Other detection tasks




Facial Feature Localization

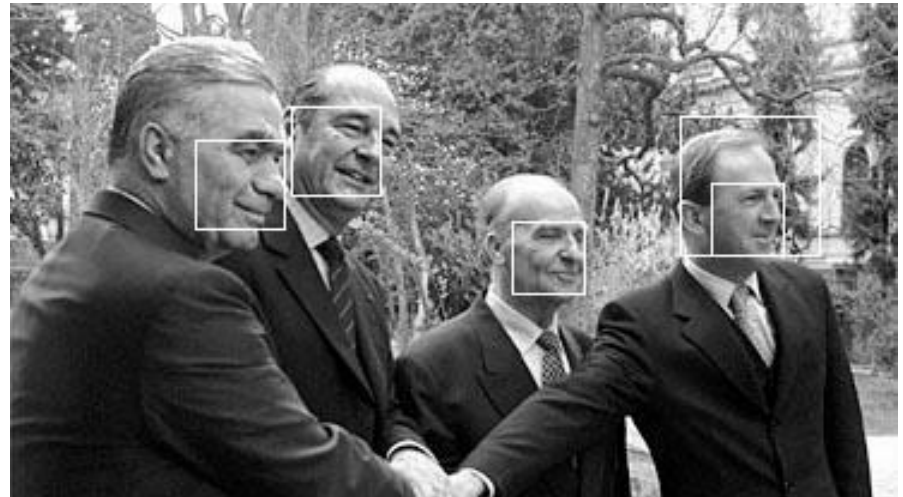


Profile Detection


Male vs.
female

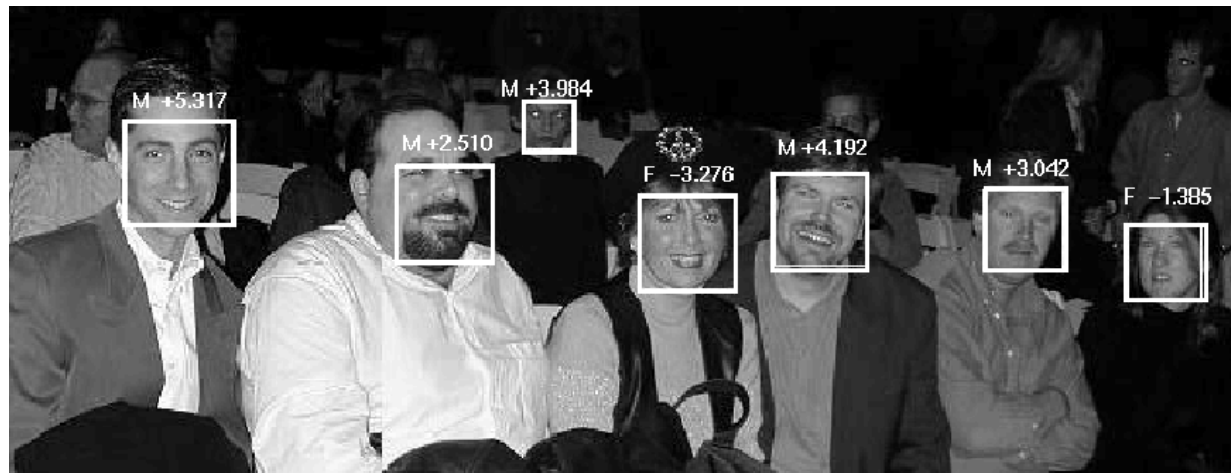

Profile Detection

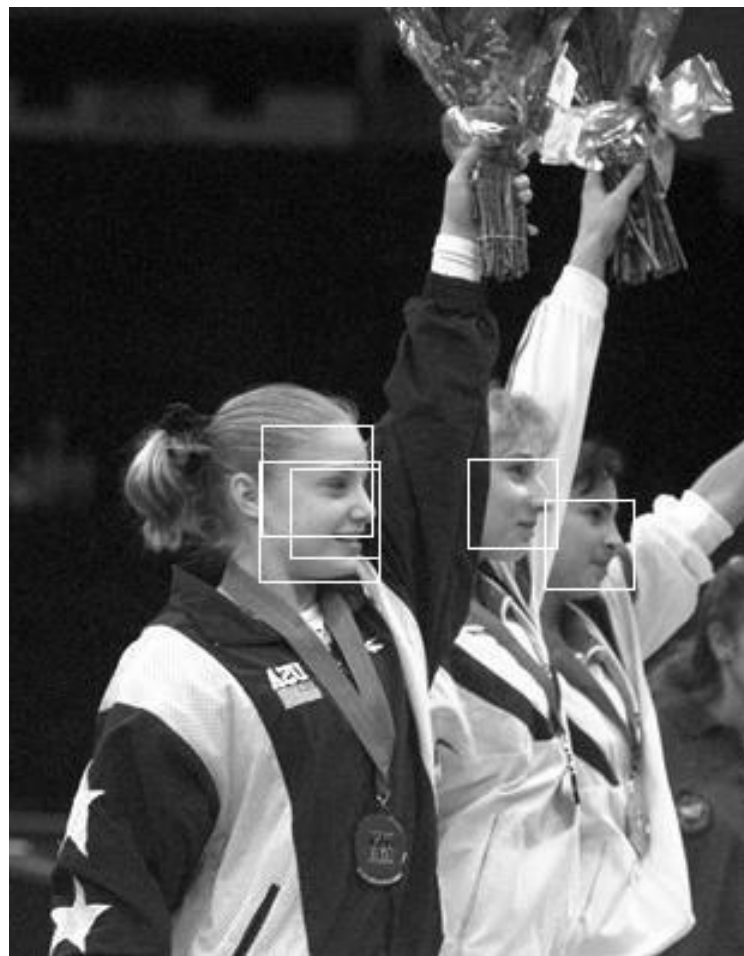

Profile Features

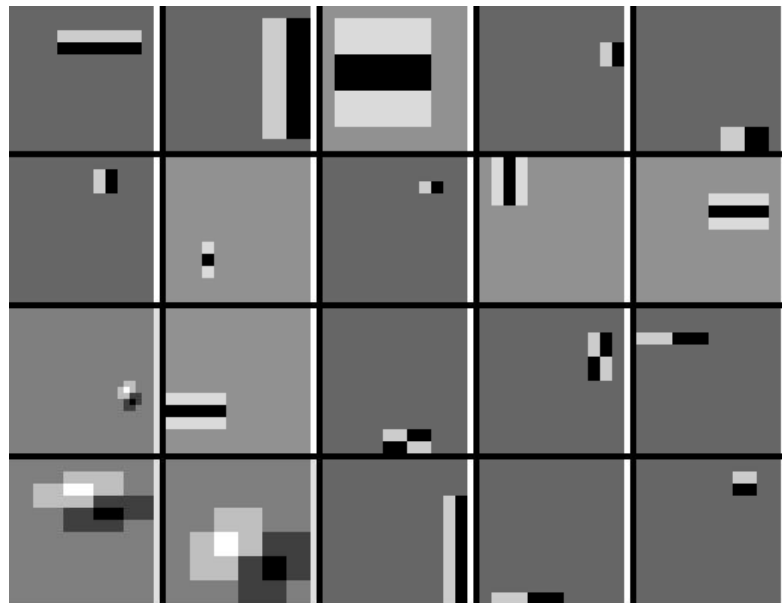

Summary: Viola/Jones detector

- Rectangle features
- Integral images for fast computation
- Boosting for feature selection
- Attentional cascade for fast rejection of negative windows