


Tables used by Regix core. Functionality of the core is available to all components. Additional components may define their own tables which can depend on core tables, however, they should avoid dependencies on other optional components.


These tables are used by Regix core to provide UAC functionality and permission control. Note that different controllers may define independent permissions in permission\_required table. Those permissions can then be granted to user groups via group\_has\_permission table. All users in that group can use all permissions assigned to the group.

## Core

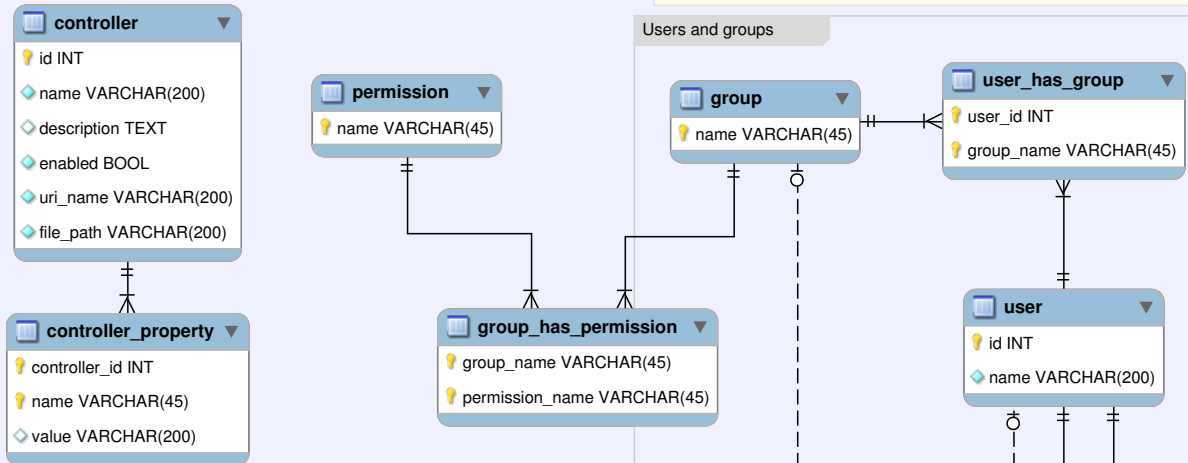

Tables used by Calendar component.

## Calendar

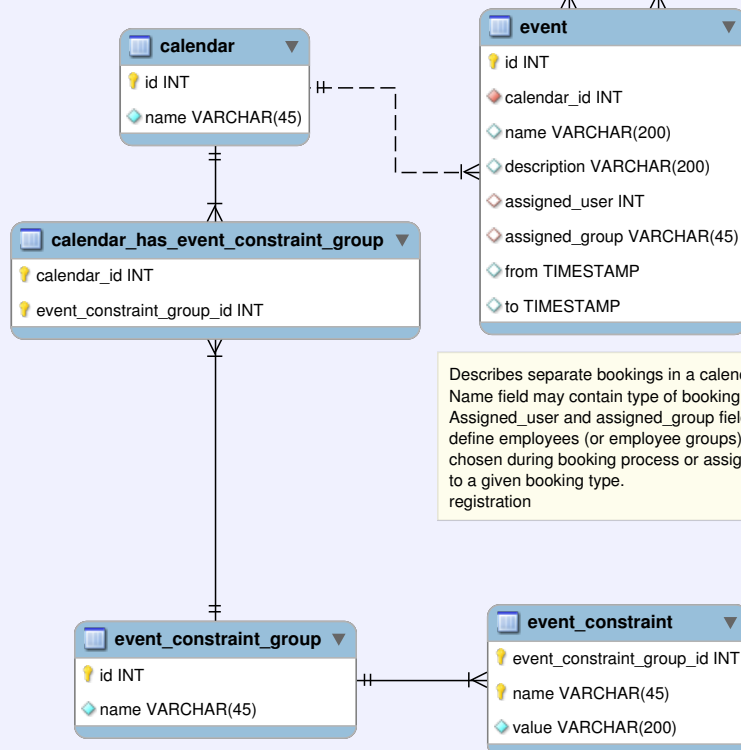

Describes separate bookings in a calendar. Name field may contain type of booking. Assigned\_user and assigned\_group fields define employees (or employee groups) chosen during booking process or assigned to a given booking type. registration

Aggregates simple constraints into a set of rules applied to calendars. Event can be added only if all event constraints within a group are satisfied.

Limits for times available for booking. Every constraint should be quite "simple" (e.g. "can register from 10:00 until 16:00", "can register from monday to friday", "cannot register for 31 Dec.").

## LocalLogin




Table used by LocalLogin component. Use of SHA-512 for hashing presumed.

## FacebookLogin



Table used by FacebookLogin component.