


# From objects to qactors

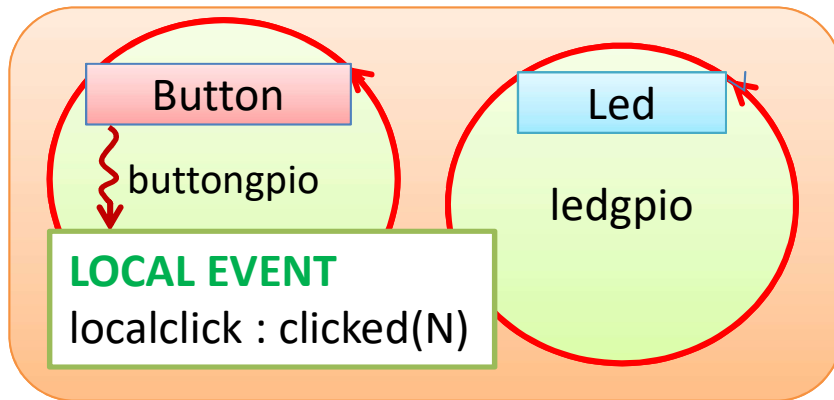

The **Button** generates **localclick** events.  
The **Led** perceives **localclick** events  
They work in the same context

**System blsRasp2017**

**Event local\_click : clicked**

**Context ctxBlsRasp**

**ip [host="localhost" port=8030]**

**QActor buttongpio context ctxBlsRasp {**

**Plan init normal**

**actorOp createPi4jButton( 24 )**

**}**

**QActor ledgpio context ctxBlsRasp {**

**Plan init normal**

**actorOp createPi4jLed( 25 )**

**switchToPlan work ;**

**Plan work**

**sense time(600000) local\_click -> continue ;**

**[ ?? tout(senseevent,Worker)]**

**endPlan "tout: ledgpio work ends" ;**

**actorOp ledSwitch ;**

**repeatPlan**

**}**