


From objects to qactors

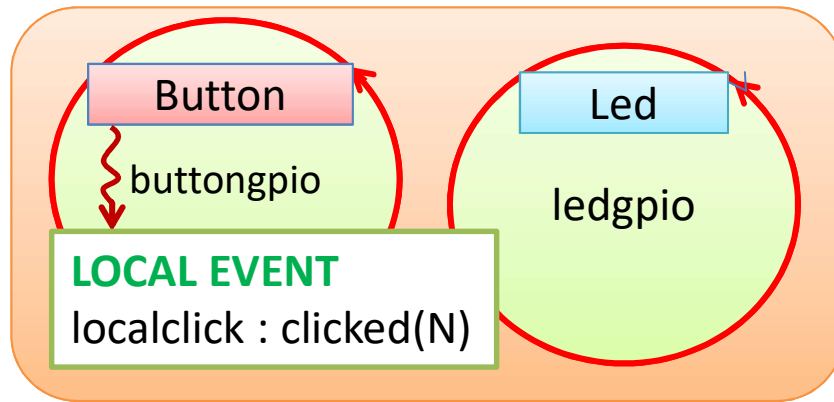

The **Button** generates **localclick** events.
The **Led** perceives **localclick** events
They work in the same context

System blsRasp2017

Event **local_click** : clicked(N)

Context ctxBlsRasp

ip [host="localhost" port=8030]

QActor **buttongpio** context ctxBlsRasp {

Plan init normal

actorOp createPi4jButton(24)

}

QActor **ledgpio** context ctxBlsRasp {

Plan init normal

actorOp createPi4jLed(25)

switchToPlan work ;

Plan work

sense time(600000) local_click -> continue ;

[?? tout(senseevent,Worker)]

endPlan "tout: ledgpio work ends" ;

actorOp ledSwitch ;

repeatPlan

}