


Dry Run

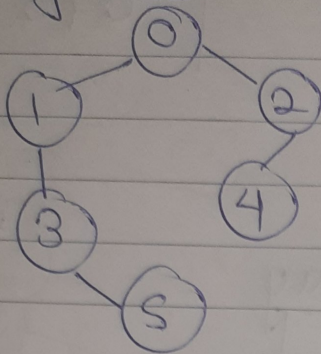

Adj List

0 → 1 → 2

1 → 0 → 3

2 → 0 → 4

3 → 1 → 5

4 → 2

5 → 3

DFS Traversal

function call

(0, visited)

v[0] = T

0's neighbors: 1, 2

for (1, visited)

as visited[1] = F
v[1] = T

1's neighbors: 0, 3
skip 0

for (3, visited)
v[3] = T

3's neighbors: 1, 5
skip 1

for (5, visited)
v[5] = T

5's neighbors: 3
skip

Backtrack to 0's neighbor 2
(2, visited) v[2] = T

DFS:

0

0 1

0 1 3

0 1 3 5

0 1 3 5 2

visited array

F	F	F	F	F	F
T	F	F	F	F	F
0	1	2	3	4	5

T	T	F	F	F	F
0	1	2	3	4	5

T	T	F	T	F	F
0	1	2	3	4	5

T	T	F	T	F	T
0	1	2	3	4	5

T	T	T	T	F	T
0	1	2	3	4	5

DFS:

for (4, visited)
v[4] = T

013524

T	T	T	T	T	T
0	1	2	3	4	5

BFS Traversal

function call

queue &
visited array

BFS

(queue, visited)

q | 0 |
v | T | F | F | F | F | F |

node = 0

0's neighbor 1

v[1] = T

v | T | T | F | F | F | F |

0

0's neighbor 2

v[2] = T

v | T | T | T | F | F | F |

q | 1 | 2 |

(queue, visited)

node = 1

1's neighbor 0

skip

q | 2 |

0 1

1's neighbor 3

v[3] = T

v | T | T | T | T | F | F |

q | 2 | 3 |

(queue, visited)

node = 2

2's int neighbor 0 skip

int neighbor 4

v[4] = T

q | 3 |

0 1 2

v | T | T | T | T | T | F |

q | 3 | 4 |

(queue, visited)

node = 3

3's int neighbor 1 skip

v[5] = T, neighbor 5

(queue, visited)

node = 4

4's int neighbor 2, skip

node = 5

q | 4 |

0 1 2 3

q | 4 | 5 |

v | T | T | T | T | T | T |

0 1 2 3 4

q | 5 |

q |

0 1 2 3 4 5