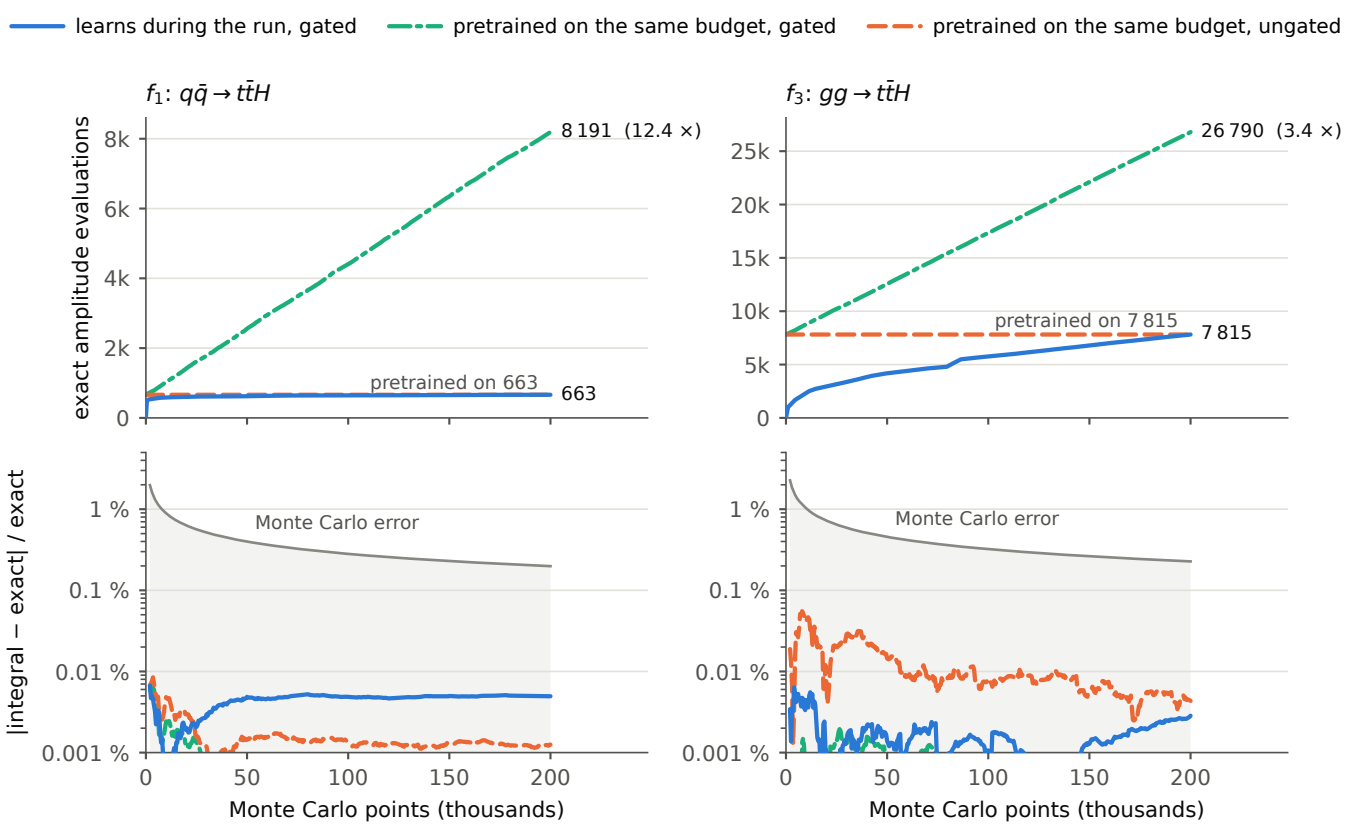
learns during the run, gated
pretrained on the same budget, gated
pretrained on the same budget, ungated
f_1: $q\bar{q} \to t\bar{t}H$
f_3: $gg \to t\bar{t}H$
exact amplitude evaluations
8k
6k
4k
2k
0
8 191 (12.4 ×)
pretrained on 663
663
25k
20k
15k
10k
5k
26 790 (3.4 ×)
pretrained on 7 815
7 815
|integral − exact| / exact
1 %
0.1 %
0.01 %
0.001 %
Monte Carlo error
0
50
100
150
200
Monte Carlo points (thousands)