

Finding Resource Manipulation Bugs with Monitor Automata on the Example of the Linux Kernel

Anders Fischer-Nielsen
afn@itu.dk

2020

Contents

Contents	2
1 Introduction	3
2 Background	3
3 An Algorithm for Finding Bugs	3
3.1 Monitor Templates	3
3.2 Control Flow	7
4 Finding Double-Unlock Bugs in Practice	11
4.1 Integration into EBA	11
4.2 Automata Signatures	18
5 Results	20
6 Future Work	20
7 Conclusion	20
References	21
8 Appendix	22

1 Introduction

The Linux kernel supports a vast array of computer architectures and runs on a multitude of devices from embedded devices, through personal computers to large servers; on wireless access points, smart TVs, smartphones, refrigerators. Errors in the Linux kernel therefore affect a multitude of devices and can therefore have a potential significant negative impact.

An important aspect of kernel programming is management and manipulation of resources, be it devices, file handles, memory blocks, and locks. Shared-memory concurrency and locks are used extensively in the C source code of the Linux kernel in order to allow parallelization of subsystems within the kernel while at the same time avoiding race conditions. Static analysers allow detection of errors in the C source code of the Linux kernel by reasoning about this resource manipulation. A control flow graph can be found for the components of the kernel, which can then in turn be statically analysed to detect possible resource manipulation errors.

[3]

2 Background

3 An Algorithm for Finding Bugs

A finite state machine is a quintuple $(\Sigma, S, s_0, \delta, F)$, where Σ is an alphabet, S is a finite non-empty set of states, s_0 is an element of S and initial state, δ is the state-transition function $\delta : S \times \Sigma \rightarrow S$ and F is the possibly empty set of final states and a subset of S . I will use such state machines to represent the code under analysis and the properties I wish to detect in input source files.

Add section introduction

3.1 Monitor Templates

I use monitor automata to analyze the control flow of a given input source file and detect whether possible bug are present in. A monitor automaton changes state based on what is happening in the control flow of the program. When the automaton reaches an error state, then a possible bug has been discovered. The effect analysis provided by EBA allows monitoring which effects program points have, and monitor automata can then monitor these effects in order to determine whether possible bugs are present.

EBA infers what effects happen on a memory region, which is an abstract variable or value in the heap. Monitor automata track effects happening on a given region in order to determine whether they could be manifesting buggy behaviour. Both effects and regions must be tracked. For example, it is common to have multiple locks on different regions within programs, but a lock on one region followed by a lock on a different region does not necessarily mean that a locking bug is present. Monitor templates are defined formally as follows.

Given a region variable ρ , a monitor template is defined as the tuple $X_\rho(\Sigma, S, s_0, \delta, F, E)$ where Σ is the alphabet of effects registered on memory objects represented by a region ρ , S is a finite non-empty set of states, s_0 an initial state and an element of S , δ is the state-transition function $\delta : S \times \Sigma \rightarrow S$, F is the possibly empty set of final states and a subset of

S , E is the non-empty set of error states, and a subset of F . An illustration of such a monitor automaton can be seen in Figure 1.

change to
final-state
monitor

From this definition, I distinguish two kinds of monitor templates: *long-term* templates and *short-term* templates. *Short-term* templates will monitor effects happening on a region indefinitely until a final state or error state is reached. *Long-term* templates operate as *short-term* templates, though they only include a single final state, which is the error state. They will therefore monitor indefinitely until only an error-state is found. This distinction is made since early termination of monitors might result in performance improvements in the implementation of these monitors.

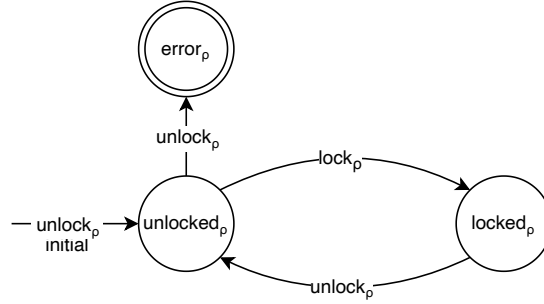


Figure 1: An illustration of a monitor automaton.

I will present several examples of these monitors in the following sections. Though these are examples, they are important since the implementation of the monitors follows these examples.

Our monitors operate on the set of possible effects of a statement in the Control-flow Graph. EBA allows defining new effects tracking a host of different operation. In this thesis I will only be using the following effects, defined as $E = \{\text{alloc}, \text{free}, \text{read}, \text{write}, \text{uninit}, \text{call}, \text{lock}, \text{unlock}\}$ by Abal [1]. The effects and what they represent can be seen in table 1.

alloc	The allocation of a memory location
free	The freeing of a memory location
read	The reading of a memory location
write	The writing to a memory location
uninit	Indicating that a memory location is uninitialized
call	The call of a function
lock	The locking of a memory location
unlock	The unlocking of a memory location

Table 1: Effects and what they represent.

Double-lock monitor automata

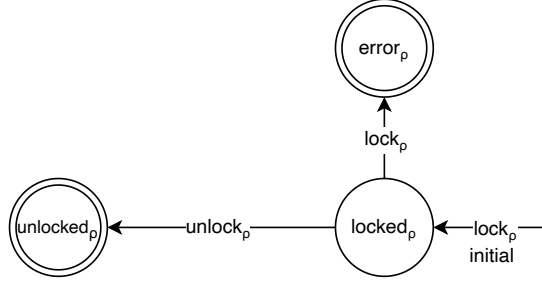


Figure 2: An illustration of a double-lock monitor automata.

A double-unlock monitor detects two consecutive locks on a memory location with no unlock in between them, leading to an infinite spinlock. Given a region ρ , a double-lock monitor automata is defined as the quintuple $(\Sigma, S, s_0, \delta, E, F)$ where:

- $\Sigma = \{\text{lock}_\rho, \text{unlock}_\rho\}$, a subset of E
- $S = \{\text{locked}_\rho, \text{unlocked}_\rho, \text{error}_\rho, \text{terminate}\}$
- $s_0 = \text{unlocked}_\rho$
- $\delta = \text{the relation } \{(\text{unlocked}_\rho, \text{lock}_\rho, \text{locked}_\rho), (\text{locked}_\rho, \text{unlock}_\rho, \text{terminate}), (\text{locked}_\rho, \text{lock}_\rho, \text{error}_\rho), (\text{unlocked}_\rho, \text{unlock}_\rho, \text{unlocked}_\rho)\}$
- $E = \text{error}_\rho$
- $F = \text{terminate}$

It is worth noting that this is a *short-term* monitor, indicated by F . This monitor will therefore terminate when encountering a legal use of locks followed by an unlock. An illustration of this monitor automata can be seen in Figure 2.

Double-unlock monitor automata

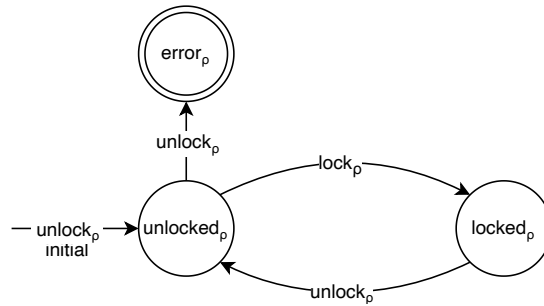


Figure 3: An illustration of a double-unlock monitor automata.

A double-unlock monitor detects two consecutive unlocks on a memory location with no lock in between them, leading to undefined behaviour. Given a region ρ , a double-unlock monitor automata is defined as the sextuple $(\Sigma, S, s_0, \delta, E, F)$ where:

- $\Sigma = \{\text{unlock}_\rho, \text{lock}_\rho\}$, a subset of E
- $S = \{\text{locked}_\rho, \text{unlocked}_\rho, \text{error}_\rho\}$
- $s_0 = \text{unlocked}_\rho$
- $\delta = \text{the relation } \{(\text{locked}_\rho, \text{unlock}_\rho, \text{unlocked}_\rho), (\text{locked}_\rho, \text{lock}_\rho, \text{locked}_\rho), (\text{unlocked}_\rho, \text{lock}_\rho, \text{locked}_\rho), (\text{unlocked}_\rho, \text{unlock}_\rho, \text{error}_\rho)\}$
- $E = \text{error}_\rho$
- $F = E$

An illustration of this monitor automata can be seen in Figure 3.

Double-free monitor automata

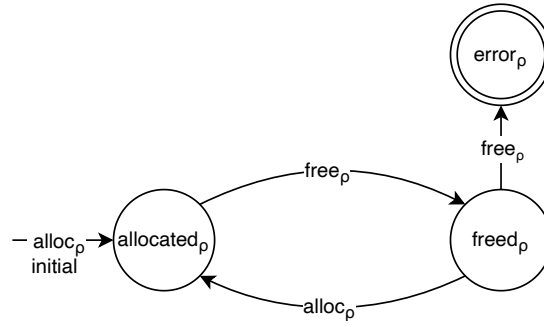


Figure 4: An illustration of a double-free monitor automata.

A double-free monitor detects two consecutive frees on a memory location with no allocation in between them, potentially leading to modification of unexpected memory locations. Given a region ρ , a double-free monitor automata is defined as the quintuple $(\Sigma, S, s_0, \delta, E, F)$ where:

- $\Sigma = \{\text{free}_\rho, \text{alloc}_\rho\}$, a subset of E
- $S = \{\text{allocated}_\rho, \text{freed}_\rho, \text{error}_\rho\}$
- $s_0 = \text{freed}_\rho$
- $\delta = \text{the relation } \{(\text{freed}_\rho, \text{alloc}_\rho, \text{allocated}_\rho), (\text{allocated}_\rho, \text{free}_\rho, \text{freed}_\rho), (\text{freed}_\rho, \text{free}_\rho, \text{error}_\rho), (\text{allocated}_\rho, \text{alloc}_\rho, \text{allocated}_\rho)\}$
- $E = \text{error}_\rho$
- $F = E$

An illustration of this monitor automata can be seen in Figure 4.

Use-before-init monitor automata

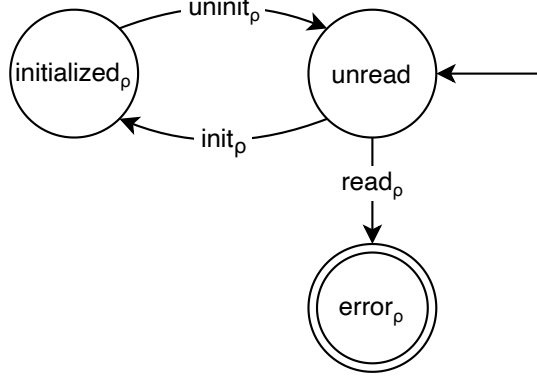


Figure 5: An illustration of a use-before-init monitor automata.

A use-before init monitor detects usage of a memory location before the location has been initialized, possibly leaving the resource in an unexpected state when it is accessed or used. Given a region ρ , a use-before-init monitor automata is defined as the quintuple $(\Sigma, S, s_0, \delta, E, F)$ where:

- $\Sigma = \{\text{read}_\rho, \text{init}_\rho\}$, a subset of E
- $S = \{\text{unread}_\rho, \text{initialized}_\rho, \text{error}_\rho\}$
- $s_0 = \text{unused}_\rho$
- $\delta =$ the relation $\{(\text{unread}_\rho, \text{init}_\rho, \text{initialized}_\rho), (\text{initialized}_\rho, \text{uninit}_\rho, \text{unread}_\rho), (\text{unread}_\rho, \text{read}_\rho, \text{error}_\rho), (\text{initialized}_\rho, \text{init}_\rho, \text{initialized}_\rho)\}$
- $E = \text{error}_\rho$
- $F = E$

An illustration of this monitor automata can be seen in Figure 5.

3.2 Control Flow

EBA provides a representation of the control flow of the input source files which is utilized in order to detect bugs. EBA generates a tree structure of the input with path in this tree structure modeling a possible execution path containing information about the modelled statements.

The control flow graph of a program can be seen as a finite state machine $(\Sigma, S, s_0, \delta, F)$, where Σ is the alphabet, S is a finite non-empty set of states, s_0 is an element of S and initial state, δ is the state-transition function $\delta : S \times \Sigma \rightarrow S$ and F is the possibly empty set of final states and a subset of S .

The control flow generated by EBA is acyclic, since EBA unrolls loops within a fixed depth and generates a path of this length accordingly. I keep the abstract formulation since, in principle, the monitor automata checkers will work with more general abstractions over programs.

The alphabet, Σ , of the of the control flow abstraction is the set of all effects EBA detects, annotated by the region variables being affected by a given effect. The states, S , are program points after the unrolling of loops. The definition of the control flow abstraction is shown in the following, with a concrete example of a control flow formulated using this abstraction in Figure 6.

- $\Sigma = \{Entry, Nil, (alloc, \rho), (free, \rho), (read, \rho), (write, \rho), (uninit, \rho), (call, \rho), (lock, \rho), (unlock, \rho)\}$
- $S = \{(allocated, \rho), (freed, \rho), (read, \rho), (written, \rho), (uninitialized, \rho), (called, \rho), (locked, \rho), (unlocked, \rho), End\}$

The remainder of the automaton definition is defined according to the control flow being modelled, where the initial state, s_0 , is dependent on the control flow being modelled and therefore is an element of Σ . This also applies to the transition function δ and the set of final states F , which is also a subset of Σ . A concrete definition of an example control flow is shown below with an accompanying illustration of this in Figure 6.

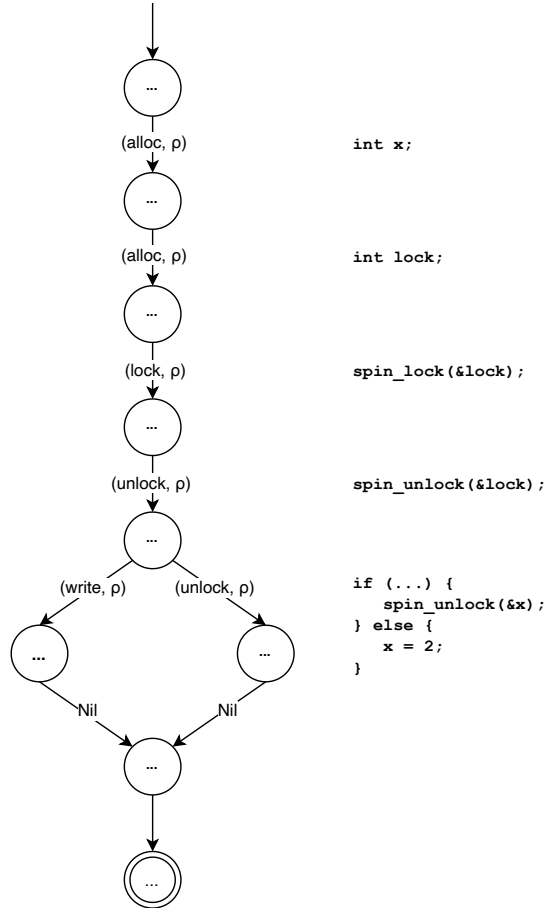


Figure 6: An illustration of a Control Flow automaton.

- $s_0 = \text{Entry}$
- $\delta = \text{the relation } \{ (\text{Entry}, (\text{alloc}, \rho), (\text{allocated}, \rho)),$
 $(\text{allocated}, (\text{alloc}, \rho), (\text{allocated}, \rho)),$
 $((\text{allocated}, \rho), (\text{lock}, \rho), (\text{locked}, \rho)),$
 $((\text{locked}, \rho), (\text{unlock}, \rho), (\text{unlocked}, \rho)),$
 $((\text{unlocked}, \rho), \text{unlock}, (\text{unlocked}, \rho),$
 $((\text{write}, \rho), \text{write}, (\text{written}, \rho)),$
 $((\text{unlocked}, \rho), \text{Nil}, \text{End}),$
 $((\text{written}, \rho), \text{Nil}, \text{End}) \}$
- $F = \text{End}$

A few things are of note here; *Nil* indicates the end of a path in the tree structure. Branches occur when an if-branch is encountered in the input source file and models the effects of the statements within if-statements.

To show the detection of a possible double-unlock bug where a double-unlock monitor automaton has reached the final state, we find the product of the control flow example shown in Figure 6 and the monitor generated from the template.

Given two automata $A_{CFG} = (\Sigma, S, s_0, \delta, F)$ and $A_{monitor} = (\Sigma, S', s'_0, \delta', F')$ both working over the same alphabet Σ , the product automaton of A_{CFG} and $A_{monitor}$ is an automaton $P = (\Sigma, Q, s'_0, \delta_P, F_P)$ where $F_N = S \times F' \cup F \times S'$, $Q = S \times S'$ and $\delta_P : Q \times \Sigma \rightarrow Q$. Furthermore, $\forall q \in Q, q' \in Q'$ and $e \in \Sigma$, we require that since monitors generated from the monitor template only monitor a given input region, it is necessary to define rules for the state changes within this product, given that a monitor only accepts effects on a given region. This requirement can be formalized as follows.

$$\frac{s \xrightarrow{e} s' \quad p \xrightarrow{E} p' \quad e \in E}{(s, p) \rightarrow (s', p')} \qquad \frac{p \xrightarrow{E} p' \quad \forall e \in E. s \not\xrightarrow{e}}{(s, p) \rightarrow (s, p')}$$

E is the set of effects happening in a given program step, $p \rightarrow p'$. The state s will change given that the transition happens on the effect e , present in E . If this is not the case, the control flow will have changed state to p' , while the monitor has not and stays the same, s .

In other words, the state of the automata should not change if the effect does not happen on the monitored region, but the automaton representing the control flow *should*. The observant reader might notice that if regions are no longer present since they go out of scope in a given program, only the rightmost of the two previous inference rules is relevant. This is not the case though, since the previous control flow abstraction does not provide any information in regards to when variables go out of scope, mirroring the internal control flow representation of EBA. Furthermore, taking scopes into account would complicate the product construction significantly and the reader might appreciate not having to reason about more convoluted definitions. Lack of scope information does lead to the question of whether these "dangling" regions incur a performance cost when implemented. I will investigate and evaluate this in later sections.

The product of the control flow example shown in Figure 6 and a generated double-unlock monitor automaton can now be found in order to demonstrate that a possible bug is detected by the monitor, resulting in the following definition. This definition is illustrated in Figure 7.

Fine? Andrzej's way of expressing this was more elegant
AFAIR

- $\Sigma = \{Entry, Nil, (alloc, \rho), (free, \rho), (read, \rho), (write, \rho), (uninit, \rho), (call, \rho), (lock, \rho), (unlock, \rho)\}$
- $S = \{(allocated, \rho), (freed, \rho), (read, \rho), (written, \rho), (uninitialized, \rho), (called, \rho), ((locked, \rho), locked_\rho), ((unlocked, \rho), unlocked_\rho), ((unlocked, \rho), error_\rho), End\}$
- $s_0 = Entry$
- $\delta = \text{the relation } \{ (Entry, (alloc, \rho), (allocated, \rho)), (allocated, (alloc, \rho), (allocated, \rho)), ((allocated, \rho), (lock, \rho), (locked, \rho)), ((locked, \rho), (unlock, \rho), ((unlocked, \rho), unlocked_\rho)), (((unlocked, \rho), unlocked_\rho), unlock, ((unlocked, \rho), error_\rho)), (((write, \rho), unlocked_\rho), write, ((written, \rho), unlocked_\rho)), (((unlocked, \rho), error_\rho), Nil, (End, error_\rho)), (((written, \rho), unlocked_\rho), Nil, (End, error_\rho)) \}$
- $F = (End, error_\rho)$

This product is illustrated in Figure 7.

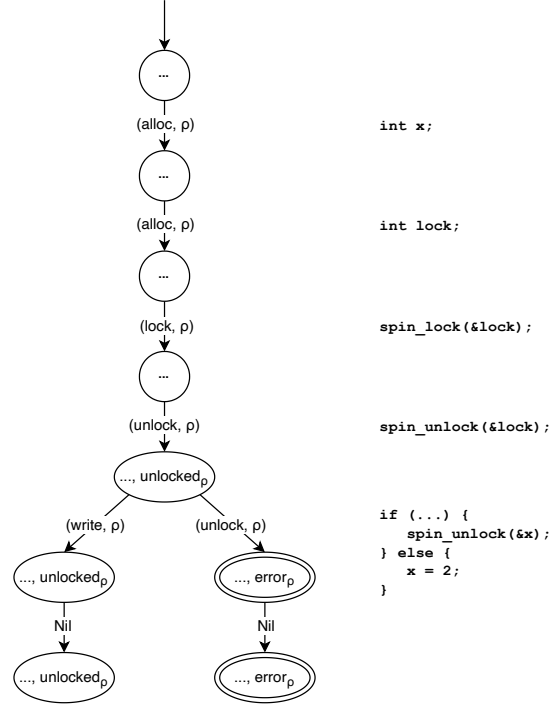


Figure 7: An illustration of the product construction of a double-unlock monitor automata and a control flow.

I have shown that it is possible to construct monitor templates which allows generating monitor automata monitoring effects happening on a region and shown that such a monitor can detect a possible bug in an example control flow. In order to implement this approach in practice, two things are needed, namely

- A control flow abstraction
- Concrete definitions of monitor templates

It is therefore necessary to implement these monitor templates, since the EBA framework can provide the control flow abstractions over a given input file. I will present the implementation of the monitor templates as part of this thesis in the following section.

4 Finding Double-Unlock Bugs in Practice

This section will detail how the abstractions defined previously are integrated into the EBA framework in order to explore the control flow graph of input programs while generating the product of the control flow and monitor automata in order to detect possible bugs.

4.1 Integration into EBA

In order to implement a new bug checker in EBA, the implementation has to conform to the structure set up by the framework of how these checkers should behave. Furthermore, signatures

must be defined for these checkers in order to allow the framework to instantiate these checkers on the inferred regions of an input program. This section will describe how this has been accomplished.

The EBA framework allows specifying checker signatures whose implementations are executed on a given input source file. Checker signature implementations instantiate a given bug checker for a given bug type and the internal logic of the bug checker is run by the framework.

These bug checkers must conform to the existing signatures of EBA in order to allow the framework to instantiate a given bug checker after which an abstract representation of the input source file is passed to the instantiated checker.

In order to detect possible bugs in input programs, monitor automata are used to detect bugs over control flow graphs. The control flow graph is provided by the EBA framework, while the monitor automata have been defined and implemented as part of this thesis.

A signature for a checker which allows instantiation of monitor automata bug checkers has been defined as part of this thesis. This signature is then implemented in order to let EBA instantiate the implemented checker. A function, `check`, is the only requirement for implementing this signature and takes two parameters after which it returns a list of strings for each detected possible bug in the input source file as expected by the EBA framework. These parameters are the abstractions of the input file and each global function defined in this file, both of which are passed to the function by the framework. This mimics the implementation of the existing CTL checkers in EBA and allows for easy integration into the framework.

The aforementioned signature is implemented as a module, `Make`, which is used by EBA in order to run automata bug checkers conforming to an automata signature. Specifying a signature which all automata-based checkers must conform to ensures that the automata expose the required state and transition functions for them to run. This `Make` module expects an implementation of this `AutomataSpec` signature.

When inferred effects happening on regions are encountered in the control flow graph, a monitor is instantiated based on the monitor template defined in `Make`. The `check` function of the `Make` module explores the CFG provided by the EBA framework of the given file and applies the transition of the monitor using the effects of statements, represented as nodes in the CFG. The control flow graph is represented as a tree-like structure, and this tree is then explored further until the end of each path in the tree is explored, resulting in a set of monitor states. This set of states can then be explored in order to determine if any monitors have reached accepting — Error — states. If such a state is present, a possible bug has been discovered. This on-the-fly exploration and application of transition functions models the product construction of the control flow automata and monitor described in Chapter 3.1. On-the-fly exploration is used since the design of EBA necessitates exploring effects when they are encountered due to performance reasons [2].

Explain how product construction in previous section corresponds to this on-the-fly exploration.

EBA can generate the required control flow abstraction, which is used for analysis. This thesis consists of integrating the implementation of monitor templates into the existing framework, using the control flow abstractions provided by EBA. In order to present how monitor templates

are instantiated based on the given control flow, it is necessary to describe the control flow abstractions. EBA generates a tree structure of the input, modeling statements as so-called **steps**. A path in this tree structure models a possible execution path, with each **step** in a path containing information about the modelled statements. The implementation of `check`, initiating the generation of the control flow abstraction using EBA can be seen in Figure 8.

```
let check file declaration =
  let variable_info = Cil.(declaration.svar) in
  let _, global_function = Option.get(AFile.find_fun file variable_info) in
  let path_tree = paths_of global_function in
  let results = explore_paths path_tree Map.empty in
  let states = Map.values results in
  let matches = Enum.fold (fun acc m -> (List.filter A.is_accepting m) @ acc)
    [] states in
  let matches_reversed = List.rev matches in
  let pp = List.map (fun m -> A.pp_checker_state m) matches_reversed in
  let pp_list = List.map (fun m -> PP.to_string m) pp in
  L.of_list pp_list
```

Discuss proper use of code section(s) in meeting.

Figure 8: The implementation of `check` initializing the control flow generation using EBA.

Nodes in the CFG structure provided by EBA can be of one of four different types, each representing the input statement. Nodes representing if-statements in the source input result are *If*-nodes in the tree, containing two branches. If an If-node is discovered, the two branches from that node are explored and the union of the resulting states is found. Nodes representing the end of a branch are *Nil*-nodes in the tree. Nodes representing assumptions made after if-statements are either true or false are *Assume*-nodes, but are not used in this work since all branches are explored. Finally all other statements are represented as *Seq*-nodes, which contain information about the shapes and effects of statements. An illustration of these types can be seen in Figure 9. These *Seq*-nodes are of interest, since they allow analysis on effects.

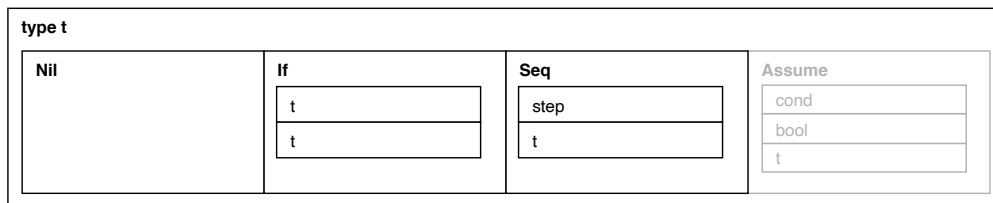


Figure 9: An illustration of the CFG node types found in EBA.

Seq-nodes contain a *step* which models a statement in the input source code. When a *Seq*-node is discovered in the tree, the — possibly multiple — effects of its containing step are explored. An illustration of this node can be seen in Figure 11. These possibly multiple effects raise a problem; since a given step contains a set of effects, the order of these effects are therefore not known and all orders of executing these effects must be explored. This must be done since a given ordering of effects can lead to a bug, while a different order might not. The reader is encouraged to examine the example given in Figure 10 to understand why this is the case. In the example, two locks are taken on two different regions and these regions are then both unlocked

in a called function. One of the regions is then unlocked again following the function call, leading to a double-unlock bug. If monitors are not instantiated for each region, an error state would occur when analyzing the effects of the function call even though the bug is in fact not found within the function, but just after the function.

```

int lock1;
int lock2;

void unlock_func()
{
    _spin_unlock(&lock1);
    _spin_unlock(&lock2);
}

int main()
{
    _spin_lock(&lock1);
    _spin_lock(&lock2);
    unlock_func();
    _spin_unlock(&lock2);
}

```

Figure 10: An example of multiple locks happening on different regions, leading to a bug on one region, but not the other.

All permutations of the set of effects must therefore be found and mapped to a given region, while also preserving the information of the other permutations for that given region. Furthermore, the transition function of the monitor automata must be evaluated on the current input, resulting in a new state of that automata which again must also be stored for that region.

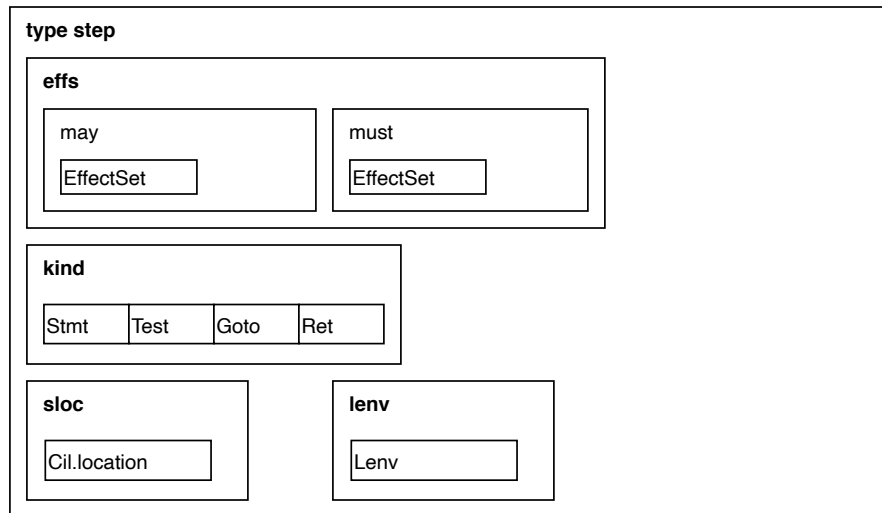


Figure 11: An illustration of the step type and its containing structures found in EBA.

In order to accomplish this, the current state of the monitor monitoring a region needs to be copied and applied as the current state of the monitor for each permutation found for a given set of effects. This is done in order to find all possible states of the monitor when given all effect orderings as input. The resulting states are then stored in the map for the given region, and future effects on that region are then applied on these states. An illustration of this copying on two permutations followed by another effect happening on the same region can be seen in Figure 12, leading to a possible double-unlock bug.

Discuss correctness at meeting.

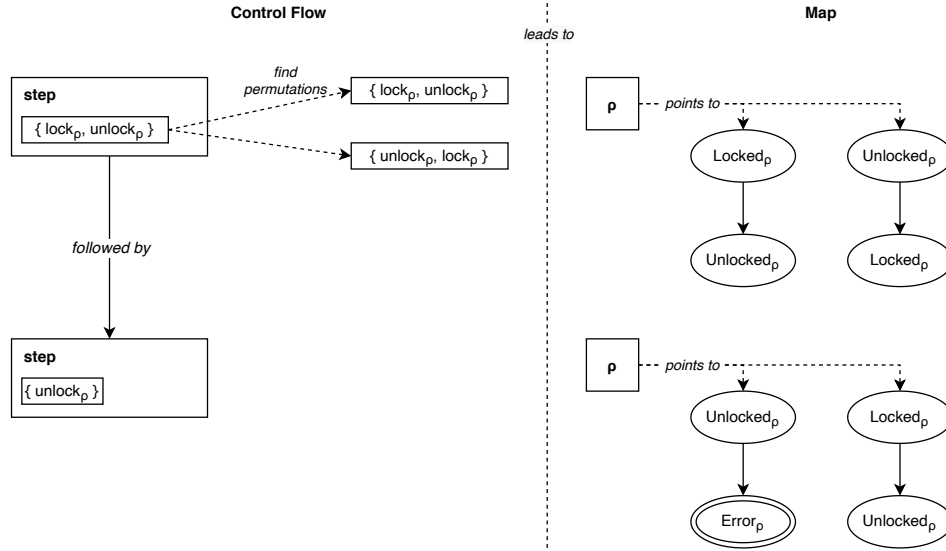


Figure 12: An illustration of how copies of a double-unlock monitor are instantiated given multiple permutations of effect orderings.

This map can be formalized as the function $m : \text{region} \rightarrow \text{checker_state}$ where *checker_state* is the internal state of the monitor automata. Using this map it is possible to apply each permutation of effects and fold this list of effects into a modified map with possibly altered automata states for their corresponding regions. The resulting map can be explored in order to find any accepting states of monitor automata for a given region.

Monitors need to be instantiated whenever a new region is encountered and stored in the map. Given that the map maps a region to the state of monitor automatas, the length of the map will never be larger than the number of regions in the input source file. The size of the set of possible monitor automata states for a given region depends on the effects of a statement operating on a given region, though this can be improved by filtering effects, as we will see shortly.

Given a large number of possible effects of a statement the resulting set of permutations of these effects will naturally grow. A set of N effects will result in $N!$ permutations; in other words, the number of monitor states for a given region will therefore in the worst case be $|\text{effects}|!$. This N can be reduced by only applying effects to monitors which are of interest, namely effects which are in the alphabet, Σ , of the monitor template definition. Filtering effects caused by a program point to only include elements in Σ greatly reduces the number of monitors states, though this is inherently dependent on the template definition. Definitions with a restricted alphabet will perform better. Effects are only applied to the monitors monitoring a region if the alphabet

of the monitor in question accepts this effect, in other words utilizing the product construction inference rules defined in Chapter 3.1.

The implementation of the exploration of control flow, finding states and adding these states to the map can be seen in Figure 13. This `explore_paths` function takes a control flow graph generated by EBA and an initially empty map as input parameters and results in a map of all inferred regions and the resulting monitor states for these regions. This is accomplished by recursively exploring the tree-like control flow graph and depending on the encountered program point, applies the possible effects of the program point on the transition function of the instantiated monitor, `A`. The resulting state(s) are then added to the map.


```

let rec explore_paths path map =
  let p = path() in
  match p with
  | Seq(step, remaining) ->
    let apply_transition effect map =
      let region = get_region effect in
      match region with
      | Some r ->
        let result = Map.find_default [A.initial_state] r map in
        let m = List.fold_left
          (fun acc s -> A.transition s effect step :: acc)
          [] result in
        Map.add r m map
      | None -> map
    in
    let input = EffectSet.filter is_in_transition_labels step.offs.map
      |> EffectSet.to_list in
    if List.is_empty input then explore_paths remaining map
    else
      (* Find all permutations of effects e.g. {{lock, unlock}
         -> {{lock, unlock}, {unlock, lock}} *)
      let permutations = permute input in
      let map = List.fold_left (fun map effects ->
        (* For each effect in a permutation, apply the transition,
           and add the result to the map. *)
        List.fold_left (fun map effect -> apply_transition effect map)
          map effects
      ) map permutations in
      explore_paths remaining map
  | Assume(_, _, remaining) ->
    explore_paths remaining map
  | If(true_path, false_path) ->
    let true_branch = explore_paths true_path map in
    let false_branch = explore_paths false_path map in
    Map.union true_branch false_branch
  | Nil -> map

```

Figure 13: The implementation of the EBA control flow while keeping track of states for regions. This function takes a control flow graph generated by EBA and an initially empty map as input parameters and results in a map of all inferred regions and the resulting monitor states for these regions.

When all paths in the CFG tree structure have been explored, the regions which map to accepting states along with their location and traces are extracted from the mapping and presented to the user as possible bugs.

This approach can be described in pseudocode as follows.

```

function EXPLORE_PATHS(tree_node, map)
  if tree_node is Nil then
    return map
  else if tree_node is If(t, f) then
    true_branch  $\leftarrow$  EXPLORE_PATHS(t)
    false_branch  $\leftarrow$  EXPLORE_PATHS(f)
    return UNION(true_branch, false_branch)
  else if tree_node is Seq(step, next) then
    effects  $\leftarrow$  step.effects
    if IS_EMPTY(effects) then return EXPLORE_PATHS(next, map)
    end if
    permutations  $\leftarrow$  FIND_PERMUTATIONS(effects)
    return
    FOLD(
      FOLD(APPLY_TRANSITION(effect, map), map, effects),
      map, effects)
       $\triangleright$  Find all possible states for permutations.
       $\triangleright$  Add these states to the region map.

  end if
end function

function APPLY_TRANSITION(effect, map)
  region  $\leftarrow$  effect.region
  previous_states_for_region  $\leftarrow$  FIND_DEFAULT([initial_state], region, map)
  states  $\leftarrow$  FOLD(TRANSITION(state, effect, previous_states_for_region))
  return ADD(map, region, states)
end function

tree  $\leftarrow$  GENERATE_TREE(input_file)
map  $\leftarrow$  EXPLORE_PATHS(tree)

```

4.2 Automata Signatures

The signature of monitor automata must be implemented in order to use the bug checker with EBA. The implementation of a given monitor automata is passed to the aforementioned **Make** module and is then used to evaluate states based on the effects of regions. The signature of the monitor automata specifies a **state** as a discriminated union type, describing the possible states of the automata as well as a transition function, **transition**, which takes a previous state of the monitor along with an input effect.

```

type state =
| Initial
| Locked
| Unlocked
| Error of Effects.e

type checker_state = {
  current_state: state;
  trace: step list;
  matches: step list;
}

```

Figure 14: An illustration of the *checker_state* structure for a double-unlock monitor.

In order to provide the user with detailed error reports this state is encapsulated in a **checker state** structure which keeps track of the current trace through the CFG along with granular location details for discovered possible bugs. Providing this information requires that the current CFG node must also be passed to the automata, due to the architecture of the EBA framework. The full signature for the transition function is therefore $transition : checker_state \rightarrow effect \rightarrow step \rightarrow checker_state$. No references to instantiated monitor modules are stored in the map, merely the current states of monitors.

A concrete example of a *checker_state* structure can be seen in Figure 14. This transition function in other words operates on an effect which is part of the set of effect types and results in a new monitor state which is part of the set of possible states defined within the monitor, reflecting the definition of a monitor template seen in Section 3.1. A concrete example of an implementation of the transition function can be seen in Figure 15.

```

let transition previous input step =
  let next new_state = with_previous previous new_state step in
  let previous_state = previous.current_state in
  match previous_state with
  | Initial ->
    (match input with
    | Mem(Lock, _) -> next Locked
    | Mem(Unlock, _) -> next Unlocked
    | _ -> next previous_state
    )
  | Unlocked ->
    (match input with
    | Mem(Lock, _) -> next Locked
    | Mem(Unlock, _) -> next (Error input)
    | _ -> next previous_state
    )
  | Locked ->
    (match input with
    | Mem(Unlock, _) -> next Unlocked
    | _ -> next previous_state
    )
  | Error _ -> next previous_state

```

Figure 15: The implementation of the transition function of the double-unlock monitor template definition.

This implementation has been chosen for performance and simplicity reasons, since the transition function of a monitor does not change after it has been defined and can therefore be implemented as a performant static function. Storing only previous states and taking this previous state into consideration in the implementation of transition functions results in a lower memory footprint and possibly higher readability of the implementation since an alternative implementation, e.g. based on dynamically assigning transitions to an internal map within the monitor, would increase the memory footprint and possibly make it hard to track what the possible states for a given monitor are for the reader.

5 Results

6 Future Work

7 Conclusion

References

- [1] Iago Abal, Claus Brabrand, and Andrzej Wasowski. Effective bug finding in c programs with shape and effect abstractions. pages 34–54, 01 2017.
- [2] Iago Abal, Claus Brabrand, and Andrzej Wasowski. Effective bug finding in c programs with shape and effect abstractions. In *VMCAI*, 2017.
- [3] IEEE and The Open Group. pthread_spin_unlock - unlock a spin lock object. <https://pubs.opengroup.org/onlinepubs/9699919799/>, 2017. Accessed: 2019-11-25.

8 Appendix