



The Intelligent Cloud Contact Center

Agent and Supervisor REST APIs

Developer's Guide

October 2025

Learn how to use the secure Agent and Supervisor REST APIs to access the Five9 Intelligent CX Platform.

Five9 and the Five9 logo are registered trademarks of Five9 and its subsidiaries in the United States and other countries. Other marks and brands may be claimed as the property of others. The product plans, specifications, and descriptions herein are provided for information only and subject to change without notice, and are provided without warranty of any kind, express or implied. Copyright © 2025 Five9, Inc.

About Five9

Five9 is the leading provider of cloud contact center software, bringing the power of the cloud to thousands of customers and facilitating more than three billion customer interactions annually. Since 2001, Five9 has led the cloud revolution in contact centers, delivering software to help organizations of every size transition from premise-based software to the cloud. With its extensive expertise, technology, and ecosystem of partners, Five9 delivers secure, reliable, scalable cloud contact center software to help businesses create exceptional customer experiences, increase agent productivity and deliver tangible results. For more information visit www.five9.com.

Trademarks

Five9®

Five9 Logo

Five9® SoCoCare™

Five9® Connect™

Contents

What's New	23
About the Five9 Agent and Supervisor REST APIs	24
Audience	24
API Platform	24
Secure Authentication and Authorization	25
WebSocket Connections	26
Managing Sessions	26
Obtaining the Metadata	26
Initial Login Request (Using Region-Specific URLs)	27
Management Requests (MGR) and Other Operations	28
Handling Issues/failures	28
Creating the URL	29
Creating the WebSocket Connection	29
Checking Your Users' Activity with a WebSocket Connection	30
Closing a WebSocket Connection	31
Constructing Requests and Responses	31
Requests	32
Syntax	32
Initiating the login	32
Body	34
Responses	34
Managing Cookies	35
Using Cookies	35
Avoiding Cookies	36
REST API Requests	36
Five9 Chat	37
Agent REST Requests and Responses	38
Agent Settings	39
Sets the Agent's State to System Not Ready	39
Gets all Users With the Agent Role	40
Gets the Logged-In Users	41
Updates the Agent's Settings for Text Interactions	42
Gets the Agent's Settings	42
Gets all Domain Users With a Specific Role	42
Gets an Agent	43
Gets all Agent Groups	44
Gets all Options	44
Updates the User's Options	45
Updates the Agent's Options	45
Gets the Agent's Permissions	46
Gets the User's Permissions	46
Gets the User's Roles	47
Gets the Customer Portal Information	47

Sets the Agent's Third-Party Variables	48
Changes the Agent's Password	48
Gets the Channel Readiness of Agents	49
Gets the State of the Agent	50
Updates the State of the Agent	50
Gets Channels Available to the Agent	51
Gets the Available Agents for Chat Sessions by Profile	51
Agent Interactions	52
Gets a List of Text Interactions	53
Gets a Paginated List of Text Interactions	53
Accepts a Text Interaction URL	54
AcceptBody	54
Searches Interactions	55
Gets All Interactions	55
Gets Information about Cold Transfers	56
Gets Logged-In Agents for Chat Interactions	56
Initiates a Search for Completed Interactions	57
Iterates the Search for Completed Interactions	58
Rejects an Interaction with a Reason	58
Gets All the Notes	59
Creates a Note	59
Updates a Note	60
Returns a List of Messages	61
Attachments	61
Enables Downloading Email attachments	62
Downloads an Email Attachment for an Agent	62
Downloads an Email Attachment Created Before Agent Assignment	63
Downloads an Email Attachment	63
Calls	64
Gets a List of Active Interactions for the Agent	65
Gets Calls Available to the Agent	65
Gets Information about a Call	66
Gets All Speed Dial Information	66
Gets a Speed Dial ID for the Domain	67
Updates the Contact for the Call	67
Calls Another Agent	68
Calls an External Number	69
Calls a Queue	69
Calls a Speed Dial ID	70
Clicks to Dial an External Number	70
Makes a Test Call	73
Answers a Call	73
Places a Call on Hold	74
Takes a Call Off Hold	75

Parks a Call	75
Retrieves a Call	76
Gets the Estimated Waiting Time for a Text Interaction	77
Updates Call Comments	78
Sets a Call Disposition	79
Rejects a Call	79
Disconnects a Call	80
Adds a Number to the DNC List	81
Makes an Echo Call	81
Cancels an Echo Call	82
Gets an Echo Call	82
Call Variables	83
Gets Call Variables for the Domain	83
Sets Call Variables	83
Callbacks	84
Gets Scheduled Callbacks for an Agent	85
Gets the Scheduled Callbacks for the Domain	86
Gets the State of Postponed and Dismissed Callbacks	86
Adds a Callback	87
Updates a Callback	88
Updates a List of Callbacks	88
Deletes a Callback	89
Deletes a List of Callbacks	89
Dismisses a Callback	90
Dismisses Multiple Callbacks	90
Returns a Call	91
Postpones a Callback	92
Postpones Multiple Callbacks	93
Returns a Personal Missed Call	93
Campaigns	94
Gets Available Campaigns	94
Gets all Campaigns in the Domain	95
Gets Information about a Campaign ID in the Domain	95
Gets a List of Inbound Campaigns	96
Gets the Campaigns Available to the Agent	97
Gets the Field Views for a Campaign	97
Gets a Campaign Script in the Domain	98
Gets Worksheet Questions for a Campaign	99
Accepts the Results of a Survey	99
Updates the Call Worksheet	100
Client Errors	100
Conferences	101
Gets Agents Available as Conference Participants	101
Adds an Agent as Conference Participant	102

Adds a Campaign as Conference Participant	103
Adds an External Party as Conference Participant	104
Adds a Queue as Conference Participant	105
Adds a Speed Dial Number as Conference Participant	106
Adds a Parked Call as Conference Participant	107
Disconnects a Conference Participant	108
Leaves a Conference	109
Completes a Warm Conference	110
Connectors	111
Gets Manual Connectors During the Call	111
Gets Manual Connectors for a Preview Session	112
Gets Pending Connectors	113
Gets a Pending Connector	114
Creates Connector Information for a Manual Connector	115
Creates a Pending Connector for a Manual Connector During a Preview Ses- sion	116
Processes a Pending Connector	116
Contacts	117
Gets Contact Field Layouts	118
Gets Contact Fields for the Domain	119
Creates a View of the History of a Contact	119
Iterates the View of the History of a Contact in the Domain	120
Gets Contacts for the Domain	121
Gets Contacts for the Call	122
Gets a Contact ID in the Domain	123
Creates a Contact in the Domain	124
Creates and Assigns a Contact to an Interaction	124
Creates a Contact for the Call	125
Creates and Attaches a Contact to the Social Item	126
Selects the Contact for the Call	126
Updates the Contact for an Interaction	127
Updates the Contact of the Social Item	127
Updates a Contact in the Domain	128
Deletes a Contact from the Domain	129
Adds a Note to a Contact in the Domain	129
Deletes a Note for the Contact in the Domain	130
Gets Unified Communication Settings	130
Updates the Unified Communication Settings	131
Synchronizes the Unified Communication Settings	131
Dispositions	132
Gets the Dispositions Available for the Campaign	132
Gets the Dispositions Not Associated with Campaigns	133
Updates the Disposition of an Interaction	133
Escalates a Chat to an Agent	134

Features	134
Gets the List of all Features	135
Gets the List of Specified Features	135
Help Requests	136
Sends a Help Request	136
Gets the Agent's Logging Settings	136
Logs an Issue	137
Locales and Languages	138
Gets the Supported Locales for the Domain	138
Gets the Domain Attributes	139
Gets the Current Time of the Domain	139
Gets the Time Zones for the Domain	140
Gets the Time Zone IDs for the Domain	141
Gets the Agent's Time Zone	141
Gets User Locales	142
Gets the Phone Number Format for the Data Center	142
Gets the Phone Number Format for the Domain	143
Gets the Localization Options for the Domain	143
Gets Bundles of Translated Resources	144
Uses the NLP Tagging Service	144
Gets the NLP Categories for the Domain	145
Maintenance	146
Gets all Maintenance Notices	146
Gets a Maintenance Notice	146
Accepts a Maintenance Notice	147
Gets the Maintenance State of an Agent	147
Messages	148
Gets a List of Messages	148
Sends a Message	149
Sends a Message with an Identifier	149
Broadcasts a Message to Logged-In Users	150
Accepts an Email Message Sent from an External Source	150
Preview Sessions	151
Gets All Preview Sessions	152
Gets a Preview Session	152
Skips a Preview Session	153
Ends a Preview Session	154
Rejects a Chat Preview With a Reason	154
Makes a Call After a Preview Session	155
Renews a Preview Session	156
Updates the Contact of the Preview	157
Gets the Latest Items for a Contact	157
Prompts and Recordings	158
Gets all Audio Files for a Call	159

Gets the State of the Audio Player	159
Gets a Sound File for the Event Type	160
Uploads a Sound File for an Agent Event	161
Plays an IVR Recording During a Call	162
Pauses a Recording During a Call	163
Resumes a Paused Audio File During a Call	163
Stops an Audio File During a Call	164
Starts Recording a Call	165
Pauses Recording a Call	165
Resumes Recording a Call	166
Stops Recording a Call	167
Gets a Call Recording Stream	167
Gets all Active Skills Prompts	168
Gets a Skill Prompt Recording	168
Plays a Skill Prompt During a Call	169
Gets Voicemail Greeting Information	170
Uploads a Personal Voicemail Greeting	170
Resets a Personal Voicemail Greeting	171
Queue Callbacks	171
Gets All Scheduled Queue Callbacks	172
Gets a Queue Callback	172
Answers a Queue Callback	173
Rejects a Queue Callback	174
Queues	174
Gets the Queues in the Domain	174
Gets the Agent's Queues	175
Gets the Agent's Active Queues	175
Sets the Agent's Active Queues	176
Gets a List of Queues for Social Interactions	177
Reason Codes	178
Gets the Logout Reason Codes for the Domain	178
Gets all Not-Ready Reason Codes for the Domain	178
Sessions	179
Gets Metadata About the User's Session	179
Creates a Session	180
Restarts the Agent's Session	181
Gets Session Expiration Information	182
Gets Logout Restrictions	182
Stops the Agent's Session	183
Gets the User's Permissions for the Current Session	184
Gets the User's Roles for the Current Session	184
Gets the Login Page Information	185
Gets the Agent's Logged-In State	185
Checks Whether the Agent is Active	186

Logs In the User	187
Logs Out the User	187
Returns Settings for the Logged-In User	188
Restarts the Agent's Station	188
Forces the Agent's Station to Restart	188
Gets Information About the Agent's Station	189
Gets the Agent's Station State	189
Gets the Softphone Configuration	190
Statistics	191
Gets Dashboard Subscriptions	191
Creates a Dashboard Subscription	192
Updates a Dashboard Subscription	192
Deletes a Dashboard Subscription	193
Gets the Subscriptions Available to the Agent	193
Subscribes or Unsubscribes the Agent to/from Statistics	194
Subscribes the Agent to Gamification Statistics	195
Unsubscribes the Agent from Gamification Statistics	195
Transfers	196
Gets Agents Who Can Receive Transfers	196
Transfers a Call to Another Agent	197
Transfers a Parked Call to Another Parked Call	198
Transfers a Call to a Campaign	198
Transfers a Call to an External Number	199
Transfers a Call to a Skill Group	200
Transfers a Call to a Speed Dial Number	201
Completes a Warm Call Transfer	202
Cancels an Incomplete Warm Call Transfer	202
VCC Configuration	203
Gets the Domain Information	203
Gets the Domain Settings	203
Gets the Password Policies for the Domain	204
Voicemail	205
Gets all Voicemail Messages	205
Gets a Voicemail Message	206
Gets a Voicemail Recording	207
Counts Personal Voicemail Messages	208
Accepts a Skill Voicemail Message	208
Rejects a Skill Voicemail Message	209
Returns a Call	210
Updates a Voicemail Message	211
Transfers a Voicemail Message	212
Marks the Voicemail Message Read or Processed	213
Deletes a Voicemail Message	213
Gets the Contacts for the Voicemail Message	214

Updates the Contact in the Skill Voicemail	215
Selects the Active Contact for the Voicemail Message	216
Worksheets	216
Gets a Worksheet	216
Updates a Worksheet	217
Deletes a Worksheet	218
Supervisor REST Requests and Responses	219
Alerts	219
Creates an Alert for a Supervisor	220
Updates an Alert for a Supervisor	220
Deletes an Alert for a Supervisor	221
Gets an Alert for a Supervisor	221
Gets All the Alerts for a Supervisor	222
Callbacks	222
Gets the Callbacks	222
Moves a Callback	223
Moves Multiple Callbacks	224
Calls and Recordings	225
Makes a Test Call	225
Makes a Test Call to Queues	226
Makes an Echo Call	226
Deletes an Echo Call	227
Creates a Call Recording View	227
Gets the Call Recording Views	228
Deletes a Call Recording View	228
Updates a Call Recording View	229
Gets the Next Set of Records from a Call Recording View	230
Gets the Previous Set of Records from a Call Recording View	230
Deletes Call Recordings	231
Campaigns	232
Gets all Campaigns	232
Starts a Campaign	232
Stops a Campaign	233
Resets the Campaign, List Position, Disposition, or Dropped Call Statistics	234
Gets a Campaign System Message	234
Gets the Campaign Profiles	235
Gets the Campaign List Details	235
Gets the Campaign List Statistics	236
Updates the Outbound Campaign Runtime Statistics	237
Gets the Time Zones for the Domain	237
Cloud User ID	238
Gets the Cloud User ID	238
Domain Settings	239

Gets the Domain Information	239
Gets the Dispositions in the Domain	239
Gets the Queues in the Domain - Agent ID	240
Gets the Current Time in the Domain	240
Gets the Agent Groups in the Domain	241
Gets the Users in the Domain	241
Gets the Queues in the Domain - Domain ID	242
Gets the Reason Codes in the Domain	242
Gets the Dialing Lists in the Domain	243
Logs out a User	243
Gets the Domain Clusters	244
Gets the Domain Attributes	244
Domain Users and Active User Sessions	245
Gets the Domain Users	245
Gets the User Profiles in the Domain	246
Gets the Agent States in the Domain	246
Gets the Active User Sessions	247
Updates the State of an Agent	247
Migrates a Supervisor	248
Gets the Maintenance State of a Supervisor	249
Messages	250
Gets a List of Messages	250
Sends a Message	251
Sends a Message with an Identifier	251
Broadcasts a Message to Logged-In Users	251
Accepts an Email Message Sent from an External Source	252
Monitoring	253
Starts and Stops Agent Monitoring	253
Gets Information About all Agents	253
Gets Information About a Specific Agent	254
Updates an Agent's Information	255
Gets an Agent's Parked Calls	256
Gets an Agent's Session History	256
Sets an Agent's Recording State	257
Sets an Agent's Voicemail State	257
Sets the Monitored Campaigns	258
Gets the Monitored Campaigns	258
Gets the User Locales	259
Gets the Domain Objects for the Locale	260
Queues and Agent Groups	260
Gets the Supervisor's Queues	260
Gets the Supervisor's Agent Groups	261
Sets the Agent's Active Queues	261
Statistics and Portal Information	262

Gets the Statistics Filter Settings	262
Sets the Statistics Filter Settings	263
Gets the Statistics Metadata	263
Gets the Statistic Type Metadata	264
Gets the Customer Portal Information	264
Gets a Snapshot of the ACD	265
Gets the Auxiliary Statistics of Agents	265
Supervisor Messages	266
Gets a List of Messages	266
Sends a Message	267
Sends a Message with a Message ID	267
Gets Maintenance Notices	268
Gets a Specified Maintenance Notice	268
Accepts a Specified Maintenance Notice	269
Supervisor Sessions	269
Starts a Supervisor's Session	270
Stops a Supervisor's Session	271
Restarts a Supervisor's Session	271
Sets the Time Zone	272
Obtains a WebSocket Event	272
Gets the Supervisor's Login State	273
Indicates Whether the Supervisor is Active	273
Gets the Supervisor's Station	274
Gets the Supervisor's Station State	275
Restarts the Supervisor's Station	275
Gets the Supervisor's Softphone Configuration	276
Restarts the Supervisor's Softphone	276
Voicemail Messages	277
Creates a Voicemail View	277
Gets a List of Voicemail Views	278
Deletes a Voicemail View	279
Refreshes a Personal Voicemail View	280
Gets the Next Set of Records from a Personal Voicemail View	280
Gets the Previous Set of Records from a Personal Voicemail View	281
Transfers Voicemail Messages	282
Changes a Voicemail State	283
Deletes Agent's Voicemail Messages	284
Gets the Recording Stream of a Voicemail Message	284
Statistics	285
Subscribes to an Interaction	285
Subscribes to Interactions	286
Unsubscribes from an Interaction	287
Unsubscribes from Interactions	287
Subscribes to a Skill	288

Unsubscribes from a Skill	288
Transfers	289
Gets Agents Available for Receiving Transfers	289
Gets Skills Who Can Accept Emails	290
Transfers an Interaction to a Group	290
Transfers Interactions to a Group	291
Transfers an Interaction to an Agent	291
Transfers Interactions to Agents	292
Data Types	293
AcceptBody	293
ActiveSkillsInfo	294
AddressType	294
AgentAbilityCode	295
AgentApplicationType	295
AgentsAreLoggedInInfo	296
AgentAuxiliaryStatsInfo	296
AgentCallDestinationInfo	296
AgentChatBody	297
AgentGamificationInteractionTotals	297
AgentGroupInfo	297
AgentGroupWSInfo	298
AgentInfo	298
AgentMonitorInfo	299
AgentMonitorMode	300
AgentOptions	300
AgentOptionsInfo	302
AgentReadyPresence	302
AgentRecordingStateInfo	302
AgentRecordingState	303
AgentSkillInfo	303
AgentTransferDestinationInfo	304
AgentWSInfo	304
AlertInfo	305
AlertNotificationInfo	306
AlertNotificationMethod	306
AlertParameterInfo	307
AlertParameterName	307
AnswerCriteriaInfo	307
Assistance	308
Attribute	308
AttributeValue	308
Audio	309
AudioSegment	309

AudioFileInfo	310
Auth	310
AuthorAccount	311
AvailableCampaigns	312
BusinessHoursDailyInfo	312
BusinessHoursInfo	313
BroadcastMessageInfo	314
CallAttachedVariable	314
CallAudioFileInfo	315
CallEvent	315
CallEventType	315
CallInfo	317
CallLoggingSettingsChangedEvent	330
CallQualityInfo	331
CallNotifyReason	331
CallQualityStatsInfo	333
CallState	334
CallVariableInfo	334
CallVariablesInfo	335
Callback	336
CallbackDestinationInfo	336
CallbackInfo	338
CallbackSnoozeInfo	338
CallbackStatesInfo	339
CallContactInfo	339
CallRecordingInfo	339
CallType	340
CampaignDispositionResetWSInfo	341
CampaignFlag	341
CampaignInfo	342
CampaignListDetailsInfo	345
CampaignListWSInfo	346
CampaignMode	346
CampaignOutOfNumbersWSInfo	347
CampaignProfileWSInfo	347
CampaignType	347
CampaignStateType	348
CampaignResetInfo	348
CampaignResetType	349
CampaignSystemMessageInfo	349
CampaignTransferDestinationInfo	349
CampaignWSInfo	350
CampaignsConfigInfo	350
CategoryInfo	351

CategoryItemInfo	351
ChangePasswordInfo	351
ChannelInfo	351
ChannelType	352
ChatOffer	353
Cluster	354
ClusterInfo	354
ColdTransferSettingsInfo	355
ConferenceCampaignParticipantInfo	355
ConferenceExternalParticipantInfo	355
ConferenceInternalParticipantInfo	356
ConferenceSpeedDialParticipantInfo	357
ContactFieldInfo	358
ContactSessionType	359
ContactInfo	360
ContactLookupResultInfo	361
CreateReplayRequest	361
CustomerPortalInfo	362
CustomerUpdateContactBody	362
DashboardSubscriptionInfo	363
DataCenterInfo	363
Delivery	364
DraftAttachmentInfo	364
DraftInfo	364
Data Types	364
DataType	365
VCC Internal Data Formats	365
Single Values	365
Predefined List	367
DataValidationErrorType	368
DetailedACDSnapshotInfo	370
DialError	372
DialingRestrictionInfo	372
DisposeOptionsInfo	373
DispositionBody	374
DispositionFilterInfo	374
DispositionFlag	375
DispositionInfo	375
DispositionLayoutGroupInfo	377
DispositionsInfo	378
DispositionWSInfo	378
DomainObjectKeyInfo	378
DomainObjectTranslationInfo	379
DomainSettingsInfo	379

EchoCallInfo	380
EditTopicBody	380
Event	380
EventSchema	381
EWTInfo	381
ExceptionParameters	382
ExchangeMessage	383
ExchangeMessageBody	384
ExternalCallDestinationInfo	384
ExternalDestinationInfo	386
ExternalTransferDestinationInfo	387
F9RuntimeException	388
FieldViewInfo	389
FeatureFlagInfo	389
FeatureFlagRequest	390
FeatureType	390
FieldInfo	390
FieldSchema	391
FilterSettingsSelectionType	391
Five9ExceptionDetail	391
Five9ExceptionDetailWrapper	392
ForceLoggingConfigInfo	392
FullStateInfo	393
GamificationDisposition	393
GamificationSkill	394
GracefulAgentStateTransitionSettingsChangedEvent	394
HelpRequestDestinationInfo	394
HttpDelivery	395
I18nObjectField	395
I18nObjectType	396
IdInfo	396
InteractionFilterInfo	397
InteractionHistoryViewInfo	398
InteractionHistoryViewOptions	398
InteractionInfo	400
InteractionSessionInfo	400
InteractionType	402
LeaveConferenceInfo	402
LimitedSetInfo	403
ListWSInfo	404
LocaleInfo	404
LoggedInProfileAgent	405
LoginState	406
LogoutRestriction	406

LongCollectionValue	407
MaintenanceHostInfo	407
MaintenanceNoticeInfo	407
MaintenanceNotifyReason	408
MaintenanceState	408
ManualCallSettingsChangedEvent	409
ManualConnectorInfo	409
MediaType	409
MediaTypeConstants	410
MessageBodyItem	410
MessageDirection	411
MessageType	411
Metadata	411
MonitoredCampaignsInfo	411
MoveCallbackInfo	412
MultipartBody	412
NlpTag	412
NlpTagRequest	413
NlpTagRequestItem	413
NlpTagResponse	414
Note	414
NoteBody	415
ObjectType	415
Objects	416
Org	416
OutboundCampaignListStatsInfo	417
OrganizationInfo	418
OutgoingCallFailedEvent	418
ParkedCallInfo	419
PasswordCredentials	419
PasswordPolicy	419
PendingConnectorInfo	420
PermissionEnum	421
PersonalGreetingInfo	426
PersonalVoicemailInfo	426
PersonalVoicemailSortingField	426
PersonalVoicemailState	427
PersonalVoicemailViewOptions	427
PhoneNumberFormatInfo	428
PhoneNumberLocaleInfo	428
PhoneNumberLocalizationOptionsInfo	429
PlayerStateInfo	430
PlayerTrackInfo	430
PredefinedValueInfo	430

PresenceInfo	431
PresenceNotifyReason	431
PreviewAcceptBody	432
PreviewInfo	433
PreviewNotifyReason	434
PreviewState	435
PubSubDelivery	435
QuestionInfo	436
QueueCallbackInfo	437
QueueCallbackNotifyReason	439
QueuedCallInfo	439
QueuedVoicemailInfo	439
RandomMonitorWSInfo	440
RateLimit	440
ReasonCodeInfo	441
ReasonCodeWSInfo	442
RecordingInfo	442
RecordingsViewInfo	442
RecordingsViewOptions	443
RelatedFieldInfo	443
RequestEmailBody	443
RequestEmailInfo	444
ResourcesUpdateInfo	444
RestrictionInfo	445
RestrictionsInfo	446
ReturnCallExternalOptionInfo	446
ReturnMissedCallOptions	448
RollingPeriod	450
SendSocialBody	450
SessionEventType	451
SessionExpirationInfo	452
SessionHistoryInfo	453
SessionStartCode	453
SetSettingsBody	455
SimpleIdInfo	457
SkillCallDestinationInfo	457
SkillFilterInfo	457
SkillInfo	458
SkillLevelInfo	458
SkillStatsSnapshotInfo	458
SkillTransferDestinationInfo	459
SkillVoicemailState	459
SkillVoicemailViewOptions	460
SkillVMStateChangeInfo	460

SkillWSInfo	460
SnoozeAllRequest	461
SocialItem	461
SocialItemReply	467
SoftphoneDefaultFlagsChangedEvent	468
SoftphoneType	469
SoftphoneRegistrationInfo	469
SpeedDialCallDestinationInfo	472
SpeedDialInfo	474
SpeedDialTransferDestinationInfo	474
StashItemInfo	475
StationState	475
StationInfo	476
StatisticRequest	476
StatisticType	477
StatisticTypeData	478
StatisticsField	478
StatisticsFieldType	478
StatisticsRange	479
StatisticsSchema	480
StatsFieldType	480
StatsFilterSettingsInfo	481
StatsFilterSettingsWsInfo	482
StatsMetadataFieldInfo	483
StatsMetadataInfo	483
StatsResourceType	483
StreamingOutputInfo	484
SubscriptionDetailsData	484
Subscription	484
SubscriptionIdInfo	485
SubscriptionRequest	486
SubscriptionStartAction	486
SubscriptionInfo	486
SubscriptionUpdateReason	487
SupervisorAgentGroupInfo	487
SupervisorAgentInfo	488
SupervisorAgentMonitorInfo	488
SupervisorAgentMonitorWSInfo	489
SupervisorAgentSkillInfo	489
SupervisorCampaignInfo	490
SupervisorCampaignProfileInfo	490
SupervisorDispositionInfo	490
SupervisorDispositionBody	491
SupervisorTransferToAgentBody	491

SupervisorTransferToGroupBody	491
SupervisorListInfo	492
SupervisorReasonCodeInfo	492
SupervisorUserInfo	492
SupervisorUserProfileInfo	493
SurveyBody	493
SurveyRequestInfo	494
SwitchoverMetadata	494
Tenant	495
TestCallInfo	496
TestSkillCallInfo	496
TextSearchRequestInfo	497
TextTransform	497
ThirdPartyConfig	497
TimeRangeData	498
TimezoneInfo	498
Token	498
Topic	499
UnifiedCommunicationInfo	499
UnifiedCommunicationSettingsInfo	500
UpdateReplayRequestStateBO	501
UserFilter	501
UserSessionInfo	503
UserInfo	503
UserSyncInfo	504
UserSyncRecordInfo	504
UserSyncResponseInfo	505
UserWSInfo	505
UserProfileWSInfo	506
VersionInfo	506
VoicemailContactInfo	507
VoicemailCountInfo	507
VoicemailInfo	508
VoicemailLookupResultInfo	510
VoicemailNotifyReason	510
VoicemailState	511
VoicemailsViewInfo	512
VoicemailsTransferDestinationInfo	512
VoicemailType	512
VoicemailsTransferDestinationInfo	513
VoicemailType	513
WorksheetInfo	513

WebSocket Events	515
Manage WebSocket Session Timeouts and Reconnections	516
Session Cleanup Timing	516
Reconnection Behavior	516
Check If a Session Is Still Active	516
Context	517
Payload	518
Agent Events	519
Supervisor Events	538
 Errors	 541
HTTP Status Codes	541
Five9 Error Codes	542
Events Subscription Service Errors	553
WFO Statistics Service Errors	554
 Use Cases	 556
Agent REST API Examples	556
Login	556
Request	556
Response	557
Get the Permissions	558
Request	558
Response	558
Get the Station	559
Request	559
Response	559
Get the Login State	559
Request	559
Response	560
Gets the Options	560
Request	560
Response	560
Get the Channels	561
Request	561
Response	561
Supervisor REST API Examples	561
Login	562
Request	562
Response	562
Start a Session	564
Request	564
Response	564
Get the Queues	564

Request	564
Response	565
Get the Station	565
Request	565
Response	565
Get the Login State	566
Request	566
Response	566
Get the Agents	566
Request	567
Response	567

What's New

Release	Change	Topic
Sep 2025	The ContactLookupResultInfo data type has been updated to clarify some API requests that return this object in their response.	ContactLookupResultInfo
March 2025	Added a section to outline WebSocket session timeouts, reconnection behavior, and how to verify session status.	WebSocket Events
	Updated the parameter description for campaignId as the campaign name is required.	Clicks to Dial an External Number
Jan 2025	Updated result code -6 to EWT_RESULT_CODE_AGENTS_LOGGED_IN with description.	EWTInfo
Aug 2024	Added a sub section to Syntax about initiating the login and changed the URLs (from data center to common base) for the Base_API_URL element description.	Constructing Requests and Responses
	Updated the Metadata section to include only the following fields: context (which contains farmID), dataCenters, and freedomURL.	Metadata
Feb 2024	Added an important note about permission challenges.	API Platform
Jan 2024	Added new topic.	Cloud User ID
	Updated cursor field.	Gets Contacts for the Domain
May 2023	Added Sets the Agent's Active Queues.	Sets the Agent's Active Queues
May 2022	Updated the REST API URLs.	Constructing Requests and Responses
	Added new permission.	PermissionEnum
	Updated /users/<user_ID>/logged_in_users requestlogged_in_users, and	Gets the Logged-In Users
	/appsvcs/rs/svc/orgs/<orgId>/users.	Gets all Domain Users With a Specific Role

About the Five9 Agent and Supervisor REST APIs

This guide describes how to use the secure Five9 Agent and Supervisor REST APIs. To use the APIs, your domain must be enabled for Five9 Plus applications. For more information, consult your Five9 representative.

[Audience](#)
[API Platform](#)
[Managing Sessions](#)
[Constructing Requests and Responses](#)
[Managing Cookies](#)

Audience

To create contact center applications, you must understand these technologies:

- REST API architecture
- HTTP, HTTPS, and WebSocket protocols
- JavaScript, JSON, and jQuery
- HTML5 and CSS
- Computer-telephony and contact-center concepts, processes, terminology, events, and applications


API Platform

The Agent REST API communicates with the Virtual Call Center (VCC) with requests and responses that perform contact center tasks for agents, for example:

- Logging in and out.
- Modifying the agents' state and options.
- Connecting to a VoIP softphone.

- Accepting assigned calls.
- Initiating, answering, and processing all parts of calls.
- Processing voicemail messages and callbacks.
- Distributing WebSocket events to the REST API clients.

The Agent API uses two forms of communication: HTTPS REST requests and WebSocket events. This figure summarizes the connections for the Agent:

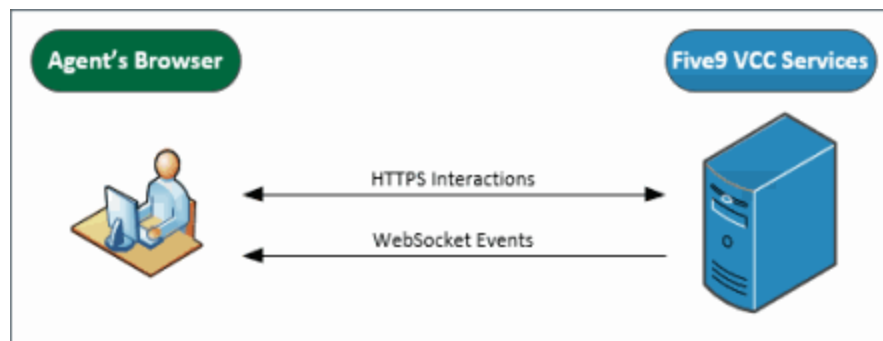

Secure requests and responses are exchanged between the agent's browser and the Five9 services. WebSocket events are returned to the agent's browser. You can see the events in the browser console.

The Supervisor REST API operates in the same way as the Agent REST API. The Supervisor REST API allows you to access data about sessions, domains, agents, campaigns, statistics, and other system information.

Secure Authentication and Authorization

Authentication validates the user's standard or single sign-on credentials. Authorization verifies that the user has permission to perform the requested operation. All service requests contain a security filter that validates the session ID (token), user ID, and customer ID.

To access the APIs, you must authenticate the user by using standard login or single sign-on when the user logs into an account. The login request passes the user's credentials to the VCC. A cookie is returned as an authorization token in the response to the `/auth/login`, `anon`, and `metadata` requests. Subsequently, the user must use the same browser for all API operations because the response to the login request contains access tokens that are stored in a browser cookie. The cookie is used in production for all subsequent requests until the token expires at the end of the session.

Important

To avoid permission challenges when accessing REST methods, complete the security questionnaire and disable the "user must change their password at next login" option.

WebSocket Connections

WebSocket connections enable communication between the browser and the VCC Services. When services trigger events, these are sent to your Web application. If you do not use a WebSocket connection, your API requests succeed, but you do not receive events.

The WebSocket protocol provides secure communication because of a single connection between your Web client and the Five9 server. Because the WebSocket protocol does not depend on long polling, messages are exchanged in real time, even with proxies and firewalls.

When you use the WebSocket protocol, the HTTP connection is replaced by the WebSocket connection, which uses the same TCP/IP connection and, by default, the same port (80) and HTTPS (443). To use WebSocket connections in your implementation, see [Managing Sessions](#).

Managing Sessions

This section describes how to create and manage a user session, retrieving necessary metadata, and making authenticated API requests.

[Obtaining the Metadata](#)

[Creating the URL](#)

[Creating the WebSocket Connection](#)

[Checking Your Users' Activity with a WebSocket Connection](#)

[Closing a WebSocket Connection](#)

Obtaining the Metadata

To ensure that all API requests are properly authenticated and routed through the correct data centers, you need to follow the session initialization process. This process

involves logging in, retrieving metadata, and synchronizing all systems.

Responses to these requests contain metadata and cookies to authenticate the user and route subsequent requests.

Important

After any successful `/auth/login` and `/auth/anon` metadata request, always request `/auth/metadata`.

Initial Login Request (Using Region-Specific URLs)

Start a new session by logging into your account with your region-specific URL.

1 Login using your region-specific URL. Below are the URLs for different regions:

- **US:** `app.five9.com`.
- **UK:** `app.five9.eu`
- **CA:** `app.five9.ca`
- **EU:** `eu.five9.com`
- **IN:** `in.five9.com`

```
POST http://app.company1.com/appsvcs/rs/svc/auth/login
Content-Type: application/json
Accept: application/json
{
  "passwordCredentials": {
    "username": "syoung@yes.com",
    "password": "XXXXXXXX"
  },
  "policy": "ForceIn"
}
```

- 2 Retrieving Login Metadata:** After logging in successfully, retrieve the following values: `tokenID`, `farmID`, and `apiUrl`.
- 3 Requesting Additional Metadata for System Synchronization:** Request metadata post-login using the values in Step 2.

Important: This step is critical to sync Five9 systems/datacenters and ensure all cookies are reset (if using).

Use the `tokenID`, `farmID`, and `apiUrl` for the metadata request.

You can apply these values in two ways:

- **Managing Cookies:** Use the values to create cookies. For more information on where to put the values, see [Managing Cookies](#).
 - **API Requests (Without Cookies):** Pass the values as headers in each API request. Use the `apiUrl` as the endpoint, with the `TokenID` as the Authorization header and the `FarmID` as a custom header. Use the `apiUrl` provided for your environment, to ensure compatibility with region-specific or custom configurations. For example, in the US region, the `apiUrl` might look like: `https://atl-app.five9.com/appsvcs/rs/svc/auth/metadata`. For more information on where to put the values, see [REST API Requests](#).
- 4 Once the metadata request completes, obtain the `tokenID`, `farmID`, and `apiUrl` for future API requests.

Management Requests (MGR) and Other Operations

In some cases, such as MGR or other operations, you may need to request additional metadata.

- 1 Request metadata from your region specific URL:

- US: `app.five9.com`.
- UK: `app.five9.eu`
- CA: `app.five9.ca`

This step is **critical** to sync Five9 systems/datacenters and ensure all cookies are reset (if using).

- 2 Retrieve the following values: `tokenID`, `farmID`, and `apiUrl`.

- 3 Once the metadata request completes, obtain the `tokenID`, `farmID`, and `apiUrl` for future API requests.

Handling Issues/failures

a. **Logout:** If issues arise, such as synchronization failures, log out and clear any existing session data.

b. **Login:** Perform the initial login process again (see steps above).

Note

It may be necessary to accept any Maintenance Notices during login process.

Creating the URL

The metadata that you obtained with the `login` or `metadata` request contains the user's token and the service end points that are currently active for the application.

The `apiUrls` field in the `DataCenterInfo` data type contains an array of URLs, for example:

```
apiUrls": [1]
  0: {
    "host": "app-<active_data_center>.five9.com"
    "port": "443"
    "routeKey": "LDNAPINxaX"
    "version": "9.2.152"
  }
```

To create the `Base_API_URL`, use the host and port. The above snippet creates a URL similar to this one:

```
https://app-scl.five9.com:443/
```

Use your `Base_API_URL` in all requests.

Creating the WebSocket Connection

The WebSocket URL augments the HTTPS URL. For the Agent REST API, after an agent is logged in, you can create up to three WebSocket connections with this URL:

- Single connection: `<Base_API_URL>/appsvcs/ws/`
- Up to three connections with your `ws_key` tag:
`<Base_API_URL>/appsvcs/ws/<ws_key>`

For the Supervisor REST API, after a supervisor is logged in, you can create up to three WebSocket connections with these URLs:

- Single connection: `<Base_API_URL>/supsvcs/sws/`
- Up to three connections with your `ws_key` tag:
`<Base_API_URL>/supsvcs/sws/<ws_key>`

The initial connection is used for the primary application. Additional WebSocket connections may be created by a third-party application, such as a CRM application, if monitoring the API event channel is it required.

The results are as follows:

- If no authorization cookie exists, HTTP status code 401 (Unauthorized) is returned. Return to [Obtaining the Metadata](#).
- If a WebSocket connection is created, event [ID: 1010](#) (`ServerConnected`) is returned as a WebSocket message. For each user, you can create up to three connections for each session. Event [ID: 1010](#) is returned for each WebSocket connection.
- If a duplicate connection occurs, event [ID: 1020](#) (`DuplicateConnection`) is returned, and the second connection is closed with `CloseReason 3000`. When you create multiple connections, a duplicate connection may occur if two `ws_key` values are identical.
- If you try to create more than three connections, the last connection is closed with `CloseReason 3001`.

All events are described in [WebSocket Events](#).

Your Web application must maintain this connection at all times during the user's session. If the connection is dropped, you must reconnect it.

Checking Your Users' Activity with a WebSocket Connection

After you have created a WebSocket connection, you need to send `ping` text messages to each open WebSocket connection to check that agents and supervisors are active and that connectivity is intact. If you do not check, the server will end the user's session. Users must have permission to use the web client.

Every 15–20 seconds when no other requests are made, use the `timer` function to send a `ping` message to each open WebSocket connection.

Example

JavaScript functions:

```
var socket = new window.WebSocket('WebSocket URL that you want to use');
var pingIntervalHandle = null;
socket.onopen = function() {
  //every 15 seconds
  pingIntervalHandle = window.setInterval(function () {
    socket.send('ping');
  }, 15 * 1000);
};
socket.onclose = function() {
  window.clearInterval(pingIntervalHandle);
};
window.addEventListener('unload', function() {
  socket.close();
});
```

15 * 1000 = 15 seconds * 1000 milliseconds

Set the function to be repeated at an interval no greater than 30 seconds.

For each successful ping text message, the server sends a corresponding message with [ID: 1202](#) to each WebSocket connection. The message is similar to this one:

```
{
  "context": {
    "eventId": "1202",
    "eventReason": null,
    "messageId": null,
    "userId": "<userId>",
    "correlationId": null,
    "userName": null,
    "timeStamp": 1539297410892,
    "tenantId": "<tenantId>",
    "broadCast": false,
    "payload": "pong"
  }
}
```

If no pong response is returned twice in a row, close the connection, if it is not already closed, and recreate it.

Closing a WebSocket Connection

The session remains active until the user closes the browser page, or you send an `/auth/logout` request. At that time, all connections are closed. If another WebSocket connection is not created within three minutes, the user is logged out.

Constructing Requests and Responses

This section applies to all methods: GET, POST, PUT, and DELETE. Before sending user requests, be sure to start the station.

Character encoding is ISO 8859-1. The number of characters in each field is not restricted. To see and download a JavaScript example program that shows the agent login, metadata retrieval, and logout processes, see this [basic API example](#).

Requests

Each request contains secure HTTP headers and may contain parameters:

- **Headers:** `Content-type` and `Cookie` are required in each request. Other headers are inserted automatically depending on your library.
 - The cookie is returned as an authorization token in the response to the `/auth/login`, `anon`, and `metadata` requests.
 - If the request contains a body (POST and PUT requests), include the appropriate `Content-type` header:
 - **JSON body:** `Content-type:application/json`
 - **Form data:** `Content-type:multipart/form-data`
- **Request data:** Each request may contain data in these locations:
 - **Body:** The payload, JSON or multipart form data, is appended to the header in the `Content-type` field.
 - **Path:** Each resource has a unique URI that is built on the client side. Some resources, such as `agentId` or `supervisorId` are always in the URI.
 - **Query:** In GET requests, most parameters follow the URL.

Syntax

This section provides information about the syntax to use when making API calls.

Use this syntax for all requests:

```
https://<Base_API_URL>/<Context>/<Path>[?<Query_String>...]
```

Initiating the login

To initiate the login process, use the common base URL for your region. For example, US: `https://app.five9.com:443`.

This URL handles the authentication process and returns the host data center information in the `apiUrls` used for all subsequent API requests. To construct the `Base_API_URL`, combine the host and port values from the `apiUrls` array. For example,

the Base_API_URL would be: `https://app-scl.five9.com:443/`. For more information, see [Creating the URL](#).

Element	Description
Base_API_URL	Common base URL and port of the Five9 REST API server: US: <code>https://app.five9.com:443</code> UK: <code>https://app.five9.eu:443</code> CA :<code>https://app.ca.five9.ca:443</code> For more information, see Creating the URL.
Context	Path to the Agent REST API services: <code>/appsvcs/rs/svc</code> Example: Path to the agent call recordings and email message attachments: <code>/strsvcs/rs/svc</code> Path to the Supervisor REST API services: <code>/supsvcs/rs/svc</code>
Path	Path to the request. Use the paths as they are described in Agent REST Requests and Responses. The path may include parameters, such as <code>{agentId}</code> or <code>{supervisorId}</code>. Examples: <code>/agents/{agentId}/callbacks</code>
Query_String	Possible parameters depending on the request, such as <code>?metadata</code>. Example: Complete HTTPS URL without a JSON body. This request returns information about all agents in the domain. The from and limit query parameters specify the range, in this case starting at 0 (zero) and returning all agents: <code>https://app.five9.com:443/appsvcs/rs/svc/agents/2385/callbacks?from=0?limit=0</code> Example: This request starts a session for supervisor ID 2385. The <code>force</code> query parameter indicates that a new session is to be started even if the supervisor already has a session. <code>https://app.five9.com:443/supsvcs/rs/svc/supervisors/2385/session_start?force=true</code>

Body

Some requests include a body, which, by default, is a JSON-formatted structure that contains required and optional parameters. For example, an `/auth/login` request may contain these parameters:

```
{
  "org": {
    "orgName": "",
    "orgId": ""
  },
  "appKey": "",
  "ssoToken": "",
  "passwordCredentials": {
    "password": "",
    "tenantName": "",
    "username": ""
  },
  "policy": ""
}
```

Only these parameters are required:

- **username** and **password**: The user's credentials assigned by the administrator.
- **policy**: This parameter has two possible values.
 - **ForceIn**: The existing session is terminated, and a session is created.
 - **AttachExisting**: The token from the existing session is returned. The existing session is reused; no session is created.

Example

`/auth/login` request that contains only required parameters.

```
{
  "passwordCredentials": {
    "username": "syoung@infodev.com",
    "password": "XXXXXXXX"
  },
  "policy": "ForceIn"
}
```

Responses

The HTTP response contains these elements:

- Success or failure HTTP code.
- Depending on the request, optional information in HTTP headers and/or body.
 - JSON body: Content-type:application/json
 - Recordings: Content-type:application/octet-stream
 - Image: Content-type:application/image-png
 - HTML: Content-type:text/html

Managing Cookies

Depending on your business requirements, you can avoid cookies or use them.

[Using Cookies](#)
[Avoiding Cookies](#)

Using Cookies

This C# example from a .NET Windows application shows how to create cookies. After logging into the Five9 Plus adapter, a customization reads the metadata that is received. The metadata is sent to the desktop application, which reads the `tokenId` and `farmId` values from the metadata. The values are used to create the corresponding Authorization and farmId cookies.

```
const string cookiePath = "/";
const string domain = "five9.com";
var authToken = sessionData["tokenId"];
var farmId = sessionData["context"]?["farmId"] ?? 0;
var cookieContainer = new CookieContainer();
cookieContainer.Add(new Cookie("Authorization", $"Bearer-{authToken}", cookiePath, domain));
cookieContainer.Add(new Cookie("farmId", farmId, cookiePath, domain));
```

The example enables any application, inside or outside a web browser, to open a WebSocket connection and receive events for the user's login session. The desktop application can also create the WebSocket URI by using the `apiUrls[0]["host"]` and `apiUrls[0]["port"]` values from the metadata, as shown below:

```
_baseWebSocketUrl = new Uri($"wss://{apiUrlHost}:{apiUrlPort}/apps-{vcs/ws/{ws_key}");
```

The `/appsvcs/rs/svc/auth/logout` method returns no event. Instead, you can use the `agents/{agentId}/login_state` method until a `Five9ExceptionDetail` object is returned with the message `User is not logged in`. You then close the WebSocket connection and wait for the user to log in again and send the metadata. You can add code to recover the WebSocket connection to handle connection errors. If the user is logged in, you can restore the WebSocket connection with the original metadata.

Avoiding Cookies

To avoid using cookies, follow these sections:

[REST API Requests](#)
[Five9 Chat](#)

REST API Requests

You must pass these headers in each REST API request: `Authorization` (value of `tokenId`) and `farmId`. You can obtain the values of these headers from login and metadata API requests.

Logs in the agent. The request contains the user's credentials.

```
POST /appsvcs/rs/svc/auth/login
Body: {"passwordCredentials":{"username":"XXX","password":"XXX"},
      "appKey":"web-ui"}
```

The response contains the `tokenId` and `farmId` values:

```
{
  "tokenId": "08c0dbd3-797e-11e8-abd0-005056a48ed9",
  "orgId": "1",
  "userId": "13368",
  "context": {"farmId": "41"},
  ...
}
```

To set the `Authorization` value, use the `tokenId` value, preceded by `Bearer-`:

```
Authorization: Bearer-08c0dbd3-797e-11e8-abd0-005056a48ed9
```

Gets the agent channels. This request retrieves the agent channels:

```
GET /appsvcs/rs/svc/agents/128/channels?_=1528950504971 HTTP/1.1
Host: app.five9.com
Connection: keep-alive
Authorization: Bearer-08c0dbd3-797e-11e8-abd0-005056a48ed9
Accept: application/json, text/javascript, */*; q=0.01
User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_12_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/66.0.3359.181 Safari/537.36
```

```
X-Requested-With: XMLHttpRequest
farmId: 41
f9-transaction-id: XXX
Referer: https://app.five9.com/clients/agent/main.html?role=Agent
Accept-Encoding: gzip, deflate, br
Accept-Language: en-US,en;q=0.9,ru;q=0.8
```

Five9 Chat

This section applies to all types of chat. Users who block any cookies cannot chat with agents who use Five9 Chat.

You can use the console's anonymous chat or email API without cookies. In that case, the HTTP header must contain `Authorization` and `farmId`. However, if users block third-party cookies, local storage is automatically disabled. Therefore, applications that use a cookie-less API must not use local storage.

Agent REST Requests and Responses

Request parameters contain the name, data type, description, and the location of the parameter in the request. All parameters are required unless specified by (O) before the description.

Important

In the REST APIs and the documentation, the terms *organization*, *orgs*, *domain*, and *tenant* IDs refer to your organization and to the Five9 domains in your organization. The term *queue* used in this document is also known as a *skill*, *skill group*, or *skill queue* in the Five9 software, including the API request and parameter names.

For requests that apply to the entire domain (`/orgs/...`), the value of [LoginState](#) must be `WORKING` unless stated otherwise in the description of the request.

For requests that apply to agents (`/agents/...`), agent must be authenticated, logged in, and in the `WORKING` state.

For all requests, if the user state is incorrect, the request returns an error with the required user state to successfully perform the request.

You must log in and issue requests that set these user states in the specified order to perform most additional requests:

- 1 `SELECT_STATION`
- 2 `SELECT_SKILLS`
- 3 `WORKING`

These sections describe the Agent REST API requests.

Agent Settings	Connectors	Queue Callbacks
Agent Interactions	Contacts	Queues
Attachments	Dispositions	Reason Codes
Calls	Help Requests	Sessions
Call Variables	Locales and Languages	Transfers
Callbacks	Maintenance	VCC Configuration

[Campaigns](#)[Client Errors](#)[Conferences](#)[Messages](#)[Preview Sessions](#)[Prompts and Recordings](#)[Voicemail](#)[Worksheets](#)

Agent Settings

This section contains requests about the state, channels, and availability of agents and other users.

Users

[Sets the Agent's State to System Not Ready](#)[Gets all Users With the Agent Role](#)[Gets the Logged-In Users](#)[Updates the Agent's Settings for Text Interactions](#)[Gets the Agent's Settings](#)[Gets all Domain Users With a Specific Role](#)[Gets an Agent](#)

Options

[Gets all Agent Groups](#)[Gets all Options](#)[Updates the Agent's Options](#)[Updates the User's Options](#)[Gets the Agent's Permissions](#)[Gets the User's Permissions](#)[Gets the User's Roles](#)[Gets the Customer Portal Information](#)[Sets the Agent's Third-Party Variables](#)[Changes the Agent's Password](#)

Channels

[Gets the Channel Readiness of Agents](#)[Gets the State of the Agent](#)[Updates the State of the Agent](#)[Gets Channels Available to the Agent](#)[Gets the Available Agents for Chat Sessions by Profile](#)

Sets the Agent's State to System Not Ready

```
PUT /agents/{agentId}/set_system_not_ready_state
```

Set the state of the agent to Not Ready.

Use this method when the client needs to prevent receiving interactions for internal reasons. Do not use it as a result of the agent's actions. These conditions apply to the request:

- Call processing:
 - If the agent is not processing a call, the current state is updated immediately.
 - If the agent is processing a call, the state changes at the end of the call.
- Reason codes:
 - If reason codes are disabled, the state of the agent is changed to the default Not ready.
 - If reason codes are enabled, the reason code is System (-3). Otherwise, the default is -1.

The event that occurs is [EVENT PRESENCE UPDATED](#) (12).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request.

`https://<Base_API_URL/context>/agents/2385/set_system_not_ready_state`

Response.

Data	Description
FullStateInfo	Complete information about the state of the agent.

Gets all Users With the Agent Role

`GET /agents`

Returns an array of active users with the agent role.

This request is similar to [Gets all Domain Users With a Specific Role](#). The responses contain similar information, except that this request returns `availableChannels` and `firstName` also whereas [Gets all Domain Users With a Specific Role](#) returns `loggedIn`

and `role`. To obtain users with a specific role, use [Gets all Domain Users With a Specific Role](#).

Parameters.

Name	Data	Description	Type
from	int	Optional index to select, starting with 0 (zero).	Query
limit	int	Optional maximum number to return (0=all).	Query

Example request. Returns all users in the domain.

`https://<Base_API_URL/context>/agents?from=0&limit=0`

Response.

Data	Description
AgentInfo []	Array of all users in the domain. VCC supervisors and administrators are included even if they do not have the agent role.

Gets the Logged-In Users

GET `/users/{userId}/logged_in_users`

Important

Method is deprecated. Instead, use `/orgs/{orgId}/users` (see [Gets all Domain Users With a Specific Role](#)).

Returns the list of logged in users, excluding the user who performs the request.

Parameters.

Name	Data	Description	Type
userId	string	User ID.	Query

Example request. Returns the logged in users.

`https://<Base_API_URL/context>/users/2385/logged_in_users`

Response.

Data	Description
UserInfo []	Array of users.

Updates the Agent's Settings for Text Interactions

PUT /agents/{agentId}/settings

Updates user filter settings for text interactions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
setSettingsBody	SetSettingsBody	Detailed settings.	Body

Response. Empty.

Gets the Agent's Settings

GET /agents/{agentId}/settings

Returns the options available to the agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Response.

Data	Description
AgentOptionsInfo	Options available to the agent.

Gets all Domain Users With a Specific Role

GET /orgs/{orgId}/users

Returns an array of users for your domain.

Each entry in the array contains information about the user, including the logged-in role and state. For example, a user may be logged in as an agent and as an

administrator. Logged-in (`loggedIn`) users are ready to receive internal chat messages. Use this request to obtain a list of users with a specific role.

This request is similar to [Gets all Users With the Agent Role](#). The responses contain the same information, except that this request returns `loggedIn` and `role` also whereas [Gets all Users With the Agent Role](#) returns `availableChannels` and `firstName`.

Parameters.

Name	Data	Description	Type
<code>orgId</code>	<code>string</code>	Domain ID.	Path

Example request. Returns all information about users in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/users`

Response.

Data	Description
UserInfo []	Array of information about logged-in users, except for the user who sent the request.

Gets an Agent

`GET /agents/{agentId}`

Returns information about an agent.

This user may have the agent, supervisor, or administrator role. Agents may request information about any user in the domain, including themselves.

Parameters.

Name	Data	Description	Type
<code>agentId</code>	<code>string</code>	ID of the agent performing the request.	Path

Example request. Returns information about user ID 2385.

`https://<Base_API_URL/context>/agents/2385`

Response.

Data	Description
AgentInfo	Information about the specified user.

Gets all Agent Groups

GET /agents/{agentId}/agent_groups

Returns the list of agent groups to which the agent belongs.

Parameters.

Name	Data	Description	Type
agentId	string	ID of the agent performing the request.	Path

Example request. Returns the agent groups to which user ID 2385 belongs.

https://<Base_API_URL/context>/agents/2385/agent_groups

Response.

Data	Description
AgentGroupInfo []	Array of agent groups.

Gets all Options

GET /agents/{agentId}/options

Returns an array of options selected by the agent.

The agent must have the [CAN RUN WEB AGENT](#) permission.

This list is a subset of all options available to the agent, such as the auto-answer, select skills, and alerts that the agent can set in the user interface.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the list of options selected by user ID 2385.

`https://<Base_API_URL/context>/agents/2385/options`

Response.

Data	Description
AgentOptionsInfo []	Array of the agent's options.

Updates the User's Options

`PUT /users/{userId}/ui_options`

Updates the options for the specified user.

Parameters.

Name	Data	Description	Type
userId	string	User ID.	Path
options	string	User options.	Body

Example request. Updates the options for user ID 111.

`https://<Base_API_URL/context>/users/111/ui_options`

Response. Empty.

Updates the Agent's Options

`PUT /agents/{agentId}/options`

Updates the list of options available to the agent.

This list is a subset of all options available to the agent.

The agent must have the [CAN RUN WEB AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
options	AgentOptionsInfo	Array of agent options.	Body

Example request. Updates the list of options available to user ID 2385.

`https://<Base_API_URL/context>/agents/2385/options`

Response.

Data	Description
AgentOptionsInfo	Updated list of agent options.

Gets the Agent's Permissions

`GET /agents/{agentId}/permissions`

Returns the list of permissions assigned to the agent.

Method is deprecated and will be removed in a future release. Use `GET /users/{userId}/permissions` instead (see [Gets the User's Permissions](#)).

Parameters.

Name	Data	Description	Type
<code>agentId</code>	<code>string</code>	Agent ID.	Path

Example request. Returns the permissions assigned to agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/permissions`

Response.

Data	Description
PermissionEnum []	Array of permissions assigned to the agent.

Gets the User's Permissions

`GET /users/{userId}/permissions`

Returns the list of permissions assigned to the user.

Parameters.

Name	Data	Description	Type
<code>userId</code>	<code>string</code>	User ID.	Path

Example request. Returns the permissions assigned to user ID 2385.

`https://<Base_API_URL/context>/users/2385/permissions`

Response.

Data	Description
PermissionEnum []	Array of permissions assigned to the user.

Gets the User's Roles

`GET /users/{userId}/roles`

Returns the list of roles assigned to the user.

Parameters.

Name	Data	Description	Type
userId	string	User ID.	Path

Example request. Returns the roles assigned to user ID 2385.

`https://<Base_API_URL/context>/users/2385/roles`

Response.

Data	Description
string[]	Array of roles assigned to the user.

Gets the Customer Portal Information

`GET /agents/{agentId}/customer_portal`

Returns information about logging into the Customer Portal.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the login information for the Customer Portal for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/customer_portal`

Response.

Data	Description
CustomerPortalInfo	Information about the link to the Customer Portal that agents can click in the Agent Desktop Plus application.

Sets the Agent's Third-Party Variables

`POST /agents/{agentId}/third_party_config`

Sets the agent's third-party variables.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
configBody	ThirdPartyConfig	Information about the third-party variables.	Body

Example request. Sets the third-party variables of agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/third_party_config`

Response. Empty.

Changes the Agent's Password

`PUT /agents/{agentId}/password`

Changes the agent's password.

This list is a subset of all options available to the agent.

These exceptions may occur:

- `WRONG_PASSWORD` if the new password does not match the policy.
- `PASSWORD_MATCH_PREVIOUS` if the new password matches the previous one.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
passwords	ChangePasswordInfo	Information about the old and new passwords. The agent creates a new password according to the domain requirements listed in Gets the Password Policies for the Domain .	Body

Example request. Changes the password of agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/password`

Response. Empty.

Gets the Channel Readiness of Agents

`GET /orgs/{orgId}/agent_states`

Returns the state of all agents in the domain for all available channels.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the agent ready states for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/agent_states`

Response.

Data	Description
Map<string,string>	Channel readiness: • Key: Agent ID. • Value: String sequence of single-letter codes described in AgentAbilityCode. If the string is empty, the agent is logged in but not ready for all channels. Example: 2492: "c"

Gets the State of the Agent

GET /agents/{agentId}/presence

Returns the state of the agent.

This request applies to agents logged into the voice channels for calls and voicemail. However, the request also returns the state of all channels, including Digital Engagement channels if any.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the current state of agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/presence`

Response.

Data	Description
FullStateInfo	Information about the state of the agent.

Updates the State of the Agent

PUT /agents/{agentId}/presence

Updates the state of the agent.

If the agent is not on a call, the current state is updated immediately. Otherwise the update is applied as follows:

- If the agent is on a call, the update is applied at the end of the call.
- If the agent is ready for calls and/or voicemail, and the Graceful Agent State Transition feature is enabled in the Administrator application, the update is applied after the time-out specified in that feature.

This method generates the [EVENT PRESENCE UPDATED](#) event.

If the request results in error code 403 (`NOT_AUTHORIZED`), the context may contain a field named `notPermittedChannel`, which contains an array of `ChannelType` values.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
stateInfo	PresenceInfo	Updated state of the agent.	Body

Example request. Updates the state of agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/presence`

Response.

Data	Description
FullStateInfo	Updated state of the agent.

Gets Channels Available to the Agent

`GET /agents/{agentId}/channels`

Returns information about channels available to the agent. The agent must have the [CAN RUN WEB AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the channels available to agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/channels`

Response.

Data	Description
ChannelInfo []	Array of information about channels available to the agent.

Gets the Available Agents for Chat Sessions by Profile

`GET /agents/{agentId}/logged_in_profiles`

Returns an array of `LoggedInProfileAgent` objects, which notifies the chat client or user of agents that are available for the chat session.

This request is typically called by a chat client application or user.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
profiles	string	Comma-separated list of profile names.	Query

Example request. Returns the agents available for a chat session.

`https://<Base_API_URL/context>/agents/2385/<list of profiles>`

Response.

Data	Description
<code>LoggedInProfileAgent</code> []	Array of agent profiles.

Agent Interactions

These requests enable the agent to find for interactions.

- [Gets a List of Text Interactions](#)
- [Gets a Paginated List of Text Interactions](#)
- [Accepts a Text Interaction URL](#)
- [Searches Interactions](#)
- [Gets All Interactions](#)
- [Gets Information about Cold Transfers](#)
- [Gets Logged-In Agents for Chat Interactions](#)
- [Initiates a Search for Completed Interactions](#)
- [Iterates the Search for Completed Interactions](#)
- [Rejects an Interaction with a Reason](#)
- [Gets All the Notes](#)
- [Creates a Note](#)
- [Updates a Note](#)
- [Returns a List of Messages](#)

Gets a List of Text Interactions

POST /agents/{agentId}/np_interactions

Retrieves a list of text interactions that are assigned to, offered (ACD mode) to, or queued (cherry-pick mode) for an agent. This method requires the `IS_CHAT_MEDIA_ENABLED`, `IS_SOCIAL_MEDIA_ENABLED`, or `IS_EMAIL_MEDIA_ENABLED` permission. If you need to see paginated results, it is recommended to use the [Gets a Paginated List of Text Interactions](#) method.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
minimalData	boolean	Whether the response should return minimal information.	Query

Example request. Gets a list of text interactions for agent ID 1333.

`https://<Base_API_URL/context>/agents/1333/np_interactions`

Response. Empty

Gets a Paginated List of Text Interactions

POST /agents/{agentId}/interactions

Retrieves a list of text interactions that are assigned or offered (ACD mode) to, or queued (cherry-pick mode) for an agent. This method requires the `IS_CHAT_MEDIA_ENABLED`, `IS_SOCIAL_MEDIA_ENABLED`, or `IS_EMAIL_MEDIA_ENABLED` permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
mediaType	boolean	Type of media: text or chat.	Query
pageSize	integer	Number of interactions to show in a page.	Query
pageStart	integer	Starting page number.	Query

Example request. Gets a list of paginated text interactions that are assigned or offered to, or queued for the agent ID 1333.

```
https://<Base_API_URL/context>/agents/1333/interactions
```

Response. Empty

Accepts a Text Interaction URL

```
PUT /{agentId}/interactions/{interactionId}/accept
```

Important

You must have Text Channels enabled to run this API.

Accepts the assignment of the interaction to the agent with the specified ID {agentId}, excluding call or voicemail interactions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path

Example request. Accepts the assignment of the interactions to agent ID 1333.

```
https://<Base_API_URL/context>/agents/1333/interactions/accept
```

AcceptBody

Describes the request sent when accepting a social interaction that has been offered.

Name	Type	Description
mediaType	string	Channel of the interaction expressed as a number: • SOCIAL=1 • NOTE=100 • CHAT=1000 • AGENT_CHAT=1010 • EMAIL=2000 • CALL=3000 • VM=4000

Name	Type	Description
profileId	long	Campaign ID to which the interaction applies.
type	string	One of these values: 1: Choose item from the available options (cherry picking). 2: Automatic interaction distribution (AID).

Response. Empty

Searches Interactions

POST /agents/{agentId}/interactions/search

Performs a full-text search of email interactions. The search result is sent by using web socket events. Requires the permissions `IS_EMAIL_MEDIA_ENABLED` and `CAN_SEARCH_EMAILS`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID	Path
searchRequestInfo	TextSearchRequestInfo	Information used for text interaction search.	Body

Example request. Searches for text interactions.

`https://<Base_API_URL/context>/agents/123/interactions/search`

Response. Empty.

Gets All Interactions

GET /agents/{agentId}/interaction

Returns a list of interactions in which the agent is taking part.

This request returns only calls and voicemail messages. It does not return previews, queue callbacks, and Digital Engagement interactions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns a list of interactions for user ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions`

Response.

Data	Description
InteractionInfo []	List of interactions.

Gets Information about Cold Transfers

`GET /orgs/{orgId}/cold_transfer_settings`

Returns the specified domain's cold transfer settings.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns cold transfer settings of domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/cold_transfer_settings`

Response.

Data	Description
ColdTransferSettingsInfo	Information about the domain's cold transfer settings.

Gets Logged-In Agents for Chat Interactions

`GET /orgs/{orgId}/users/logged_in_agents`

Returns true if agents are logged in.

This request does not apply to agents available for calls or voicemail.

Parameters.

Name	Data	Description	Type
orgId	string	Organization ID.	Path

Response.

Data	Description
AgentWSInfo	Agents available for chat interactions.

Initiates a Search for Completed Interactions

POST /agents/{agentId}/history

Initiates the search of interactions completed by the agent.

The response contains an initial subset of records specified by the `limit` field of [InteractionHistoryViewOptions](#). If the `hasMore` field is true, use [Iterates the Search for Completed Interactions](#) to obtain the next set of records.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
options	InteractionHistoryViewOptions	Search criteria for the interaction history.	Body

Example request. Searches for the initial interactions completed by the agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/history`

Response.

Data	Description
InteractionCreatedResponse	Data structure that contains an ID, an array of records that match the specified options, and a flag that indicates if more records are available.

Iterates the Search for Completed Interactions

```
PUT /agents/{agentId}/history/{viewId}/next
```

Fetches the next set of records from history view.

Use this request if the response to [Initiates a Search for Completed Interactions](#) indicates that more records exist in the agent's history. The number of records to retrieve is specified in the `limit` field of [InteractionHistoryViewOptions](#)

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
viewId	string	View ID.	Path

Example request. Fetches the next set of records completed by the agent ID 2385 in history view ID 12.

```
https://<Base_API_URL/context>/agents/2385/history/12/next
```

Response.

Data	Description
InteractionHistoryViewInfo	Information about the history view.

Rejects an Interaction with a Reason

```
PUT /agents/{agentId}/interactions/{interactionId}/reject/{reason}
```

Declines an interaction assigned to the agent.

Do not use this method for calls and voicemail.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
reason	int	Possible values:	Path

Name	Data	Description	Type
		0: Interaction offered to agent timed out, or the agent explicitly rejected the interaction. 1: Client application rejected the interaction offer because the agent was not in the correct state.	

Response. Empty.

Gets All the Notes

GET /agents/{agentId}/interactions/{interactionId}/note

Returns a list of all the notes added to interactions. Requires the `IS_CHAT_MEDIA_ENABLED` permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path

Example request. Returns a list of notes for user ID 2385 and interaction ID 246.

`https://<Base_API_URL/context>/agents/2385/interactions/246/note`

Response.

Data	Description
Note []	List of notes.

Creates a Note

POST /agents/{agentId}/interactions/{interactionId}/note

Adds a note to an interaction. Requires the `IS_CHAT_MEDIA_ENABLED` permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
noteBody	NoteBody	Note content.	Query

Example request. Adds note to interaction ID 1246 for user ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/1246/note`

Response.

Data	Description
Note	Note content.

Updates a Note

`PUT /agents/{agentId}/interactions/{interactionId}/note/{noteId}`

Updates an interaction's note. Requires the `IS_CHAT_MEDIA_ENABLED` permission.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
noteId	string	Note ID.	Path
noteBody	NoteBody	Note content.	Query

Example request. Updates note ID 123, which is added to interaction ID 246 for user ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/246/note/123`

Response.

Data	Description
long	Note modification time.

Returns a List of Messages

GET /agents/{agentId}/messages

Returns a list of messages.

The user may have the agent or supervisor role.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
conversationId	string	Conversation ID. If omitted, message headers are returned.	Query
creationTime	long	Start time for the oldest message. If omitted, the default is the current time.	Body
pagesize	int	Number of messages to return. If omitted, the default is 50.	Query

Response.

Data	Description
ExchangeMessage []	Array of messages.

Attachments

This section describes the requests that you can use to download email message file attachments.

For these requests, the <Base_API_URL/context> parameter combination is set to /strsvcs/rs/svc.

[Enables Downloading Email attachments](#)

[Downloads an Email Attachment for an Agent](#)

[Downloads an Email Attachment Created Before Agent Assignment](#)

[Downloads an Email Attachment](#)

Enables Downloading Email attachments

```
GET /attachments/interactions/email/{interactionId}/attachment_by_id/{attachmentId}/{fileName}
```

Enables secure download of email attachments. Removes MIME type of HTML files to force download.

Parameters.

Name	Data	Description	Type
attachmentId	string	Attachment ID.	Path
fileName	string	Attachment file name.	Path
interactionId	string	Interaction ID.	Path

Example request. Downloads the attachment for interaction ID 6531 for attachment ID 2385.

```
https://<Base_API_URL/context>/interactions/email/6351/attachment_by_id/2385/testFile
```

Response.

Data	Description
StreamingOutputInfo	Information about the streaming output.

Downloads an Email Attachment for an Agent

```
GET /attachments/{agentId}/interactions/email/{interactionId}/attachment/{fileName}
```

Downloads an email attachment for an agent. Removes the MIME type of the HTML file to force the download.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
fileName	string	Attachment file name.	Path
interactionId	string	Interaction ID.	Path

Example request. Downloads the attachment for interaction ID 6531 for agent ID 2385.

```
https://<Base_API_URL/context>/attachments/2385/interactions/email/6531/attachment/testFile
```

Response.

Data	Description
StreamingOutputInfo	Information about the streaming output.

Downloads an Email Attachment Created Before Agent Assignment

```
GET /attachments/interactions/email/{interactionId}/attachment/{fileName}
```

Downloads an email attachment. The interaction has not yet been assigned to an agent. The MIME type of the HTML file containing the email content is removed.

Parameters.

Name	Data	Description	Type
fileName	string	Attachment file name.	Path
interactionId	string	Interaction ID.	Path

Example request. Downloads the attachment for interaction ID 6531.

```
https://<Base_API_URL/context>/attachments/interactions/email/6531/attachment/testFile
```

Response.

Data	Description
StreamingOutputInfo	Information about the streaming output.

Downloads an Email Attachment

```
PUT /attachments/{agentId}/interactions/email/{interactionId}/download
```

Downloads an email attachment for an agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
timezoneId	TimezoneInfo	Time zone information.	Body

Example request. Downloads interaction ID 6531 for agent ID 2385.

`https://<Base_API_URL/context>/attachments/2385/interactions/email/6531/download`

Response. Empty.

Calls

This section describes the requests that you can use to make a call.

Call information

- [Gets a List of Active Interactions for the Agent](#)
- [Gets Calls Available to the Agent](#)
- [Gets Information about a Call](#)
- [Gets All Speed Dial Information](#)
- [Gets a Speed Dial ID for the Domain](#)
- [Updates the Contact for the Call](#)

Manual Calls

- [Calls Another Agent](#)
- [Calls an External Number](#)
- [Calls a Queue](#)
- [Calls a Speed Dial ID](#)
- [Clicks to Dial an External Number](#)
- [Makes a Test Call](#)

Call actions

- [Answers a Call](#)
- [Places a Call on Hold](#)
- [Takes a Call Off Hold](#)

[Parks a Call](#)
[Retrieves a Call](#)
[Gets the Estimated Waiting Time for a Text Interaction](#)
[Updates Call Comments](#)
[Sets a Call Disposition](#)
[Rejects a Call](#)
[Disconnects a Call](#)
[Adds a Number to the DNC List](#)

Echo calls

[Makes an Echo Call](#)
[Cancels an Echo Call](#)
[Gets an Echo Call](#)

Gets a List of Active Interactions for the Agent

GET /agents/{agentId}/interactions

Returns calls and voicemail messages for the agent.

This request does not return previews calls and queue callbacks.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Response.

Data	Description
InteractionInfo []	List of interactions.

Gets Calls Available to the Agent

GET /agents/{agentId}/interactions/calls

Returns a list of calls with which the agent can work.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns all the calls available for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls`

Response.

Data	Description
CallInfo []	Array of calls.

Gets Information about a Call

GET /agents/{agentId}/interactions/calls/{callId}

Returns information about the specified call.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Returns information about call ID 2856 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856`

Response.

Data	Description
CallInfo	Information about the call ID.

Gets All Speed Dial Information

GET /orgs/{orgId}/speed_dials

Returns an array of speed dial information.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns all available speed dial information for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/speed_dials`

Response.

Data	Description
<u>SpeedDialInfo</u> []	Array of speed dial information.

Gets a Speed Dial ID for the Domain

`GET /orgs/{orgId}/speed_dials/{speedDialId}`

Returns information about a speed dial ID.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
speedDialId	string	Speed dial ID.	Path

Example request. Returns for domain ID 1357 information about speed dial ID 987.

`https://<Base_API_URL/context>/orgs/1357/speed_dials/987`

Response.

Data	Description
<u>SpeedDialInfo</u>	Information about the speed dial ID.

Updates the Contact for the Call

`PUT /agents/{agentId}/interactions/calls/{callId}/update_contact`

Updates the contact for the call.

The result is sent in event [EVENT CALL UPDATED](#). The event reason is `ACTIVE_CONTACT_UPDATED`, and the payload (`activeContact`) is the data for to the updated contact ID.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
contact	ContactInfo	Details about the contact.	Body

Example request. Updates the contact for the call with agent ID 2385 and call ID 2856.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/update_contact`

Response.

Data	Description
CallInfo	Information about the call ID.

Calls Another Agent

`POST /agents/{agentId}/interactions/make_agent_call`

Calls another agent.

The events are the same as those in [Calls an External Number](#). A call can be made only when no other active call exists. The agent must have [CAN MAKE CALLS TO AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
destination	AgentCallDestinationInfo	Destination and call options.	Body

Example request. Calls another agent for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/make_agent_call`

Response. Empty.

Calls an External Number

POST /agents/{agentId}/interactions/make_external_call

Calls an external number.

A call can be made only when no other active call exists. The agent must have [CAN_MAKE_CALLS_TO_EXTERNAL](#) permission.

If dialing starts, these events occur:

- [EVENT_CALL_CREATED](#): The state is OFFERED.
- [EVENT_CALL_CREATED](#): The state is OFFERED.
- [EVENT_CALL_UPDATED](#): The event reason is UPDATED, the state is RINGING_ON_OTHER_SIDE.

Afterward, either of these events occur:

- If the call is answered, the event ID is [EVENT_CALL_UPDATED](#), the event reason is CONNECTED, and the state is TALKING.
- If the call is not answered, the event ID is [EVENT_MAKE_CALL_FAILED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
destination	ExternalCallDestinationInfo	Destination and call options.	Body

Example request. Calls an external number for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/interactions/make_external_call

Response. Empty.

Calls a Queue

POST /agents/{agentId}/interactions/make_skill_call

Performs a call to a queue.

For events, see [Calls an External Number](#). A call can be made only when no other active call exists. The agent must have [CAN MAKE CALLS TO SKILL](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
destination	SkillCallDestinationInfo	Skill ID.	Body

Example request. Calls a queue for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/make_skill_call`

Response. Empty.

Calls a Speed Dial ID

`POST /agents/{agentId}/interactions/make_speed_dial_call`

Calls by using speed dial.

The events are the same as those in [Calls an External Number](#). The agent must have [CAN MAKE CALLS TO SPEED DIAL](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
destination	SpeedDialCallDestinationInfo	Destination and call options.	Body

Example request. Uses speed dial to make a call for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/make_speed_dial_call`

Response. Empty.

Clicks to Dial an External Number

`GET /orgs/{orgId}/interactions/click_to_dial`

Calls an external number from a link.

This request cannot be used with the TCPA mode.

Request.

Parameter	Type	Description	Type
autoResolveDialingRules	boolean	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. If set to <code>true</code> , the flag overrides <code>skipMultipleContactsCheck</code> flag.	
campaignId [use campaign name - see description]	string	The full plain-text (case sensitive) name of the desired campaign.	Query
contactId	string	Contact ID.	Query
dialImmediately	boolean	Whether to dial the number immediately. False by default. If false, only a WebSocket event is triggered.	Query
number	string	Contact's phone number without spaces or other characters.	Query
orgId	string	Organization ID.	Path
skipDNCCheck	boolean	Whether to skip checking the DNC list. Use the flag as follows: 1 Set the flag to false (default), and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST (10006)</code>: Show an error dialog to warn the agent that the number is in the DNC list.	Query

Parameter	Type	Description	Type
		Q_NUMBER_IN_DNC_LIST_FORCE(1001): Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to true and resend the request.}	
skipMultipleContactsCheck	boolean	Whether to check for multiple contacts. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set the flag to false (default), and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002. 2 if server returns the error, show the list of the matched contacts to let the user choose the correct one. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user confirms the request, set the flag to true and resend the request.	Query

Example request. In domain 1234, calls number 9255551212 as soon as possible in campaign named Manual.

```
https://<Base_API_URL/context>/orgs/1234/interactions/click_to_dial?number=9255551212&campaignId=Manual&dialImmediately=true
```

Response.

Data	Description
Response	HTML response (JavaScript code that closes the window.).

Makes a Test Call

POST /agents/{agentId}/interactions/make_test_call

Makes a test call.

The result is sent in [EVENT CALL CREATED](#). A call can be made only when no other active call exists. The agent must have [CAN PLAY AUDIO FILES TO CALLER](#) permission. If an active call exists, error ID 3 ([WRONG_STATE](#)) is returned.

These events occur in this order: (these are Agent_Events)

1 [EVENT CALL CREATED](#): The payload state is OFFERED.

2 [EVENT CALL CREATED](#): The payload state is OFFERED.

3 [EVENT CALL UPDATED](#): The event reason is UPDATED, and the payload state is TALKING.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Makes a test call for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/make_test_call`

Response. Empty.

Answers a Call

PUT /agents/{agentId}/interactions/calls/{callId}/answer

Accepts an offered call.

To set auto-answer options for incoming calls, see [Gets all Options](#). The event is [EVENT_CALL_UPDATED](#). The event reason is `UPDATED`, and the state is `TALKING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Accepts call ID 2856 for agent ID 2385 and returns all available information about that call ID.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/answer
```

Response.

Data	Description
CallInfo	Information about the call ID.

Places a Call on Hold

```
PUT /agents/{agentId}/interactions/calls/{callId}/hold
```

Places a call on hold.

This request does not apply to test calls. The call must be in the `TALKING` state. The agent must have [CAN_PLACE_CALL_ON_HOLD](#) permission. The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `ON_HOLD`, and the payload state is `ON_HOLD`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Places on hold call ID 2856 for agent ID 2385 and returns all available information about that call ID.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/hold
```

Response.

Data	Description
CallInfo	Updated call information.

Takes a Call Off Hold

PUT /agents/{agentId}/interactions/calls/{callId}/unhold

Takes a call off hold.

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `OFF_HOLD`, and the payload state is `TALKING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	ID of the call to take off hold.	Path

Example request. Takes off hold call ID 2856 for agent ID 2385 and returns all available information about that call ID.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/unhold`

Response.

Data	Description
CallInfo	Updated information about the call.

Parks a Call

PUT /agents/{agentId}/interactions/calls/{callId}/park

Parks a call.

Use this request to park an active call that is not a conference or to park a conference participant. You cannot park the original participant of a conference call.

The agent must have [CAN_PARK_CALL](#) permission.

The event is [EVENT_CALL_UPDATED](#). The event reason is `PARKED`, and the payload state is `PARKED`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Parks call ID 2856 for agent ID 2385 and returns all available information about that call ID.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/park`

Response.

Data	Description
CallInfo	Updated call information.

Retrieves a Call

`PUT /agents/{agentId}/interactions/calls/{callId}/retrieve`

Retrieves a parked call.

These events occur in this order:

- 1 Event about parked call deletion: [EVENT_CALL_DELETED](#). The event reason is `RETRIEVED`.
- 2 Incoming call events: The ID of the newly created call resource is different from the ID of the original parked call:
 - a [EVENT_CALL_CREATED](#)
 - b [EVENT_CALL_CREATED](#). The payload state is `OFFERED`.
 - c [EVENT_CALL_UPDATED](#). The event reason is `UPDATED`, and the payload state is `TALKING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Retrieves parked call ID 2856 for agent ID 2385 and returns all available information about that call ID.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/retrieve`

Response.

Data	Description
CallInfo	Updated information about the call.

Gets the Estimated Waiting Time for a Text Interaction

`GET /orgs/estimatedwaittime/{mediaType}`

Returns detailed information about a text interaction to be assigned to an agent.

Important

If you need to see if a campaign is open for business, execute the method `GET /available_campaign`. For more information, refer to [Gets Available Campaigns](#).

The response contains this information:

- Whether the business is open. In this case, the chat widget is displayed.
- Business schedule for the next seven days.
- Estimated wait time to display when the business is open.

Parameters.

Name	Data	Description	Type
campaignName	string	Name of the campaign.	Query
mediaType	string	Channel of the interaction expressed as a number: • CHAT=1000 • EMAIL=2000	Path
tenantName	string	Domain name.	Query

Example request. Gets the estimated chat wait time for `myDomain` and `myCampaign`.

```
https://<Base_API_URL/context>/orgs/estimatedwaittime/1000?tenantName=myDomain&campaignName=myCampaign
```

Response.

Data	Description
EWTInfo	Information about the estimated waiting time.

Updates Call Comments

```
PUT /agents/{agentId}/interactions/calls/{callId}/comments
```

Updates call comments.

Comments are stored if call has active contact. Therefore, if a call comes from an unknown number, the agent should create a contact with the number and set the contact active. The length of comments is not restricted. An error is returned if the call is not associated with a contact. This request applies to call comments only. For voicemail comments, see [Gets a Voicemail Message](#).

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `COMMENTS_UPDATED`, and the payload comment field is the updated comment.

If the call is not associated with a contact, this exception occurs: [CALL_HAS_NO_CONTACT](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
comments	StringValue	New comments.	Body

Example request. Updates for agent ID 2385 call comments call ID 1234.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/comments
```

Response.

Data	Description
string	String of the updated comment.

Sets a Call Disposition

```
PUT /agents/{agentId}/interactions/calls/{callId}/dispose
```

Finishes a call and sets a disposition.

If the [DispositionFlag](#) is `MUST_CONFIRM`, show a confirmation window to the agent. If the agent confirms the disposition, set the disposition.

If the call is associated with a preview session, the call is not necessarily finalized:

- If the disposition is not final, the [CallState](#) might be set to `WRAP_UP`. In this case, the [PreviewState](#) is set to `RENEWING`. The server remembers the `options` parameter in the request to apply the disposition later when the call is finalized.
- If the disposition is final, the call and the preview are finalized immediately.

For more information about preview sessions, see [Gets a Preview Session](#).

The main resulting event is [EVENT_CALL_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
options	DisposeOptionsInfo	Disposition options.	Body

Example request. Sets a disposition for agent ID 2385 for call ID 1234.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/dispose
```

Response.

Data	Description
CallInfo	Updated call information.

Rejects a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/reject
```

Rejects an offered call.

A call that has been answered cannot be rejected. The agent must have `CAN_REJECT_CALLS` permission. The event is [EVENT_CALL_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Rejects call ID 2856 for agent ID 2385 and returns all available information about that call ID.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/reject`

Response.

Data	Description
CallInfo	Information about the call.

Disconnects a Call

`PUT /agents/{agentId}/interactions/calls/{callId}/disconnect`

Disconnects the current call for all participants.

This request applies to all participants, including conference participants. If the call is not internal, the [CAN_WRAPUP_CALL](#) permission is required.

The events are as follows:

- [EVENT_CALL_UPDATED](#): The event reason is `DISCONNECTED_BY_AGENT`; the payload is `WRAP_UP`.
- [EVENT_CALL_DELETED](#): For internal calls because the call is finished.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Accepts call ID 2856 for agent ID 2385 and returns all available information about that call ID.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/2856/answer`

Response.

Data	Description
CallInfo	Information about the call ID.

Adds a Number to the DNC List

`PUT /agents/{agentId}/add_number_to_dnc`

Adds a phone number to the DNC list.

The agent must have [CAN_ADD_DNC](#) and [IS_VOICE_MEDIA_ENABLED](#) permissions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
number	string	Number to add to the DNC list. Optional string.	Body

Example request. Adds a phone number to the DNC list for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/add_number_to_dnc`

Response. Empty.

Makes an Echo Call

`POST /agents/{agentId}/echo_call`

Makes an echo call.

After the echo call has ended, this event occurs [Agent Events](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Makes an echo call for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/echo_call`

Response.

Data	Description
EchoCallInfo	Information about the echo call.

Cancels an Echo Call

`DELETE /agents/{agentId}/echo_call`

Cancels an echo call.

The main resulting event is [EVENT_ECHO_CALL_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Cancels an echo call for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/echo_call`

Response. Empty.

Gets an Echo Call

`GET /agents/{agentId}/echo_call`

Returns information about an echo call.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns information about an echo call for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/echo_call`

Response.

Data	Description
EchoCallInfo	Information about the echo call.

Call Variables

These requests enable you to obtain information about and to set call variables.

[Gets Call Variables for the Domain](#)
[Sets Call Variables](#)

Gets Call Variables for the Domain

GET /orgs/{orgId}/call_variables

Returns a list of call variables.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the call variables for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/call_variables

Response.

Data	Description
CallVariableInfo []	List of call variables.

Sets Call Variables

PUT /agents/{agentId}/interactions/calls/{callId}/variables_2

Sets call variables.

This request saves variables that are modified by the client. Send only modified variables. To set the value of a variable to null, do so explicitly in the client. These variables are not updated: read-only variables, system variables, and those not visible to agents in the campaign field view ([Gets the Field Views for a Campaign](#)).

The main event is [EVENT CALL UPDATED](#). The event reason is `VARIABLES_UPDATED_V2`, and the payload contains the updated values.

If the request results in error code 4 [INVALID_PARAMETER_VALUE](#), the context may contain a field named `callVariableName`. The field value contains the name of the call variable with invalid data.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	ID of the call to take off hold.	Path
callVariables	Map<string, string>	Call variable details keys and values.	Body

Example request. For agent ID 2385, updates call variables for call ID 1476.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/1476/variables_2`

Response.

Data	Description
Map	Updated string of call variable keys and values. • Key: Call variable ID. • Value: String value of the call variable.

Callbacks

These requests enable you to manage callbacks for your agents.

[Gets Scheduled Callbacks for an Agent](#)
[Gets the Scheduled Callbacks for the Domain](#)
[Gets the State of Postponed and Dismissed Callbacks](#)
[Adds a Callback](#)
[Updates a Callback](#)
[Updates a List of Callbacks](#)
[Deletes a Callback](#)
[Deletes a List of Callbacks](#)
[Dismisses a Callback](#)
[Dismisses Multiple Callbacks](#)
[Returns a Call](#)
[Postpones a Callback](#)
[Postpones Multiple Callbacks](#)
[Returns a Personal Missed Call](#)

Gets Scheduled Callbacks for an Agent

GET /agents/{agentId}/callbacks

Returns a list of scheduled callbacks for an agent.

For an array of callbacks for the domain, see GET /orgs/{orgId}/callbacks.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
fromDate	long	Optional oldest date in ms Epoch time. If absent, no oldest date exists.	Query
toDate	long	Optional most recent date in ms Epoch time. If absent, no most recent date exists.	Query
includeCompleted	boolean	Optionally, whether to include completed callbacks in the response: • True: (Default) Include completed callbacks. • False: Exclude completed callbacks.	Query
maxCompleted	long	Maximum number of completed callbacks sorted by date. If not specified, the default is 100.	Query

Example request. Returns an array of scheduled callbacks for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks`

Response.

Data	Description
CallbackInfo []	Array of scheduled callbacks.

Gets the Scheduled Callbacks for the Domain

`GET orgs/{orgId}/callbacks`

Returns a list of scheduled callbacks for a domain.

This request does not apply to calls and voicemail.

Parameters.

Name	Data	Description	Type
orgId	long	Domain ID.	Path

Response.

Data	Description
CallVariablesInfo []	Array of scheduled callbacks.

Gets the State of Postponed and Dismissed Callbacks

`GET /agents/{agentId}/callbacks/snooze`

Returns the state of postponed and dismissed callbacks.

The result is returned in [EVENT_CALLBACK_CREATED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the state of postponed or dismissed callbacks for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks/snooze`

Response.

Data	Description
CallbackStatesInfo	Information about postponed and dismissed callbacks.
CallbackSnoozeInfo	Information about postponed callbacks.

Adds a Callback

`POST /agents/{agentId}/callbacks`

Schedules a callback.

The agent must have [CAN CREATE CALLBACKS](#) permission. A new callback resource is also received in [EVENT CALLBACK CREATED](#)

An agent cannot self-assign a callback. If `agentId` is the same as `CallbackInfo.agentId`, an [INVALID PARAMETER VALUE](#) error occurs.

Parameters.

Name	Data	Description	Type
<code>agentId</code>	string	Agent ID.	Path
<code>callback</code>	CallbackInfo	Information about the callback. In <code>CallbackInfo</code> , the value of the <code>id</code> field is ignored.	Body

Example request. Schedules a callback for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks`

Response.

Data	Description
CallbackInfo []	Array of information about callbacks.

Updates a Callback

PUT /agents/{agentId}/callbacks/{callbackId}

Updates a scheduled callback.

The updated callback resource is also received in [EVENT CALLBACK UPDATED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callback	CallbackInfo	Information about the callback to update. In the <code>CallbackInfo.id</code> field, enter the same callback ID value as in the <code>callbackId</code> field. Otherwise, the API returns an INVALID PARAMETER VALUE error with a <i>Wrong callback ID</i> message.	Body
callbackId	string	Callback ID.	Path

Example request. Updates scheduled callback ID 648 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks/648`

Response.

Data	Description
CallbackInfo	Updated callback information.

Updates a List of Callbacks

PUT /agents/{agentId}/callbacks

Updates a list of scheduled callbacks. The updated resources are received in [EVENT CALLBACKS UPDATED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbacks	CallbackInfo []	List of callbacks to update.	Body

Response.

Data	Description
CallbackInfo []	List of updated callbacks.

Deletes a Callback

```
DELETE /agents/{agentId}/callbacks/{callbackId}
```

Deletes a callback.

This request applies to all callbacks, whether or not they have been processed. The deleted callback resource is also received in [EVENT CALLBACK DELETED](#). If a callback ID is invalid or absent, it is ignored, and the request is processed.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackId	string	Callback ID.	Path

Example request. Deletes callback ID 648 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/callbacks/648
```

Response. Empty.

Deletes a List of Callbacks

```
DELETE /agents/{agentId}/callbacks
```

Deletes a list of callbacks for the agent. The deletion request applies to all callbacks, whether or not they have been processed. The event is [EVENT CALLBACKS DELETED](#). If a callback ID is invalid or absent, it is ignored, and the request is processed.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackIds	string []	List of callback IDs to delete.	Body

Example request. Deletes callback ID 648 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks`

Response.

Data	Description
string[]	List of deleted callback IDs.

Dismisses a Callback

`PUT /agents/{agentId}/callbacks/{callbackId}/dismiss`

Dismisses a callback.

When a callback is dismissed, the agent does not receive reminders about this callback during the current session. The agent can still receive a dismissed callback with [Gets Scheduled Callbacks for an Agent](#) during the session. A deleted callback cannot.

All dismissed and delayed callbacks are reset after the agent logs out and back in again.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackId	string	Callback ID.	Path

Example request. Dismisses callback ID 648 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks/648/dismiss`

Response. Empty.

Dismisses Multiple Callbacks

`PUT /agents/{agentId}/callbacks/dismiss`

Dismisses multiple callbacks. Use the `callbacks` field to avoid dismissing callbacks that may be delivered to the agent while the request is in progress. All dismissed callbacks are reset after the agent logs out and back in again.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackIds	LongCollectionValue	List of callbacks IDs to dismiss. If the list is empty, dismiss all.	Body

Example request. Dismisses all callbacks for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/callbacks/dismiss`

Response. Empty.

Returns a Call

`POST /agents/{agentId}/callbacks/{callbackId}/make_call`

Returns a call.

The result is returned in [EVENT_CALLBACK_UPDATED](#) in which payload completed is `true`. If dialing starts, these events occur:

- [EVENT_CALL_CREATED](#): The state is `OFFERED`.
- [EVENT_CALL_CREATED](#) The state is `OFFERED`.
- [EVENT_CALL_UPDATED](#) The event reason is `UPDATED`, the state is `RINGING_ON_OTHER_SIDE`.

Afterward, either of these events occur:

- If the call is answered, the event ID is [EVENT_CALL_UPDATED](#), the event reason is `CONNECTED`, and the state is `TALKING`.
- If the call is not answered, the event ID is [EVENT_MAKE_CALL_FAILED](#).

If the call fails, you may see these errors, which require specific action to make the call.

- [INVALID_PHONE_NUMBER](#) if the number is invalid.
- [CALL_NOT_IN_TIME](#) if the call is not made in time.
- [Q_MULTIPLE_CONTACTS_SELECT](#) if the correct number cannot be determined among multiple contacts. To make the call, find a contact for the number, update the callback `CallbackInfo.contactId` field with the ID of the contact, and resend the request.

- [Q NUMBER IN DNC LIST FORCE](#) if the number is in the DNC list. To make the call, use the `skipDNCCheck` field. See the description of `skipDNCCheck` in [CallbackDestinationInfo](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackId		Callback ID.	Path
callbackDestinationInfo	Callback	Details about the destination of the callback.	Body

Example request. Returns for agent ID 2385 the call for callback ID 648.

`https://<Base_API_URL/context>/agents/2385/callbacks/648/make_call`

Response. Empty.

Postpones a Callback

`PUT /agents/{agentId}/callbacks/{callbackId}/snooze`

Postpones a callback and delays reminders for the callback until the specified time in the current session. A postponed callback can still be received by using a `GET /agents/{agentId}/callbacks` request during the current session. All delayed callbacks are deleted after the agent logs out and back in again.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callbackId	string	Callback ID.	Path
untilTimeStamp	long	Postpone callback until the specified time.	Body

Example request. Postpones for agent ID 2385 callback ID 648 until the specified time in the request body.

`https://<Base_API_URL/context>/agents/2385/callbacks/648/snooze`

Response. Empty.

Postpones Multiple Callbacks

PUT /agents/{agentId}/callbacks/snooze

Postpones multiple callbacks and delays reminders until the specified time during the current session. All delayed callbacks are deleted after the agent logs out and back in again.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
snoozeRequest	SnoozeAllRequest	List of callbacks to postpone.	Body

Example request. Postpones for agent ID 2385 all callbacks until the specified time.
https://<Base_API_URL/context>/agents/2385/callbacks/snooze

Response. Empty.

Returns a Personal Missed Call

POST /agents/{agentId}/interactions/return_missed_call

Returns a personal missed call.

The request payload should contain the following items:

- **sessionId:** Value of the `id` field from the agent's history records.
- **skipDNCCheck:** Indicates client wants to skip checking if number of missed call in DNC list
- **contactId:** Related contact ID for making the call.
- **checkMultipleContacts:** Indicates if a check for multiple contacts should be made. If the number of the missed call matches more than one contact and it is not clear what dialing rules to apply, the server returns the [Q MULTIPLE CONTACTS SELECT](#) error. In this case, the client should specify the contact explicitly.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
options	ReturnMissedCallOptions	Options for the callback.	Body

Example request. Returns for agent ID 2385 a missed call.

```
https://<Base_API_URL/context>/agents/2385/interactions/return_missed_call
```

Response. Empty.

Campaigns

These requests enable you to obtain all information about campaign configuration and features in your domain.

Campaign information

[Gets Available Campaigns](#)

[Gets all Campaigns in the Domain](#)

[Gets Information about a Campaign ID in the Domain](#)

[Gets a List of Inbound Campaigns](#)

[Gets the Campaigns Available to the Agent](#)

[Gets the Field Views for a Campaign](#)

Campaign features

[Gets a Campaign Script in the Domain](#)

[Gets Worksheet Questions for a Campaign](#)

[Accepts the Results of a Survey](#)

[Updates the Call Worksheet](#)

Gets Available Campaigns

```
GET /orgs/{orgId}/available_campaigns
```

Retrieves a list of campaigns open for business. The tenant and campaign names must be specified as URL query parameters.

Parameters.

Name	Data	Description	Type
campaignNames	string	Campaign names.	Query
tenantName	string	Domain name.	Query

Example request. Returns the list of campaigns available for business.

`https://<Base_API_URL/context>/orgs/available_campaigns?tenantName=five9&campaignNames=campaign1,campaign2,campaign3`

Response.

Data	Description
<u>AvailableCampaigns</u>	Information about the campaigns available for business. Result codes are listed below: • 0: RESULT_CODE_SUCCESS • 1: RESULT_TENANT_NOT_FOUND • 2: RESULT_NO_CAMPAIGN_FOUND • 3: RESULT_NOT_ALL_CAMPAIGNS_FOUND

Gets all Campaigns in the Domain

`GET /orgs/{orgId}/campaigns`

Returns all campaigns for the domain.

All campaigns are returned, whether or not they are running.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the campaigns for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns`

Response.

Data	Description
<u>CampaignInfo</u> []	Array of campaign information.

Gets Information about a Campaign ID in the Domain

`GET /orgs/{orgId}/campaigns/{campaignId}`

Returns information about a campaign ID in the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path

Example request. Returns information about campaign ID 284 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/284`

Response.

Data	Description
CampaignInfo	Information about the campaign.

Gets a List of Inbound Campaigns

GET /agents/{agentId}/campaigns

Returns an array of inbound campaigns that could receive a call.

The agent selects a campaign from this list to transfer a call or to select a conference for a participant.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns an array of campaigns for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/campaigns`

Response.

Data	Description
CampaignInfo []	Array of campaigns.

Gets the Campaigns Available to the Agent

GET /agents/{agentId}/campaigns_config

Returns a list of campaigns available to the agent for manual calls.

The agent can optionally select one of these campaigns when making a manual call ([Calls an External Number](#) and [Calls a Speed Dial ID](#)) and in other cases, such as adding a callback ([Adds a Callback](#)).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns campaign configuration for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/campaigns_config`

Response.

Data	Description
CampaignsConfigInfo []	Information about available campaigns.

Gets the Field Views for a Campaign

GET /agents/{agentId}/campaign/{campaignId}/field_views

Returns an array of field views for a campaign.

The client uses the layout when presenting interaction data to the agent. The layout applies to any campaign interaction, such a call or skill voicemail. Fields should be presented in the user interface in the same order as in the response.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
campaignId	string	Campaign ID.	Path

Example request. Returns the field views for campaign 975 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/campaign/975/field_views`

Response.

Data	Description
FieldInfo []	Array of field views that represent the layout.

Gets a Campaign Script in the Domain

`GET /orgs/{orgId}/campaigns/{campaignId}/script`

Returns a script for the campaign.

Use this request in these cases:

- The client displays the script for the campaign of an active call. The call may be associated with any campaign in the domain.
- An agent manually selects a campaign, which displays its script. In this case, the campaign must be one of those returned by [Gets the Campaigns Available to the Agent](#).

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID returned by Gets the Campaigns Available to the Agent .	Path

Example request. Returns a campaign script for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/1357/script`

Response.

Data	Description
StreamingOutputInfo	zlib-compressed campaign script. After decompressing the script, check for BOM (Byte Order Mark) to determine its format: • UTF-8: The first three bytes are 0xEF, 0xBB, 0xBF. • Windows-1252: all other cases.

Gets Worksheet Questions for a Campaign

GET /orgs/{orgId}/campaigns/{campaignId}/worksheet_questions

Returns the worksheet questions for the campaign.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID returned by Gets the Campaigns Available to the Agent .	Path

Example request. Returns worksheet questions for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/campaigns/1357/worksheet_questions

Response.

Data	Description
QuestionInfo []	Array of worksheet questions.

Accepts the Results of a Survey

POST /orgs/interactions/survey

Accepts the survey results.

The agent does not need to be logged in.

Parameters.

Name	Data	Description	Type
surveyBody	SurveyBody	Information about a survey.	Body

Response.

Data	Description
SurveyRequestInfo	Information about the survey.

Updates the Call Worksheet

```
PUT /agents/{agentId}/interactions/calls/{callId}/worksheet
```

Updates a worksheet.

If the call is not associated with a contact, error ID 9 ([CALL HAS NO CONTACT](#)) is returned. The main resulting event is [EVENT CALL UPDATED](#). The event reason is `WORKSHEET_UPDATED`, and the payload worksheet is updated.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
worksheetInfo	WorksheetInfo	Worksheet information.	Body

Example request. Updates a worksheet for call ID 246 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/246/worksheet
```

Response.

Data	Description
WorksheetInfo	Updated worksheet information.

Client Errors

```
PUT /auth/exceptions
```

Reports client-specific errors that occurred during user login and logout.

This request sends errors about the user interface and the client to the server for analysis. Do not log server errors back to the server because they have already been logged and sent to the client.

Parameters.

Name	Data	Description	Type
exceptionDetails	Five9ExceptionDetailWrapper	Exception details.	Body

Example request. Updates exceptions.

`https://<Base_API_URL/context>/auth/exceptions`

Response. Empty.

Conferences

Available Agent Participants

[Gets Agents Available as Conference Participants](#)

Add and remove participants

[Adds an Agent as Conference Participant](#)
[Adds a Campaign as Conference Participant](#)
[Adds an External Party as Conference Participant](#)
[Adds a Speed Dial Number as Conference Participant](#)
[Adds a Parked Call as Conference Participant](#)
[Adds a Queue as Conference Participant](#)
[Disconnects a Conference Participant](#)
[Leaves a Conference](#)

Warm conference

[Completes a Warm Conference](#)

Gets Agents Available as Conference Participants

`GET /agents/{agentId}/conferee_agents`

Returns an array of agents that may be added as conference participants to a call.

The agent uses this list to select another agent when adding a conference participant to a call.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
from	int	Optional index to select, starting with 0 (zero).	Query
limit	int	Optional maximum number to return (0=all).	Query

Example request. Returns for agent ID 2385 an array of agents available to participate in a conference call.

`https://<Base_API_URL/context>/agents/2385/conferee_agents`

Response.

Data	Description
AgentInfo []	Array of available agents.

Adds an Agent as Conference Participant

`POST /agents/{agentId}/interactions/calls/{callId}/add_agent_to_conference`

Adds another agent as a conference participant to an active call.

The `CAN_CREATE_CONFERENCE_WITH_AGENT` permission is required to perform the request.

The call becomes a conference after the participant is added. Events are returned in this order:

- 1 **[EVENT_CALL_CREATED](#)**: The state is `CONFERENCE_PARTICIPANT_RINGING` (cold mode) or `CONFERENCE_PARTICIPANT_CONSULTING` (warm mode). See the `warm` field of the `participant` parameter.
- 2 Either of these events with the same payload ID:
 - If the participant answers the phone, the event is **[EVENT_CALL_UPDATED](#)**, the event reason is `CONFERENCE_PARTICIPANT_ADDED`, and the payload state is `CONFERENCE_PARTICIPANT_TALKING`.

- If the participant does not answer the phone, the event is [EVENT CALL DELETED](#), and the event reason is `DISCONNECTED_BY_CALLER`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
participant	ConferenceInternalParticipantInfo	Information about the agent participant.	Body

Example request. Adds to call ID 234 for agent ID 2385 the participant described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/234/add_agent_to_conference/`

Response.

Data	Description
CallInfo	Updated information about the active call.

Adds a Campaign as Conference Participant

`POST /agents/{agentId}/interactions/calls/{callId}/add_campaign_to_conference`

Adds a campaign as a participant to an active call.

The `CAN_CREATE_CONFERENCE_WITH_CAMPAIGN` permission is required to perform the request.

The call becomes a conference after the campaign is added. The campaign IVR determines who is connected to the conference. Events are returned in this order:

- 1 [EVENT CALL CREATED](#): The state is `CONFERENCE_PARTICIPANT_RINGING` (cold mode) or `CONFERENCE_PARTICIPANT_CONSULTING` (warm mode). See the `warm` field of the `participant` parameter.
- 2 Either of these events with the same payload ID:
 - If the participant answers the phone, the event is [EVENT CALL UPDATED](#), the event reason is `CONFERENCE_PARTICIPANT_ADDED`, and the payload

state is `CONFERENCE_PARTICIPANT_TALKING`.

- If the participant does not answer the phone, the event is [EVENT CALL DELETED](#), and the event reason is `DISCONNECTED_BY_CALLER`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
participant	ConferenceCampaignParticipantInfo	Information about the campaign.	Body

Example request. Adds to call ID 234 for agent ID 2385 the participant described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/add_campaign_to_conference//`

Response.

Data	Description
CallInfo	Updated information about the active call.

Adds an External Party as Conference Participant

`POST /agents/{agentId}/interactions/calls/{callId}/add_external_to_conference`

Adds an external participant to a conference call.

The `CAN_CREATE_CONFERENCE_WITH_EXTERNAL` permission is required to perform the request.

The call becomes a conference after the participant is added. Events are returned in this order:

- 1 [EVENT CALL CREATED](#): The state is `CONFERENCE_PARTICIPANT_RINGING` (cold mode) or `CONFERENCE_PARTICIPANT_CONSULTING` (warm mode). See the `warm` field of the `participant` parameter.
- 2 Either of these events with the same payload ID:

- If the participant answers the phone, the event is [EVENT_CALL_UPDATED](#), the event reason is `CONFERENCE_PARTICIPANT_ADDED`, and the payload state is `CONFERENCE_PARTICIPANT_TALKING`.
- If the participant does not answer the phone, the event is [EVENT_CALL_DELETED](#), and the event reason is `DISCONNECTED_BY_CALLER`.

In some cases, these exceptions are returned:

- [Q_NUMBER_IN_DNC_LIST_FORCE](#) if the user must confirm dialing a number in the DNC list.
- [Q_MULTIPLE_CONTACTS_SELECT](#) if multiple contacts match the number.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
participant	ConferenceExternalParticipantInfo	Information about the external participant.	Body

Example request. Adds to call ID 234 for agent ID 2385 the external participant described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/add_external_to_conference//`

Response.

Data	Description
CallInfo	Updated information about the active call.

Adds a Queue as Conference Participant

`POST /agents/{agentId}/interactions/calls/{callId}/add_skill_to_conference`

Adds a queue to an active call.

The `CAN_CREATE_CONFERENCE_WITH_SKILL` permission is required to perform the request.

The call becomes a conference after the participant is added. Events are returned in this order:

- 1 **EVENT_CALL_CREATED**: The state is `CONFERENCE_PARTICIPANT_RINGING` (cold mode) or `CONFERENCE_PARTICIPANT_CONSULTING` (warm mode). See the `warm` field of the `participant` parameter.
- 2 Either of these events with the same payload ID:
 - If the participant answers the phone, the event is **EVENT_CALL_UPDATED**, the event reason is `CONFERENCE_PARTICIPANT_ADDED`, and the payload state is `CONFERENCE_PARTICIPANT_TALKING`.
 - If the participant does not answer the phone, the event is **EVENT_CALL_DELETED**, and the event reason is `DISCONNECTED_BY_CALLER`.

Parameters.

Name	Data	Description	
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
participant	ConferenceInternalParticipantInfo	Information about the skill group participant.	Body

Example request. Adds to call ID 234 for agent ID 2385 the skill group participant described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/add_skill_to_conference/`

Response.

Data	Description
CallInfo	Updated information about the active call.

Adds a Speed Dial Number as Conference Participant

`POST /agents/{agentId}/interactions/calls/{callId}/add_speed_dial_to_conference`

Adds a speed dial number as participant to an active call.

The `CAN_CREATE_CONFERENCE_WITH_SPEED_DIAL` permission is required to perform the request.

The call becomes a conference after the participant is added. Events are returned in this order:

- 1 **[EVENT_CALL_CREATED](#)**: The state is `CONFERENCE_PARTICIPANT_RINGING` (cold mode) or `CONFERENCE_PARTICIPANT_CONSULTING` (warm mode). See the `warm` field of the `participant` parameter.
- 2 Either of these events with the same payload ID:
 - If the participant answers the phone, the event is **[EVENT_CALL_UPDATED](#)**, the event reason is `CONFERENCE_PARTICIPANT_ADDED`, and the payload state is `CONFERENCE_PARTICIPANT_TALKING`.
 - If the participant does not answer the phone, the event is **[EVENT_CALL_DELETED](#)**, and the event reason is `DISCONNECTED_BY_CALLER`.

Parameters.

Name	Data	Description	Type
<code>agentId</code>	<code>string</code>	Agent ID.	Path
<code>callId</code>	<code>string</code>	Call ID.	Path
<code>participant</code>	ConferenceSpeedDialParticipantInfo	Information about the participant with a speed dial number.	Body

Example request. Adds to call ID 234 for agent ID 2385 the speed dial number participant described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/add_speed_dial_to_conference/`

Response.

Data	Description
CallInfo	Updated information about the active call.

Adds a Parked Call as Conference Participant

`PUT /agents/{agentId}/interactions/calls/{parkedCallId}/add_to_conference`

Adds to an active call a parked call as conference participant.

When the parked call is added, it is removed from park. The resulting event is [EVENT_CALL_UPDATED](#). The event reason is `ADDED_TO_CONFERENCE`, the payload state is `CONFERENCE_PARTICIPANT_TALKING`, and the payload ID is that of the `parkedCallId`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	ID of the conference participant's call.	Body
parkedCallId	string	ID of the parked call.	Path

Example request. Adds as conference participant parked call ID 370 described in the body of the request for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/370/add_to_conference`

Response.

Data	Description
CallInfo	Updated information about the former parked call converted to conference participant.

Disconnects a Conference Participant

```
PUT /agents/{agentId}/interactions/calls/{callId}/disconnectConferenceParticipant
```

Disconnects a conference participant.

Use this request to remove either the original party or a participant added later to the conference. To do so, add to the request the call ID of the person that you want to remove. As a result, a person is disconnected from the conference, but the other participants remain in the conference.

A conference call consists of the initial active call and the call of the third party. When the agent removes the third party from the conference, the client receives these events at the same time:

- Update to the active call:
 - Event ID 4 [EVENT_CALL_UPDATED](#)
 - Event reason: `CONFERENCE_PARTICIPANT_DISCONNECTED_BY_AGENT`

- Call ID of the initial active call
- End of the third party's call:
 - Event ID 5 [EVENT_CALL_DELETED](#)
 - Event reason: REMOVED_FROM_CONFERENCE_BY_AGENT
 - Call ID of the third party's call

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	ID of the conference participant's call.	Path

Example request. Disconnects for agent ID 2385 the participant with call ID 234.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/disconnectConferenceParticipant`

Response.

Data	Description
CallInfo	Updated information about the disconnected call.

Leaves a Conference

`PUT /agents/{agentId}/interactions/calls/{callId}/leave_conference`

Leaves a conference call.

Leaving a conference that contains more than three parties is not supported. The event is [EVENT_CALL_DELETED](#) with the call ID in the payload.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	ID of the conference participant's call.	Path
options	LeaveConferenceInfo	Information about leaving the conference.	Body

Example request. Agent ID 2385 leaves call ID 234.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/leave_conference`

Response.

Data	Description
LeaveConferenceInfo	Updated information about the active call.

Completes a Warm Conference

`POST /agents/{agentId}/interactions/calls/{callId}/complete_warm_conference`

Completes a warm conference.

The resulting event is [EVENT CALL UPDATED](#), the event reason is `CONFERENCE_PARTICIPANT_ADDED`, the payload state is `CONFERENCE_PARTICIPANT_TALKING`, and the payload ID is that of the call created by the previous request (`.../add_xxx_to_conference`).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Completes for call ID 234 a warm conference for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/complete_warm_conference/`

Response.

Data	Description
CallInfo	Updated information about the active call.

Connectors

Connectors enable you to transfer information about a call to a third-party service when one of these events occurs:

- A contact record is selected.
- A call is accepted, disconnected, or assigned a disposition.
- A preview record is delivered to the agent.
- The agent initiates a warm transfer.
- The agent triggers a manual connector.

Get connectors

[Gets Manual Connectors During the Call](#)
[Gets Manual Connectors for a Preview Session](#)
[Gets Pending Connectors](#)
[Gets a Pending Connector](#)

Manage connectors

[Creates Connector Information for a Manual Connector](#)
[Creates a Pending Connector for a Manual Connector During a Preview Session](#)
[Processes a Pending Connector](#)

Gets Manual Connectors During the Call

GET /agents/{agentId}/interactions/calls/{callId}/manual_connectors

Returns an array of connectors that the agent may trigger manually during an active call.

The agent must have [CAN USE CONNECTORS](#) permission. For manual connectors to use with preview calls, see [Gets Manual Connectors for a Preview Session](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path

Example request. Returns for agent ID 2385 an array of manual connectors for call ID 234.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/234/manual_connectors`

Response.

Data	Description
ManualConnectorInfo []	Array of manual connectors available to the agent during the active call.

Gets Manual Connectors for a Preview Session

GET /agents/{agentId}/previews/{previewId}/manual_connectors

Returns an array of manual connectors for a preview session.

The agent must have [CAN_USE_CONNECTORS](#) permission.

The main resulting event is [EVENT_PENDING_CONNECTOR_CREATED](#).

See also these requests:

- [Gets Manual Connectors During the Call](#): Returns an array of possible connectors from which you can select the `connectorId` parameter for the current request.
- [Processes a Pending Connector](#): Processes a pending connector by using the ID of the pending connector created by the current request.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path

Example request. Returns for agent ID 2385 all manual connectors for preview call ID 298374.

`https://<Base_API_URL/context>/agents/2385/previews/298374/manual_connectors`

Response.

Data	Description
ManualConnectorInfo []	Array of manual connectors.

Gets Pending Connectors

GET /agents/{agentId}/pending_connectors

Returns an array of pending connectors.

Important

Pending connectors are not documented in the Administrator's and Agent's guides because this concept is unique to the REST API.

A *pending* connector in the response is not an actual connector but a unique instance of data that describes how to execute the manual or automatic connector in the browser. One list of pending connectors is maintained for each agent. Before triggering a manual or automatic connector, create a `PendingConnectorInfo` instance.

When a pending connector is added to or removed from the list, the client is notified as follows:

- The client sends either of these requests to execute a manual connector:
 - Manual connector for a preview session: [Creates a Pending Connector for a Manual Connector During a Preview Session](#)
 - Manual connector for an active call: [Creates Connector Information for a Manual Connector](#)
- The server triggers an automatic connector, for example with a disposition, such as *On Call Disposition*.

Use this requests in this order:

- 1 Get a list of connectors.
- 2 Create a pending connector.

This request creates connector context with call variables; the response contains information about how the client should use the connector. Pending connectors should be executed by the client as soon as possible.

- 3 Request [Processes a Pending Connector](#).

Pending connectors should be executed as soon as possible. When a pending connector is executed, send an HTTP response code with this request. The pending connector is deleted after it is executed. This request ensures that the connector is executed by the client and that the result is recorded. The results of `PendingConnectorInfo` are available in reports.

The agent must have [CAN USE CONNECTORS](#) permission. To obtain a single pending connector, use [Gets a Pending Connector](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Creates for agent ID 2385 an array of pending connectors.

`https://<Base_API_URL/context>/agents/2385/pending_connectors`

Response.

Data	Description
PendingConnectorInfo []	Array of pending connectors.

Gets a Pending Connector

`GET /agents/{agentId}/pending_connectors/{pendingConnectorId}`

Returns a pending connector.

To obtain the list of pending connectorsID, use [Gets Pending Connectors](#). The agent must have [CAN USE CONNECTORS](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
pendingConnectorId	string	ID of the pending connector.	Path

Example request. Returns for agent ID 2385 pending connector ID 28467.

`https://<Base_API_URL/context>/agents/2385/pending_connectors/28467`

Response.

Data	Description
PendingConnectorInfo []	Information about the pending connector.

Creates Connector Information for a Manual Connector

```
POST /agents/{agentId}/interactions/calls/{callId}/manual_connectors/{connectorId}/execute
```

Creates for the manual connector a pending connector that the agent may trigger manually during an active call.

Use this request when an agent wants to trigger a connector during a call. The agent must have [CAN USE CONNECTORS](#) permission.

The main resulting event is [EVENT_PENDING_CONNECTOR_CREATED](#)

See also these requests:

- [Gets Manual Connectors During the Call](#): Returns an array of possible connectors from which you can select the `connectorId` parameter for the current request.
- [Processes a Pending Connector](#): Processes a pending connector by using the ID of the pending connector created by the current request.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path
connectorId	string	ID of the manual connector.	Path

Example request. Creates for agent ID 2385 pending connector ID 479 for call ID 234.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/234/manual_connectors/479/execute
```

Response.

Data	Description
PendingConnectorInfo	Information about the pending connector.

Creates a Pending Connector for a Manual Connector During a Preview Session

```
POST /agents/{agentId}/previews/{previewId}/manual_connectors/{connectorId}/execute
```

Creates a pending connector for a manual connector during a preview session.

Use this request when an agent wants to trigger a connector during a preview session. The agent must have [CAN_USE_CONNECTORS](#) permission.

The main resulting event is [EVENT_PENDING_CONNECTOR_CREATED](#).

To execute a manual connector, use either of these requests:

- Manual connector for a preview session: [Gets Manual Connectors for a Preview Session](#)
- Manual connector for an active call: [Processes a Pending Connector](#)

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the previewsession.	Path
connectorId	string	ID of the manual connector.	Path

Example request. Creates for agent ID 2385 manual connector ID 3675 for preview call ID 298374.

```
https://<Base_API_URL/context>/agents/2385/previews/298374/manual_connectors/3675/execute
```

Response.

Data	Description
PendingConnectorInfo	Information about the pending connector.

Processes a Pending Connector

```
PUT /agents/{agentId}/pending_connectors/{pendingConnectorId}/finalize
```

Processes a pending connector.

This request processes the connector and stores the HTTP response code received by the client when the pending connector was executed. The pending connector is then removed from the list of pending connectors, and a notification is sent to the client. The HTTP response code is used in reports.

The agent must have [CAN_USE_CONNECTORS](#) permission.

The main resulting event is [EVENT_PENDING_CONNECTOR_DELETED](#)

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
pendingConnectorId	string	ID of the pending connector.	Path
connectorResponse	PendingConnectorInfo	Information about the HTTP response code received in reply to the execution of the connector.	Body

Example request. Processes for agent ID 2385 pending connector ID 28467.

`https://<Base_API_URL/context>/agents/2385/pending_connectors/28467/finalize/`

Response.

Data	Description
PendingConnectorInfo	Updated information about the pending connector.

Contacts

Contact fields

[Gets Contact Field Layouts](#)
[Gets Contact Fields for the Domain](#)

Contact history

[Creates a View of the History of a Contact](#)

[Iterates the View of the History of a Contact in the Domain](#)**Get contacts**[Gets Contacts for the Domain](#)[Gets Contacts for the Call](#)[Gets a Contact ID in the Domain](#)**Manage contacts**[Creates a Contact in the Domain](#)[Creates and Assigns a Contact to an Interaction](#)[Creates a Contact for the Call](#)[Creates and Attaches a Contact to the Social Item](#)[Selects the Contact for the Call](#)[Updates the Contact for an Interaction](#)[Updates the Contact of the Social Item](#)[Updates a Contact in the Domain](#)[Deletes a Contact from the Domain](#)[Adds a Note to a Contact in the Domain](#)[Deletes a Note for the Contact in the Domain](#)**Manage internal contacts**[Gets Unified Communication Settings](#)[Updates the Unified Communication Settings](#)[Synchronizes the Unified Communication Settings](#)

Gets Contact Field Layouts

```
GET /agents/{agentId}/contact/field_views
```

Returns a list of contact field layouts.

The client uses this layout to represent the contact's information to the agent. The layout depends on the agent's profile:

- If the profile contains a defined field layout, this layout is returned.
- If the profile does not contain a defined field layout or if no profile exists, the default layout is returned.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns a contact field layout for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/contact/field_views`

Response.

Data	Description
FieldInfo []	Array of field view layouts.

Gets Contact Fields for the Domain

GET /orgs/{orgId}/contact_fields

Returns an array of contact fields.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns contact fields for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contact_fields`

Response.

Data	Description
ContactFieldInfo []	Array of contact field information.

Creates a View of the History of a Contact

POST /orgs/{orgId}/contacts/{contactId}/history

Creates a view of the history of a contact.

Use this request to obtain iterations of the contact's history. Each view contains a subset of records selected in the `options` parameter.

This initial view contains the first selected records. If the [InteractionHistoryViewInfo](#) `hasMore` parameter is true, use [Iterates the View of the History of a Contact in the Domain](#) to obtain the next set of records.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
options	InteractionHistoryViewOptions	View options.	Body

Example request. Creates a view of the history of contact ID 435 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts/435/history`

Response.

Data	Description
InteractionHistoryViewInfo	Information about view options.

Iterates the View of the History of a Contact in the Domain

`PUT /orgs/{orgId}/contacts/{contactId}/history/{viewId}/next`

Fetches the subsequent sets of records from history.

Subsequent sets of records are determined by the [InteractionHistoryViewOptions](#) `limit` parameter.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
viewId	string	View options.	Body

Example request. Fetches the set of records with view ID 444 of contact ID 435 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts/435/history/444/next`

Response.

Data	Description
InteractionHistoryViewInfo	Information about view options.

Gets Contacts for the Domain

GET /orgs/{orgId}/contacts

Returns contacts with the specified criteria.

Specify search criteria as a URL query parameter named `_s` in which the fields are in name-value pair format. Separate each pair with a semicolon. For the available field names, see [Gets Contact Fields for the Domain](#).

Example

First and last names

```
http://servername.com/appsvcs/rs/svc/orgs/54/contacts?_s=first  
name==Alex;last name==Smith
```

To further narrow down a search result, add another value after the first value, separated by a space, comma, or semicolon:

Example

Example Phone number and email address

```
https://app-scl.five9.com/appsvcs/rs/svc/orgs/107310/contacts??_  
s=8015561212;test.agent01@jlovell.com
```

To search for a specific value, use a colon. For example, to search for a contact that has 18005551212 as the value of `number1`, use:

Example

Phone number

```
http://servername.com/appsvcs/rs/svc/orgs/54/contacts?  
number:18005551212
```

The agent must have the [CAN_PERFORM_CONTACT_LOOKUP](#) permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
cursor	string	(O) Object used to navigate through contacts: • First query: You may omit the initial value. • Subsequent queries: Use the cursor value from the previously searched ContactLookupResultInfo. Note: This field always returns a null value but might be utilized in the future.	Query
limit	int	(O) Number of contacts from 1000 (default) to 10000.	Query
_s	string	(O) See the above description.	Query

Example request. Returns contacts for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts`

Response.

Data	Description
ContactLookupResultInfo	Information about contact fields.

Gets Contacts for the Call

`GET /agents/{agentId}/interactions/calls/{callId}/contacts`

Returns the contacts that match the call.

This request applies only to the current call. For other types of calls, the response is empty.

Use this request if the contact information of an external call is not known. In this case, the phone number is obtained from the contact database, and the result is provided in the `contactLookupResult` parameter of [CallInfo](#). The result may contain from 0 (zero) to 20 contacts.

To retrieve all contacts related to the call by sets of 20 records, send the same request as many times as needed. To do so, use the `cursor` field of the response as the `cursor` argument.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
cursor	string	Optional object used to navigate through contacts: • First query: Use the cursor value in <code>contactLookupResult</code> in CallInfo. • Subsequent queries: Use the cursor value from the previously returned ContactLookupResultInfo.	Query

Example request. Returns the contacts for call ID 246 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/246/contacts
```

Response.

Data	Description
ContactLookupResultInfo	Information about the contact.

Gets a Contact ID in the Domain

```
GET /orgs/{orgId}/contacts/{contactId}
```

Returns a contact.

The agent must have [CAN_PERFORM_CONTACT_LOOKUP](#) permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
fullTextSearch	boolean	Whether to use full text search.	Query

Example request. Returns contact ID 435 for domain ID 1357.

```
https://<Base_API_URL/context>/orgs/1357/contacts/435
```

Response.

Data	Description
ContactInfo	Information about the contact.

Creates a Contact in the Domain

POST /orgs/{orgId}/contacts

Creates a contact.

Use this request when receiving an inbound call from an unknown phone number. However, do not create a contact if the customer has entered an invalid phone number and has not correctly completed the contact fields, such as worksheet and comments.

The agent must have the [CAN EDIT NUMBER CONTACT FIELDS](#) and [CAN PERFORM CONTACT LOOKUP](#) permissions.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
info	ContactInfo	Information about the contact.	Body

Example request. Creates a contact for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts`

Response.

Data	Description
ContactInfo	Information about the contact.

Creates and Assigns a Contact to an Interaction

POST /agents/{agentId}/interactions/calls/{callId}/contacts

Creates and assigns a contact to an interaction.

Important

This request will be deleted in the near future. Instead, use [Creates a Contact for the Call](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Response.

Data	Description
ContactInfo	Information about the contact.

Creates a Contact for the Call

POST /agents/{agentId}/interactions/calls/{callId}/contacts_2

Creates a contact for the call.

Include at least one phone number while creating a contact. If no number exists or if the field view is set for read only, you can use the number of the other party (remoteNumber in [CallContactInfo](#)) as the primary number.

This request generates event ID 4 ([Agent Events](#)); the value of CallNotifyReason is ACTIVE_CONTACT_UPDATED_V2.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
info	ContactInfo	Contact information to create.	Body

Example request. For call ID 246, creates a contact for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/interactions/calls/246/contacts_2

Response.

Data	Description
ContactInfo	Call contact's information.

Creates and Attaches a Contact to the Social Item

POST /agents/{agentId}/interactions/{itemId}/create_contact

Creates a contact and attaches it to the social item.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
contact	ContactInfo	Contact information to create.	Body
itemId	string	Item ID.	Path

Example request. Creates a contact for item ID 555 for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/interactions/555/create_contact

Response.

Data	Description
CallInfo	Call information updated with the new contact.

Selects the Contact for the Call

PUT /{agentId}/interactions/calls/{callId}/active_contact_2

Selects the contact for a call.

The main resulting event is [EVENT CALL UPDATED](#). The event reason is `ACTIVE_CONTACT_SELECTED_V2`, and the payload is the contact data for the updated contact ID.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
contactId	stringValue	Contact ID.	Body

Example request. For call ID 246, assigns a contact for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/246/active_contact_2`

Response.

Data	Description
CallContactInfo	Information about the contact.

Updates the Contact for an Interaction

`PUT /agents/{agentId}/interactions/{interactionId}/contact`

Updates the contact record with the information from the interaction.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
body	CustomerUpdateContactBody	Contact ID.	Body
interactionId	string	Call ID.	Path

Example request. Updates contact information for interaction ID 246 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/246/contact`

Response. Empty.

Updates the Contact of the Social Item

`PUT /agents/{agentId}/interactions/{itemId}/update_contact/{contactId}`

Updates the contact record with the information from the social item.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
contactId	string	Contact ID.	Path
itemId	string	ID of the social item.	Path

Example request. Updates the information of contact 9999 for item ID 555 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/555/update_contact/9999`

Response.

Data	Description
SocialItem	Information about the social item.

Updates a Contact in the Domain

`PUT /orgs/{orgId}/contacts/{contactId}`

Saves a contact modified by the agent.

This request saves contacts that are modified by the client. Send only modified contacts.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
info	ContactInfo	Contact information to update. Fields that are not modified remain as they are. Fields may be set to null.	Body

Example request. Updates contact ID 435 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts/435`

Response.

Data	Description
ContactInfo	Updated information about the contact.

Deletes a Contact from the Domain

```
DELETE /orgs/{orgId}/contacts/{contactId}
```

Deletes a contact.

The agent must have the [CAN_REMOVE_CONTACTS](#) permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path

Example request. Deletes contact ID 999 from domain ID 1357.

```
https://<Base_API_URL/context>/orgs/1357/contacts/999
```

Response. Empty.

Adds a Note to a Contact in the Domain

```
PUT /orgs/{orgId}/contacts/{contactId}/note
```

Adds a note to a contact.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
info	Note	Information about the note.	Body

Example request. Creates a note for contact ID 435 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts/435/note`

Response.

Data	Description
Note	Information about the note.

Deletes a Note for the Contact in the Domain

`DELETE /orgs/{orgId}/contacts/{contactId}/note/{noteId}`

Deletes a contact note.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
contactId	string	Contact ID.	Path
noteId	string	Note ID.	Body

Example request. Deletes note ID 100 for contact ID 435 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/contacts/435/note/100`

Response.

Data	Description
Note	Information about the note.

Gets Unified Communication Settings

`GET orgs/{orgId}/uc_settings`

Returns the unified communication settings.

You may use this request when the logged-in agent is in the `ACCEPT_NOTICE` or `SELECT_SKILLS` state. The agent must not be in the `WORKING` state. The agent must have `UNIFIED_COMMUNICATION` permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Response.

Data	Description
UnifiedCommunicationSettingsInfo	Unified communication settings.

Updates the Unified Communication Settings

PUT `/orgId/users/sync`

Synchronizes the unified communication settings.

Method is deprecated and will be removed in a future release. Instead, use `PUT /users/{userId}/user_sync` (see [Synchronizes the Unified Communication Settings](#)).

The user must be a logged-in administrator who wants to update the users' information.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
userSyncInfo	UserSyncInfo	Information about VCC users to be synchronized.	Body

Response.

Data	Description
UserSyncResponseInfo	Information about success or failure of a synchronization operation.

Synchronizes the Unified Communication Settings

PUT `/users/{userId}/user_sync`

Synchronizes the unified communication settings. The user must be a logged-in administrator who wants to update the users' information.

Parameters.

Name	Data	Description	Type
userId	string	User ID.	Path
userSyncInfo	UserSyncInfo	Information about VCC users to be synchronized.	Body

Response.

Data	Description
UserSyncResponseInfo	Information about success or failure of a synchronization operation.

Dispositions

After a call is terminated by the agent or the remote party, the agent must select one of the voice dispositions defined in the VCC. After the disposition is selected, the agent is ready for another call.

[Gets the Dispositions Available for the Campaign](#)
[Gets the Dispositions Not Associated with Campaigns](#)
[Updates the Disposition of an Interaction](#)
[Escalates a Chat to an Agent](#)

Gets the Dispositions Available for the Campaign

GET /orgs/{orgId}/campaigns/{campaignId}/dispositions

Returns the dispositions available for the campaign.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path

Example request. Returns the dispositions for campaign ID 586 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/586/dispositions`

Response.

Data	Description
DispositionInfo	Information about all available dispositions.

Gets the Dispositions Not Associated with Campaigns

GET `/orgs/{orgId}/no_campaign_dispositions`

Returns the dispositions for calls not associated with campaigns.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the dispositions not associated with campaigns for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/no_campaign_dispositions`

Response.

Data	Description
DispositionInfo	Information about dispositions.

Updates the Disposition of an Interaction

PUT `/agents/{agentId}/interactions/{interactionId}/disposition`

Updates the disposition of an interaction.

This request does not apply to call and voicemail (VCC) interactions. The agent may be in any logged-in state.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
dispositionBody	DispositionBody	Information about an interaction disposition.	Body

Response. Empty.

Escalates a Chat to an Agent

```
POST /agents/{agentId}/interactions/client_chat/  
{interactionId}/escalateToLiveAgent
```

Escalates a chat from a chatbot to an available agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
agentChatBody	AgentChatBody	Chat content.	Body
interactionId	string	Interaction ID.	Path

Example request. Escalates interaction ID 123 to agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/client_  
chat/123/escalateToLiveAgent
```

Response. Empty.

Features

These requests get information on Features.

[Gets the List of all Features](#)

[Gets the List of Specified Features](#)

Gets the List of all Features

GET `/ {orgId}/features`

Returns the list of all features for the specified organization.

Parameters.

Name	Data	Description	Type
orgId	string	Organization ID.	Path

Example request. Sends a list features request for organization ID 427.

`https://<Base_API_URL/context>/427/features`

Response.

Data	Description
FeatureFlagInfo[]	Array of features.

Gets the List of Specified Features

POST `/ {orgId}/features`

Returns the list of available features in the specified list of features for the specified organization.

This restricts the list of features returned to those that are in the list of features sent in the POST payload.

Parameters.

Name	Data	Description	Type
orgId	string	Organization ID.	Path
features[]	FeatureFlagRequest	Array of feature flag requests.	Body

Example request. Escalates interaction ID 123 to agent ID 2385.

`https://<Base_API_URL/context>/427/features`

Response.

Data	Description
FeatureFlagInfo[]	Array of features.

Help Requests

These requests enable the agent to manage problems.

[Sends a Help Request](#)
[Gets the Agent's Logging Settings](#)
[Logs an Issue](#)

Sends a Help Request

POST /agents/{agentId}/help_request

Requests help from a supervisor or administrator.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
destination	HelpRequestDestinationInfo	Information about to which supervisors and administrators to send the help request.	Body

Example request. Sends a help request for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/help_request

Response. Empty.

Gets the Agent's Logging Settings

GET /agents/{agentId}/logging_config

Returns the enhanced logging configuration ID.

The API returns an event with a resource update when the logging period set by the administrator in the agent's permissions is modified or expires. If logging is not allowed ID, the API returns an error.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Sends a help request for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/logging_config`

Response.

Data	Description
ForceLoggingConfigInfo	Logging configuration.

Logs an Issue

POST /agents/{agentId}/issue

Logs an issue.

This request helps Five9 Support to investigate an issue that the agent encountered. The agent enters a brief description of the issue. The multipart body of this request should contain parts named `description` and `logs` that contain the agent's description and the applications logs. The log file attachment can be up to 100 MB.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
multipart	MultipartBody	Information about the email attachment. The request payload is binary data transferred as multipart/form-data. The part containing the file to be uploaded should be named <code>file</code> . For details on multipart/form-data, see https://www.ietf.org/rfc/rfc2388.txt .	Body

Example request. Sends a help request for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/issue`

Response. Empty.

Locales and Languages

The locale of a domain is an entity represented by a locale ID and other information, such as language, region, and country.

Locales

[Gets the Supported Locales for the Domain](#)

[Gets the Domain Attributes](#)

[Gets the Current Time of the Domain](#)

[Gets the Time Zones for the Domain](#)

[Gets the Time Zone IDs for the Domain](#)

[Gets the Agent's Time Zone](#)

[Gets User Locales](#)

Phone number localization

[Gets the Phone Number Format for the Data Center](#)

[Gets the Phone Number Format for the Domain](#)

[Gets the Localization Options for the Domain](#)

Translation resources

[Gets Bundles of Translated Resources](#)

Natural language Processing

[Uses the NLP Tagging Service](#)

[Gets the NLP Categories for the Domain](#)

Gets the Supported Locales for the Domain

`GET /orgs/{orgId}/locales`

Returns a array of supported locales for the domain.

The agent may be in any `LoginState` and must have the [CAN_SELECT_LANGUAGE](#) permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the locales for domain ID 1234.

`https://<Base_API_URL/context>/orgs/1234/locales`

Response.

Data	Description
LocaleInfo []	Array of supported locales.

Gets the Domain Attributes

`GET /orgs/{orgId}/attributes`

Returns a list of attributes of the domain.

Parameters.

Name	Data	Description	Type
orgId	long	Domain ID.	Path

Example request. Retrieves the list of attributes for domain ID 2385.

`https://<Base_API_URL/context>/orgs/2385/attributes`

Response.

Data	Description
Attribute []	List of domain attributes.

Gets the Current Time of the Domain

`GET /orgs/{orgId}/time`

Retrieves the current system time.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the current time of domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/time`

Response.

Data	Description
NonNullLongValue	Current time of the domain.

Gets the Time Zones for the Domain

`GET /orgs/{orgId}/time_zones`

Retrieves a list of all available region-based IDs from IANA TZDB, such as Europe/London or America/New_York.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns time zones of domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/time_zones`

Response.

Data	Description
string[]	Array of available time zones.
Example:	
51: "America/Cayenne LMT GFT GFT 3t.k 40 30 012 -2mrwu.E 2gWou.E"	
52: "America/Cayman KMT EST 57.b 50 01 -211uQ.N"	

Gets the Time Zone IDs for the Domain

GET /orgs/{orgId}/time_zone_ids

Retrieves a list of all available region-based IDs from IANA Time Zone Database (TZDB), such as Europe/London America/New_York.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns time zone IDs for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/time_zone_ids

Response.

Data	Description
string[]	Array of available time zones IDs.

Gets the Agent's Time Zone

GET /agents/{agentId}/time_zone

Returns the agent's time zone.

The time zone is returned in the format of the [IANA Time Zone Database](#). The Default value indicates the client's time zone.

Parameters.

Parameter	Type	Description
agentId	string	Agent ID.

Response.

Parameter	Type	Description
	StringValue	ID of the agent's time zone.

Gets User Locales

GET `agents/{agentId}/locales`

Returns the available user locales as a collection of objects.

If the domain is not enabled for multiple languages, error code 11 ([UNSUPPORTED](#)) is returned.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
isDefault	boolean	Whether to return only the default agent locale. Optional.	Query

Response.

Data	Description
LocaleInfo []	List of locale information: - id: String; locale ID. - locale: String; locale name.

Gets the Phone Number Format for the Data Center

GET `/orgs/{orgId}/phone_number/format`

Returns phone number format and home locale for the data center.

The phone locale contains the numbering rules for a country, such as the national and international prefixes used while dialing and parsing numbers.

All requests that contain phone numbers must provide and accept numbers only if they conform to this format.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns phone number and locale information for domain ID 1234.

`https://<Base_API_URL/context>/orgs/1234/phone_number/format`

Response.

Data	Description
PhoneNumberFormatInfo	Details about the phone number format.

Gets the Phone Number Format for the Domain

`GET /orgs/{orgId}/phone_number/locales`

Returns the phone number locales configured for the domain.

Use this request to show an array of names and country codes or to provide hints when prompting users to enter a phone number.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the phone number locales for domain ID 1234.

`https://<Base_API_URL/context>/orgs/1234/phone_number/locales`

Response.

Data	Description
PhoneNumberLocaleInfo []	Array of phone number information.

Gets the Localization Options for the Domain

`GET /orgs/{orgId}/phone_number/localization_options`

Returns localization options for the domain.

Use this request to display phone numbers and to export data to outside your domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns localization options for domain ID 1234.

`https://<Base_API_URL/context>/orgs/1234/phone_number/localization_options`

Response.

Data	Description
PhoneNumberLocalizationOptionsInfo	Phone number information.

Gets Bundles of Translated Resources

`GET agents/{agentId}/locales/{localeId}/domain_objects`

Returns bundles of translated resources to clients.

The request API returns a configuration bundle common to all types of clients and individual application bundle for each UI client. For any language enabled in the API, clients can receive a separate bundle.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
localeId	string	Locale ID.	Path

Response.

Data	Description
DomainObjectTranslationInfo	Information about translated resources.

Uses the NLP Tagging Service

`POST nlp/{domainId}/tag`

Analyzes text in real time.

The service analyzes text and returns a classification and a sentiment. The classification is a domain category defined for the customer; the sentiment is a relative score between (worst) -1.0 to (best) +1.0, including the limits.

To use this request, your domain must be enabled for Digital Engagement and Natural Language Processing.

The user must be in the `LoginState.WORKING` state.

Parameters.

Name	Data	Description	Type
domainId	string	Domain ID	Path
tagRequest	NlpTagRequest	Information for the request.	Body

Response.

Data	Description
NlpTagResponse	Results of tagged interactions. The response is empty if either no data or the service is not available.

Gets the NLP Categories for the Domain

GET `orgs/{orgId}/clusters`

Returns a list of Natural Language Processing (NLP) categories or clusters for the domain.

You can use this request only if your domain is enabled for Natural Language Processing. This request does not apply to calls and voicemail.

Parameters.

Name	Data	Description	Type
orgId	long	Domain ID.	Path

Response.

Data	Description
Cluster []	List of categories.

Maintenance

[Gets all Maintenance Notices](#)
[Gets a Maintenance Notice](#)
[Accepts a Maintenance Notice](#)
[Gets the Maintenance State of an Agent](#)

Gets all Maintenance Notices

GET /agents/{agentId}/maintenance_notices

Returns an array of maintenance notices.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the maintenance notices for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/maintenance_notices

Response.

Data	Description
MaintenanceNoticeInfo []	Array of maintenance notices.

Gets a Maintenance Notice

GET /agents/{agentId}/maintenance_notices/{noticeId}

Returns a specific maintenance notice.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
noticeId	string	Maintenance notice ID.	Path

Example request. Returns maintenance notice ID 999 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/maintenance_notices/999`

Response.

Data	Description
MaintenanceNoticeInfo	Information about the maintenance notice.

Accepts a Maintenance Notice

`PUT /agents/{agentId}/maintenance_notices/{noticeId}/accept`

Accepts a maintenance notice.

The event is [EVENT_LOGIN_STATE_UPDATED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
noticeId	string	Maintenance notice ID.	Path

Example request. Accepts maintenance notice ID 999 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/maintenance_notices/999/accept`

Response.

Data	Description
MaintenanceNoticeInfo	Information about the maintenance notice.

Gets the Maintenance State of an Agent

`GET /agents/{agentId}/switchover_metadata`

Returns the specified agent's maintenance state.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Retrieves the maintenance state of agent ID 5712.

`https://<Base_API_URL/context>/agents/5712/switchover_metadata`

Response.

Data	Description
<u>SwitchoverMetadata</u>	Information about the agent's maintenance state.

Messages

This section describes the message requests that can be called by agents and supervisors and are not specific to either role.

[Gets a List of Messages](#)

[Sends a Message](#)

[Sends a Message with an Identifier](#)

[Broadcasts a Message to Logged-In Users](#)

[Accepts an Email Message Sent from an External Source](#)

Gets a List of Messages

GET /messages/{agentId}/messages

Returns a list of messages.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
conversationId	string	Conversation ID. If omitted, the message headers are returned.	Query
creationTime	long	Epoch start time to retrieve messages. If omitted, the default is the current time.	Query

Name	Data	Description	Type
pageSize	int	Number of messages to return. If omitted, the default is 50.	Query

Example request. Returns the messages for agent ID 6512.

`https://<Base_API_URL/context>/messages/6512/messages`

Response.

Data	Description
Collection< ExchangeMessage >	Collection of messages.

Sends a Message

POST /messages/{agentId}/messages

Sends a message to an agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
messageBody	ExchangeMessageBody	Message body.	Body

Example request. Sends a message to agent ID 6512.

`https://<Base_API_URL/context>/messages/6512/messages`

Response. Empty.

Sends a Message with an Identifier

POST /messages/{agentId}/messages/{messageId}

Sends a message to an agent with a message identifier.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
messageBody	ExchangeMessageBody	Message body.	Body
messageId	string	Message ID.	Path

Example request. Sends a message to agent ID 6512 with message ID 8642.

`https://<Base_API_URL/context>/messages/6512/messages/8642`

Response. Empty.

Broadcasts a Message to Logged-In Users

`POST /users/{userId}/broadcast_messages`

Broadcasts a message to all logged-in users with the specified role (agent and/or supervisor).

Parameters.

Name	Data	Description	Type
message	BroadcastMessageInfo	Broadcast message.	Body
userId	string	ID of the user who sends the message.	Path

Example request. Broadcasts a message to user 345.

`https://<Base_API_URL/context>/users/345/broadcast_messages`

Response. Empty.

Accepts an Email Message Sent from an External Source

`POST /orgs/{orgId}/interactions/email`

Accepts an email message that was sent from an external source.

Parameters.

Name	Data	Description	Type
emailBody	RequestEmailBody	Message body.	Body

Example request. Accepts an email message.

`https://<Base_API_URL/context>/orgs/6384/interactions/email`

Response. Empty.

Preview Sessions

In the VCC, you can set the preview dialing mode for an outbound campaign. In that mode, the dialer shows a preview of the call to the agent before dialing the call. The preview contains information about the contact, such as the home, work, and mobile phone numbers.

The agent or the client can choose the phone number to dial or can choose to skip the contact. Depending on the configuration of the outbound campaign, this same contact may be presented more than once to the agent, but without the previously called number. Instead, the agent must select among the remaining numbers.

In a typical phone call work flow, the agent proceeds as follows:

- 1 Previews information about the contact.
- 2 Calls one of the contact's phone numbers.
- 3 Sets a disposition for the call.

The state of the preview task is changed to either of these values:

- **RENEWING:** The agent can select another number to call.
- **FINISHED:** The call and preview session are finalized.

Preview sessions also apply to chat interactions, which have a different work flow.

[Gets All Preview Sessions](#)
[Gets a Preview Session](#)
[Skips a Preview Session](#)
[Ends a Preview Session](#)
[Rejects a Chat Preview With a Reason](#)
[Makes a Call After a Preview Session](#)
[Renews a Preview Session](#)
[Updates the Contact of the Preview](#)
[Gets the Latest Items for a Contact](#)

Gets All Preview Sessions

GET /agents/{agentId}/previews

Returns an array of preview sessions to be processed by the agent.

For information about a specific preview session, see [Gets a Preview Session](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns for agent ID 2385 all available previews.

https://<Base_API_URL/context>/agents/2385/previews

Response.

Data	Description
PreviewInfo []	Array of content preview sessions.

Gets a Preview Session

GET /agents/{agentId}/previews/{previewId}

Returns information about a single preview session.

For the list of all preview sessions, see [Gets All Preview Sessions](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path

Example request. Returns for agent ID 2385 preview ID 987.

`https://<Base_API_URL/context>/agents/2385/previews/987`

Response.

Data	Description
PreviewInfo	Information about the preview session.

Skips a Preview Session

`PUT /agents/{agentId}/previews/{previewId}/dispose`

Skips a preview session.

When skipping a preview session, the agent must assign a disposition. This request is similar to [Sets a Call Disposition](#). The agent must have [CAN SKIP NUMBERS IN PREVIEW](#) permission. The main resulting event is [EVENT_PREVIEW_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path
disposeOptionsInfo	DisposeOptionsInfo	Disposition options for the preview session.	Body

Example request. Agent ID 2385 skips preview ID 987.

`https://<Base_API_URL/context>/agents/2385/previews/987/dispose`

Response.

Data	Description
PreviewInfo	Information about the skipped preview session.

Ends a Preview Session

```
PUT /agents/{agentId}/previews/{previewId}/end
```

Ends a preview session.

Use this request if the agent declines to continue previewing a call in the `RENEWING` state.

The main resulting event is [EVENT_PREVIEW_DELETED](#). Depending on the disposition used, the call is not necessarily finalized:

- If the disposition is not final, the call might be set to the `WRAP-UP` state. In this case, the preview is set to the `RENEWING` state. The server remembers the `options` parameter in the request to apply the disposition later when the call is finalized.
- If the disposition is final, the call and the preview are finalized immediately.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path

Example request. Agent ID 2385 ends preview ID 987.

```
https://<Base_API_URL/context>/agents/2385/previews/987/end
```

Response.

Data	Description
PreviewInfo	Information about the ended preview session.

Rejects a Chat Preview With a Reason

```
PUT /agents/{agentId}/interactions/{interactionId}/reject_preview/{reason}
```

Declines a chat preview interaction assigned to the agent and assigns a reason.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
reason	int	Possible values: • 0: Interaction offer to agent timed out or the agent explicitly rejected the interaction. • 1: Client application rejected the offer the interaction because the agent was not in the correct state.	Path

Example request. Agent ID 2385 rejects preview ID 987 with reason code 1.

`https://<Base_API_URL/context>/agents/2385/interactions/987/reject_preview/1`

Response. Empty.

Makes a Call After a Preview Session

`POST /agents/{agentId}/previews/{previewId}/make_call`

Makes a call after a preview session.

The result is returned in [EVENT_PREVIEW_UPDATED](#). The event reason is `RESTRICTIONS_CHANGED`. If a call is allowed, the event reason is `CALL_CREATED`, and the payload state is `CALL_CREATED`.

If dialing starts, these events occur:

- [EVENT_CALL_CREATED](#): The state is `OFFERED`.
- [EVENT_CALL_CREATED](#): The state is `OFFERED`.
- [EVENT_CALL_UPDATED](#): The event reason is `UPDATED`, the state is `RINGING_ON_OTHER_SIDE`.

Afterward, either of these events occur:

- If the call is answered, the event ID is [EVENT_CALL_UPDATED](#), the event reason is `CONNECTED`, and the state is `TALKING`.
- If the call is not answered, the event ID is [EVENT_MAKE_CALL_FAILED](#).

You may see these exceptions:

- [NOT_A_NUMBER_FIELD](#) if the content of the specified field is not a number.
- [NUMBER_IS_RESTRICTED_FOR_CALL](#) if the number is restricted.

- [WRONG_STATE](#) if the preview time has expired.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path
contactFieldId	StringValue	ID of one of the contact number fields that may be called. For allowed field IDs, see PreviewInfo [restrictions].	Body

Example request. Agent ID 2385 calls preview ID 987.

`https://<Base_API_URL/context>/agents/2385/previews/987/make_call`

Response. Empty.

Renews a Preview Session

`PUT /agents/{agentId}/previews/{previewId}/renew`

Renews a preview session.

Use this request when the preview is in the `RENEWING` state to enable the agent to call another number for the same contact. If the agent declines to continue dialing, use [Ends a Preview Session](#) instead.

This request finalizes the live call associated with the preview. The agent can perform another call if updated preview is in the `PREVIEW` state.

The main resulting event is [EVENT_PREVIEW_UPDATED](#). The event reason is `RENEWED`, and the payload state is `PREVIEW`.

Depending on the disposition used, the call is not necessarily finalized:

- If the disposition is not final, the call might be set to the `WRAP_UP` state. In this case, the preview is set to `RENEWING`. The server remembers the `options` parameter in the request to apply the disposition later when the call is finalized.
- If the disposition is final, the call and the preview are finalized immediately.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
previewId	string	ID of the preview session.	Path

Example request. Agent ID 2385 renews preview ID 987.

`https://<Base_API_URL/context>/agents/2385/previews/987/renew`

Response.

Data	Description
PreviewInfo	Updated preview information.

Updates the Contact of the Preview

`PUT agents/{agentId}/previews/{previewId}/update_contact`

Updates a contact.

While previewing a contact before an interaction, the agent may update contact details. The main event is [EVENT_PREVIEW_UPDATED](#). The event reason is `CONTACT_UPDATED`, and the payload `activeContact` is the data for the updated contact ID.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
contact	ContactInfo	Information about updated contact	Body
previewId	string	ID of the preview session.	Path

Response.

Data	Description
PreviewInfo	Updated preview information.

Gets the Latest Items for a Contact

`GET /orgs/{orgId}/authors/{authorId}/preview`

Returns the latest five items for the contact (`authorID`).

Parameters.

Name	Data	Description	Type
<code>orgId</code>	<code>long</code>	Organization ID.	Path
<code>authorId</code>	<code>string</code>	Author ID.	Path

Response.

Data	Description
<code>SocialItem</code> <code>[]</code>	Array of social items.

Prompts and Recordings

Audio Files During Calls

[Gets all Audio Files for a Call](#)
[Gets the State of the Audio Player](#)
[Gets a Sound File for the Event Type](#)
[Uploads a Sound File for an Agent Event](#)
[Plays an IVR Recording During a Call](#)
[Pauses a Recording During a Call](#)
[Resumes a Paused Audio File During a Call](#)
[Stops an Audio File During a Call](#)

Call Recordings

[Starts Recording a Call](#)
[Pauses Recording a Call](#)
[Resumes Recording a Call](#)
[Stops Recording a Call](#)
[Gets a Call Recording Stream](#)

Prompts

[Gets all Active Skills Prompts](#)
[Gets a Skill Prompt Recording](#)
[Plays a Skill Prompt During a Call](#)

Voice Mailbox Greetings

[Gets Voicemail Greeting Information](#)
[Uploads a Personal Voicemail Greeting](#)
[Resets a Personal Voicemail Greeting](#)

Gets all Audio Files for a Call

GET /agents/{agentId}/interactions/calls/{callId}/audio

Returns the audio files available for the call.

The agent must have `CAN_PLAY_AUDIO_FILES_TO_CALLER` permission. To change the audio files, send a call update event that contains the `UPDATED` value in the `CallNotifyReason` data type.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Returns for agent ID 2385 the audio files available for call ID 34567.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio`

Response.

Data	Description
CallAudioFileInfo	Information about the audio files available for the call.

Gets the State of the Audio Player

GET /agents/{agentId}/interactions/calls/{callId}/audio/player

Returns the state of the audio player.

The agent must have `CAN_PLAY_AUDIO_FILES_TO_CALLER` permission. To change the audio files, send a call update event that contains the `UPDATED` value in the `CallNotifyReason` data type.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Returns for agent ID 2385 the state of the audio player for call ID 34567.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player`

Response.

Data	Description
PlayerStateInfo	Information about the state of the player.

Gets a Sound File for the Event Type

`GET /agents/{agentId}/sounds/{eventType}/file`

Returns a sound file for the event type.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
download	boolean	Optional. Whether to save the recording. If <code>true</code> , the range is ignored, and the entire content is returned.	Query
eventType	string	Type of the event: Path - INCOMING_CALL - INCOMING_VM - REMINDER	

Name	Data	Description	Type
range	string	Optional range in bytes to get partial content. The value must meet byte-ranges specifier in rfc2616 . Example: - Bytes=0-9: The first 10 bytes. - Bytes=0-: All bytes from the beginning. - Bytes=-10: The last 10 bytes.	Header

Response.

Data	Description
StreamingOutputInfo	Saved audio file. zlib-compressed campaign script. After decompressing the script, check for BOM (Byte Order Mark) to determine its format: - UTF-8: The first three bytes are 0xEF, 0xBB, 0xBF. - Windows-1252: all other cases.

Uploads a Sound File for an Agent Event

PUT agents/{agentId}/sounds/{eventType}/file

Uploads a sound file for the event specified by the agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
eventType	string	Type of the event: • INCOMING_CALL • INCOMING_VM • REMINDER	Path
file	Attachment	Audio file in one of these formats: MP3, WAV, and WMA. The body of the HTTP request should be <code>enctype = multipart/form-data</code> At least one part should contain <code>Content-Disposition: form-data; name="file"; filename="somefilename.wav"</code> .	Body

Response. Empty.

Plays an IVR Recording During a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/audio/player/play_recording
```

Plays an IVR recording during the call.

The agent must have [CAN_PLAY_AUDIO_FILES_TO_CALLER](#) permission. The main resulting event is [EVENT_AUDIO_PLAYER_UPDATED](#). Initially, the payload state is `PLAYING`. After the prompt is played, the payload state `NON_PLAYING`.

An [OBJECT_NOT_FOUND](#) exception occurs if the call or the prompt is not found.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
recordingId	string	ID of the IVR recording to play.	Body

Example request. Plays for agent ID 2385 a recording for call ID 34567.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player/play_recording
```

Response. Empty.

Pauses a Recording During a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/audio/player/pause
```

Pauses an audio prompt or IVR recording during the call.

The agent must have [CAN_PLAY_AUDIO_FILES_TO_CALLER](#) permission. To start a prompt or a recording, use [Plays a Skill Prompt During a Call](#) or [Plays an IVR Recording During a Call](#).

To pause or resume, use [Pauses a Recording During a Call](#) and [Resumes a Paused Audio File During a Call](#).

The main resulting event is [EVENT_AUDIO_PLAYER_UPDATED](#). The payload state is PAUSED.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Pauses for agent ID 2385 the audio player for call ID 34567.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player/pause
```

Response. Empty.

Resumes a Paused Audio File During a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/audio/player/resume
```

Resumes a paused audio file during the call.

The agent must have [CAN_PLAY_AUDIO_FILES_TO_CALLER](#) permission. The main resulting event is [EVENT_AUDIO_PLAYER_UPDATED](#). Initially, the payload state is `PLAYING`. After the prompt is played, the payload state `NON_PLAYING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Resumes playing for agent ID 2385 a recording for call ID 34567.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player/resume
```

Response. Empty.

Stops an Audio File During a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/audio/player/stop
```

Stops an audio file during the call.

The agent must have `CAN_PLAY_AUDIO_FILES_TO_CALLER` permission. The main resulting event is [EVENT_AUDIO_PLAYER_UPDATED](#). The payload state `NON_PLAYING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Stops for agent ID 2385 a recording for call ID 34567.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player/stop
```

Response. Empty.

Starts Recording a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/start_recording
```

Starts to record a call.

The agent must have [CAN_MAKE_RECORDINGS](#) permission.

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `RECORDING_INFO_UPDATED`, and the payload `recording` is `true`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Starts to record call ID 1234 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/start_recording
```

Response.

Data	Description
CallInfo	Updated information about the call.

Pauses Recording a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/pause_recording
```

Pauses the recording of a call.

The agent must have [CAN_MAKE_RECORDINGS](#) permission.

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `RECORDING_INFO_UPDATED`, and the payload `recording` is `false`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Pauses the recording of call ID 1234 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/pause_recording`

Response.

Data	Description
CallInfo	Updated call information.

Resumes Recording a Call

`PUT /agents/{agentId}/interactions/calls/{callId}/resume_recording`

Resumes the paused recording of a call.

The agent must have [CAN_MAKE_RECORDINGS](#) permission.

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `RECORDING_INFO_UPDATED`, and the payload recording is `true`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Resumes the recording of call ID 1234 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/resume_recording`

Response.

Data	Description
CallInfo	Updated information about the call.

Stops Recording a Call

```
PUT /agents/{agentId}/interactions/calls/{callId}/stop_recording
```

Stops to record a call.

The main resulting event is [EVENT CALL UPDATED](#). The event reason is `RECORDING_INFO_UPDATED`, and the payload recording is `false`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path

Example request. Stops to record call ID 1234 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/1234/stop_recording
```

Response.

Data	Description
CallInfo	Updated information about the call.

Gets a Call Recording Stream

```
GET /agents/{agentId}/recordings/{recordingId}
```

Returns a call recording stream.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
download	boolean	If set to <code>true</code> , the entire call recording is returned and the <code>range</code> parameter is ignored.	Query
range	string	Range in bytes for returning partial content. Value must be in the format of a <code>byte-</code>	Header

Name	Data	Description	Type
		ranges-specifier from rfc261.	
recordingId	string	Recording ID.	Path

Example request. Returns call recording stream ID 3461 to agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/recordings/3461`

Response.

Data	Description
StreamingOutputInfo	Information about the streaming output.

Gets all Active Skills Prompts

GET /agents/{agentId}/prompts

Returns active skills prompts information for the specified agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns an array of skill prompts for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/prompts`

Response.

Data	Description
Auth []	Array of skill prompts.

Gets a Skill Prompt Recording

GET /agents/{agentId}/prompts/{promptId}/stream

Returns an audio stream for a skill prompt.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
promptId	string	ID of the skill prompt.	Path

Example request. Returns MPEG file ID 135 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/prompts/135/stream`

Response.

Data	Description
StreamingOutputInfo	The body of the response is an MPEG file. The header is Content-Type: application/octet-stream.

Plays a Skill Prompt During a Call

`PUT /agents/{agentId}/interactions/calls/{callId}/audio/player/play_prompt`

Plays a skill prompt during the call.

The agent must have [CAN_PLAY_AUDIO_FILES_TO_CALLER](#) permission. The main resulting event is [EVENT_AUDIO_PLAYER_UPDATED](#). Initially, the payload state is `PLAYING`. After the prompt is played, the payload state `NON_PLAYING`.

An [OBJECT_NOT_FOUND](#) exception occurs if the call or the prompt is not found.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	Call ID.	Path
promptId	string	ID of the prompt to play.	Body

Example request. Plays for agent ID 2385 a prompt for call ID 34567.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/34567/audio/player/play_prompt`

Response. Empty.

Gets Voicemail Greeting Information

GET /agents/{agentId}/personal_greeting

Returns whether the agent has uploaded a personal greeting.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns information about a personal greeting for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/personal_greeting`

Response.

Data	Description
<u>PersonalGreetingInfo</u>	Information about a personal greeting: hasGreeting (boolean): Whether the agent has uploaded a personal greeting.

Uploads a Personal Voicemail Greeting

PUT /agents/{agentId}/personal_greeting

Uploads a personal greeting file.

If the uploaded file format is invalid, the [INVALID_WAV_FILE_FORMAT](#) exception occurs.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
file	Attachment	Greeting file to upload.	Body

Example request. Uploads a personal greeting file for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/personal_greeting`

Response.

Data	Description
PersonalGreetingInfo	Information about a personal greeting: <code>hasGreeting (boolean)</code> : Whether the agent has uploaded a personal greeting.

Resets a Personal Voicemail Greeting

DELETE /agents/{agentId}/personal_greeting

Resets a personal greeting.

If a greeting file had been uploaded, it is deleted. Otherwise nothing happens.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Resets a personal greeting for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/personal_greeting

Response.

Data	Description
PersonalGreetingInfo	Information about a personal greeting: <code>hasGreeting (boolean)</code> : Whether the agent has uploaded a personal greeting.

Queue Callbacks

[Gets All Scheduled Queue Callbacks](#)

[Gets a Queue Callback](#)

[Answers a Queue Callback](#)

[Rejects a Queue Callback](#)

Gets All Scheduled Queue Callbacks

GET /agents/{agentId}/queue_callbacks

Returns an array of queue callbacks to be processed by the agent.

For information about a single queue callback, use [Gets a Queue Callback](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns all queue callbacks for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/queue_callbacks

Response.

Data	Description
QueueCallbackInfo []	Information about an array of queue callbacks.

Gets a Queue Callback

GET /agents/{agentId}/queue_callbacks/{queueCallbackId}

Returns information about a queue callback.

For information about an array of queue callbacks, use [Gets All Scheduled Queue Callbacks](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
queueCallbackId	string	ID of the queue callback.	Path

Example request. Returns for agent ID 2385 queue callback ID 264.

https://<Base_API_URL/context>/agents/2385/queue_callbacks/264

Response.

Data	Description
QueueCallbackInfo	Information about a queue callback.

Answers a Queue Callback

PUT /agents/{agentId}/queue_callbacks/{queueCallbackId}/answer

Answers a queue callback.

The queue callback must be in the `ANSWERING` state.

These main resulting events occur:

- [EVENT_QUEUE_CALLBACK_UPDATED](#)[Agent Events](#): The event reason is `STATE_CHANGED`, and the payload state is `DIALING`.
- [EVENT_QUEUE_CALLBACK_DELETED](#)[Agent Events](#)

If dialing starts, these events occur:

- [EVENT_CALL_CREATED](#) The state is `OFFERED`.
- [EVENT_CALL_CREATED](#): The state is `OFFERED`.
- [EVENT_CALL_UPDATED](#): The event reason is `UPDATED`, the state is `RINGING_ON_OTHER_SIDE`.

Afterward, either of these events occur:

- If the call is answered, the event ID is [EVENT_CALL_UPDATED](#), the event reason is `CONNECTED`, and the state is `TALKING`.
- If the call is not answered, the event ID is [EVENT_MAKE_CALL_FAILED](#).

If the queue callback is not in the `ANSWERING` state, a `WRONG_STATE` exception occurs.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
queueCallbackId	string	ID of the queue callback.	Path

Example request. Agent ID 2385 answers queue callback ID 264.

`https://<Base_API_URL/context>/agents/2385/queue_callbacks/264/answer`

Response.

Data	Description
QueueCallbackInfo	Information about the queue callback.

Rejects a Queue Callback

```
PUT /agents/{agentId}/queue_callbacks/{queueCallbackId}/reject
```

Rejects a queue callback.

If the queue callback is not in the `ANSWERING` state, a `WRONG_STATE` exception occurs. The agent must have `CAN_REJECT_CALLS` permission. The main resulting event is [EVENT_QUEUE_CALLBACK_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
queueCallbackId	string	ID of the queue callback.	Path

Example request. Agent ID 2385 rejects queue callback ID 264.

```
https://<Base_API_URL/context>/agents/2385/queue_callbacks/264/reject
```

Response.

Data	Description
<u>QueueCallbackInfo</u>	Updated queue callback information.

Queues

[Gets the Queues in the Domain](#)
[Gets the Agent's Queues](#)
[Gets the Agent's Active Queues](#)
[Sets the Agent's Active Queues](#)
[Gets a List of Queues for Social Interactions](#)

Gets the Queues in the Domain

```
GET /orgs/{orgId}/skills
```

Returns an array of queues in the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns an array of queues for agent ID 2385.

`https://<Base_API_URL/context>/orgs/749/skills`

Response.

Data	Description
SkillInfo []	Array of queues.

Gets the Agent's Queues

GET /agents/{agentId}/skills

Returns an array of queues assigned to the agent.

If the agent activates all the assigned queues, this request and [Gets the Agent's Active Queues](#) return the same list.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns an array of queues for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/skills`

Response.

Data	Description
AgentSkillInfo []	Array of queues assigned to the agent. This array is a subset of the queues that are returned by Gets the Queues in the Domain .

Gets the Agent's Active Queues

GET /agents/{agentId}/active_skills

Returns the list of queues that were activated when the agent started the session.

The active queues are a subset of the assigned queues. This request may be used when the agent is logging in and in the `WORKING` state.

The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns an array of active queues for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/ActiveSkills`

Response.

Data	Description
string[]	Array of active queue IDs. Can be empty.

Example: ["1", "2", "21"]

Sets the Agent's Active Queues

`PUT /agents/{agentId}/active_skills`

Selects active queues for the session.

The active queues are a subset of those assigned to the agent queues ([Gets the Agent's Queues](#)). The agent may activate only a subset of the queues during a session. To obtain the list of queues activated during a session, see [Gets the Agent's Active Queues](#). This method requires the agent to have the `CAN_MANAGE_SKILL_AVAILABILITY` permission. This method generates the [EVENT_ACTIVE_SKILLS_UPDATED](#) and [EVENT_LOGIN_STATE_UPDATED](#) events.

Do not use this request if queues are activated automatically, which occurs in these cases:

- The agent does not have permission to manage queues ([CAN_MANAGE_AGENT_SCRIPTS](#)). To obtain the queues assigned to the agent, use this request: `/agents/{agentId}/skills`

- The agent has disabled manual queue selection ([SHOW_SELECT_SKILLS](#)) in the softphone options.

When an agent logs into the Plus application for the first time, `SHOW_SELECT_SKILLS` is enabled by default so the agent must select queues to continue work. However, the agent can disable the option at any time.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
skills	string[]	Array of queues IDs to activate.	Body

Example request. Selects active queues for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/ActiveSkills`

Response.

Data	Description
string[]	Updated list of active queues.

Gets a List of Queues for Social Interactions

`GET /agents/{agentId}/social_transferable_skills`

Returns a list of queues for the logged-in agent to receive social interactions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Sends a list of queues for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/social_transferable_skills`

Response.

Data	Description
AgentSkillInfo []	List of queues.

Reason Codes

[Gets the Logout Reason Codes for the Domain](#)
[Gets all Not-Ready Reason Codes for the Domain](#)

Gets the Logout Reason Codes for the Domain

GET /orgs/{orgId}/logout_reason_codes

Returns an array of logout reason codes for the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the logout reason codes for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/logout_reason_codes

Response.

Data	Description
ReasonCodeInfo []	Array of reason codes.

Gets all Not-Ready Reason Codes for the Domain

GET /orgs/{orgId}/not_ready_reason_codes

Returns an array of Not Ready reason codes for the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the Not Ready reason codes for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/not_ready_reason_codes

Response.

Data	Description
ReasonCodeInfo []	Array of reason codes.

Sessions

Session

[Gets Metadata About the User's Session](#)
[Creates a Session](#)
[Restarts the Agent's Session](#)
[Gets Session Expiration Information](#)
[Gets Logout Restrictions](#)
[Stops the Agent's Session](#)
[Gets the User's Permissions for the Current Session](#)
[Gets the User's Roles for the Current Session](#)
[Gets the Login Page Information](#)

State

[Gets the Agent's Logged-In State](#)
[Checks Whether the Agent is Active](#)

Station

[Logs In the User](#)
[Logs Out the User](#)
[Restarts the Agent's Station](#)
[Forces the Agent's Station to Restart](#)
[Gets Information About the Agent's Station](#)
[Gets the Agent's Station State](#)
[Gets the Softphone Configuration](#)

Gets Metadata About the User's Session

GET /auth/metadata

Returns information about the user's session.

Metadata contains information about the user's token and the service end points that are currently active for the application.

Important

Before using this request, be sure that the agent is logged in because the request requires the current authorization information.

Parameters.

Name	Data	Description	Type
role	string	User role.	Path

Example request. Returns information about the user's session.

`https://<Base_API_URL/context>/auth/metadata?role=Agent`

Response.

Data	Description
Token	Information about the user's session.

Creates a Session

`PUT /agents/{agentId}/session_start`

Creates a session and registers the station for the agent.

The initial login state must be in `SELECT_STATION` state. This request modifies the agent's login state. If successful, the request changes the [LoginState](#) value and sends the [EVENT_STATION_UPDATED](#) and [EVENT_LOGIN_STATE_UPDATED](#) events. The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

This request can return these exceptions:

- [DUPLICATE_LOGIN](#): Ask the user whether to close the existent session. If the user agrees, resend the request with `force = true`.
- [CANNOT_FORCE_LOGOUT_WHEN_TALKING](#): The agent has an active call. In this case, a new session cannot be created.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
stationInfo	StationInfo	Station information.	Body
force	boolean	Optional. Normally, set this parameter to <code>false</code> .	Query
appType	string	Optional. For internal use only.	Query
timeZoneOffset	long	Optional offset from UTC defined in whole minutes, for example: (GMT-08:00) America/Los_Angeles, PST = 480.	Query

Example request. Starts the session for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/session_start?timeZoneOffset=480&appType=AGENT_PLUS
```

```
StationInfo: {"stationId":"551","stationType":"SOFTPHONE"}
```

Response. Empty.

Restarts the Agent's Session

```
PUT /agents/{agentId}/session_restart
```

Restarts the current session.

The agent's state must be `RELOGIN`. To obtain the agent's state, see [Gets the Agent's Logged-In State](#).

If successful, this request sends the [EVENT_STATION_UPDATED](#) and [EVENT_LOGIN_STATE_UPDATED](#) events. In addition, the event [EVENT_ACTIVE_SKILLS_UPDATED](#) is sent unconditionally.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Restarts the session for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/session_restart
```

Response. Empty.

Gets Session Expiration Information

GET /agents/{agentId}/session_expiration

Returns the expiration settings for the session.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the session expiration settings for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/session_expiration

Response.

Data	Description
SessionExpirationInfo	Information about the session expiration settings.

Gets Logout Restrictions

GET /agents/{agentId}/can_stop_session

Checks if the agent is allowed to log out.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the possible logout restrictions for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/can_stop_session

Response.

Data	Description
LogoutRestriction []	Array of possible logout restrictions. If the list is empty, the agent may log out.

Stops the Agent's Session

```
PUT /agents/{agentId}/session_stop
```

Terminates the agent's session if no logout restrictions exist.

If the client makes this request while the personal queue contains one or more calls, this error occurs: [CANNOT_LOG_OUT_WHEN_QUEUED_CALLS](#) (12039).

To obtain logout restrictions, see use [Gets Logout Restrictions](#). When `force=true`, most logout restrictions (see [Gets Logout Restrictions](#)) are skipped. Agents on the phone cannot be disconnected, for example, if the agent is talking (`CallState=TALKING`) or consulting another person during a warm transfer ([hasIncompleteTransfer](#)).

This method generates the [EVENT_LOGIN_STATE_UPDATED](#) event.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
reasonCodeInfo	ReasonCodeInfo	Logout reason code.	Body
force	boolean	Whether to automatically disconnect the agent: - False: The agent disconnects manually. - True: The client automatically disconnects the agent because of inactivity. See Gets Session Expiration Information. If the agent is assumed as talking on the phone, disconnection is prevented by returning the error CANNOT_FORCE_LOGOUT_WHEN_TALKING (code 8). If this error is returned, restart the inactivity timer. Note that an agent cannot stay on the phone call forever. VCC automatically drops calls longer than eight hours.	Query

Example request. Allows agent ID 2385 to stop the session manually.

```
https://<Base_API_URL/context>/agents/2385/session_stop?force=false
```

```
ReasonCodeInfo: {"displayName": "Callback","id": "23400","name":  
"Callback","selectable": "True"}
```

Response. Empty.

Gets the User's Permissions for the Current Session

```
GET /auth/permissions
```

Returns the permissions for the current user session.

Parameters. None.

Example request. Returns the permissions for the current user session.

```
https://<Base_API_URL/context>/auth/permissions
```

Response.

Data	Description
PermissionEnum []	Set of user permissions.

Gets the User's Roles for the Current Session

```
GET /auth/roles
```

Returns the roles for the current user session.

Parameters. None.

Example request. Returns the roles for the current user session.

```
https://<Base_API_URL/context>/auth/roles
```

Response.

Data	Description
string []	Set of user roles. For example:

Data	Description
	• Agent: Agent role. • DomainAdmin: Administrator role. Not used in the API. Used in the Supervisor Plus and Agent Desktop Plus applications. • DomainSupervisor: Supervisor role. • Reporting: Reporting role. Not used in the API. Used in the Supervisor Plus and Agent Desktop Plus applications.

Gets the Login Page Information

GET /auth/login_page_info

Returns the information about the login page.

Parameters. None.

Example request. Returns the information about the login page.

https://<Base_API_URL/context>/auth/login_page_info

Response.

Data	Description
Map<string, string>	Map with information about the login page.

Gets the Agent's Logged-In State

GET /agents/{agentId}/login_state

Returns the agent's login state.

The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

To follow the login process, use this request iteratively: (1) `SELECT_STATION`, (2) `SELECT_SKILLS`, and (3) `WORKING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the login state for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/login_state`

Response.

Data	Description
LoginState	String of the agent's logged-in state: • <code>ACCEPT_NOTICE</code>: Agent must accept a maintenance notice. • <code>RELOGIN</code>: Agent needs to restart the station. • <code>SELECT_SKILLS</code>: Agent is selecting skills. • <code>SELECT_STATION</code>: Agent is selecting a station. • <code>WORKING</code>: Agent is ready to work. • <code>SPECIFY_CLIENT_TIMEZONE</code>: API client needs to specify the local time zone to continue working.

Checks Whether the Agent is Active

`PUT /agents/{agentId}/ping`

Pings the server to let it know whether that the agent is active.

To prevent the server from ending the session, use this request once every 15–20 minutes when no other requests are made. HTTP status codes 200 or 204 and event [ID: 1202](#) are returned for successful requests. The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

See also [Gets Session Expiration Information](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Pings the server for the active state of agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/ping`

Response. Empty.

Logs In the User

POST /auth/login

Returns a token after logging in the user.

Before using this request, verify that the agent is logged out ([Logs Out the User](#)) and that you have the session state ([Gets Metadata About the User's Session](#)).

Important

Before logging users into a PSTN station or forwarding calls between sessions, be sure that these users have permission because they may incur high long-distance fees.

Parameters.

Name	Data	Description	Type
auth	Auth	Information about the user's session.	Body

Example request. Returns a token.

`https://<Base_API_URL/context>/auth/login`

Response.

Data	Description
Token	Information about the user's session.

Logs Out the User

POST /auth/logout

Ends the user's HTTP and REST API sessions.

Parameters. Empty.

Example request. Ends the user's session.

`https://<Base_API_URL/context>/auth/logout`

Response. Empty.

Returns Settings for the Logged-In User

GET /auth/settings

Returns settings, such as logs, for the logged-in user.

Parameters. Empty.

Response.

Data	Description
map<string, string>	Map of the user's settings.

Restarts the Agent's Station

PUT /agents/{agentId}/station/restart

Restarts the agent's station.

Use this request only when the agent is in Not Ready state and has selected a station.

Two **EVENT_STATION_UPDATED** events follow:

- The payload of the first one is CONNECTING.
- The payload of the second one is CONNECTED if the restart succeeds. Otherwise, the payload is DISCONNECTED.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Restarts the station for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/station/restart

Response. Empty.

Forces the Agent's Station to Restart

PUT /agents/{agentId}/station/softphone_force_restart

Forces the agent's station to restart.

The agent's current ready state and active tasks are ignored.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
delay	int	Delay before the softphone restarts. Name changed from <code>timeout</code> to <code>delay</code> in.	Query

Response. Empty.

Gets Information About the Agent's Station

GET /agents/{agentId}/station

Returns information about the agent's station. The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns station information for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/station

Response.

Data	Description
StationInfo	Information about the agent's station. The response is Empty. if no station is selected: when the station is NULL, no payload is returned, and the status code is 204.

Gets the Agent's Station State

GET /agents/{agentId}/station_state

Returns the state of the station assigned to the agent.

This request will be removed in the future. See [Gets Information About the Agent's Station](#) instead. The agent must have the [CAN_RUN_WEB_AGENT](#) permission.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the state of the station for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/station_state`

Response.

Data	Description
StationState	State of the station (string): - CONNECTED: Station is connected. - CONNECTING: Station is being connected. - DISCONNECTED: Station is not connected.

Gets the Softphone Configuration

`GET /agents/{agentId}/softphone_config`

Returns the information required to register the softphone.

This request provides information about softphone registration and can be used to connect any SIP phone to the VCC.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the softphone configuration for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/softphone_config`

Response.

Data	Description
SoftphoneRegistrationInfo []	Information about the softphone registration.

Statistics

These requests enable agents to subscribe to several types of statistics. Each statistic generates WebSocket events with a payload structure that contains statistic data.

[Gets Dashboard Subscriptions](#)
[Creates a Dashboard Subscription](#)
[Updates a Dashboard Subscription](#)
[Deletes a Dashboard Subscription](#)
[Gets the Subscriptions Available to the Agent](#)
[Subscribes or Unsubscribes the Agent to/from Statistics](#)
[Subscribes the Agent to Gamification Statistics](#)
[Unsubscribes the Agent from Gamification Statistics](#)

Gets Dashboard Subscriptions

GET /agents/{agentId}/dashboard/subscriptions

Retrieves the list of an agent's dashboard subscriptions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Retrieves dashboard subscriptions for agent ID 125.

`https://<Base_API_URL/context>/agents/125/dashboard/subscriptions`

Response.

Data	Description
DashboardSubscriptionInfo []	List of all the agent's dashboard subscriptions.

Creates a Dashboard Subscription

POST /agents/{agentId}/dashboard/subscriptions

Creates a new subscription for gamification statistics. This method generates the [EVENT_DASHBOARD_SUBSCRIPTION_CREATED](#) event.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
subscriptionInfo	CustomerPortalInfo	Subscription parameters.	Body

Example request. Creates a dashboard subscription for agent ID 123.

`https://<Base_API_URL/context>/agents/agents/123/dashboard/subscriptions`

Response.

Data	Description
DashboardSubscriptionInfo	Updated subscription information.

Updates a Dashboard Subscription

PUT /agents/{agentId}/dashboard/subscriptions/{subscriptionId}

Updates an existing gamification dashboard subscription. This method generates the [EVENT_DASHBOARD_SUBSCRIPTION_UPDATED](#) events.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
subscriptionId	string	Subscription ID.	Path
subscriptionInfo	CustomerPortalInfo	Subscription parameters.	Body

Example request. Updates dashboard subscription ID 122 for agent ID 123.

`https://<Base_API_URL/context>/agents/123/dashboard/subscriptions/122`

Response.

Data	Description
DashboardSubscriptionInfo	Updated subscription information.

Deletes a Dashboard Subscription

Delete /agents/{agentId}/dashboard/subscriptions/{subscriptionId}

Deletes an existing gamification dashboard subscription. This method generates the [EVENT_DASHBOARD_SUBSCRIPTION_DELETED](#) event.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
subscriptionId	string	Subscription ID.	Path

Example request. Unsubscribes from a dashboard.

https://<Base_API_URL/context>/agents/123/dashboard/subscriptions

Response. Empty.

Gets the Subscriptions Available to the Agent

GET /agents/{agentId}/subscriptions

Returns information about the available subscriptions.

These subscriptions enable the client to be notified of the specified event:

- Agent ready presence subscription ID = 1 generates event ID15 [EVENT_AGENTS_READY_PRESENCES_SUBSCRIPTION_UPDATE](#) when the agent's presence changes.
- Skill statistics subscription ID = 10 generates event ID 29 [EVENT_SKILL_STATS_SNAPSHOT_SUBSCRIPTION_UPDATE](#).

Every subscription is included in the response whether or not the agent is subscribed.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns for agent ID 2385 an array of subscriptions.

`https://<Base_API_URL/context>/agents/2385/subscriptions`

Response.

Data	Description
SubscriptionInfo []	Array of information about subscriptions: name, ID, and current state.

Subscribes or Unsubscribes the Agent to/from Statistics

PUT /agents/{agentId}/subscriptions/{subscriptionId}

Subscribes the agent to or unsubscribes the agent from statistics.

The request changes the value of the boolean `subscribed` field in [SubscriptionInfo](#). The event is [EVENT_SUBSCRIPTION_UPDATED](#). The event reason is as follows:

- SUBSCRIBED if the `subscribed` field in `subscriptionInfo` is true.
- UNSUBSCRIBED otherwise. In this case, `subscribed` is false.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
subscriptionId	string	ID of the subscription.	Path
subscriptionInfo	SubscriptionInfo	Subscription information. To subscribe to or unsubscribe from statistics, use the boolean <code>subscribed</code> field.	Body

Example request. Agent ID 2385 subscribes to subscription ID 123.

`https://<Base_API_URL/context>/agents/2385/subscriptions/123`

Response.

Data	Description
SubscriptionInfo	Updated subscription information.

Subscribes the Agent to Gamification Statistics

POST /agents/{agentId}/gamification

Subscribes the agent to gamification statistics.

This subscription (gamificationSubscription) ID = 20 generates these events. In each case, the payload is an array of statistics:

- EVENT_GAMIFICATION_AGENT_STAT (ID=200): [AgentGamificationInteractionTotals](#)
- EVENT_GAMIFICATION_DISPOSITION_STAT (ID=201): [GamificationDisposition](#)
- EVENT_GAMIFICATION_SKILL_STAT (ID=202): [GamificationSkill](#)

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Subscribes agent ID 2385 gamification statistics.

`https://<Base_API_URL/context>/agents/2385/gamification`

Response. Empty.

Unsubscribes the Agent from Gamification Statistics

DELETE /agents/{agentId}/gamification

Unsubscribes the agent from gamification statistics.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Unsubscribes agent ID 2385 gamification statistics.

`https://<Base_API_URL/context>/agents/2385/gamification`

Response. Empty.

Transfers

Agents who can receive transfers

[Gets Agents Who Can Receive Transfers](#)

Transfers

[Transfers a Call to Another Agent](#)

[Transfers a Parked Call to Another Parked Call](#)

[Transfers a Call to a Campaign](#)

[Transfers a Call to an External Number](#)

[Transfers a Call to a Skill Group](#)

[Transfers a Call to a Speed Dial Number](#)

Warm transfers

[Completes a Warm Call Transfer](#)

[Cancels an Incomplete Warm Call Transfer](#)

Gets Agents Who Can Receive Transfers

GET /agents/{agentId}/transferable_agents

Returns an array of agents who have permission to receive transfers.

The agent uses this array to select another agent when transferring a call.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
from	int	(O) Index to select, starting with 0 (zero).	Query
limit	int	(O) Maximum number to return (0=all).	Query

Example request. Returns an array of agents IDs to whom agent ID 2385 can transfer calls.

`https://<Base_API_URL/context>/agents/2385/transferable_agents?from=0?limit=0`

Response.

Data	Description
AgentInfo []	Array of information about all agents who have permission to receive transfers.

Transfers a Call to Another Agent

```
PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_agent
```

Transfers a call to another agent.

This request applies to either an active or parked call. The agent who transfers the call must have [CAN_TRANSFER_TO_AGENT](#) permission. The transfer recipient must have [CAN_RECEIVE_TRANSFERS](#) permission.

These main resulting events occur:

- Cold transfer: [EVENT_CALL_DELETED](#). See `warm` in the `destination` parameter.
- Warm transfer: [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_STARTED`, and the payload state is `ON_HOLD`.

To obtain an array of agents who can receive a transfer, use [Gets Agents Who Can Receive Transfers](#).

Parameters.

Name	Data	Description	Type
<code>agentId</code>		Agent ID.	Path
<code>callId</code>	<code>string</code>	call ID.	Path
<code>destination</code>	AgentTransferDestinationInfo	Information about the transfer.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the agent ID in the transfer destination described in the body of the request.

```
https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_agent/
```

Response. Empty.

Transfers a Parked Call to Another Parked Call

PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_call

Transfers a parked call to another parked call.

To transfer calls that are not parked, see the other transfer requests.

The main resulting event is [EVENT_CALL_DELETED](#). The payload ID is that of the call.

An exception occurs ([NOT_AUTHORIZED](#)) if the agent does not have permission to transfer a call to the other party of either call, or if the other party of either call is an agent who does not have a permission to receive a transfer.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path
destinationCallId	string	ID of the destination parked call.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the transfer destination described in the body of the request.

https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_call/

Response. Empty.

Transfers a Call to a Campaign

PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_campaign

Transfers a call to a campaign.

This request applies to either an active or parked call. The agent must have [CAN_TRANSFER_TO_CAMPAIGN](#) permission.

These main resulting events occur:

- Cold transfer: [EVENT_CALL_DELETED](#). See `warm` in the `destination` parameter.
- Warm transfer: [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_STARTED`, and the payload state is `ON_HOLD`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path
destination	CampaignTransferDestinationInfo	Information about the transfer.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the campaign destination described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_campaign/`

Response. Empty.

Transfers a Call to an External Number

`PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_external_number`

Transfers a call to an external number.

This request applies to either an active or parked call. The agent must have [CAN_TRANSFER_TO_EXTERNAL](#) permission.

These main resulting events occur:

- Cold transfer: [EVENT_CALL_DELETED](#). See `warm` in the `destination` parameter.
- Warm transfer: [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_STARTED`, and the payload state is `ON_HOLD`.

You may see these error codes:

- ID 1001 ([Q_NUMBER_IN_DNC_LIST_FORCE](#)) if the user must confirm dialing a number in the DNC list.
- ID 1002 ([Q_MULTIPLE_CONTACTS_SELECT](#)) if multiple records match the number.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId		call ID.	Path
destination	ExternalTransferDestinationInfo	Information about the external destination.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the external destination described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_campaign/`

Response. Empty.

Transfers a Call to a Skill Group

`PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_skill`

Transfers a call to a skill group.

This request applies to either an active or parked call. The agent must have [CAN_TRANSFER_TO_SKILL](#) permission.

These main resulting events occur:

- Cold transfer: [EVENT_CALL_DELETED](#). See `warm` in the `destination` parameter.
- Warm transfer: [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_STARTED`, and the payload state is `ON_HOLD`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path
destination	SkillTransferDestinationInfo	Information about the transfer.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the skill destination described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_skill/`

Response. Empty.

Transfers a Call to a Speed Dial Number

`PUT /agents/{agentId}/interactions/calls/{callId}/transfer_to_speed_dial`

Transfers a call to a speed dial number.

This request applies to either an active or parked call. The agent must have [CAN TRANSFER TO SPEED DIAL](#) permission.

These main resulting events occur:

- Cold transfer: [EVENT_CALL_DELETED](#). See `warm` in the `destination` parameter.
- Warm transfer: [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_STARTED`, and the payload state is `ON_HOLD`.

You may see these error codes:

- ID 1001 ([Q_NUMBER_IN_DNC_LIST_FORCE](#)).
- ID 1002 ([Q_MULTIPLE_CONTACTS_SELECT](#)).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path
destination	SpeedDialTransferDestinationInfo	Information about the speed dial number.	Body

Example request. Transfers call ID 987 for agent ID 2385 to the speed dial destination described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/calls/987/transfer_to_speed_dial/`

Response. Empty.

Completes a Warm Call Transfer

PUT /agents/{agentId}/interactions/calls/{callId}/complete_transfer

Completes the warm transfer of a call.

The main resulting event is [EVENT_CALL_DELETED](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path

Example request. Completes the warm transfer of call ID 987 for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/interactions/calls/987/complete_transfer

Response. Empty.

Cancels an Incomplete Warm Call Transfer

PUT /agents/{agentId}/interactions/calls/{callId}/cancel_transfer

Cancels the incomplete warm transfer of a call.

The main resulting event is [EVENT_CALL_UPDATED](#). The event reason is `WARM_TRANSFER_CANCELED`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
callId	string	call ID.	Path

Example request. Cancels the transfer of call ID 12345 for agent ID 2385.

https://<Base_API_URL/context>/agents/2385/interactions/12345/cancel_transfer

Response. Empty.

VCC Configuration

[Gets the Domain Information](#)

[Gets the Domain Settings](#)

[Gets the Password Policies for the Domain](#)

Gets the Domain Information

GET `orgs/{orgId}`

Returns information about the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Response.

Data	Description
OrganizationInfo	Information about a domain.

Gets the Domain Settings

GET `/orgs/{orgId}/settings`

Returns the settings for the domain.

This example shows that the external routing setting is enabled:

```
"settings": {  
  "EXTERNAL_ROUTING": "ENABLED"  
}
```

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the settings for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/settings`

Response.

Data	Description
DomainSettingsInfo	Domain settings information.

Gets the Password Policies for the Domain

`GET /orgs/{orgId}/password_policies`

Returns the password policies for the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the password policies for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/password_policies`

Response.

Data	Description
Map< PasswordPolicy , Integer>	Password policies for the domain: • Key: Password policy: ◦ MIN_PASSWORD_LENGTH: Minimum number of characters. ◦ MIN_COUNT_OF_SPECIAL_SYMBOLS: Minimum number of punctuation marks. ◦ MIN_COUNT_OF_CAPITAL_LETTERS: Minimum number of capital letters. ◦ MIN_COUNT_OF_DIGIT_CHARS: Minimum number of digits. • Value: Policy value, which is always an integer. The value depends on the key. For example, {"MIN_PASSWORD_LENGTH": 6} means that a password must contain at least 6 characters.

Voicemail

Voicemail messages can be associated with a skill. When a skill routing module is used, you can offer to the caller the option to leave a voicemail message for a particular skill. These messages are then routed to agents who possess that skill. When a skill voicemail message is delivered to an agent, event [EVENT_VOICEMAILS_CREATED](#) is sent.

Voice mailbox

- [Gets all Voicemail Messages](#)
- [Gets a Voicemail Message](#)
- [Gets a Voicemail Recording](#)
- [Counts Personal Voicemail Messages](#)

Voicemail processing

- [Accepts a Skill Voicemail Message](#)
- [Rejects a Skill Voicemail Message](#)
- [Returns a Call](#)
- [Updates a Voicemail Message](#)
- [Transfers a Voicemail Message](#)
- [Marks the Voicemail Message Read or Processed](#)
- [Deletes a Voicemail Message](#)

Voicemail contacts

- [Gets the Contacts for the Voicemail Message](#)
- [Updates the Contact in the Skill Voicemail](#)
- [Selects the Active Contact for the Voicemail Message](#)

Gets all Voicemail Messages

GET /agents/{agentId}/interactions/voicemails

Returns the agent's skill and personal voicemail messages.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
cursor	string	Optional marker that contains the position of the current search. - First query: Set the cursor to null. - Subsequent queries: Resend the request with the <code>cursor</code> value set to the value in the previous response. Continue to send requests until the response contains a number of messages smaller than <code>pageSize</code>.	Query
pageSize	int	Optional number of messages to return. The default value is 50; the maximum is 300. The request can return up to <code>pageSize + 1</code> messages.	Query
newerFirst	boolean	Optional. Sorts voicemails by age. If <code>true</code> , returns new voicemails first. If <code>false</code> , returns old voicemails first. The default is <code>false</code> , which returns old voicemails first.	Query

Example request. Returns the first set of messages for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails?pageSize=50`

Response.

Data	Description
VoicemailLookupResultInfo	Search results.

Gets a Voicemail Message

`GET /agents/{agentId}/interactions/voicemails/{voicemailId}`

Returns information about a voicemail message.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Returns voicemail message ID 234 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/234`

Response.

Data	Description
VoicemailInfo	Information about the voicemail message.

Gets a Voicemail Recording

`GET /agents/{agentId}/interactions/voicemails/{voicemailId}/recordings/{recordingId}`

Returns the stream of a voicemail recording.

A voicemail message may contain more than one recording. Each recording is a file with voice media.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
download	boolean	Optional. Whether to save the recording. If <code>true</code> , the range is ignored, and the entire content is returned.	Query
range	string	Optional range in bytes to get partial content. Header The value must meet <code>byte-ranges-specifier</code> in rfc2616 .	Header

Example:

- `Bytes=0-9`: The first 10 bytes.
- `Bytes=0-`: All bytes from the beginning.
- `Bytes=-10`: The last 10 bytes.

Name	Data	Description	Type
recordingId	string	ID of the voicemail recording.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Returns recorded message ID 12345 of voicemail message 512 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/512/recordings/12345?download=true`

Response.

Data	Description
byte[]	Voice data in MP3 format as a binary stream of mime-type application/octet-stream.

Counts Personal Voicemail Messages

GET /agents/{agentId}/interactions/voicemails/count_info

Counts the number of personal voicemail messages.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path

Example request. Returns the number of voicemail messages for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/count_info`

Response.

Data	Description
<u>VoiceMailCountInfo</u>	Counts of personal voicemail messages.

Accepts a Skill Voicemail Message

PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/accept

Accepts a skill voicemail message offered to the agent.

The message must be in the `NEW` state in the [VoicemailInfo](#) parameter.

The main resulting event is [EVENT_VOICEMAILS_UPDATED](#). The event reason is `ACCEPTED`, the payload ID is `voicemailId`, and the payload state is `PROCESSING`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Accepts voicemail message ID 512 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/voicemails/512/accept
```

Response.

Data	Description
VoicemailInfo	Updated information about the voicemail message. At least the state field is updated from <code>NEW</code> to <code>PROCESSING</code> .

Rejects a Skill Voicemail Message

```
PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/reject
```

Rejects a skill voicemail message.

The value of the `VoicemailInfo` [state](#) field must be `NEW`.

The main resulting event is [EVENT_VOICEMAILS_DELETED](#). The event reason is `REJECTED`, and the payload ID is `voicemailId`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Rejects voicemail message ID 567 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/567/reject`

Response.

Data	Description
VoicemailInfo	Updated information about the voicemail message.

Returns a Call

`POST /agents/{agentId}/interactions/voicemails/{voicemailId}/return_call`

Returns a call to the person who left a voicemail message.

If dialing starts, these events occur:

- [EVENT CALL CREATED](#): The state is OFFERED.
- [EVENT CALL CREATED](#): The state is OFFERED.
- [EVENT CALL UPDATED](#): The event reason is UPDATED, the state is RINGING_ON_OTHER_SIDE.

Afterward, either of these events occur:

- If the call is answered, the event ID is [EVENT CALL UPDATED](#), the event reason is CONNECTED, and the state is TALKING.
- If the call is not answered, the event ID is [EVENT MAKE CALL FAILED](#).

HTTP Status Code = 435 (application error) is returned, you may see one of these Five9 error codes in the response body:

- ID 12021 ([INVALID_PHONE_NUMBER](#)).
- ID 10005 ([CALL_NOT_IN_TIME](#)).
- ID 1001 ([Q_NUMBER_IN_DNC_LIST_FORCE](#)) (Applies to the next release).
- ID 1002 ([Q_MULTIPLE_CONTACTS_SELECT](#)).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
externalOptions	ReturnCallExternalOptionInfo	Options for	Body

Name	Data	Description	Type
		returning an external call. This parameter is ignored for internal voicemail messages.	
voicemailId	string	ID of the voicemail message.	Path

Example request. Returns the call to the person who left voicemail message ID 234 for agent ID 2385 to the number described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/234/return_call/`

Response. Empty.

Updates a Voicemail Message

`PUT /agents/{agentId}/interactions/voicemails/{voicemailId}`

Updates a voicemail message.

The maximum length of comments for all voicemail messages is 250 characters.

- For skill voicemail messages, only comments can be updated. To update comments, the message must be in the `PROCESSING` state in the [VoicemailInfo](#) parameter. If the message is not associated with a contact, error ID 10 ([SKILL_VOICEMAIL_HAS_NO_CONTACT](#)) is returned.
- For personal voicemail messages, comments and number fields can be updated. Logged-in agents can update their personal voicemail at any time.

The main resulting event is [EVENT_VOICEMAILS_UPDATED](#). The payload ID is the value of `voicemailId`; the payload is the updated voicemail data.

- Skill voicemail: The event reason is `COMMENTS_CHANGED`.
- Personal voicemail: The event reason is `UPDATED`.

If you try to update a skill voicemail message that is not associated with a contact, the [SKILL_VOICEMAIL_HAS_NO_CONTACT](#) exception occurs.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemail	VoicemailInfo	Voicemail information to update. In the <code>id</code> field, enter the same voicemail ID as in the <code>voicemailId</code> parameter.	Body
voicemailId	string	ID of the voicemail message.	Path

Example request. Updates voicemail message ID 234 for agent ID 2385 to the voicemail information described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/234`

Response.

Data	Description
VoicemailInfo	Updated voicemail information.

Transfers a Voicemail Message

`PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/transfer`

Transfers a voicemail message.

The agent must have `CAN_TRANSFER_VOICEMAIL` permission. The main resulting event is [EVENT_VOICEMAILS_DELETED](#). The event reason is `DISPOSED` for a skill voicemail or `TRANSFERRED` for a personal voicemail, and the payload is `voicemailId`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
transferInfo	VoicemailsTransferDestinationInfo	Information about the transfer destination.	Body
voicemailId	string	ID of the voicemail message.	Path

Example request. Transfers voicemail message ID 345 for agent ID 2385 to the transfer destination described in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/345/transfer/`

Response. Empty.

Marks the Voicemail Message Read or Processed

`PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/mark_as_read`

Marks a personal voicemail message read or a skill voicemail message processed.

If the voicemail message is personal, it remains available after performing this action. The number of new personal voicemail messages decreases. Skill voicemail messages are removed.

The main resulting event is [EVENT_VOICEMAILS_UPDATED](#). The event reason is `MARKED_AS_READ`, the payload ID is the value of `voicemailId`, and the payload state is `PROCESSED`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Returns voicemail message ID 512 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/512/mark_as_read`

Response.

Data	Description
VoicemailInfo	Updated information about the voicemail message.

Deletes a Voicemail Message

`DELETE /agents/{agentId}/interactions/voicemails/{voicemailId}`

Deletes a voicemail message.

If this is a skill voicemail, the agent must have `CAN_DELETE_VOICEMAIL_SESSION` permission. The resulting event is [EVENT_VOICEMAILS_DELETED](#). The event reason is `DISPOSED` for a skill voicemail or `DELETED` for a personal voicemail. The payload ID is the value of `voicemailId`.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
voicemailId	string	ID of the voicemail message.	Path

Example request. Deletes voicemail message ID 234 for agent ID 2385.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/234`

Response. Empty.

Gets the Contacts for the Voicemail Message

`GET /agents/{agentId}/interactions/voicemails/{voicemailId}/contacts`

Returns the contacts that match the voicemail message.

For more details, see [Gets Contacts for the Call](#), which is a similar request.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
cursor	string	Optional object used to navigate through contacts: First query: Use the cursor value in <code>contactLookupResult</code> in the <code>VoicemailInfo</code> parameter. Subsequent queries: Use the cursor value from the previously returned in the ContactLookupResultInfo parameter.	Query
voicemailId	string	ID of the voicemail message.	Path

Example request. Returns the search results that match voicemail message ID 512 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/voicemails/512/contacts/cursor="..YW5nLlN0cmVudC512"=="
```

Response.

Data	Description
ContactLookupResultInfo	Search results.

Updates the Contact in the Skill Voicemail

PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/update_contact

Updates the contact in the skill voicemail.

The main resulting event is [EVENT_VOICEMAILS_UPDATED](#). The event reason is `ACTIVE_CONTACT_SELECTED`, the payload ID is `voicemailId`, and the payload `activeContact` is the data for the updated contact ID.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
contact	ContactInfo	Updated contact information.	Body
voicemailId	string	ID of the voicemail message.	Path

Example request. Updates the information of the contact who left voicemail message ID 234 for agent ID 2385.

```
https://<Base_API_URL/context>/agents/2385/interactions/voicemails/234/update_contact
```

Response.

Data	Description
VoicemailInfo	Updated voicemail information.

Selects the Active Contact for the Voicemail Message

PUT /agents/{agentId}/interactions/voicemails/{voicemailId}/active_contact

Selects the contact associated with the voicemail message.

The main resulting event is [EVENT_VOICEMAILS_UPDATED](#). The event reason is `ACTIVE_CONTACT_SELECTED`, the payload ID is `voicemailId`, and the payload `activeContact` is the data for the updated contact ID.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
contactId	string	Contact ID.	Body
voicemailId	string	ID of the voicemail message.	Path

Example request. Associates the current contact with voicemail message ID 512 for agent ID 2385 to contact ID 78 in the body of the request.

`https://<Base_API_URL/context>/agents/2385/interactions/voicemails/512/active_contact/`

Response.

Data	Description
VoicemailInfo	Information about the voicemail message.

Worksheets

[Gets a Worksheet](#)
[Updates a Worksheet](#)
[Deletes a Worksheet](#)

Gets a Worksheet

GET /agents/{agentId}/interactions/{interactionId}/worksheet

Returns a worksheet filled during an interaction.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path

Response.

Data	Description
WorksheetInfo	Information filled in the worksheet.

Example request. Retrieves worksheet information for agent ID 1 and interaction 1234.

`https://<Base_API_URL/context>/agents/1/interactions/1234/worksheet`

Updates a Worksheet

`PUT /agents/{agentId}/interactions/{interactionId}/worksheet`

Returns a worksheet filled during an interaction. Returns the following exceptions:

- If the specified worksheet is not found, returns [WORKSHEET NOT FOUND](#).
- If the specified worksheet has been updated in another sessions, returns [WORKSHEET UPDATED BY OTHER SESSION](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path
WorksheetInfo	string	Worksheet information. Body	

Response.

Data	Description
WorksheetInfo	Updated worksheet information.

Example request. Updates worksheet information for agent ID 1 and interaction 1234.

`https://<Base_API_URL/context>/agents/1/interactions/1234/worksheet`

Deletes a Worksheet

```
DELETE /agents/{agentId}/interactions/{interactionId}/worksheet
```

Returns a worksheet filled during an interaction.

This method may return the [WORKSHEET_NOT_FOUND](#) exception if the specified worksheet is not found.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
interactionId	string	Interaction ID.	Path

Response. Empty.

Example request. Deletes worksheet information for agent ID 1 and interaction 1234.

```
https://<Base_API_URL/context>/agents/1/interactions/1234/worksheet
```

Supervisor REST Requests and Responses

Request parameters contain the name, data type, description, and the location of the parameter in the request.

Important

For requests that apply to supervisors (`/supervisors/...`), the supervisor must be authenticated, logged in, and in the appropriate state as indicated by the request. If the user state is incorrect, the request returns an error with the required user state to successfully perform the request.

These sections describe the Supervisor REST API methods:

Alerts	Queues and Agent Groups
Callbacks	Statistics and Portal Information
Calls and Recordings	Supervisor Messages
Campaigns	Supervisor Sessions
Domain Settings	Voicemail Messages
Domain Users and Active User Sessions	Statistics
Messages	Transfers
Monitoring	

Alerts

[Creates an Alert for a Supervisor](#)
[Updates an Alert for a Supervisor](#)
[Deletes an Alert for a Supervisor](#)
[Gets an Alert for a Supervisor](#)
[Gets All the Alerts for a Supervisor](#)

Creates an Alert for a Supervisor

POST /supervisors/{supervisorId}/alerts

Creates an alert for a supervisor.

Parameters.

Name	Data	Description	Type
alertInfo	AlertInfo	Alert information.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Creates an alert for supervisor ID 2385. The alert information is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/alerts`

Response.

Data	Description
AlertInfo	Alert information.

Updates an Alert for a Supervisor

PUT /supervisors/{supervisorId}/alerts/{alertId}

Updates an alert for a supervisor.

Parameters.

Name	Data	Description	Type
alertId	string	Alert ID.	Path
alertInfo	AlertInfo	Alert information.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Updates alert ID 4876 for supervisor ID 2385. The alert information is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/alerts/4876`

Response.

Data	Description
AlertInfo	Alert information.

Deletes an Alert for a Supervisor

```
DELETE /supervisors/{supervisorId}/alerts/{alertId}
```

Deletes an alert for a supervisor.

Parameters.

Name	Data	Description	Type
alertId	string	Alert ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Deletes alert ID 4876 for supervisor ID 2385.

```
https://<Base_API_URL/context>/supervisors/2385/alerts/4876
```

Response. Empty.

Gets an Alert for a Supervisor

```
GET /supervisors/{supervisorId}/alerts/{alertId}
```

Returns an alert to a supervisor.

Parameters.

Name	Data	Description	Type
alertId	string	Alert ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Returns alert ID 4876 to supervisor ID 2385.

```
https://<Base_API_URL/context>/supervisors/2385/alerts/4876
```

Response.

Data	Description
AlertInfo	Alert information.

Gets All the Alerts for a Supervisor

GET /supervisors/{supervisorId}/alerts

Returns multiple alerts to a supervisor.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns alerts to supervisor ID 2385.

https://<Base_API_URL/context>/supervisors/2385/alerts

Response.

Data	Description
AlertInfo []	Collection of information for alerts.

Callbacks

[Gets the Callbacks](#)
[Moves a Callback](#)
[Moves Multiple Callbacks](#)

Gets the Callbacks

GET /supervisors/{supervisorId}/agents/{agentId}/callbacks

Returns the scheduled callbacks for an agent.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentId	string	Agent ID.	Path

Example request. Supervisor ID 2385 retrieves the callbacks for agent ID 3671.

`https://<Base_API_URL/context>/supervisors/2385/agents/3671/callbacks`

Response.

Data	Description
CallbackInfo []	Array of callbacks.

Moves a Callback

`POST /supervisors/{supervisorId}/agents/{agentIdFrom}/callbacks/{callbackId}/move_to_agent`

Moves a callback from one agent to another agent.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentIdFrom	string	Agent ID currently assigned to the callback.	Path
callbackId	string	Callback ID.	Path
agentIdTo	string	New agent ID to assign the callback.	Body

Example request. Supervisor ID 2385 moves the callback with ID 5712 from agent ID 3671. The new agent to assign the callback is specified in the body.

`https://<Base_API_URL/context>/supervisors/2385/agents/3671/callbacks/5712/move_to_agent`

Response. Empty.

Moves Multiple Callbacks

POST /supervisors/{supervisorId}/agents/{agentIdFrom}/callbacks/move_to_agent

Moves multiple callbacks from one agent to another agent.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentIdFrom	string	Agent ID currently assigned to the callbacks.	Path
moveCallbackInfo	MoveCallbackInfo	Information containing the callbacks to move, including the new agent to assign the callbacks.	Body

Example request. Supervisor ID 2385 moves the callbacks from agent ID 3671. The agent to assign the callbacks is specified in the body.

https://<Base_API_URL/context>/supervisors/2385/agents/3671/callbacks/move_to_agent

Response.

Data	Description
string[]	Array of callback IDs that were moved.

Calls and Recordings

[Makes a Test Call](#)
[Makes a Test Call to Queues](#)
[Makes an Echo Call](#)
[Deletes an Echo Call](#)
[Creates a Call Recording View](#)
[Gets the Call Recording Views](#)
[Deletes a Call Recording View](#)
[Updates a Call Recording View](#)
[Gets the Next Set of Records from a Call Recording View](#)
[Gets the Previous Set of Records from a Call Recording View](#)
[Deletes Call Recordings](#)

Makes a Test Call

POST /supervisors/{supervisorId}/interactions/make_test_call

Makes a test call to an agent.

A call can be made only when a valid campaign ID is set in [TestCallInfo](#). If an invalid campaign ID is supplied, error ID 4 ([INVALID_PARAMETER_VALUE](#)) is returned. This method should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance states.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
info	TestCallInfo	Test call information.	Body

Example request. Supervisor ID 2385 makes a test call.

`https://<Base_API_URL/context>/supervisors/2385/interactions/make_test_call`

Response. Empty.

Makes a Test Call to Queues

POST /supervisors/{supervisorId}/interactions/make_skills_test_calls

Makes a test call to the specified queues.

You must specify at least one valid queue in [TestSkillCallInfo](#). If no valid queue is specified, error ID 4 ([INVALID_PARAMETER_VALUE](#)) is returned. This method should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance states.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
info	TestSkillCallInfo	Test call information.	Body

Example request. Supervisor ID 2385 calls the users that are in the specified queues set in the request body.

`https://<Base_API_URL/context>/supervisors/2385/interactions/make_skills_test_calls`

Response. Empty.

Makes an Echo Call

POST /supervisors/{supervisorId}/echo_call

Makes an echo call. If the supervisor station is not connected or monitoring is in progress, the request throws `F9WrongStateException`. This method should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance state.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 makes an echo call.

`https://<Base_API_URL/context>/supervisors/2385/echo_call`

Response. Empty.

Deletes an Echo Call

```
DELETE /supervisors/{supervisorId}/echo_call
```

Deletes an echo call that a supervisor has initiated.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 deletes an echo call.

```
https://<Base_API_URL/context>/supervisors/2385/echo_call
```

Response. Empty.

Creates a Call Recording View

```
POST /supervisors/{supervisorId}/agents/{agentId}/recording_views
```

Creates a call recording view, which is used to iterate an agent's recordings. A view contains a subset of recording records that are selected using the `options` parameter.

This method returns an initial view state containing the first selected records.

If records are returned, the `RecordingsViewInfo.hasMore` parameter is true. Use `recording_views/{viewId}/next` to get the next set of records.

When you no longer need the recording view, delete the view.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
options	RecordingsViewOptions	Recording view options.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 creates a recording view for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views`

Response.

Data	Description
RecordingsViewInfo	Information about the recording view.

Gets the Call Recording Views

GET /supervisors/{supervisorId}/agents/{agentId}/recording_views

Returns the IDs of the recording views that have been created.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the recording views for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views`

Response.

Data	Description
string[]	Recording view IDs.

Deletes a Call Recording View

DELETE /supervisors/{supervisorId}/agents/{agentId}/recording_views/{viewId}

Deletes a call recording view.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	View ID.	Path

Example request. Supervisor ID 2385 deletes recording view ID 7634 for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views/7634`

Response. Empty.

Updates a Call Recording View

`PUT /{supervisorId}/agents/{agentId}/recording_views/{viewId}`

The data in a call recording view is divided into pages of data. To retrieve more records, you use this method to refresh the page of data.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	View ID.	Path

Example request. Supervisor ID 2385 refreshes recording view ID 7634 for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views/7634`

Response.

Data	Description
<u>RecordingsViewInfo</u>	Information about the recording view.

Gets the Next Set of Records from a Call Recording View

PUT `/supervisorId/agents/{agentId}/recording_views/{viewId}/next`

Returns the next set of records from a call recording view. The number of records returned is less than or equal to the [RecordingsViewOptions](#) limit parameter.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	View ID.	Path

Example request. Supervisor ID 2385 gets the next set of records from recording view ID 7634 for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views/7634/next`

Response.

Data	Description
RecordingsViewInfo	Information about the recording view.

Gets the Previous Set of Records from a Call Recording View

PUT `/supervisorId/agents/{agentId}/recording_views/{viewId}/previous`

Returns the previous set of records from a call recording view. The number of records returned is less than or equal to the [RecordingsViewOptions](#) limit parameter.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	View ID.	Path

Example request. Supervisor ID 2385 gets the previous set of records from recording view ID 7634 for agent ID 1262.

`https://<Base_API_URL/context>/supervisors/2385/agents/1262/recording_views/7634/previous`

Response.

Data	Description
<u>RecordingsViewInfo</u>	Information about the recording view.

Deletes Call Recordings

This request deletes an agent's call recordings:

`PUT /supervisors/{supervisorId}/agents/{agentId}/recordings/delete`

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
recordingIds	string[]	Recording IDs.	Body

Example request. Supervisor ID 2385 deletes call recordings from agent ID 7623.

`https://<Base_API_URL/context>/supervisors/2385/agents/7623/recordings/delete`

Response. Empty.

Campaigns

[Gets all Campaigns](#)

[Starts a Campaign](#)

[Stops a Campaign](#)

[Resets the Campaign, List Position, Disposition, or Dropped Call Statistics](#)

[Gets a Campaign System Message](#)

[Gets the Campaign Profiles](#)

[Gets the Campaign List Details](#)

[Gets the Campaign List Statistics](#)

[Updates the Outbound Campaign Runtime Statistics](#)

[Gets the Time Zones for the Domain](#)

Gets all Campaigns

GET /orgs/{orgId}/campaigns

Returns the campaigns in the domain. All campaigns are returned, whether they are running or not.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the campaigns for domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/campaigns

Response.

Data	Description
SupervisorCampaignInfo []	Array of campaign information.

Starts a Campaign

PUT /orgs/{orgId}/campaigns/{campaignId}/start

Starts a campaign.

The user must have the `CAN_START_CAMPAIGNS` permission. A campaign cannot be started when the domain is ready for migration (`READY_FOR_MIGRATION`), or maintenance has started (`STARTED`).

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path

Example request. Starts campaign ID 6541 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/6541/start`

Response. Empty.

Stops a Campaign

`PUT /orgs/{orgId}/campaigns/{campaignId}/stop`

Stops a campaign.

A campaign cannot be stopped when the domain is ready for migration (`READY_FOR_MIGRATION`), or maintenance has started (`STARTED`). The supervisor must have the `CAN_STOP_CAMPAIGNS` permission to run this method.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path
force	boolean	When set to true, the campaign is immediately stopped regardless of other campaign activity. Dialing of numbers is stopped and all active calls are disconnected. When set to false, the campaign is stopped after the active calls are completed. No new calls can begin. The campaign status is changed to <code>Not Running</code> .	Query

Example request. Stops campaign ID 6541 for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/6541/stop`

Response. Empty.

Resets the Campaign, List Position, Disposition, or Dropped Call Statistics

`PUT /orgs/{orgId}/campaigns/{campaignId}/reset`

Resets a campaign, campaign list position, campaign disposition, or campaign dropped call statistics object.

Depending on the task, the user must have one or more of the following permissions to run this method:

- CAN_RESET_CAMPAIGNS
- CAN_RESET_DISPOSITIONS
- CAN_RESET_LIST_POSITION
- CAN_RESET_ABANDON_CALL_RATE

A campaign cannot be started when the domain is ready for migration (`READY_FOR_MIGRATION`), or maintenance has started (`STARTED`).

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path
campaignResetInfo	CampaignResetInfo	Campaign reset information.	Body

Parameters

Example request. Resets campaign ID 6541 in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/6541/reset`

Response. Empty.

Gets a Campaign System Message

`GET /orgs/{orgId}/campaigns/{campaignId}/system_message`

Returns a campaign system message, which is the last message sent for a campaign about the campaign state.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
campaignId	string	Campaign ID.	Path

Example request. Returns a system message for campaign ID 1284 in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/1284/system_message`

Response.

Data	Description
CampaignSystemMessageInfo []	Information about the campaign system message.

Gets the Campaign Profiles

GET /orgs/{orgId}/campaign_profiles

Returns the campaign profiles in the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the campaign profiles for domain 1254.

`https://<Base_API_URL/context>/orgs/1254/campaign_profiles`

Response.

Data	Description
SupervisorCampaignProfileInfo []	Array of campaign profiles.

Gets the Campaign List Details

GET /orgs/{orgId}/campaigns/{campaignId}/lists/{listId}/details

Returns statistics about campaign dialing records for the last 24 hours, based on time intervals specified in milliseconds.

Parameters.

Name	Data	Description	Type
campaignId	string	Campaign ID.	Path
listId	string	List ID. To return the details for all lists, set this parameter to 0.	Path
orgId	string	Domain ID.	Path
step	int	Time interval for the statistics retrieval. The time interval specified in ms is known as a step.	Query

Example request. Returns list ID 6512 details for campaign ID 1284 in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/1284/lists/6512/details`

Response.

Data	Description
CampaignListDetailsInfo []	Information about the campaign lists.

Gets the Campaign List Statistics

GET /orgs/{orgId}/campaigns/{campaignId}/lists/statistics

Returns the campaign list statistics.

Parameters.

Name	Data	Description	Type
campaignId	string	Campaign ID.	Path
orgId	string	Domain ID.	Path

Example request. Returns the statistics for campaign ID 1284 in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/campaigns/1284/lists/statistics`

Response.

Data	Description
OutboundCampaignListStatsInfo []	Information about the campaign lists.

Updates the Outbound Campaign Runtime Statistics

PUT /orgs/{orgId}/campaigns/{campaignId}/statistics/refresh

Updates the outbound campaign runtime statistics.

Parameters.

Name	Data	Description	Type
campaignId	string	Campaign ID.	Path
orgId	string	Domain ID.	Path

Example request. Updates the outbound runtime statistics for campaign ID 1284 in domain ID 1357.

https://<Base_API_URL/context>/orgs/1357/campaigns/1284/statistics/refresh

Response. Empty.

Gets the Time Zones for the Domain

GET /orgs/{orgId}/time_zones

Retrieves a list of all the available region-based IDs from IANA Time Zone Database (TZDB), such as Europe/London or America/New_York

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Response.

Data	Description
string[]	Array of available time zones.
Example:	
51: "America/Cayenne LMT GFT GFT 3t.k 40 30 012 -2mrwu.E 2gWou.E"	
52: "America/Cayman KMT EST 57.b 50 01 -211uQ.N"	

Cloud User ID

[Gets the Cloud User ID](#)

Gets the Cloud User ID

GET /supervisors/{supervisorId}/agents/{agentId}/user_uid

Returns the cloud user ID for the supervisor.

Note

This user ID is required for some cloud requests.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentId	string	Agent ID.	Path

Example request. Supervisor ID 2385 retrieves the userID for agent ID 3671.

https://<Base_API_URL/context>/supervisors/2385/agents/3671/user_uid

Response.

Data	Description
CallbackInfo	User identifier.

Domain Settings

[Gets the Domain Information](#)
[Gets the Dispositions in the Domain](#)
[Gets the Queues in the Domain - Agent ID](#)
[Gets the Current Time in the Domain](#)
[Gets the Agent Groups in the Domain](#)
[Gets the Users in the Domain](#)
[Gets the Queues in the Domain - Domain ID](#)
[Gets the Reason Codes in the Domain](#)
[Gets the Dialing Lists in the Domain](#)
[Logs out a User](#)
[Gets the Domain Clusters](#)
[Gets the Domain Attributes](#)

Gets the Domain Information

GET `orgs/{orgId}`

Returns information about the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Response.

Data	Description
OrganizationInfo	Information about a domain.

Gets the Dispositions in the Domain

GET `/orgs/{orgId}/dispositions`

Returns the dispositions available for the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the dispositions for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/dispositions`

Response.

Data	Description
<u>SupervisorDispositionInfo</u> []	Array of dispositions.

Gets the Queues in the Domain - Agent ID

`GET /orgs/{orgId}/skills`

Returns an array of queues in the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns an array of queues for agent ID 2385.

`https://<Base_API_URL/context>/orgs/749/skills`

Response.

Data	Description
<u>SkillInfo</u> []	Array of queues.

Gets the Current Time in the Domain

`GET /orgs/{orgId}/time`

Returns the current time from the server.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the time for domain ID 1234.

`https://<Base_API_URL/context>/orgs/1234/time`

Response.

Data	Description
NonNullLongValue	Current epoch time from the server in milliseconds.

Gets the Agent Groups in the Domain

`GET /orgs/{orgId}/agent_groups`

Returns an array of agent groups.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns an array of agent groups for domain ID 1254.

`https://<Base_API_URL/context>/orgs/1254/agent_groups`

Response.

Data	Description
SupervisorAgentGroupInfo []	Array of agent groups.

Gets the Users in the Domain

`GET /orgs/{orgId}/users`

Returns an array of users.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns an array of users for domain ID 1254.

`https://<Base_API_URL/context>/orgs/1254/users`

Response.

Data	Description
SupervisorUserInfo[]	Array of agent groups.

Gets the Queues in the Domain - Domain ID

`GET /orgs/{orgId}/skills`

Returns an array of queues.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the queues for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/skills`

Response.

Data	Description
SkillInfo[]	Array of queues.

Gets the Reason Codes in the Domain

`GET /orgs/{orgId}/reason_codes`

Returns an array of reason codes.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the reason codes for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/reason_codes`

Response.

Data	Description
SupervisorReasonCodeInfo []	Array of reason codes.

Gets the Dialing Lists in the Domain

`GET /orgs/{orgId}/lists`

Returns the dialing lists in the domain. The supervisor must have the `CAN_RUN_WEB_SUPERVISOR` permission.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the dialing lists for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/lists`

Response.

Data	Description
SupervisorListInfo []	Array of dialing list information.

Logs out a User

`PUT /orgs/{orgId}/user_sessions/{sessionId}/logout`

Forcibly logs out an active user from the domain. You must have the `CAN_VIEW_USERS_DATA` permission to run this method.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path
sessionId	string	Session ID to terminate.	Path

Example request. Forcibly logs out session ID 3422 in domain ID 2385.

`https://<Base_API_URL/context>/orgs/2385/user_sessions/3422/logout`

Response. Empty.

Gets the Domain Clusters

`GET /orgs/{orgId}/clusters`

Returns a list of Natural Language Processing (NLP) categories or clusters for the domain.

You can use this request only if your domain is enabled for Natural Language Processing. This request does not apply to calls and voicemail. The supervisor must have the `CAN_VIEW_TEXT_DATA` and `CAN_RUN_WEB_SUPERVISOR` permissions.

Parameters.

Name	Data	Description	Type
orgId	long	Domain ID.	Path

Example request. Retrieves the list of clusters for domain ID 2385.

`https://<Base_API_URL/context>/orgs/2385/clusters`

Response.

Data	Description
<u>Cluster</u> []	List of categories.

Gets the Domain Attributes

`GET /orgs/{orgId}/attributes`

Returns a list of attributes of the domain. The supervisor must have the `CAN_RUN_WEB_SUPERVISOR` and `CAN_VIEW_TEXT_DATA` permissions.

Parameters.

Name	Data	Description	Type
orgId	long	Domain ID.	Path

Example request. Retrieves the list of attributes for domain ID 2385.

`https://<Base_API_URL/context>/orgs/2385/attributes`

Response.

Data	Description
Attribute []	List of domain attributes.

Domain Users and Active User Sessions

[Gets the Domain Users](#)
[Gets the User Profiles in the Domain](#)
[Gets the Agent States in the Domain](#)
[Gets the Active User Sessions](#)
[Updates the State of an Agent](#)
[Migrates a Supervisor](#)
[Gets the Maintenance State of a Supervisor](#)

Gets the Domain Users

`GET /orgs/{orgId}/users`

Returns an array of users for your domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns information about users in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/users`

Response.

Data	Description
SupervisorUserInfo []	Array of user information.

Gets the User Profiles in the Domain

GET `/orgs/{orgId}/user_profiles`

Returns an array of user profiles for your domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns information about users in domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/users`

Response.

Data	Description
SupervisorUserProfileInfo []	Array of user profile information.

Gets the Agent States in the Domain

GET `/orgs/{orgId}/agent_states`

Returns the agent ready states in the domain.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the agent states for domain ID 1357.

`https://<Base_API_URL/context>/orgs/1357/agent_states`

Response.

Data	Description
Map<string, string>	Channel readiness: • Key string: Contains agent ID. • Value string: Sequence of single-letter codes. An empty string means that the agent is logged in but not ready for all the channels. Contains AgentAbilityCode. If empty, agent is logged in but not ready for all channels.

Gets the Active User Sessions

GET /orgs/{orgId}/user_sessions

Returns the active user sessions.

Parameters.

Name	Data	Description	Type
orgId	string	Domain ID.	Path

Example request. Returns the active user sessions for domain ID 2385.

https://<Base_API_URL/context>/orgs/2385/user_sessions

Response.

Data	Description
UserSessionInfo []	Array of information about the user sessions.

Updates the State of an Agent

PUT /{supervisorId}/agents/{agentId}/presence

If the agent is not on a call, the current state is updated immediately. Otherwise the update is applied as follows:

- If the agent is on a call, the update is applied at the end of the call.
- If the agent is ready for calls and/or voicemail, and the Graceful Agent State Transition feature is enabled in the Administrator application, the update is applied after the time-out specified in that feature.

This method generate the [EVENT_PRESENCE_UPDATED](#) event.

If the request results in a `NOT_AUTHORIZED` error, the context may contain a field named `notPermittedChannel`, which contains an array of `ChannelType` values.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
stateInfo	PresenceInfo	Updated state of the agent.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 5712 updates the state for agent ID 2367.
`https://<Base_API_URL/context>/5712/agents/2367/presence`

Response.

Data	Description
FullStateInfo []	Updated state of the agent.

Migrates a Supervisor

```
PUT /{supervisorId}/migrate
```

Migrates the specified supervisor between a primary and maintenance destination.

If successful, the request sends the [EVENT_STATION_UPDATED](#) and [EVENT_LOGIN_STATE_UPDATED](#) events. Generates the event [EVENT_FILTER_SETTINGS_UPDATED](#) unconditionally.

You can migrate from the backup to the primary maintenance states, however, migration cannot be done from the following states:

- Primary maintenance states:
 - COMPLETED
 - CANCELED
 - ANNOUNCED
 - STARTED
- Backup maintenance states:

- COMPLETED
- CANCELED
- ANNOUNCED
- STARTED

A user who is logged in as a supervisor cannot perform the migration if the user is logged in as an agent at the same time. Exceptions are returned in these cases:

- If the supervisor is already at the maintenance destination, throws the [ALREADY ON FARM](#) exception.
- If the supervisor has an active task, throws the [USER HAS ACTIVE TASK](#) exception.

Parameters.

Name	Data	Description	Type
migrateToMaintenance	boolean	Whether to migrate the supervisor to a maintenance destination.	Query
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 5712 migrates to the maintenance destination.
`https://<Base_API_URL/context>/5712/migrate?migrateToMaintenance=true`

Response. Empty.

Gets the Maintenance State of a Supervisor

GET `/ {supervisorId} /switchover_metadata`

Returns the specified supervisor maintenance state.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 5712 retrieves the maintenance state.
`https://<Base_API_URL/context>/5712/switchover_metadata`

Response.

Data	Description
SwitchoverMetadata	Supervisor maintenance state.

Messages

This section describes the message requests that can be called by agents and supervisors and are not specific to either role.

[Gets a List of Messages](#)

[Sends a Message](#)

[Sends a Message with an Identifier](#)

[Broadcasts a Message to Logged-In Users](#)

[Accepts an Email Message Sent from an External Source](#)

Gets a List of Messages

GET /messages/{agentId}/messages

Returns a list of messages.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
conversationId	string	Conversation ID. If omitted, the message headers are returned.	Query
creationTime	long	Epoch start time to retrieve messages. If omitted, the default is the current time.	Query
pageSize	int	Number of messages to return. If omitted, the default is 50.	Query

Example request. Returns the messages for agent ID 6512.

https://<Base_API_URL/context>/messages/6512/messages

Response.

Data	Description
Collection< ExchangeMessage >	Collection of messages.

Sends a Message

POST /messages/{agentId}/messages

Sends a message to an agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
messageBody	ExchangeMessageBody	Message body.	Body

Example request. Sends a message to agent ID 6512.

`https://<Base_API_URL/context>/messages/6512/messages`

Response. Empty.

Sends a Message with an Identifier

POST /messages/{agentId}/messages/{messageId}

Sends a message to an agent with a message identifier.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
messageBody	ExchangeMessageBody	Message body.	Body
messageId	string	Message ID.	Path

Example request. Sends a message to agent ID 6512 with message ID 8642.

`https://<Base_API_URL/context>/messages/6512/messages/8642`

Response. Empty.

Broadcasts a Message to Logged-In Users

POST /users/{userId}/broadcast_messages

Broadcasts a message to all logged-in users with the specified role (agent and/or supervisor).

Parameters.

Name	Data	Description	Type
message	BroadcastMessageInfo	Broadcast message.	Body
userId	string	ID of the user who sends the message.	Path

Example request. Broadcasts a message to user 345.

`https://<Base_API_URL/context>/users/345/broadcast_messages`

Response. Empty.

Accepts an Email Message Sent from an External Source

`POST /orgs/{orgId}/interactions/email`

Accepts an email message that was sent from an external source.

Parameters.

Name	Data	Description	Type
emailBody	RequestEmailBody	Message body.	Body

Example request. Accepts an email message.

`https://<Base_API_URL/context>/orgs/6384/interactions/email`

Response. Empty.

Monitoring

[Starts and Stops Agent Monitoring](#)
[Gets Information About all Agents](#)
[Gets Information About a Specific Agent](#)
[Updates an Agent's Information](#)
[Gets an Agent's Parked Calls](#)
[Gets an Agent's Session History](#)
[Sets an Agent's Recording State](#)
[Sets an Agent's Voicemail State](#)
[Sets the Monitored Campaigns](#)
[Gets the Monitored Campaigns](#)
[Gets the User Locales](#)
[Gets the Domain Objects for the Locale](#)

Starts and Stops Agent Monitoring

PUT /supervisors/{supervisorId}/agents/{agentId}/monitor

Controls agent monitoring. This method requires the `CAN_SILENT_MONITOR` permission and should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance states.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentIdFrom	string	Agent ID to monitor.	Path
agentMonitorInfo	AgentMonitorInfo	Information containing the agent monitor mode.	Body

Example request. Supervisor ID 2385 monitors agent ID 3671.

`https://<Base_API_URL/context>/supervisors/2385/agents/3671/monitor`

Response. Empty.

Gets Information About all Agents

GET /supervisors/{supervisorId}/agents

Returns an array of agent information.

Parameters.

Name	Data	Description	Type
supervisorID	string	Supervisor ID.	Path
include	string	Optional type of agent information to return. If the parameter is not set, basic information is returned for every agent. The <code>include</code> parameter can be set to one of these values: <code>monitor</code>: A list of supervisor monitors is returned for every agent. <code>skills</code>: A list of agent queues is returned for every agent.	Query

Example request. Supervisor ID 2385 requests the agent information, including the queues.

`https://<Base_API_URL/context>/supervisors/2385/agents?include=skills`

Response.

Data	Description
<u>SupervisorAgentInfo</u> []	Array of agent information.

Gets Information About a Specific Agent

`GET /supervisors/{supervisorId}/agents/{agentId}`

Returns the information about a specific agent.

Parameters.

Name	Data	Description	Type
supervisorID	string	Supervisor ID.	Path
agentID	string	Agent ID.	Path
include	string	Optional type of agent information to return. If the parameter is not set, basic information	Query

Name	Data	Description	Type
		is returned for every agent. The <code>include</code> parameter can be set to one of these values: <code>monitor</code>: A list of supervisor monitors is returned for every agent. <code>skills</code>: A list of agent queues is returned for every agent.	

Example request. Supervisor ID 2385 requests the information for agent ID 2512, including the monitors.

`https://<Base_API_URL/context>/supervisors/2385/agents/2512?include=monitor`

Response.

Data	Description
SupervisorAgentInfo	Agent information.

Updates an Agent's Information

PUT /supervisors/{supervisorId}/agents/{agentId}

Updates the information for an agent, such as the agent's list of skills.

Parameters.

Name	Data	Description	Type
supervisorID	string	Supervisor ID.	Path
agentID	string	Agent ID.	Path
info	SupervisorAgentInfo	Information containing the updates for the agent, for example: A new list of queues to be assigned to the agent.	Body

Example request. Supervisor ID 2385 updates the information for agent ID 2512. The agent information to update is set in the body.

`https://<Base_API_URL/context>/supervisors/2385/agents/2512`

Response. Empty.

Gets an Agent's Parked Calls

GET /supervisors/{supervisorId}/agents/{agentId}/parked_calls

Returns the calls parked by an agent.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the calls parked by agent ID 2856.

https://<Base_API_URL/context>/supervisors/2385/agents/2856/parked_calls

Response.

Data	Description
ParkedCallInfo []	Array of parked calls.

Gets an Agent's Session History

GET /supervisors/{supervisorId}/agents/{agentId}/session_history

Returns an agent's session history.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the session history for agent ID 2856.

https://<Base_API_URL/context>/supervisors/2385/agents/2856/session_history

Response.

Data	Description
SocialItem []	Array of session history information.

Sets an Agent's Recording State

PUT /supervisors/{supervisorId}/agents/{agentId}/recording_state

Sets the recording state for an agent's current session.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentId	string	Agent ID.	Path
agentRecordingStateInfo	AgentReadyPresence	Information containing the agent recording state.	Body

Example request. Supervisor ID 2385 sets the recording state for agent 6342.

https://<Base_API_URL/context>/supervisors/2385/agents/6342/recording_state

Response. Empty.

Sets an Agent's Voicemail State

PUT /supervisors/{supervisorId}/agents/{agentId}/voicemail_state

Sets the voicemail state for an agent who is logged in.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
agentId	string	Agent ID.	Path
readyState	boolean	Whether the agent is ready to work on voicemails.	Body

Example request. Supervisor ID 2385 sets the voicemail state for agent ID 6512. The voicemail state is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/agents/6512/voicemail_state`

Response. Empty.

Sets the Monitored Campaigns

`PUT /supervisors/{supervisorId}/monitor/campaigns`

Sets the monitored campaigns. Agents for the monitored campaigns are randomly selected for silent monitoring.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
monitoredCampaigns	MonitoredCampaignsInfo	Information about the monitored campaigns.	Body

Example request. Supervisor ID 2385 sets the monitored campaigns.

`https://<Base_API_URL/context>/supervisors/2385/monitor/campaigns`

Response.

Data	Description
MonitoredCampaignsInfo	Information about the monitored campaigns.

Gets the Monitored Campaigns

`GET /supervisors/{supervisorId}/monitor/campaigns`

Returns the monitored campaigns.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the monitored campaigns.

`https://<Base_API_URL/context>/supervisors/2385/monitor/campaigns`

Response.

Data	Description
MonitoredCampaignsInfo	Information about the monitored campaigns.

Gets the User Locales

`GET /supervisors/{supervisorId}/locales`

Retrieves a list of user locales. If the domain does not support localization, the request returns error code 11. Returns domain objects fields translations. The returned bundle is a collection of objects. For more information about object types, see [ObjectType](#).

object can be one of the following types:

- REASON_CODE
- CAMPAIGN
- USER
- SPEEDDIAL
- DISPOSITION

ObjectField can be one of the following enumeration constants:

- NAME
- DESCRIPTION

Parameters.

Name	Data	Description	Type
isDefault	boolean	(Optional) Whether to return only the default locale for the user.	Query
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the user locales.

`https://<Base_API_URL/context>/supervisors/2385/locales`

Response.

Data	Description
LocaleInfo []	Information about the locales.

Gets the Domain Objects for the Locale

GET /supervisors/{supervisorId}/locales/{localeId}/domain_objects

Returns the domain objects for the locale.

Parameters.

Name	Data	Description	Type
localeId	string	Locale ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets the domain objects for locale ID 6513.

`https://<Base_API_URL/context>/supervisors/2385/locales/6513/domain_objects`

Response.

Data	Description
DomainObjectTranslationInfo []	Information about the domain objects.

Queues and Agent Groups

[Gets the Supervisor's Queues](#)
[Gets the Supervisor's Agent Groups](#)
[Sets the Agent's Active Queues](#)

Gets the Supervisor's Queues

GET /supervisors/{supervisorId}/skills

Returns the supervisor's queues.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the queues for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/skills`

Response.

Data	Description
SkillInfo []	Array of queues assigned to the supervisor. This array is a subset of the queues that are returned by Gets the Queues in the Domain - Domain ID .

Gets the Supervisor's Agent Groups

GET /supervisors/{supervisorId}/agent_groups

Returns the agent groups assigned to the supervisor.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the agent groups for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/agent_groups`

Response.

Data	Description
SupervisorAgentGroupInfo []	Array of agent groups.

Sets the Agent's Active Queues

PUT /supervisors/{supervisorId}/agents/{agentId}/active_skills

Selects active queues for the agents session.

The active queues are a subset of those assigned to the agent queues ([Gets Information About a Specific Agent](#)). The supervisor may activate only a subset of the

queues during a session. To obtain the list of queues activated during a session, see [Gets Information About a Specific Agent](#).

Parameters.

Name	Data	Description	Type
supervisorID	string	Supervisor ID.	Path
agentId	string	Agent ID.	Path
skills	string[]	Array of queues IDs to activate.	Body

Example request. Selects active queues for agent ID 2385 by supervisor ID 567.

`https://<Base_API_URL/context>/supervisors/567/agents/2385/active_skills>`

Response.

Data	Description
string[]	Updated list of active queues.

Statistics and Portal Information

[Gets the Statistics Filter Settings](#)
[Sets the Statistics Filter Settings](#)
[Gets the Statistics Metadata](#)
[Gets the Statistic Type Metadata](#)
[Gets the Customer Portal Information](#)
[Gets a Snapshot of the ACD](#)
[Gets the Auxiliary Statistics of Agents](#)

Gets the Statistics Filter Settings

GET /supervisors/{supervisorId}/stats_filter_settings

Returns the global settings that filter the statistics sent to the supervisor.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the global filter settings for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/stats_filter_settings`

Response.

Data	Description
StatsFilterSettingsInfo []	Array of statistics filter settings.

Sets the Statistics Filter Settings

PUT `/supervisors/{supervisorId}/stats_filter_settings`

Sets the global settings that filter the statistics sent to the supervisor.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
filterSettings	StatsFilterSettingsInfo	Statistics filter settings.	Body

Example request. Sets the global filter settings for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/stats_filter_settings`

Response. Empty.

Gets the Statistics Metadata

GET `/supervisors/{supervisorId}/stats_metadata`

Returns the statistics metadata for all fields and statistic types.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns all of the statistics metadata to supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/stats_metadata`

Response.

Data	Description
StatsMetadataInfo	Information about the statistics metadata.

Gets the Statistic Type Metadata

GET /supervisors/{supervisorId}/stats_metadata/{statisticType}

Returns the statistics metadata for a specified statistic type.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
statisticType	StatisticRequest	Statistic type.	Path

Example request. Returns the USER_SESSION statistics metadata to supervisor ID 2385.

https://<Base_API_URL/context>/supervisors/2385/stats_metadata/USER_SESSION

Response.

Data	Description
StatsMetadataInfo	Information about the statistics metadata.

Gets the Customer Portal Information

GET /supervisors/{supervisorId}/customer_portal

Returns the customer portal information.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the customer portal information to supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/customer_portal`

Response.

Data	Description
CustomerPortalInfo	Information about the customer portal.

Gets a Snapshot of the ACD

`GET /supervisors/{supervisorId}/skills/{skillId}/snapshot`

Returns the details for an Automatic Call Distributor (ACD) snapshot. An ACD snapshot contains information about voicemail messages, callbacks, and other data returned in [DetailedACDSnapshotInfo](#).

Parameters.

Name	Data	Description	Type
skillId	string	Queue ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Returns the ACD snapshot to supervisor ID 2385 for queue ID 3652.

`https://<Base_API_URL/context>/supervisors/2385/skills/3652/snapshot`

Response.

Data	Description
DetailedACDSnapshotInfo	ACD snapshot information.

Gets the Auxiliary Statistics of Agents

`GET /supervisors/{supervisorId}/agents/{agentId}/auxiliary_stats`

Returns the agent's auxiliary statistics, which include statistics for calls, campaigns, and dispositions.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Returns the statistics to supervisor ID 2385 for agent ID 4652.

`https://<Base_API_URL/context>/supervisors/2385/agents/4652/auxiliary_stats`

Response.

Data	Description
AgentApplicationType	Information about the agent auxiliary statistics.

Supervisor Messages

[Gets a List of Messages](#)
[Sends a Message](#)
[Sends a Message with a Message ID](#)
[Gets Maintenance Notices](#)
[Gets a Specified Maintenance Notice](#)
[Accepts a Specified Maintenance Notice](#)

Gets a List of Messages

GET /supervisors/{supervisorId}/messages

Returns a list of messages.

Parameters.

Name	Data	Description	Type
conversationId	string	Conversation ID. If omitted, the message headers are returned.	Query
creationTime	long	Epoch start time for retrieving messages. If omitted, the default is the current time.	Query
pageSize	int	Number of messages to return. If omitted,	Query

Name	Data	Description	Type
		the default is 50.	
supervisorId	string	Supervisor ID.	Path

Example request. Returns a list of messages to supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/messages`

Response.

Data	Description
ExchangeMessage []	Collection of exchange message information.

Sends a Message

`POST /supervisors/{supervisorId}/messages`

Sends a message.

Parameters.

Name	Data	Description	Type
body	ExchangeMessageBody	Message body.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 . The message information is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/messages`

Response. Empty.

Sends a Message with a Message ID

`POST /supervisors/{supervisorId}/messages/{messageId}`

Sends a message with a message ID.

Parameters.

Name	Data	Description	Type
body	ExchangeMessageBody	Message body.	Body
messageId	string	Message ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 with message ID 9754. The message information is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/messages/9754`

Response. Empty.

Gets Maintenance Notices

GET /supervisors/{supervisorId}/maintenance_notices

Returns a list of maintenance notices.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns a list of maintenance notices to supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/maintenance_notices`

Response.

Data	Description
MaintenanceNoticeInfo []	Collection of maintenance notices.

Gets a Specified Maintenance Notice

GET /supervisors/{supervisorId}/maintenance_notices/{noticeId}

Returns the maintenance notice with the specified ID.

Parameters.

Name	Data	Description	Type
noticeId	string	Maintenance notice ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Returns maintenance notice ID 3681 to supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/maintenance_notices/3681`

Response.

Data	Description
MaintenanceNoticeInfo	Information about a maintenance notice.

Accepts a Specified Maintenance Notice

`PUT /supervisors/{supervisorId}/maintenance_notices/{noticeId}/accept`

Accepts the maintenance notice with the specified ID. The event is [EVENT LOGIN STATE UPDATED](#)

Parameters.

Name	Data	Description	Type
noticeId	string	Maintenance notice ID.	Path
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 accepts maintenance notice ID 3681.

`https://<Base_API_URL/context>/supervisors/2385/maintenance_notices/3681/accept`

Response.

Data	Description
MaintenanceNoticeInfo	Information about a maintenance notice.

Supervisor Sessions

Session

[Starts a Supervisor's Session](#)
[Stops a Supervisor's Session](#)
[Restarts a Supervisor's Session](#)
[Sets the Time Zone](#)
[Obtains a WebSocket Event](#)

State

[Gets the Supervisor's Login State](#)
[Indicates Whether the Supervisor is Active](#)

Station

[Gets the Supervisor's Station](#)
[Gets the Supervisor's Station State](#)
[Restarts the Supervisor's Station](#)
[Gets the Supervisor's Softphone Configuration](#)
[Restarts the Supervisor's Softphone](#)

Starts a Supervisor's Session

```
PUT /supervisors/{supervisorId}/session_start
```

Starts a session and registers the station for the supervisor.

The initial login state must be `SELECT_STATION`. This request modifies the supervisor's login state. If successful, the request changes the [LoginState](#) value and sends the [EVENT STATION UPDATED](#) and [EVENT LOGIN STATE UPDATED](#) events.

This request can return the exception [DUPLICATE LOGIN](#), which asks the user to close the existing session. You can resend the request with `force=true` to force the creation of a session.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
stationInfo	StationInfo	Station information.	Body
force	boolean	Optional. Whether to force session creation. Normally, set this parameter to false.	Query

Example request. Starts the session for supervisor ID 2385. The station information is specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/session_start`

Body with stationInfo:
{ "stationId": "551", "stationType": "SOFTPHONE" }

Response. Empty.

Stops a Supervisor's Session

`PUT /supervisors/{supervisorId}/session_stop`

Terminates the supervisor's session.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
reasonCodeInfo	ReasonCodeInfo	Logout reason code.	Body
force	boolean	Whether to automatically disconnect the supervisor: - False: The supervisor disconnects manually. - True: Disconnects the supervisor after a period of inactivity.	Query

Example request. Allows supervisor ID 2385 to disconnect manually.

`https://<Base_API_URL/context>/supervisors/2385/session_stop?force=false`

Body with reasonCodeInfo:
{ "displayName": "Callback", "id": "23400", "name": "Callback", "selectable": "True" }

Response. Empty.

Restarts a Supervisor's Session

`PUT /supervisors/{supervisorId}/session_restart`

Restarts a supervisor's session.

Event ID 6001 `EVENT_FILTER_SETTINGS_UPDATED` is generated. The other events are the same as those for `session_start`. The use must be in the `SELECT_STATION` login state.

Parameters.

Name	Data	Description	Type
<code>supervisorId</code>	<code>string</code>	Supervisor ID.	Path

Example request. Restarts the session for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/session_restart`

Response. Empty.

Sets the Time Zone

`PUT /supervisors/{supervisorId}/client_timezone`

If the supervisor session uses an automatically detected time zone, use this request to set the time zone for the browser.

Parameters.

Name	Data	Description	Type
<code>supervisorId</code>	<code>string</code>	Supervisor ID.	Path
<code>timezone</code>	<code>string</code>	Local time zone of the browser.	Body

Example request. Supervisor ID 2385 sets the time zone.

`https://<Base_API_URL/context>/supervisors/2385/client_timezone`

Response. Empty.

Obtains a WebSocket Event

`PUT /supervisors/{supervisorId}/request_full_statistics`

Requests a WebSocket event.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns a WebSocket event for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/request_full_statistics`

Response. Empty.

Gets the Supervisor's Login State

`GET /supervisors/{supervisorId}/login_state`

Returns the supervisor's login state.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the login state for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/login_state`

Response.

Data	Description
LoginState	String with the supervisor's login state: • <code>ACCEPT_NOTICE</code>: Supervisor must accept a maintenance notice. • <code>RELOGIN</code>: Supervisor must restart the station. • <code>SELECT_SKILLS</code>: Supervisor must select the queues. • <code>SELECT_STATION</code>: Supervisor must select a station. • <code>WORKING</code>: Supervisor is ready to work.

Indicates Whether the Supervisor is Active

`PUT /supervisors/{supervisorId}/ping`

Pings the server to indicate whether the supervisor is active.

To prevent the server from ending the supervisor session, use this request once every 15–20 minutes when no other requests are made. HTTP status codes 200 or 204 and event [ID: 1202](#) are returned for successful requests.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 pings the server.

`https://<Base_API_URL/context>/supervisors/2385/ping`

Response. Empty.

Gets the Supervisor's Station

`GET /supervisors/{supervisorId}/station`

Returns null if no station is registered, otherwise returns information about the supervisor's station.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns station information for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/station`

Response.

Data	Description
StationInfo	Information about the supervisor's station. If no station is selected, empty is returned. If the station is NULL, no payload is returned and the status code is 204.

Gets the Supervisor's Station State

GET /supervisors/{supervisorId}/station_state

Returns the state of the station assigned to the supervisor.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the state of the station for supervisor ID 2385.

https://<Base_API_URL/context>/supervisors/2385/station_state

Response.

Data	Description
<u>StationState</u>	State of the station (string): - CONNECTED: Station is connected. - CONNECTING: Station is being connected. - DISCONNECTED: Station is not connected.

Restarts the Supervisor's Station

PUT /supervisors/{supervisorId}/station/restart

Restarts the supervisor's station.

Use this request only when the supervisor is in Not Ready state and has selected a station. Two [EVENT STATION UPDATED](#) events follow:

- The payload of the first event is CONNECTING.
- The payload of the second event is CONNECTED if the restart succeeds. Otherwise, the payload is DISCONNECTED.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Restarts the station for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/station/restart`

Response. Empty.

Gets the Supervisor's Softphone Configuration

`GET /supervisors/{supervisorId}/softphone_config`

Returns the supervisor's softphone configuration. This request provides information about softphone registration but can be used to connect any SIP phone to the VCC.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Returns the softphone configuration for supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/softphone_config`

Response.

Data	Description
<code>SoftphoneRegistrationInfo[]</code>	Information about the softphone registration.

Restarts the Supervisor's Softphone

`PUT /supervisors/{supervisorId}/station/softphone_force_restart`

Restarts the supervisor's softphone. The supervisor's current ready state and active tasks are ignored.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
delay	int	Milliseconds delay before the softphone restarts.	Query

Example request. Restarts the softphone for supervisor ID 2385 with 1000 milliseconds delay.

```
https://<Base_API_URL/context>/supervisors/2385/station/softphone_force_restart?timeout=1000
```

Response. Empty.

Voicemail Messages

[Creates a Voicemail View](#)

[Gets a List of Voicemail Views](#)

[Deletes a Voicemail View](#)

[Refreshes a Personal Voicemail View](#)

[Gets the Next Set of Records from a Personal Voicemail View](#)

[Gets the Previous Set of Records from a Personal Voicemail View](#)

[Transfers Voicemail Messages](#)

[Changes a Voicemail State](#)

[Deletes Agent's Voicemail Messages](#)

[Gets the Recording Stream of a Voicemail Message](#)

Creates a Voicemail View

Two versions of this request exist:

- Voicemail view for an agent or personal voicemail view:

```
POST /supervisors/{supervisorId}/agents/{agentId}/voicemail_views
```

- Voicemail view for a queue or *skill* voicemail view:

```
POST /supervisors/{supervisorId}/skills/{skillId}/voicemail_views
```

You use a voicemail view to iterate voicemail records. A view represents a subset of all of the available records and is restricted using the voicemail view options that you specify.

If more voicemail records can be retrieved, the [VoicemailsViewInfo](#) `hasMore` parameter is true. To retrieve more records, see [Gets the Next Set of Records from a Personal Voicemail View](#).

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
options	PersonalVoicemailViewOptions or SkillVoicemailViewOptions	Voicemail view options. Pass the personal options to create a personal voicemail view. Pass the skill options to create a queue voicemail view.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 creates a view for the voicemails of agent ID 6315. The voicemail view options are specified in the request body.

`https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_views`

Response.

Data	Description
VoicemailsViewInfo < PersonalVoicemailInfo > or VoicemailsViewInfo < SkillVoicemailViewOptions >	Voicemail view information.

Gets a List of Voicemail Views

Two versions of this request exist:

- This request returns an agent's personal voicemail views:
`GET /supervisors/{supervisorId}/agents/{agentId}/voicemail_views`
- This request returns a queue's voicemail views:
`GET /supervisors/{supervisorId}/skills/{skillId}/voicemail_views`

Parameters.

Name	Data	Description	Type
agentId or	string	Pass an agent ID for a personal voicemail view.	Path

Name	Data	Description	Type
skillId		Pass a skill ID for a queue voicemail view.	
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 gets a list of voicemail views for agent ID 6315.

`https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_views`

Response.

Data	Description
string[]	Set of voicemail view IDs.

Deletes a Voicemail View

Two versions of this request exist:

- This request deletes an agent's personal voicemail view:
`DELETE /supervisors/{supervisorId}/agents/{agentId}/voicemail_views/{viewId}`
- This request deletes a queue voicemail view:
`DELETE /supervisors/{supervisorId}/skills/{skillId}/voicemail_views/{viewId}`

Parameters.

Name	Data	Description	Type
agentId or skillId	string	Pass an agent ID for an agent's personal voicemail view. Pass a skill ID for a queue voicemail view.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	Voicemail view ID.	Path

Example request. Supervisor ID 2385 deletes voicemail view ID 3981 for agent ID 6315.

`https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_views/3981`

Response. Empty.

Refreshes a Personal Voicemail View

Two versions of this request exist:

- This request refreshes an agent's personal voicemail view:

```
PUT /supervisors/{supervisorId}/agents/{agentId}/voicemail_views/{viewId}
```

- This request refreshes a queue voicemail view:

```
PUT /supervisors/{supervisorId}/skills/{skillId}/voicemail_views/{viewId}
```

The data in a voicemail view is divided into pages of data. To retrieve more records, use this method to refresh the page of data.

Parameters.

Name	Data	Description	Type
agentId or skillId	string	Pass an agent ID for an agent's personal voicemail view. Pass a skill ID for a queue voicemail view.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	Voicemail view ID.	Path

Example request. Supervisor ID 2385 refreshes voicemail view ID 4591 created for agent ID 6315.

```
https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_views/4591
```

Response.

Data	Description
VoicemailsViewInfo < PersonalVoicemailInfo > or VoicemailsViewInfo < SkillVoicemailViewOptions >	Voicemail view information.

Gets the Next Set of Records from a Personal Voicemail View

Two versions of this request exist:

- This request returns the next set of records from an agent's personal voicemail view:

```
PUT /supervisors/{supervisorId}/agents/{agentId}/voicemail_views/{viewId}/next
```

- This request returns the next set of records from a queue voicemail view:

```
PUT /supervisors/{supervisorId}/skills/{skillId}/voicemail_views/{viewId}/next
```

The number of records returned is less than or equal to the [PersonalVoicemailViewOptions](#) limit parameter.

Parameters.

Name	Data	Description	Type
agentId or skillId	string	Pass an agent ID for an agent's personal voicemail view. Pass a skill ID for a queue voicemail view.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	Voicemail view ID.	Path

Example request. Supervisor ID 2385 gets the next set of records from voicemail view ID 4591 for agent ID 6315.

```
https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_views/4591/next
```

Response.

Data	Description
VoicemailsViewInfo < PersonalVoicemailInfo > or VoicemailsViewInfo < SkillVoicemailViewOptions >	Voicemail view information.

Gets the Previous Set of Records from a Personal Voicemail View

Two versions of this request exist:

- This request returns the previous set of records from an agent's personal voicemail view:

```
PUT /supervisors/{supervisorId}/agents/{agentId}/voicemail_views/{viewId}/previous
```

- This request returns the previous set of records from a queue voicemail view:

```
PUT /supervisors/{supervisorId}/skills/{skillId}/voicemail_views/  
{viewId}/previous
```

The number of records returned is less than or equal to the [PersonalVoicemailViewOptions](#) limit parameter.

Parameters.

Name	Data	Description	Type
agentId or skillId	string	Pass an agent ID for an agent's personal voicemail view. Pass a skill ID for a queue voicemail view.	Path
supervisorId	string	Supervisor ID.	Path
viewId	string	Voicemail view ID.	Path

Example request. Supervisor ID 2385 gets the previous set of records from voicemail view ID 4591 set for agent ID 6315.

```
https://<Base_API_URL/context>/supervisors/2385/agents/6315/voicemail_  
views/4591/previous
```

Response.

Data	Description
VoicemailsViewInfo < PersonalVoicemailInfo > or VoicemailsViewInfo < SkillVoicemailViewOptions >	Voicemail view information.

Transfers Voicemail Messages

Two versions of this request exist:

- This request transfers voicemail messages from an agent:

```
PUT /supervisors/{supervisorId}/agents/  
{agentId}/voicemails/transfer
```

- This request transfers voicemail messages from a queue:

```
PUT /supervisors/{supervisorId}/skills/  
{skillId}/voicemails/transfer
```

Parameters.

Name	Data	Description	Type
agentId or skillId	string	Pass an agent ID for an agent's personal voicemail messages. Pass a skill ID for a queue voicemail messages.	Path
supervisorId	string	Supervisor ID.	Path
transferInfo	VoicemailsTransferDestinationInfo	Information about the transfer destination.	Body

Example request. Supervisor ID 2385 transfers voicemail messages for agent ID 6012 to the specified transfer destination.

`https://<Base_API_URL/context>/supervisors/2385/agents/6012/voicemails/transfer`

Response. Empty.

Changes a Voicemail State

`PUT /supervisors/{supervisorId}/skills/{skillId}/voicemails/change_state`

Changes a voicemail state.

Parameters.

Name	Data	Description	Type
skillId	string	Queue ID.	Path
stateChangeInfo	SkillVMStateChangeInfo	Voicemail state change information.	Body
supervisorId	string	Supervisor ID.	Path

Example request. Supervisor ID 2385 changes the state of a voicemail.

```
https://<Base_API_URL/context>/supervisors/2385/skills/1256/voicemails/change_state
```

Response. Empty.

Deletes Agent's Voicemail Messages

```
PUT /supervisors/{supervisorId}/agents/{agentId}/voicemails/delete
```

Deletes an agent's voicemail messages.

Parameters.

Name	Data	Description	Type
agentId	string	Agent ID.	Path
supervisorId	string	Supervisor ID.	Path
voicemailIds	string[]	Voicemail IDs.	Body

Example request. Supervisor ID 2385 deletes voicemails from agent ID 7623.

```
https://<Base_API_URL/context>/supervisors/2385/agents/7623/voicemails/delete
```

Response. Empty.

Gets the Recording Stream of a Voicemail Message

```
GET /skills/{skillId}/voicemails/{voicemailId}/recordings/{recordingId}
```

Retrieves the specified recording for the specified voicemail message.

Parameters.

Name	Data	Description	Type
download	boolean	Whether to download the recording stream.	Path
skillId	string	Skill ID.	Path
voicemailId	string	Voicemail message ID.	Path
range	string	Range (in bytes) to retrieve partial content of	Header

Name	Data	Description	Type
		the recording stream. The specified value must meet the byte-ranges-specifier definition of RFC 2616. If the specified value is true, returns the full content, ignoring the range. Examples: - Retrieve the first ten bytes: bytes=0-9 - Retrieve all the bytes from the very beginning bytes=0- - Retrieve the last ten bytes: bytes=-10	
recordingId	string	Recording ID.	Path

Example request. For skill ID 123, retrieves recording stream ID 534 for voicemail message ID 221.

`https://<Base_API_URL/context>/123/voicemails/221/recordings/534`

Response.

Data	Description
StreamingOutputInfo	Voicemail recording stream.

Statistics

These requests enable agents to subscribe to several types of statistics. Each statistic generates WebSocket events with a payload structure that contains statistic data.

[Subscribes to an Interaction](#)
[Subscribes to Interactions](#)
[Unsubscribes from an Interaction](#)
[Unsubscribes from Interactions](#)
[Subscribes to a Skill](#)
[Unsubscribes from a Skill](#)

Subscribes to an Interaction

`PUT /supervisors/{supervisorId}/interactions/{interactionId}/subscribe`

Subscribes a supervisor to interactions. Requires the `CAN_VIEW_TEXT_DATA` permission and `CAN_RUN_WEB_SUPERVISOR` permissions. This method should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance states. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
interactionId	string	Interaction ID.	Path

Example request. Subscribes supervisor ID 2385 to interaction ID 1122.

`https://<Base_API_URL/context>/supervisors/2385/interactions/1122/subscribe`

Response. Empty.

Subscribes to Interactions

`PUT /supervisors/{supervisorId}/interactions/subscribe`

Subscribes for interactions that match the specified filter. Requires the `CAN_VIEW_TEXT_DATA` and `CAN_RUN_WEB_SUPERVISOR` permissions. The user needs to be in the `WORKING` login state when this method is run.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
filterInfo	InteractionFilterInfo	Filter criteria.	Body

Example request. Subscribes supervisor ID 2385 to interactions.

`https://<Base_API_URL/context>/supervisors/2385/interactions/subscribe`

Response.

Data	Description
SubscriptionIdInfo	Information about the created subscription.

Unsubscribes from an Interaction

PUT /supervisors/{supervisorId}/interactions/{interactionId}/unsubscribe

Unsubscribes a supervisor from an interaction. The user must have the `CAN_RUN_WEB_SUPERVISOR` permission.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
interactionId	string	Interaction ID.	Path

Example request. Unsubscribes supervisor ID 2385 from interaction ID 2112.

https://<Base_API_URL/context>/supervisors/2385/interactions/2112/unsubscribe

Response. Empty.

Unsubscribes from Interactions

PUT /supervisors/{supervisorId}/interactions/unsubscribe/{subscriptionId}

Unsubscribes a supervisor from interactions. The user must have the `CAN_RUN_WEB_SUPERVISOR` permission. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
subscriptionId	string	Subscription ID.	Path

Example request. Unsubscribes supervisor ID 2385 from subscription ID 2112.

https://<Base_API_URL/context>/supervisors/2385/interactions/unsubscribe/1122

Response. Empty.

Subscribes to a Skill

PUT /supervisors/{supervisorId}/interactions/skills/{skillId}/subscribe

Subscribes a supervisor to interactions. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_VIEW_TEXT_DATA` permissions. This method should not be called during the `READY_FOR_MIGRATION` or `STARTED` primary maintenance states. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
skillFilterInfo	SkillFilterInfo	Information about the types of skills on which to filter.	Body
skillId	long	Skill ID.	Path

Example request. Subscribes supervisor ID 2385 to skill ID 1122.

`https://<Base_API_URL/context>/supervisors/2385/skills/1122/subscribe`

Response.

Data	Description
SubscriptionIdInfo	Subscription ID.

Unsubscribes from a Skill

PUT /supervisors/{supervisorId}/interactions/skills/{skillId}/unsubscribe

Unsubscribes a supervisor from a skill. Requires the `CAN_RUN_WEB_SUPERVISOR` permission. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
skillFilterInfo	SkillFilterInfo	Information about the types of skills on which to filter.	Body
skillId	string	Skill ID.	Path

Example request. Unsubscribes supervisor ID 2385 from skill ID 2112.

`https://<Base_API_URL/context>/supervisors/2385/skills/2112/unsubscribe`

Response. Empty.

Transfers

Methods for transferring interaction.

[Gets Agents Available for Receiving Transfers](#)

[Gets Skills Who Can Accept Emails](#)

[Transfers an Interaction to a Group](#)

[Transfers Interactions to a Group](#)

[Transfers an Interaction to an Agent](#)

[Transfers Interactions to Agents](#)

Gets Agents Available for Receiving Transfers

GET /supervisors/{supervisorId}/transferable_agents

Retrieves a list of agents that are available for receiving interactions from the supervisor. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_TRANSFER_EMAILS` permissions. The login state of the user should be `WORKING`.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Retrieves the list of agents available to accept interactions transferred from supervisors.

`https://<Base_API_URL/context>/supervisors/2385/transferable_agents`

Response.

Data	Description
SupervisorAgentInfo []	List of agents available for accepting transferred interactions.

Gets Skills Who Can Accept Emails

GET /supervisors/{supervisorId}/email_transferable_skills

Retrieves the list of skills to which an email interaction can be transferred. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_TRANSFER_EMAILS` permissions. The login state of the user should be `WORKING`.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path

Example request. Retrieves the list of skills to which a supervisor can transfer interactions.

`https://<Base_API_URL/context>/supervisors/2385/email_transferable_skills`

Response.

Data	Description
AgentSkillInfo []	Information about the skills to whom the email interactions can be transferred.

Transfers an Interaction to a Group

PUT /supervisors/{supervisorId}/interactions/{interactionId}/transfer_to_group

Transfers an interaction to a group. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_TRANSFER_EMAILS` permissions, and the login state of the user to be `WORKING`.

Parameters.

Name	Data	Description	Type
interactionId	string	Interaction ID.	Path
supervisorId	string	Supervisor ID.	Path
transferBody	SupervisorTransferToGroupBody	Information about the interaction to transfer.	Body

Example request. Transfers iteration ID 2311 from supervisor ID 2385 to a group.

`https://<Base_API_URL/context>/supervisors/2385/interactions/2311/transfer_to_group`

Response. Empty.

Transfers Interactions to a Group

`PUT /supervisors/{supervisorId}/interactions/transfer_to_group`

Transfers interactions to a group. Requires the `CAN_TRANSFER_EMAILS` and `CAN_RUN_WEB_SUPERVISOR` permissions. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
transferBody	SupervisorTransferToGroupBody	Information about the interaction to transfer.	Body

Example request. Retrieves the switchover metadata of supervisor ID 2385.

`https://<Base_API_URL/context>/supervisors/2385/interactions/transfer_to_group`

Response. Empty.

Transfers an Interaction to an Agent

`PUT /supervisors/{supervisorId}/interactions/{interactionId}/transfer_to_agent`

Transfers an interaction to the specified agent. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_TRANSFER_EMAILS` permissions. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
interactionID	string	Interaction ID.	Path
supervisorId	string	Supervisor ID.	Path
transferBody	SupervisorTransferToAgentBody	Information about the interaction to transfer.	Body

Example request. Transfers interaction ID 1211 from supervisor ID 2385 to an agent.

`https://<Base_API_URL/context>/supervisors/2385/interactions/1211/transfer_to_agent`

Response. Empty.

Transfers Interactions to Agents

`PUT /supervisors/{supervisorId}/interactions/transfer_to_agent`

Transfers interactions to an agent. Requires the `CAN_RUN_WEB_SUPERVISOR` and `CAN_TRANSFER_EMAILS` permissions. The login state of the user should be `WORKING` when this method is called.

Parameters.

Name	Data	Description	Type
supervisorId	string	Supervisor ID.	Path
transferBody	SupervisorTransferToAgentBody	Information about the interaction to transfer.	Body

Example request. Transfers interactions to from supervisor ID 2385 to agents.

`https://<Base_API_URL/context>/supervisors/2385/interactions/transfer_to_agent`

Response. Empty.

Data Types

These data types describe data used by the API as follows:

- Data accepted by requests as parameters.
- Data returned in the payload of responses.
- Data passed to the client in the payload of events.

Important

Most dates and times are in milliseconds (ms), Epoch time. Others are specified as needed.

AcceptBody

Describes the request sent when accepting a social interaction that has been offered.

Name	Type	Description
mediaType	string	Channel of the interaction expressed as a number: • SOCIAL=1 • NOTE=100 • CHAT=1000 • AGENT_CHAT=1010 • EMAIL=2000 • CALL=3000 • VM=4000
profileId	long	Campaign ID to which the interaction applies.
type	string	One of these values: • 1: Choose item from the available options (cherry picking). • 2: Automatic interaction distribution (AID).

ActiveSkillsInfo

Active skills identifiers used by event 11 (`EVENT_ACTIVE_SKILLS_UPDATED`).

Name	Type	Description
skillIds	string[]	Array of active skills IDs in the payload of an event.

AddressType

Type of phone number to which a call is made. Used by `CallInfo` and `OutgoingCallFailedEvent`.

Description

- `AGENT`: Agent
- `CAMPAIGN`: Campaign.
- `EXTERNAL`: External phone number.
- `SKILL`: Queue.
- `VOICEMAIL`: Voicemail.

Name	Description
AGENT	Agent
CAMPAIGN	Campaign
EXTERNAL	External phone number
SKILL	Queue
VOICEMAIL	Voicemail

AgentAbilityCode

In the event payload, list of letters that correspond to a channel type for which the agent is ready.

Example

```
{
  "2491": "o",
  "2492": "c",
  "2498": "v"
}
```

Description

- a: CASE
- c: CALL
- d: Video
- e: EMAIL
- i: HAS_VIDEO_LICENSE
- o: LOGGED_OUT
- s: SOCIAL
- h: CHAT
- v: VOICE_MAIL

AgentApplicationType

Enumeration of agent applications types.

- AGENT_PLUS
- SALESFORCE_PLUS
- ORACLESC_PLUS
- ADT_PLUS
- NETSUITE_PLUS
- VELOCIFY_PLUS
- ZENDESK_PLUS
- MSDYNAMICS_PLUS

- DESKCOM_PLUS
- AGENT_3PARTY_PLUS
- SERVICENOW_PLUS

AgentsAreLoggedInInfo

Information the availability of an agent to accept chat interactions.

Name	Type	Description
agentsAreLoggedIn	boolean	Whether or not agents are available to chat.

AgentAuxiliaryStatsInfo

Enumeration with the agent auxiliary statistics.

Description
• <code>callTypes</code>: Calls statistics for each call type. A set of <code>callType statisticValue</code> parameters. • <code>campaigns</code>: Call statistics for each campaign. A set of <code>callcampaignIdType statisticValue</code> parameters. • <code>dispositions</code>: Disposition statistics. A set of <code>dispositionId statisticValue</code> parameters. • <code>id</code>: Agent ID. A <code>StatsFieldType.ID</code> parameter.

AgentCallDestinationInfo

Agent's information for the call.

Name	Type	Description
agentId	string	Agent ID of call recipient.

AgentChatBody

Contains the content of the chat message.

Name	Type	Description
content	string	Content of the chat conversation.
contentType	string	Not in use.
displayName	string	Name of the agent to whom the interaction is assigned.
messageId	string	ID of each message during the chat session.
ownerId	string	Numeric user ID of the agent.
profileId	long	ID of the profile (campaign) to which the interaction applies.
userIds	string[]	Array of user IDs of agents who participate in the chat.

AgentGamificationInteractionTotals

Array of information about interactions used by `EVENT_GAMIFICATION_AGENT_STAT`.

Name	Type	Description
aht	float	Average handling time for the task.
count	int	Number of task of corresponding type assigned to the agent.
maxQueueTime	int	Maximum time in queue for the task.
maxSkillName	string	Optional name of the task in queue for the longest time.
totalQueued	int	Number of queued tasks.
type	string	Possible types of interaction: <code>CALL</code> and <code>VOICE_MAIL</code> .

AgentGroupInfo

Description of an agent group.

Name	Type	Description
id	string	ID of the agent group.
name	string	Name of the agent group.

AgentGroupWSInfo

Information about modified and new agent groups.

Name	Type	Description
id	string	Agent group ID.
name	string	Agent group name.
users	string[]	

AgentInfo

Description of an agent.

Example

```
{
  active: true
  availableChannels: ["CHAT", "SOCIAL", "EMAIL", "CALL", "VOICE_
MAIL"]
  avatarURL: "https://<domain>/appsvcs/rs/svc/agents/2848/avatar"
  email: "syoung@example.com"
  extension: "0016"
  firstName: null
  fullName: "Sarah Young"
  id: "2848"
  lastName: null
  timeZoneID: "US/Pacific"
  userName: "syoung@example.com"
  ucId: "syoung@example.com"
  ucPhoneNumber: "9255551212"
```

```
}
```

Name	Type	Description
active	boolean	Whether the agent is active.
availableChannels	ChannelType []	Array of channels enabled for the agent.
avatarURL	string	URL of the agent's avatar.
canReceiveTransfer	boolean	Whether the agent has permission to receive transfers.
email	string	Email address.
extension	string	Agent's phone extension.
firstName	string	Agent's first name.
fullName	string	Agent's first and last name.
id	string	ID of the agent.
lastName	string	Agent's last name.
timeZoneID	string	ID of the time zone.
ucId	string	Unified communication ID, for example, a Skype for Business ID such as syoung@qa59.local.com.
ucPhoneNumber	string	Phone number of the unified communication user. Corresponds to the phone number entered in the user description in the VCC administrator application.
userName	string	Agent's user name.

AgentMonitorInfo

Information about the agent monitor mode.

Name	Type	Description
agentMonitorMode	AgentMonitorMode	Agent monitor mode.

AgentMonitorMode

Enumeration with the agent monitor mode.

Description

- **BARGE**: Interrupts a conversation between an agent and a customer.
- **FAKE**: Monitors an agent who is on a test call.
- **OFF**: Turns off agent monitoring.
- **SILENT**: Silently monitors an agent.
- **WHISPER**: Monitors an agent in whisper coach mode.

AgentOptions

Options available to an agent in the user interface.

Most of these options, such as the auto-answer options, are processed by the API. When a call is offered, the API decides whether to automatically accept the call or wait for the agent's decision. The other options are stored in the API, but the client must perform the action.

Name	Description
ALERT_ON_INCOMING_MESSAGE	Agent is notified of incoming instant messages and chat invitations. The feature is enabled by default. Must be processed by the client.
ALERT_ON_INCOMING_TEXT_INTERACTION	Agent is notified of incoming chat, social, or email interactions. Must be processed by the client.

Name	Description
ALERT_ON_OVERDUE_CALLBACK	Agent is notified of overdue callbacks. The feature is enabled by default. Must be processed by the client.
AUTO_ACCEPT_SKILL_VOICEMAIL	Skill voicemail messages are automatically accepted. Processed by the API.
AUTO_ANSWER_INBOUND_AUTODIAL_CALLS	Autodial calls are automatically answered. The feature is enabled by default. Processed by the API.
AUTO_ANSWER_INTERNAL_CALLS	Internal calls are automatically answered. The feature is enabled by default. Processed by the API.
AUTO_ANSWER_OUTBOUND_CALLS	Outbound calls are automatically answered. The feature is enabled by default. Processed by the API.
ENABLE_CALLBACK_REMINDERS	Agent is reminded when callbacks are overdue. The feature is enabled by default. Must be processed by the client.
ESTIMATED_END_OF_CALL_COUNTER	In the Agent Desktop Plus application, a feature (Enable Extend Calls) enables the agent to activate in the lower right corner of the station a countdown timer to check the estimated end of call. The feature is enabled by default. Must be processed by the client.
PBX_MODE	Agents are automatically ready to receive calls after logging in, and a disposition is set automatically when they hang up. Processed by the API.
SHOW_SEARCH_CONTENT	Flag to show the search box.
SHOW_SELECT_SKILLS	Agent selects skills from a list when logging in. The feature is enabled by default. Processed by the API.
TONE_ON_INCOMING_AUTODIAL_CALL	Agent hears a tone for incoming autodial calls. Processed by the API.
TONE_ON_INCOMING_INBOUND_CALL	Agent hears a tone for incoming inbound calls. The feature is enabled by default. Processed by the API.
TONE_ON_INCOMING_OUTBOUND_CALL	Agent hears a tone for incoming outbound

Name	Description
	calls. Processed by the API.
TONE_ON_INCOMING_PREVIEW_CALL	Agent hears a tone for incoming preview calls. The feature is enabled by default. Processed by the API.

AgentOptionsInfo

Information about VCC and SoCoCare agent options.

Name	Type	Description
options	AgentOptions []	Array of enabled settings.
userFilter	UserFilter	User options specific to SoCoCare.

AgentReadyPresence

Information about the channels available to an agent.

Name	Type	Description
channelTypes	ChannelType []	List of channels available to the agent.
hasVideoLicense	boolean	Whether the agent has a license for making video calls.

AgentRecordingStateInfo

Information about an agent recording state.

Name	Type	Description
agentRecordingState	AgentRecordingState	Agent recording state.

AgentRecordingState

Enumeration with the agent recording state.

Description

- OFF: Recording off.
- ON: Recording on.

AgentSkillInfo

Information about a skill.

Example

```
{
  0: {
    id: "1"
    motD: ""
    name: "Inbound Service"
  }
  1: {
    id: "2"
    motD: ""
    name: "Outbound Service"
  }
  2: {
    id: "21"
    motD: ""
    name: "Test skill"
  }
}
```

Name	Type	Description
id	string	ID of the skill.
motD	string	Message of the day for skill members.
name	string	Skill name.

AgentTransferDestinationInfo

Information about the agent who receives the transfer and how the transfer should occur.

Name	Type	Description
agentId	string	ID of the destination agent (<code>id</code> field of AgentInfo) returned by Gets Agents Who Can Receive Transfers . A response may contain information about several agents.
recordVoicemail	boolean	Whether to record a voicemail message if no transfer phone number is available.
recordVmImmediately	boolean	Whether to record a voicemail message immediately if no agent is available. Default value is false.
timeout	int	Number of ms until the transferred call is answered. If the time expires, a message is recorded if <code>recordVoicemail</code> is true. Otherwise, the call is returned to the agent as a parked call. Zero (0) indicates unlimited time.
warm	boolean	Whether to transfer the party in warm mode: • <code>True</code>: The agent speaks to the transfer recipient before completing the transfer. • <code>False</code>: The agent transfers the party on hold immediately.

AgentWSInfo

Information about modified and new agents.

Name	Type	Description
email	string	Agent email address.

Name	Type	Description
fullName	string	Agent full name.
id	string	Agent ID.
userName	string	Agent user name.

AlertInfo

Information about an alert.

Name	Type	Description
condition	string	Boolean expression that defines the condition for sending an alert, for example: datasource1.field1 > value1 OR (datasource1.field2 > value2 AND datasourceN.fieldX = valueZ). The maximum length is 65535.
enabled	boolean	Whether the alert is enabled. If an alert is disabled, no notifications are sent.
id	string	Alert ID.
name	string	Alert name displayed to a user. Cannot be null or empty.
notifications	AlertNotificationInfo []	Collection of notifications to be sent when alert is

Name	Type	Description
		triggered.
version	long	Alert object version. Used to prevent concurrent object modifications.

AlertNotificationInfo

Information about an alert notification.

Name	Type	Description
customInfo	string	String representation for the custom notification information. For example: Color, sound index, and so on. The information can be used by the user interface to store and display the notification.
enabled	boolean	Whether the alert notification is enabled. If an alert notification is disabled, no notifications are sent.
method	AlertNotificationMethod	Notification method.
parameters	AlertParameterInfo []	Notification parameters to provide. For an email notification method, the addresses parameter is required. For a WebSocket notification method, there are no mandatory parameters.

AlertNotificationMethod

Method for an alert notification.

Description

- `EMAIL (21)`: Notification is sent through email.
- `WEBSOCKET (11)`: Notification is sent through a WebSocket.

AlertParameterInfo

Information about an alert parameter.

Name	Type	Description
type	AlertParameterName	Alert parameter type.
value	string	Parameter value.

AlertParameterName

Information about an alert parameter name.

Description

- `EMAIL_ADDRESSES (11)`: Semicolon-separated list of email addresses.

AnswerCriteriaInfo

Information about a worksheet question.

Name	Type	Description
questionToJumpTo	string	Question that should follow if the value entered equals <code>valueToCheck</code> . The question should be compared to the value of the name field in <code>QuestionInfo</code> .

Name	Type	Description
valueToCheck	string	Value entered by the user who answers the worksheet question.

Assistance

Suggested replies to common chat or email messages.

Name	Type	Description
id	long	Assistance ID.
profileId	long	Profile ID.
response	string	Possible response by the agent.
value	string	Situation to which the agent may need to reply.

Attribute

Information about the general attributes that users can define.

Name	Type	Description
attId	string	Attribute ID.
id	string	Attribute ID.
name	string	Name of the attribute.
profileId	long	SCC profile.
tenantId	long	Five9 domain ID.
values	AttributeValue []	Array of attribute values.

AttributeValue

Array of valid values for the Attribute object.

Name	Type	Description
attvalueId	string	ID of the value of the attribute.
attributeId	long	Attribute ID.
attributevalue	string	Value of attribute.
id	long	ID of the value of the attribute.
profileId	long	Profile ID.
tenantId	long	Tenant ID.

Audio

Information about the audio file.

Name	Type	Description
segments	Array	List of audio segments.
locationUrl	string	Path to the media file.

AudioSegment

Information about the audio segment file.

Name	Type	Description
agentName	string	Required name of the agent.
duration	int	Required duration of the call. Uses the <code>int64</code> format.
endTime	string	Required segment end time in RFC-3339 format.
locationUrl	string	Required path to audio segment file.
segmentOrder	int	Sort order of the segment. Uses the <code>int32</code> format.
startTime	string	Required segment start time in RFC-3339 format.

AudioFileInfo

Information about the audio file.

Name	Type	Description
description	string	Description.
duration	long	Duration in milliseconds.
id	string	ID of the audio file.
name	string	Title.

Auth

Information about authorization and authentication.

Name	Type	Description
appKey	string	Required application key assigned to the integration. Use a unique key.
crossDCRequest	boolean	Whether to cross the data center request. Used on rare occasions when the agent tries to log in to the wrong datacenter and the customer database is down on that datacenter. In such cases, the login request is forwarded to the correct datacenter. This parameter is reserved for internal (Five9) use only.
org	Org	Optional name and ID of the domain.
passwordCredentials	PasswordCredentials	Password details.
policy	string	Required WebSocket parameter:

Name	Type	Description
		• AttachExisting: Reuse existing idle or active user session if one is available. • ForceIn: (default) Create a new user session even if an idle session with no active user task exists. For more information, see Managing Sessions.
ssoToken	string	Single sign-on token used for integrations. If ssoToken is valid, PasswordCredentials is not required.

AuthorAccount

Information about a contact's social media accounts, such as Twitter or Facebook.

Name	Type	Description
accountId	string	Account ID of the author.
authorId	string	Author ID.
handleId	string	Handle ID of the account holder.
handleName	string	Handle name of the account holder.
imageUrl	string	URL of the image of the avatar.
profileURL	string	URL of the profile of the account holder.
relation	int	Not in use.
type	string	Social account type, such as Twitter or Facebook, expressed as a number.
updateTime	long	Time in ms when the record was updated.

AvailableCampaigns

Information about the campaigns that are available for business.

Name	Type	Description
availableCampaigns	string[]	List of available campaigns.
resultCode	int	Result code. Possible values are listed below: • RESULT_CODE_SUCCESS (code 0) • RESULT_TENANT_NOT_FOUND (code -1) • RESULT_NO_CAMPAIGN_FOUND (code -2) • RESULT_NOT_ALL_CAMPAIGNS_FOUND (code -3)

BusinessHoursDailyInfo

Schedule for one business day of the week.

Name	Type	Description
dayOfWeek	int	Numerical representation of the week day. 0 (Monday) to 6 (Sunday).
fromTime	string	Business open <i>from</i> specified time; applies only to <code>scheduleType</code> 2.
scheduleType	int	0 (open all day), 1 closed), or 2 (custom interval with from/to).
special	boolean	Whether to send information about special dates.
timeZone	string	Business open <i>to</i> specified time; applies only to <code>scheduleType</code> 2.
toTime	string	Business open <i>to</i> specified time; applies only to <code>scheduleType</code> 2.

BusinessHoursInfo

Information about business hours.

Name	Type	Description
afterHoursMessage	string	Text of the message that your customers see after your business hours.
enableAfterHoursEmail	boolean	Whether customers can send an email after business hours: true or false.
nextSevenDaysBusinessHours	BusinessHoursDailyInfo []	Schedule for the next seven days of business, starting today. Array with seven rows of the following fields each: • <code>dayOfWeek</code>: 0 (Monday) to 6 (Sunday). • <code>scheduleType</code>: 0 (open all day), 1 closed), or 2 (custom interval with from/to). • <code>special</code>: Whether to send information about special dates. • <code>fromTime</code>:

Name	Type	Description
		Business open <i>from</i> specified time; applies only to <code>scheduleType 2</code> .
		• <code>toTime</code>: Business open <i>to</i> specified time; applies only to <code>scheduleType 2</code>. • <code>timeZone</code>: Time zone.
<code>openForBusiness</code>	<code>boolean</code>	Whether you are open for business: true or false.

BroadcastMessageInfo

Describes structure of broadcast message.

Name	Type	Description
<code>message</code>	<code>string</code>	Broadcast message content.
<code>role</code>	<code>string</code>	Roles to which the broadcast message can be sent, which are Agent and Supervisor.

CallAttachedVariable

Properties of a call attached variables.

Name	Type	Description
id	int	Required ID of the call attached variable. Uses the <code>int64</code> format.
value	string	Required value of the call attached variable.

CallAudioFileInfo

Information about audio files available for a call.

Name	Type	Description
qcbRecording	AudioFileInfo	Queue callback voice snippet.
recordings	AudioFileInfo []	List of available IVR recordings.
skillPrompts	AudioFileInfo []	List of available queue prompts.

CallEvent

Information about events related to a call.

Name	Type	Description
agentName	string	Required name of the agent who initiated or answered the call.
endTime	string	Event end time in RFC-3339 format.
eventType	string []	Enumeration of call event types.
startTime	string	Required event start time in RFC-3339 format.

CallEventType

List of types of call event types. Supported types are listed below:

NONE

UNKNOWN
HOLD
UNHOLD
PARK
UNPARK
CONSULT
CONFERENCE
TRANSFER_TO_CALL
WARM_TRANSFER
LEAVE_CONFERENCE
SKILL_TRANSFER
INCOMING_CALL
ORIGINATING_CALL
ANSWERED
DISCONNECTED
RING_TIMEOUT
QUEUE_TIMEOUT
SWITCHED_NOT_READY
ERROR_WHILE_DIALING
REJECTED
RNA
CONSULT_STARTED
FORCE_STOP
CONFERENCE_DURATION
TRANSFER_TO_IVR
TRANSFER_TO_SKILL
TRANSFER_TO_AGENT
TRANSFER_TO_3D_PARTY
AGENT_REJECT_INTERACTION
AUTO_REQUEUE
FIRST_AGENT_RESPONSE
DISPOSITION_SET
PROACTIVE_OFFERS
SILENT_MONITORING
WHISPER_COACHING
BARGE_IN
INCOMING_VOICEMAIL
QUEUE_CALLBACK
START_VIDEO_SESSION
STOP_VIDEO_SESSION
AGENTS_OFFER_VIDEO
CUSTOMER_ACCEPT_VIDEO_OFFER
CUSTOMER_REJECT_VIDEO_OFFER

START_REMOTE_VIDEO
STOP_REMOTE_VIDEO
START_LOCAL_VIDEO
STOP_LOCAL_VIDEO
MUTE_LOCAL_MIC
UNMUTE_LOCAL_MIC
MUTE_REMOTE_MIC
UNMUTE_REMOTE_MIC
SENT_TO_VOICEMAIL
ASSIGNED
CREATED
OFFERED
JOIN_TO_CONVERSATION
TERMINATED

CallInfo

Information about a call. For a description of call segments according to call types, see [Call Segments User's Guide](#).

Name	Type	Description
acceptTime	long	Time in ms when the call was accepted by the agent. The time is 0 until then.
activeContact	ContactInfo	Contact in the current interaction.
addressType	string	Type of phone number to which a call is made. For more information, see AddressType .

Name	Type	Description
afterCallWorkTimeout	long	Number of ms allowed for after-call work if configured in the campaign.
ani	string	ANI for the call.
autoAnswer	boolean	Whether the call that is offered is going to be automatically answered: • <code>True</code>: Only if the value of CallState is OFFERED. The system attempts to connect the agent to the other party of the call. • <code>False</code>: The agent manually answers or rejects the call with these requests: Answers a Call or Rejects a Call. The features that may be answered

Name	Type	Description
		automatically are listed in AgentOptions .
autoRecording	boolean	Whether to enable automatic recording: • True: Automatic recording is enabled, and this option is displayed to the agent. • False: Either the call is not recorded automatically or is recorded secretly. If the agent attempts to stop the recording, the value in the field never changes. The client rarely needs this value. Five9 recommends this client behavior:

Name	Type	Description
		• True: Do not allow agents to stop automatic recordings. • False: Allow agents to stop manual recordings.
averageHandleTime	long	Average handle time for the type of call in the <code>callType</code> field below. Number of ms or 0 if it is not available, such as for internal calls.
billingTime	long	Number of ms for which the call is billed.
billingTimestamp	long	Time in ms when billing started.
callType	string	Call types: • AGENT • AGENT_PREVIEW • AUTODIAL • INBOUND • INBOUND_VOICEMAIL • INTERNAL • INTERNAL_

Name	Type	Description
		VOICEMAIL • OUTBOUND • OUTBOUND_PREVIEW • OUTBOUND_VOICEMAIL • QUEUE_CALLBACK • TEST • TEST_PREVIEW • VISUAL
callback	boolean	Whether the call is a returned call.
callbackId	string	Callback ID.
campaignId	string	Campaign ID to which the call belongs. The value can be used to get campaign-specific dispositions for the call. Null if the call is not assigned to a campaign.
canRecycle	boolean	Whether a recycle disposition can be used for this call.
comment	string	Call comment.
conferenceDispositioning	string	Method to use when setting the disposition for a conference

Name	Type	Description
		call: • INITIATOR_DECIDES_WHO_DISPOSITION: The agent who initiates the conference decides who sets the disposition. • INITIATOR_DISPOSITION: The agent who initiates the conference sets the disposition. • LAST_AGENT_DISPOSITION: The last agent in the conference sets the disposition.
contactLookupResult	ContactLookupResultInfo	Contact search results that apply to the call. This field helps the agent to determine the correct activeContact when it is not known,

Name	Type	Description
		such as with inbound and manual external calls. Because the phone number of the remote party is usually known, the VCC tries to match the number with a contact in the database. The result of this match (zero, one, or multiple contacts) is placed into the field. The information about the first contact found, if any, is automatically assigned to <code>activeContact</code> . However, the agent may associate the call with another contact from the list returned by the search or create a contact record if none is appropriate.

Name	Type	Description
createTime	long	Epoch time in ms when the queued call was created in the VCC.
customer	string	Customer's title. Null unless the call state is QUEUED.
dispositionId	string	Call disposition. Null at the beginning of a call.
dnis	string	DNIS for the call.
duration	long	Number of ms for the call.
handleTime	long	Total handle time in ms.
handleTimestamp	long	Epoch time in ms when an agent started to handle the call.
hasIncompleteTransfer	boolean	Whether a warm transfer is in progress.
holdTime	long	Number of ms during which the call was in ON_HOLD state.
holdTimestamp	long	Epoch time in ms when the call entered the last ON_HOLD state.

Name	Type	Description
id	string	Call ID.
internalReceiver	boolean	Whether an agent is receiving an internal call. If true, all call operations are disabled, except for ending the call.
ivrTransferModule	string	Name of the IVR module that transferred the call to the agent.
maxParticipantsCountToLeaveConference	int	Number of participants that the conference owner can leave in the conference. If there are more participants, the owner cannot leave the conference. You can use this parameter if your domain is enabled for Extend Conference Privileges.
parkTime	long	Number of ms during which a call was in

Name	Type	Description
		PARKED state.
parkTimestamp	long	Epoch time in ms when the call entered last PARKED state.
previewId	string	Preview ID. This field contains a value only if the call was created from a preview.
priority	int	Call priority. Contains a value only if the call is in the QUEUED state.
queueType	string	Type of queue used to route a call: • PERSONAL: Call placed directly in the agent's queue. • SKILL: Call routed based on skills.
recording	boolean	Whether the call is being recorded. This field applies only if call recordings are displayed to agents. If call

Name	Type	Description
		recordings are hidden, the value of this field is not relevant.
recordingAllowed	boolean	Whether call recording is allowed. After receiving an event with <code>eventReason = RECORDING_ALLOWED</code> , use one of these methods: • Starts Recording a Call • Stops Recording a Call Even if the field is true, recording may be forbidden for other reasons. For example, the agent may not have permission to record calls.
remoteNumber	string	Contact's phone number.
startTimestamp	long	Epoch time in ms when the VCC started processing the call.

Name	Type	Description
state	CallState	State of the current call.
stateDuration	long	Number of ms during which the call is in current state.
stateSince	long	Epoch time in ms when the call entered the current state.
talkTime	long	Number of ms during which the call was in <code>TALKING</code> state.
talkTimestamp	long	Epoch time in ms when the call entered the last <code>TALKING</code> state.
transfer	boolean	Whether a person or a campaign transferred the call: • <code>True</code>: Another agent transferred the call to the current agent, either personally or to a queue for which the agent is enabled.

Name	Type	Description
		• <code>False</code>: A campaign transferred the call to the agent.
<code>transferPauseTimeout</code>	<code>long</code>	Number of ms for an inbound transfer pause until a call is automatically taken off hold. Use this field if the transferred call is on hold. After an IVR transfers the call to an agent, the caller hears the hold music, and the agent sees the call data. When ready, the agent either takes the call off hold manually or waits until the pause ends. At that time, the call is automatically taken off hold. To calculate the remaining hold time, use the <code>stateSince</code> and <code>StateDurati</code>

Name	Type	Description
		on fields.
userTransferringId	string	Agent ID if the call was transferred by an agent.
variables	Map(string, string)	Array of call variables. For more information about data types, see VCC Internal Data Formats .
worksheet	WorksheetInfo	Worksheet answers.
wrapupTime	long	Number of ms during which the call was in WRAP_UP state.
wrapupTimestamp	long	Epoch time in ms when the call entered WRAP_UP state.

CallLoggingSettingsChangedEvent

Information about enhanced call logging available in the VCC Administrator application if your CRM is Salesforce. For more information, see the [Plus Adapter for Salesforce Administrator's Guide](#).

Name	Type	Description
isEnhancedLoggingEnabled	boolean	Whether enhanced call logging is enabled: • <code>True</code>: Enhanced call logging is permanently enabled. Default for

Name	Type	Description
		new domains.
		• <code>False</code>: Enhanced call logging is disabled. Standard call logging applies.

CallQualityInfo

Information about call quality indicators. Used by event ID 52 [EVENT_CALL_QUALITY_UPDATED](#).

Name	Type	Description
index	int	Used to draw indicator. The possible values are from 1 (lowest quality) to 5 (best quality).
local	CallQualityStatsInfo	Information about the outgoing audio stream: the agent's speech.
remote	CallQualityStatsInfo	Information about the incoming audio stream: what the agent hears.

CallNotifyReason

Possible reasons for call events. The reason appears in the `eventReason` field of the context.

Description
• <code>ABANDONED_BY_ADMIN</code>: The system set a disposition for the call, for example when an administrator stops a campaign. • <code>ACTIVE_CONTACT_SELECTED</code>: The agent selected a contact. • <code>ACTIVE_CONTACT_SELECTED_V2</code>: The agent selected a contact in CallInfo as the payload type. • <code>ACTIVE_CONTACT_UPDATED</code>: The agent chose another active contact.

Description

- **ACTIVE_CONTACT_UPDATED_V2:** The agent chose another active contact in [CallInfo](#) as the payload type.
- **ADDED_TO_CONFERENCE:** The parked call was added to the active call as a conference participant.
- **AFTER_CALL_WORK_TIME_EXPIRED:** A disposition was automatically selected for the call because the after-call work time limit was reached.
- **CALL_ENTERED_QUEUE:** The extension call was delivered to the agent's personal queue.
- **CALL_LEFT_QUEUE:** The call was removed from the agent's personal queue.
- **COMMENTS_UPDATED:** The agent changed a comment.
- **CONFERENCE_LEFT:** The agent left the conference.
- **CONFERENCE_OWNERSHIP_TAKEN**
- **CONFERENCE_PARTICIPANT_ADDED:** The call was added as a conference participant.
- **CONFERENCE_PARTICIPANT_PARKED:** The agent that had been added to a conference has been parked.
- **CONFERENCE_PARTICIPANT_DISCONNECTED_BY_AGENT:** The agent disconnected the conference participant. This reason is used to update the status of the initial active call.
- **CONFERENCE_PARTICIPANT_DISCONNECTED_BY_THEMSELF:** The conference participant hung up.
- **CONFERENCE_OWNERSHIP_TAKEN:** This reason never appears on the client side. For internal use only.
- **CONFERENCE_PARTICIPANT_PARKED:** The agent who was added to a conference has been parked.
- **CONFERENCE_PARTICIPANT_RINGING:** The conference participant's call was initiated by the agent.
- **CONNECTED:** The manual call was answered on the remote side.
- **CREATED:** The incoming call appeared at the agent's side.
- **DISCONNECTED_BY_AGENT:** The agent disconnected the call.
- **DISCONNECTED_BY_CALLER:** The remote party hung up.
- **DISPOSITIONED:** The agent set a disposition for the call.
- **EXPIRED:** The offered call expired.
- **FAILED_TO_ACCEPT:** The agent refused the call.
- **FAILED_TO_CONNECT:** The manual call was not answered at the remote side.
- **OFF_HOLD:** The agent took the call off hold.
- **ON_HOLD:** The agent put the call on hold.

Description

- **PARKED:** The agent parked the call.
- **REJECTED:** The agent rejected the incoming call.
- **REMOVED_FROM_CONFERENCE_BY_AGENT:** The agent disconnected the third party from the conference call. This reason is used to update the status of the third party's call.
- **REPARKED:** The call transferred by the agent was not accepted by the recipient.
- **RESTORING:** The call is restored after recreating the agent's session with the [Restarts the Agent's Station](#) request.
- **RETRIEVED:** The agent retrieved a parked call.
- **RINGING_CANCELED:** The incoming call with [state](#) = RINGING_ON_OUR_SIDE was withdrawn from the agent's queue because the agent did not answer in time.
- **TRANSFER_CONSULTANT_DISCONNECTED:** The consultant of the transferred call disconnected from the call.
- **TRANSFERRED:** The agent transferred the call.
- **UPDATED:** Some call data was updated.
- **VARIABLES_UPDATED:** The agent changed [variables](#) in [CallInfo](#).
- **VARIABLES_UPDATED_V2:** The agent changed [variables](#) in [CallInfo](#).
- **WARM_TRANSFER_CANCELED:** The agent canceled the warm transfer.
- **WARM_TRANSFER_STARTED:** The agent started the warm transfer.
- **WITHDRAWN:** The system withdrew the incoming call from the agent's queue.
- **WORKSHEET_UPDATED:** The agent changed [worksheet](#) in [CallInfo](#).

CallQualityStatsInfo

Information about the technical quality of the call.

Name	Type	Description
jitter	double	Amount of deviation from the VoIP signal.
loss	double	Packet loss: percentage of loss and level of sound quality.
mos	double	Mean Opinion Score for VoIP signals, which measures the sound quality at the receiving end.
rtt	double	Speed test: Round Trip Time that data takes to travel to/from the destination.

CallState

Possible states of the current call.

Description
• CONFERENCE_PARTICIPANT_CONSULTING: Warm conference started. This is the consultation call during which the agent speaks with the third party before adding this party to the conference call. • CONFERENCE_PARTICIPANT_RINGING: The agent is calling a third party to create a conference call. The third party's phone is ringing. • CONFERENCE_PARTICIPANT_TALKING: Active conference call. • FINISHED: The call ended because the agent selected a disposition or transferred the call, or the VCC withdrew the call from the agent's queue. The agent is ready for the next call. • OFFERED: A call is shown to the agent who must answer or reject the call. When auto-answer is enabled, the system answers the call automatically. • ON_HOLD: The call is on hold. • PARKED: The call is parked. • QUEUED: The call is placed in the agent's personal queue. • RINGING_ON_OTHER_SIDE: The agent made a manual call and is waiting for an answer from the recipient. • RINGING_ON_OUR_SIDE: The phone is ringing because of an incoming call. This state can happen only if the phone is hung up. • TALKING: Current call. • WRAP_UP: The call is disconnected, but the disposition is not set.

CallVariableInfo

Information about a call variable. The call variable is a value attached to a call. This value may be viewed and modified by agent if call variables are enabled. The values can be filled by IVR and transferred to another agent with the call. The syntax is `<variable group name>.<variable name>`, for example: `IVR.last_module` and `Agent.first_agent`. For more information about data type formats and restrictions, see [VCC Internal Data Formats](#).

Name	Type	Description
group	string	Name of the call variable group.
id	string	Call variable ID.
name	string	Name of the call variable used in scripts and connectors. For the user interface name of the call variable, see FieldInfo .
restrictions	RestrictionsInfo	Data type restrictions for the call variable.
type	string	Data type of the call variable. • BOOLEAN • CURRENCY • DATE • DATE_TIME • EMAIL • NUMBER • PERCENT • PHONE • STRING • TIME • TIME_PERIOD • UNDEFINED • URL

CallVariablesInfo

Information about the call contact.

Name	Type	Description
id	string	Contact ID.
variables	Map <string, string>	Array of callback variables.

Callback

Information about a callback.

Name	Type	Description
creationTime	long	Creation time of the callback.
id	long	Callback ID.
itemId	string	
redirectURL	string	
requestCode	string	
tenantId	long	Domain ID.

CallbackDestinationInfo

Information about the destination of a callback.

Name	Type	Description
autoResolveDialingRules	boolean	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. When set to <code>true</code> , this flag overrides the <code>checkMultipleContacts</code> flag. This flag is applied only when a call is made and ignored during call transfers and conferences. Dialing rules are identified by looking up contacts with a limit of five for a number, and are checked for each matched contact. The call is discarded if at least one dialing rule of any matched contact does not permit the call. The default value of this flag is <code>false</code> .
contactId	string	(Optional) Related contact ID. Omit or set to null to specify no contact.

Name	Type	Description
		Default value is null.
skipMultipleContactsCheck	boolean	(Optional) Whether to check for multiple contacts when making a call. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set the flag to false (default), and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002 2 If server returns the error, show the list of the matched contacts to let the user choose the correct one. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user confirms the request, set the flag to true and resend the request.
skipDNCCheck	boolean	(Optional) Whether to skip checking the DNC list. Use the flag as follows: 1 Set the flag to false (default), and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST (10006)</code>: Show an error dialog to warn the agent that the number is in the DNC list. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE (1001)</code>: Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to true and resend the request.}

CallbackInfo

Information about a callback.

Example

```
{
  "id": "81",
  "campaignId": "2495",
  "completed": true,
  "dueDate": 1446059220000,
  "comments": "",
  "number": "9253105170",
  "contactId": "441",
  "agentId": null
}
```

Name	Type	Description
agentId	string	agentId of the callback destination. Use either the agentId (internal call) or number (external call) parameter.
campaignId	string	Campaign ID to which the callback belongs.
comments	string	Additional information entered by the agent.
completed	boolean	Whether the call was returned: true or false.
contactId	string	Contact ID of the callback destination.
dueDate	long	Due date and time of the callback in ms.
id	string	Callback ID.
number	string	External number to call. Use either the agentId (internal call) or number (external call) parameter.

CallbackSnoozeInfo

Information about a delayed callback.

Name	Type	Description
callbackId	long	Callback ID.
tillTimeStamp	long	Number of milliseconds when the agent should be reminded of the delayed callback.

CallbackStatesInfo

Information about the state of a callback.

Name	Type	Description
dismissed	string[]	IDs of dismissed callbacks.
snoozed	CallbackSnoozeInfo []	Array of postponed callbacks.

CallContactInfo

Information about the call contact.

Name	Type	Description
id	string	Contact ID.
activeContact	ContactInfo	Information about a VCC contact record.

CallRecordingInfo

Information about a call recording.

Name	Type	Description
callSessionId	string	ID of the call session to which the recording belongs.
campaignId	string	ID of the campaign.

Name	Type	Description
created	long	Creation time stamp.
id	string	ID of the call recording.
length	long	Recording duration in milliseconds.
name	string	Name associated with the recording.
number	string	Number associated with the recording.

CallType

Information about a call type.

Call Type	Description
3rd party conference	Call legs created when a conference with a third party is initiated by an agent or IVR script.
3rd party consult	Call legs created when an agent speak briefly with a participant before starting the conference.
3rd party transfer	Call legs created when a transfer to a third party is initiated by an agent or IVR script.
Autodial	Calls originated by the dialer in an autodial campaign.
Callback	Queue callback calls represented as unique service level values for each call ID.
Campaign Call	Internal calls transferred from a campaign.
Forward	Call legs created when a call is forwarded to an agent's alternative phone number because the agent is not logged into the Five9 Agent application.
Inbound	Calls processed by inbound campaigns.
Inbound Voicemail	Skill voice mail from an inbound call.
Internal	Calls between two agents in the same domain.
Internal Voicemail	Skill voice mail from an internal call made by an agent.
Manual	Calls initiated manually by agents using the Make Call dialog.

Call Type	Description
Outbound	Calls originated by the dialer in an outbound campaign.
Outbound Voicemail	Skill voice mail from an outbound call (if using an IVR Script for queue time expiration or answering machine detection) or an autodial call.
Preview	Contact preview sessions, including any calls, originated by an outbound campaign running in preview dialing mode.
Queue Callback	Calls initiated by agents to customers who request a callback instead of remaining on the line until their turn arrives.
Skill call	Calls to queues initiated manually by agents by using the Make Call menu.
Station	Call legs created for agents connecting to PSTN stations.
Test manual	Training calls that are initiated by supervisors (send test call to an agent).
Test outbound	Sample calls originated by the emulated dialer from an outbound campaign running in training mode.
Test preview	Sample contact preview sessions originated from an outbound campaign running in preview dialing mode and training mode.
Visual	Visual IVR resulting from calls.

CampaignDispositionResetWSInfo

Information about the result of running a command that resets the campaign dispositions.

Name	Type	Description
<code>campaignId</code>	<code>string</code>	Campaign ID.
<code>success</code>	<code>boolean</code>	True if the command execution was successful. Otherwise, false.

CampaignFlag

Information about a campaign flag.

Description

PASS_CONTACTS_ANI_FOR_3RD_PARTY_CONFERENCES

CampaignInfo

Information about a campaign.

Example

```
{
  "id": "2494",
  "name": "Inbound Service",
  "campaignType": "INBOUND",
  "customSource": null,
  "customIcon": null,
  "assurances": [],
  "attributes": [], "avatarURL": null,
  "chatWelcomeMessage": null,
  "chatTerminateMessage": null,
  "outEmail": null, "skillIds": [],
  "state": "RUNNING",
  "flags": ["PASS_CONTACTS_ANI_FOR_3RD_PARTY_CONFERENCES"]
}
```

Name	Type	Description
assurances	string[]	Array of assurances: possible replies that agents can use to respond to comments.
attributes	string[]	Array of attributes.
autoEngageMessage	string	If chat preview is enabled, this message is displayed to the chat user when customer engagement starts if previewAutoEngage is enabled.
avatarURL	string	Campaign profile picture for the campaign in the SCC

Name	Type	Description
		administrator's console.
campaignType	string	Campaign type: • INBOUND • OUTBOUND • AUTODIAL
chatAutoAccept	int	Whether to automatically accept a chat interaction: • 0: Disabled • 1: Enabled
chatTerminate Message	string	Custom message added in the SCC administrator's console that is displayed to the customer at the end of a chat session on behalf of the agent when the chat is assigned to this profile.
chatTimeToAccept	int	Time-out in seconds for chat interactions from time of offer to time withdrawn and returned to the queue.
chatWelcomeMessage	string	Greeting added in the SCC administrator's console that is displayed to the customer at the start of a chat session on behalf of the agent when the chat is assigned to this profile.
customIcon	string	Icon for the campaign to customize the small icon on the item for Facebook fan page posts. Not in use.
customSource	string	Facebook custom source for fan pages.
emailAutoAccept	int	Whether to automatically accept an email interaction: • 0: Disabled • 1: Enabled

Name	Type	Description
emailTimeToAccept	int	Time-out in seconds for email interactions from time of offer to time withdrawn and returned to the queue
facebookEnabled	boolean	Whether Facebook account is enabled.
flags	CampaignFlag []	Array of flags that can be used in the campaign.
googleEnabled	boolean	Whether Google account is enabled.
id	string	Campaign ID.
linkedinEnabled	boolean	Whether LinkedIn account is enabled.
name	string	Campaign name.
outEmail	int	To display a profile in the Compose Email page, use 1. Otherwise set to 0.
previewAutoAccept	int	Whether to automatically accept preview-chat interactions for agents: • 0: Disabled • 1: Enabled
previewAutoEngage	int	Whether to automatically engage customers for preview-chat interactions: • 0: Disabled • 1: Enabled
previewContactEditAllowed	int	Whether the agent is allowed to edit a contact while previewing an interaction: • 0: Disabled • 1: Enabled
skillIds	string[]	Array of skill IDs.
smsDnisId	long	DNIS ID of the SMS message.
socialAutoAccept	int	Whether to automatically

Name	Type	Description
		accept a social interaction: • 0: Disabled • 1: Enabled
socialTimeToAccept	int	Time-out in seconds for social interactions from time of offer to time withdrawn and returned to the queue
state	string	Current state of the campaign: • NOT_RUNNING • RESETTING • RUNNING • STARTING • STOPPING
twitterEnabled	boolean	Whether Twitter account is enabled.
useVCCDispositionsOnly	int	Indicates that only the VCC disposition ID should be used.

CampaignListDetailsInfo

Information about a campaign list.

Name	Type	Description
finalRecords	int	Number of records with any final disposition.
inProgressRecords	int	Number of records that have been dialed one or more times but are not final. This includes both system and agent dispositions that are set to redial.
newRecords	int	Number of records that have not yet been dialed.

Name	Type	Description
timeStamp	long	Interval start time stamp in milliseconds.
totalRecords	int	Total number of records in the lists.
unreachableCriteria	int	Number of records that are not eligible for dialing because of the criteria set in the campaign profile.
unreachableDisableNumbers	int	Number of records that are unavailable because the contact numbers are disabled in the campaign profile properties.
unreachableDNDDNC	int	Number of records that are unavailable because of the DND disposition (and the disposition is set without an expiration) or the contact phone numbers are all on the DNC list.
unreachableMaxAttempts	int	Number of records that are not eligible for dialing because the maximum number of call attempts have been made.

CampaignListWSInfo

Information about dialing lists that have been added to or removed from a campaign.

Name	Type	Description
addedListIds	string[]	Dialing list IDs that were added to the campaign.
campaignId	string	Campaign ID.
removedListIds	string[]	Dialing list IDs that were removed from the campaign.

CampaignMode

Enumeration of campaign modes. Possible types are listed below:

Description

- **BASIC:** Campaign works without any campaign profile.
- **ADVANCED:** If the campaign is running in advanced mode, the campaign profile is used.
- **TRAINING_BASIC:** Campaign has enabled training mode and works without any campaign profile.
- **TRAINING_ADVANCED:** Campaign has enabled training mode and is running in advanced mode, the campaign profile is used.

CampaignOutOfNumbersWSInfo

Information about a campaign that is out of numbers.

Name	Type	Description
campaignId	string	Campaign ID.

CampaignProfileWSInfo

Information about modified and new campaign profiles.

Name	Type	Description
id	string	Campaign profile ID.
name	string	Campaign profile name.

CampaignType

Enumeration containing the campaign type.

Description

- **AUTODIAL:** Autodial campaign.

Description

- **INBOUND:** Inbound campaign.
- **OUTBOUND:** Outbound campaign.

CampaignStateType

Enumeration containing the campaign state type.

Description

- **NOT_RUNNING:** Campaign is not running.
- **RESETTING:** Campaign is resetting.
- **RUNNING:** Campaign is running.
- **STARTING:** Campaign is starting.
- **STOPPING:** Campaign is stopping.

CampaignResetInfo

Information about resetting a campaign.

Name	Type	Description
dispositions	string[]	Array of dispositions for resetting the campaign dispositions.
endTime	long	End time period specified as an epoch value in UTC. This is the end time of the period for resetting the campaign dispositions.
startTime	long	Start time period specified as an epoch value in UTC. This is the start time of the period for resetting the campaign dispositions.
type	CampaignResetType	Reset type.

CampaignResetType

Enumeration containing the campaign reset type.

Description
- ABANDON_CALL_RATE: Client requests a reset of the campaign dropped call statistics. - CAMPAIGNS: Client requests a campaign reset. - DISPOSITIONS: Client requests a reset of call dispositions related to the campaign. - LIST_POSITION: Client requests a reset of the campaign dialing list position.

CampaignSystemMessageInfo

Information about a campaign system message.

Name	Type	Description
text	string	Message text.
timestamp	long	Message time stamp.

CampaignTransferDestinationInfo

Information about the destination campaign and how the transfer should occur.

Name	Type	Description
campaignId	string	ID of the destination campaign returned by Gets a List of Inbound Campaigns .
warm	boolean	Whether to transfer the party in warm mode. - True: The agent speaks to the transfer recipient before completing the transfer. - False: The agent transfers the party on hold immediately.

CampaignWSInfo

Information about modified and new campaigns.

Name	Type	Description
id	string	Campaign ID.
name	string	Campaign name.
type	CampaignType	Campaign type.

CampaignsConfigInfo

Information about campaigns available for an agent to select when making a manual call or obtaining a campaign script.

Example

```
{
  "campaignIds": ["2494", "2495"],
  "defaultCampaignId": "0",
  "selectAllowed": true,
  "selectNoneAllowed": false
}
```

Name	Type	Description
campaignIds	string[]	Array of campaign IDs.
defaultCampaignId	string	ID of the default campaign.
selectAllowed	boolean	Whether the agent is allowed to select a campaign: <code>true</code> or <code>false</code> .
selectNoneAllowed	boolean	Whether the agent is allowed to select the campaign value <code>None</code> in the adapter: <code>true</code> or <code>false</code> .

CategoryInfo

Information about a widget persistence category.

Name	Type	Description
id	string	Category ID (limit 255 characters).
name	string	Category Name (limit 255 characters).

CategoryItemInfo

Information about an item in a widget persistence category.

Name	Type	Description
key	string	Item key (limit 255 characters).
value	string	Item value (limit 4096 characters).

ChangePasswordInfo

Information about the agent's password.

Name	Type	Description
newPassword	string	Agent's new password.
oldPassword	string	Agent's previous password.

ChannelInfo

Information about a channel.

Name	Type	Description
intelligentRouting	boolean	Whether to enable intelligent routing for the channel. • <code>True</code>: Incoming requests are automatically sent to the agent up to the limit specified in the Media Type section of the agent's properties. • <code>False</code>: The agent selects social interactions manually from the queue.
maxAllowedInteractions	int	Maximum number of simultaneous interactions allowed for the channel.
type	string	Channel type: • <code>CALL</code> • <code>CHAT</code> • <code>EMAIL</code> • <code>SOCIAL</code> • <code>TEXT</code> • <code>VOICE_MAIL</code>

ChannelType

Type of channel.

Description
• <code>CALL</code> • <code>CASE</code> • <code>CHAT</code> • <code>EMAIL</code> • <code>SOCIAL</code> • <code>TEXT</code> • <code>VOICE_MAIL</code>

ChatOffer

Information about a customer's action that triggers a chat offer (proactive chat). For more information about the values, see the [Digital Engagement Administrator's Guide](#).

Name	Type	Description
chatOfferCondition	string	Visitor action that triggers a chat offer: - Amount_of_time_spent - Number_of_visited_web_pages - Mouse_hover_time_interval
consecutivePagesOnly	int	Whether to prevent the chat offer from being shown to customers on successive pages. 0: Disabled by default. 1: Show the chat offer on successive pages.
enablePreviewChat	int	Whether preview chat is enabled: 0: Disabled 1: Enabled
groupId	int	SCC group ID assigned to the profile in the Text Channels Administrator's Console.
id	int	Profile ID in the Text Channels Administrator's Console.
name	string	Name or alias supplied by the chat customer.
previewContactEditAllowed	int	In the preview chat script, whether to let the customer update his contact information. 0: Yes 1: No
tenantId	int	Domain ID.

Cluster

Information about a natural language processing (NLP) category.

Name	Type	Description
catchAll	int	Reserved for future use.
classification	string	Same as category tag above. Reserved for future use.
creationTime	long	Time when the category was created.
deletionTime	long	Time when the category was deleted.
id	long	Reference key for the category returned in the tagging operation.
modificationTime	long	Time when the category was modified.
name	string	User friendly name of the category.
sfClusterNr	string	Reserved for future use.
sfId	string	Reserved for future use.
tag	string	Tag of category used by the NLP engine. Clusters and associated categories, classification, and tags are configured in the Text Channels Administrator's Console.
tenantId	long	SCC ID of your organization if you are enabled for Five9 Digital Engagement.

ClusterInfo

Information about the cluster (trend or pattern in social media) in the response to the `metadata` request.

Name	Type	Description
host	string	DNS Host where the service is running.
port	string	Port of cluster.
routeKey	string	Routing key used to reach the service, for example: "routeKey": "UI_UIXXLwR"
version	string	Software version of the VCC in the cluster.

ColdTransferSettingsInfo

Information about a domain's cold transfer settings.

Name	Type	Description
actionOnTimeout	string	Action to take when the cold transfer timeout interval expires. Possible actions are listed below: • RETURN_CALL_TO_AGENT • SEND_TO_VOICEMAIL_ON_TIMEOUT • SEND_TO_VOICEMAIL_IMMEDIATELY
agentCanChangeSettings	boolean	Whether the agent is allowed to change the domain's cold transfer settings.
timeout	long	Cold transfer timeout interval in milliseconds.

ConferenceCampaignParticipantInfo

Information about the campaign to add to the conference.

Name	Type	Description
campaignId	string	Campaign ID returned by Gets a List of Inbound Campaigns .
warm	boolean	Whether to add the first conference participant in warm mode. • True: The agent speaks to the third party before completing the conference. • False: The agent adds the third party to the conference immediately.

ConferenceExternalParticipantInfo

Information about the external participant to add to the conference.

Name	Type	Description
checkDNC	boolean	Whether to check the local DNC list. Use the flag as follows: 1 Set the flag to true, and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ NUMBER IN DNC LIST (10006): Show an error dialog to warn the agent that the number is in the DNC list. ◦ Q NUMBER IN DNC LIST FORCE (1001): Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to false and resend the request.
contactId	string	Contact ID.
includeCallerInfo	boolean	Whether to give information to the conference participant: • True: New call participant receives all contact details. • False or absent: Call participant receives information only about the person who initiated the call. Set to true or omit if CampaignFlag contains <code>PASS_CONTACTS_ANI_FOR_3RD_PARTY_CONFERENCES</code>.
number	string	External phone number of the new participant.
warm	boolean	Whether the conference is warm. • True: The agent speaks to the third party before completing the conference. • False: The agent adds the third party to the conference immediately.

ConferenceInternalParticipantInfo

Information about the agent or skill to add to the conference.

Name	Type	Description
id	string	ID of the agent or skill to add to the conference.
includeCallerInfo	boolean	Whether to give information to the conference participant: • <code>True</code>: The new call participant receives all contact details. • <code>False</code> or absent: The call participant receives information only about the person who initiated the call. Set to true or omit if CampaignFlag contains <code>PASS_CONTACTS_ANI_FOR_3RD_PARTY_CONFERENCES</code>.
warm	boolean	Whether to add the first conference participant in warm mode. • <code>True</code>: The agent speaks to the third party before completing the conference. • <code>False</code>: The agent adds the third party to the conference immediately.

ConferenceSpeedDialParticipantInfo

Information about the speed dial participant to add to the conference.

Name	Type	Description
checkDNC	boolean	Whether to check the local DNC list. Use the flag as follows: 1 Set the flag to true, and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ NUMBER IN DNC LIST (10006): Show an error dialog to warn the agent that the number is in the DNC list. ◦ Q NUMBER IN DNC LIST FORCE (1001): Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag

Name	Type	Description
		to false and resend the request.
includeCallerInfo	boolean	Whether to give information to the conference participant: • True: The new call participant receives all contact details. • False or absent: The call participant receives information only about the person who initiated the call. Set to true or omit if CampaignFlag contains <code>PASS_CONTACTS_ANI_FOR_3RD_PARTY_CONFERENCES</code>.
speedDialId	string	Speed dial ID of the conference participant.
warm	boolean	Whether to add the first conference participant in warm mode. • True: The agent speaks to the third party before completing the conference. • False: The agent adds the third party to the conference immediately.

ContactFieldInfo

Information about a contact field, such as phone number, company, and address.

Example

```
{
  dataType: "NUMBER"
  id: "114"
  name: "influence_score"
  primary: false
  restrictions: {restrictions: [], limitedSetInfo: null}
}
```

Name	Type	Description
dataType	DataType	Possible data type of the contact field or call variable.

Name	Type	Description
id	string	Contact field ID.
name	string	Unique internal name of the contact field used in agent scripts and connectors. For information about the user interface name of the contact field, see FieldInfo (label).
primary	boolean	Whether the phone number is the first number. • true: number1. • false: number2 and number3.
restrictions	RestrictionsInfo	Call variable restrictions. Not null.

ContactSessionType

Enumeration with the contact session type.

Description
• UNKNOWN (0) : Unknown. • MANUAL (10) : Manual call. • OUTBOUND (11) : Outbound call. • AUTODIAL (12) : Autodial call. • PREVIEW (13) : Preview call. • INBOUND (14) : Inbound call. • QUEUE_CALLBACK (15) : Queue callback. • STATION (20) : Station. • FORWARD (21) : Forward. • THIRDPARTY_TRANSFER (30) : Third-party transfer. • THIRDPARTY_CONFERENCE (31) : Third-party conference. • THIRDPARTY_CONSULT (32) : Third-party consult. • TEST_MANUAL (40) : Manual test. • TEST_OUTBOUND (41) : Outbound test. • TEST_AUTODIAL (42) : Autodial test.

Description

- `TEST_PREVIEW (43)` : Preview test.
- `INTERNAL (50)` : Internal call.
- `INTERNAL_SKILL (51)` : Queue call.
- `INTERNAL_IVR (52)` : Internal IVR.
- `INTERNAL_CAMPAIGN (53)` : Campaign call.
- `INTERNAL_VM (60)` : Internal voicemail.
- `INBOUND_VM (61)` : Inbound voicemail.
- `OUTBOUND_VM (62)` : Outbound voicemail.
- `VISUAL (70)` : Visual.

ContactInfo

Information about a VCC contact record.

Name	Type	Description
accounts	AuthorAccount []	Array of the contact's social media accounts, such as Facebook or Twitter.
fields	Map<string, string>	Map of contact field IDs to field values. For more information about the format, see Single Values .
id	string	Contact ID. Either omit filling this field or set it to null when creating a contact with <code>POST /{orgId}/contacts</code> .
modificationTime	long	Contact modification time (Epoch time in ms): • When creating a contact, omit this field or set it to null. • When updating a contact, do not change the value of this field.
notes	Note []	Array of notes.
score	number	Weight of the match when searching.

ContactLookupResultInfo

Information about the search results of contacts.

It is returned by endpoints such as:

[Gets Contacts for the Call](#)

[Gets Contacts for the Domain](#)

Name	Type	Description
contacts	ContactInfo []	Array of contacts.
cursor	string	A serialized object in Base64 format. Do not modify or display this value. Use the value in the next request to obtain contact records.
hasMore	boolean	Indicates whether more contact entries are available on the server. The default is <code>false</code> .

CreateReplayRequest

Replay request, which is based on new or existing subscriptions.

Name	Type	Description
end	int	Required end time stamp in milliseconds to search for. Uses the <code>int64</code> format.
start	int	Required start time stamp in milliseconds to search for. Uses the <code>int64</code> format.
subscription	SubscriptionRequest	Required model for create and update subscriptions.

CustomerPortalInfo

Information about the link to the Customer Portal that agents can click in the Agent Desktop Plus application.

Example

```
{
  token: "3a74950f-2f74-4d11-bf9d-55f99c5283d3"
  url: "https://<domain>/autologin.jsp"
  userName: "syoung@example.com"
}
```

Name	Type	Description
token	string	Single sign-on token created in the VCC that enables users to access the Customer Portal without having to enter credentials.
userName	string	User name.
url	string	URL of the Customer Portal.

CustomerUpdateContactBody

Information about a contact.

Example

```
{
  emailAddress: "syoung@example.com"
  firstName: "Sarah"
  lastName: "Young"
  phoneNumber: "9255551212"
}
```

Name	Type	Description
emailAddress	string	Contact's email address.

Name	Type	Description
firstName	string	Contact's first name.
lastName	string	Contact's last name.
phoneNumber	string	Contact's phone number.

DashboardSubscriptionInfo

Information about a dashboard to which an agent can subscribe.

Name	Type	Description
subscriptionId	string	Single sign-on token created in the VCC that enables users to access the Customer Portal without having to enter credentials.
type	DashboardSubscriptionType	Type of the subscription. Possible types are: • AGENT • SKILL • DISPOSITION

DataCenterInfo

Information about data centers that is relevant only if your domain is enabled for geographic redundancy.

Name	Type	Description
active	boolean	Whether the data center is active.
apiUrls	ClusterInfo []	Array of API information about the cluster.
loginUrls	ClusterInfo []	Array of login URLs.
name	string	Name of data center.
uiUrls	ClusterInfo []	Array of user interface information about the cluster.

Delivery

The delivery directive for the subscription. Only one directive can be applied to a subscription.

Name	Type	Description
http	HttpDelivery	Directives for delivering to the HTTP end point.
pubsub	PubSubDelivery	Directives for delivering to PubSub topics.

DraftAttachmentInfo

Information about the draft.

Name	Type	Description
id	string	Draft attachment ID
name	string	File name of the draft attachment.
size	long	Size of draft attachment.

DraftInfo

Information about the draft.

Name	Type	Description
interactionId	string	Interaction ID.
interactionType	DraftAttachmentInfo	Type of interaction.

Data Types

This section describes the format of the REST API and VCC data types.

[DataType](#)
[VCC Internal Data Formats](#)

DataType

REST data types for contact fields and call variables. The VCC administrator can further restrict each data type by using filters, for example: the value cannot be less than, a value is required, and the value must be selected from a list.

Type	Description
BOOLEAN	TRUE or FALSE.
CURRENCY	Number with a currency prefix, such as: \$2.72.
DATE DATE_TIME TIME	Number of milliseconds since January 1, 1970, 00:00:00 GMT.
EMAIL PHONE STRING URL	String displayed as is.
NUMBER	Number, for example: 1, -2, or 3.14.
PERCENT	Number with a percentage symbol, for example: 2.72%.
TIME_PERIOD	Duration in milliseconds, for example: 2 hours 10 minutes 200 ms == 2:10:00.200.

VCC Internal Data Formats

This section describes how the client should parse or encode VCC data values displayed in worksheet answers, call variable, and contact fields. These formats encode values as human-readable strings. For more information about the possible VCC data types, see *Data Types* in the Contacts chapter of the [Basic Configuration Administrator's Guide](#).

Single Values

VCC Data Type	Internal Format Description	Examples
String	String specific to the type of data.	Text
Email		johndoe@example.com

VCC Data Type	Internal Format Description	Examples
URL		http://www.five9.com/
Phone		8005538159
Number	Text presentation of a number. - Number of digits before and after the decimal point: Fixed by the configuration of the field, variable, or other. If the value has fewer digits than the configured number, leading trailing zeros are added. - No digits after decimal point: Decimal point omitted.	123
Currency		-00123.450
Percent		
Duration	Text presentation of a number of milliseconds from 0 to 359999999. The VCC administrator can reduce this interval by configuring a minimum or maximum but cannot extend the interval.	1000 = 1 second 359999999 = 99:99:99.999 in the UI.
Date	yyyy-mm-dd - yyyy: Year - mm: Month from 01 to 12, - dd: Day from 01 to 31.	2017-02-14 = February 14, 2017
Time	UTC time in this format: hh:mm:ss.SSS	01:23:45.600

VCC Data Type	Internal Format Description	Examples
	• hh: Double-digit number of hours. • mm: Double-digit number of minutes. • ss: Double-digit number of seconds. • SSS: Triple-digit number of milliseconds.	
Date and Time	<Date> <Time> In the formats described above and separated from each other by one space.	2017-02-14 01:23:45.600
Boolean	true or false.	true

Predefined List

In addition to data types, the VCC administrator can configure restrictions, such as a predefined list. In this case, possible values in one of the formats from the Single Values table above are stored in the list declaration. Every possible value has its identifier in the list. A real value contains one or several identifiers.

List Types	Internal Format Description	Examples
Set	User can select several values is disabled. Text presentation of the identifier of the value in the predefined list.	0 (first possible value of the predefined list)
Multiset	User can select several values is enabled. One or more backslash-separated identifiers.	1 2\3\4

DataValidationErrorType

Information about the possible types of errors that may occur when contact records are validated. The error is returned in the `className` field of the error.

The context contains a map encoded as a JSON string, for example:

Example

```
{ "five9ExceptionDetail": {  
  "timestamp": 1456917830985,  
  "errorCode": 12032,  
  "message": "Contact record validation failed",  
  "context": {  
    "1011": "{ \"Max\": \"4\",  
      \"className\": \"STRING_MAX_LENGTH\",  
      \"msg\": \"String length cannot be more than 4\" }"  
  }  
}
```

- Key: Field ID, for example 1011.
- Value: JSON string that describes the error. This object contains two required fields:
 - `Max`: Maximum value allowed for the type of validation error.
 - `className`: Name of the type of validation error. For more information, see [DataValidationErrorType](#).
 - `msg`: Validation error message and field specific to the error class.

Description

- `DATE_AFTER`: Specified date after permitted date. Error field:
 - `Date`: Permitted date.
- `DATE_BEFORE`: Specified date before permitted date. Error field:
 - `Date`: Permitted date.
- `DATE_TIME_AFTER`: Specified date and time after permitted date and time. Error field:
 - `Date`: Permitted date and time.
- `DATE_TIME_BEFORE`: Specified date and time before permitted date and time. Error field:

Description

- **Date:** Permitted date and time.
- **DIGITS_AFTER_DECIMAL_POINT:** Number contains more digits than allowed after decimal point. Error field:
 - **DigitsAfter:** Allowed number of digits after decimal point.
- **DIGITS_BEFORE_DECIMAL_POINT:** Number contains more digits than allowed before decimal point. Error field:
 - **DigitsBefore:** Allowed number of digits before decimal point.
- **DOES_NOT_MATCH:** Value does not match pattern of regular expression. Error field:
 - **Regex:** Regex pattern.
- **EMPTY_VALUE:** Empty required field.
- **INVALID_BOOLEAN:** Invalid boolean value.
- **INVALID_DATE:** Invalid date.
- **INVALID_DATE_TIME:** Invalid date and time format. Error fields:
 - **TimeFormat:** expected time format.
 - **DateFormat:** expected date format.
- **INVALID_EMAIL_ADDRESS:** Invalid email address.
- **INVALID_NUMBER:** Invalid number.
- **INVALID_PHONE_NUMBER:** Invalid phone number format. Error field:
 - **Nf:** Phone number format.
- **INVALID_TIME:** Invalid time format. Error field:
 - **Format:** expected time format.
- **INVALID_TIME_PERIOD:** Invalid time range.
- **INVALID_URL:** Invalid URL.
- **INVALID_YEAR:** Invalid year.
- **NOT_FROM_LIST:** Value not in list of allowed values. Error field:
 - **Values:** List of valid values.
- **NOT_FROM_SET:** Value not from specified list of allowed values. Error field:
 - **Values:** List of valid values.
- **NUMBER_MAX:** Number is greater than maximum value allowed. Error field:
 - **Max:** Maximum allowed number.
- **NUMBER_MIN:** Number smaller than minimum value allowed. Error field:
 - **Min:** Minimum allowed number.
- **READ_ONLY_VALUE:** Read-only value, which cannot be edited.
- **STRING_MAX_LENGTH:** Text longer than maximum number of characters allowed. Error field:

Description

- **Max:** Maximum length of value.
- **STRING_MIN_LENGTH:** Text shorter than minimum number of characters allowed.
Error field:
 - **Min:** Minimum length of value.
- **TIME_AFTER:** Specified time is after allowed time. **Error field:**
 - **Time:** Maximum allowed time.
- **TIME_BEFORE:** Specified time is before allowed time. **Error field:**
 - **Time:** Minimum allowed time.
- **TIME_PERIOD_INCORRECT_FORMAT:** Format of time range is invalid.
- **TIME_PERIOD_MAX:** Upper limit of time interval is too late. **Error field:**
 - **Max:** Maximum allowed value.
- **TIME_PERIOD_MIN:** Lower limit of time interval is too early. **Error field:**
 - **Min:** Minimum allowed value.
- **TIME_PERIOD_TOO_BIG:** Time interval is too long. **Error field:**
 - **MaxValue:** Maximum allowed value.
- **TOO_LONG_STRING:** Text can contain up to 255 characters.

DetailedACDSnapshotInfo

Information about the ACD snapshot.

Name	Type	Description
activeAgentsIds	string[]	Set of agent IDs who have selected the queue.
inAcdQueueVoicemails	QueuedVoicemailInfo []	Collection of voicemail messages in the queue that are waiting to be processed by agents.
inProgressVoicemails	QueuedVoicemailInfo []	Collection of voicemail messages in the queue that are being processed by

Name	Type	Description
		agents.
inQueueCallbackCount	int	Number of callbacks in the queue that are waiting to be processed by agents.
inQueueCalls	QueuedCallInfo []	Collection of calls in the queue that are waiting to be transferred to agents.
loggedInAgentsIds	string []	Set of agent IDs in the queue, regardless of whether the agent selected the queue when logging in.
maxQueueDuration	long	Longest queue time in milliseconds.
notReadyForCallAgentsIds	string []	Set of agent IDs who are not ready for calls.
onCallAgentsIds	string []	Set of agent IDs in the queue and are on calls.
readyForCallAgentsIds	string []	Set of agent IDs who are ready for calls.
readyForChatAgentsIds	string []	Set of agent IDs who are ready for chats.
readyForEmailAgentsIds	string []	Set of agent IDs who are ready for emails.
readyForVoicemailAgentsIds	string []	Set of agent IDs who are ready for voicemail.
vivrCallbackCount	int	Number of callbacks that originated from Visual IVR scripts.
voicemailCount	int	Number of voicemail messages.

DialError

Possible results returned in [OutgoingCallFailedEvent](#) after a number is dialed.

Description
BUSY: The other party was busy. DIAL_ERROR: An unknown error occurred while the agent was dialing. HANGUP: The other party appears to have hung up. HARDWARE_TIMEOUT: Hardware timed out while the agent was dialing. NO_ANSWER: The other party did not answer before the time-out. OPERATOR_INTERCEPT: The other party appears to be disconnected. RESOURCE_UNAVAILABLE: Five9 ran out of telephony resources. UNKNOWN_ERROR: An unknown error occurred while the agent was dialing.

DialingRestrictionInfo

Information about possible dialing restrictions for the call.

Name	Type	Description
fieldId	string	Contact field ID. This field may contain a phone number.
type	string	Possible causes of restrictions: CONTACT_REMOVED: The contact was removed from the campaign list. CONTACT_RESTRICTION: The contact may be dialed only at certain times. DIALING_RULE: A dialing rule was ignored. DISABLED_BY_CRITERIA_IN_CURR_TIME: The contact may not be dialed because of the criteria set by the administrator in the campaign profile properties (Filter tab). DISABLED_BY_CRITERIA_IN_CURR_TIME_AND_FUTURE: The contact may not be dialed because of the campaign profile properties described above. DISABLED_IN_PROFILE: The number cannot be dialed

Name	Type	Description
		according to the campaign profile.
		• DNC: The number is in the DNC list. • DND: The number may not be dialed because it is marked <i>Do Not Dial Number for Campaign</i>. • FINAL_CONTACT: The agent set a final disposition to a live call related to a preview task. The preview ends automatically, and the agent cannot dial the same contact again. Final dispositions are set by the administrator in the properties of a disposition (Type tab). • MAX_REDIAL_ATTEMPTS: The maximum number of redial attempts for this number was reached. • NO_RESTRICTIONS: No dialing restrictions exist. • NUMBER_DND_RESTRICTION: The contact may be dialed only after a certain time. • NUMBER_REDIAL_RESTRICTION: The contact may be redialed only after a certain time. • PROFILE_LIMITATION: The number cannot be dialed during the interval specified in the campaign profile. • WRONG_NUMBER: The phone number is not valid.

DisposeOptionsInfo

Options available when setting a disposition.

Name	Type	Description
dispositionId	string	ID of the disposition to select. Ignored for internal calls.
timeout	long	Optional disposition time-out value equal to or less than one year (366*24*60*60*1000) in ms. Use when the agent wants to change the default value. For additional information, see <code>timeout</code> in DispositionInfo . Must be null if the disposition does not have one of these disposition flags: • <code>ALLOW_SET_REDAIL_TIMER</code> (DispositionFlag) or • <code>ALLOW_SET_REACTIVATE_TIMER</code> (DispositionFlag)

DispositionBody

Information about a disposition.

Name	Type	Description
dispositionId	string	Disposition ID.
isClose	string	Whether the interaction should be opened (1) or closed (0) when it is completed.
mediaType	string	Media type to which a disposition may be related. Dispositions are not unique. • SOCIAL=1 • NOTE=100 • CHAT=1000 • AGENT_CHAT=1010 • EMAIL=2000 • CALL=3000 • VM=4000
profileId	string	Profile ID of the item that belongs to an SCC profile.

DispositionFilterInfo

Information about possible filters for voice interactions returned in [DispositionsInfo](#) for these methods: `getDispositions`, `getCampaignDispositions`, and `getNoCampaignDispositions`.

Example

```
"CALL": {
  "filters": [
    "VOICE_STANDARD_DISPOSITION",
    "VOICE_DISPOSE_PREVIEW_CALL"
  ]
}
```

Name	Type	Description
filters	string[]	Array of possible filters: • SCC_DISPOSE_TASK • VOICE_DISPOSE_CALL_OR_VOICEMAIL • VOICE_DISPOSE_PREVIEW_CALL • VOICE_END_CONFERENCE • VOICE_RECYCLE_CALL • VOICE_SKIP_PREVIEW • VOICE_STANDARD_DISPOSITION • VOICE_TRANSFER_CALL

DispositionFlag

Possible disposition flags.

Description
• ALLOW_SET_REACTIVATE_TIMER: The agent can set a reactivate timer that starts when the disposition is selected. The agent does not set the timer but may be allowed to select an initial timer value. Otherwise the value is selected by default. • ALLOW_SET_REDIAL_TIMER: The agent can set a redial timer that starts when the disposition is selected. The agent does not set the timer but may be allowed to select an initial timer value. Otherwise the value is selected by default. • MUST_CONFIRM: The agent must confirm the disposition. • ONLY_FOR_TRANSFER_AND_CONFERENCE: The agent may use this disposition only for transfers and conferences. • SOCIAL_CLOSED: An SCC interaction has been closed. • SOCIAL_OPEN: an SCC interaction is still open. • WORKSHEET_REQUIRED: The agent must complete a worksheet. • WORKSHEET_FORBIDDEN: The agent cannot not complete a worksheet.

DispositionInfo

Information about a disposition.

Example

```
{
  "id": "101",
  "name": "Open",
  "displayName": "Open",
  "description": null,
  "flags": ["SOCIAL_OPEN"],
  "channelTypes": {
    "CALL": { "filters": ["VOICE_TRANSFER_CALL"] },
    "CALL": { "filters": ["VOICE_DISPOSE_CALL_OR_VOICEMAIL"] }
  },
  "timeout": -1,
  "numberForTransfersAndConferences": null,
  "type": null
}
```

Name	Type	Description
channelTypes	Map< ChannelType , DispositionFilterInfo >	Map of channel types to which the disposition applies. Contains a DispositionFilterInfo value for every channel type.
description	string	Description of the disposition.
flags	DispositionFlag	Array of disposition flags. The array can be empty.
id	string	Disposition ID.
name	string	Name of the disposition.
numberForTransfersAndConferences	string	If the disposition has the ONLY_FOR_TRANSFER_AND_CONFERENCE (DispositionInfo) flag, this field may contain a transfer or conference number to use before assigning the disposition. If the value of this field is null, the number is not restricted.
timeout	long	Default value of the timer, which applies only when the type field is REDIAL or DND.

Name	Type	Description
		Otherwise, this field is null. When setting the disposition, the agent may change the value if the disposition has either of these flags: • <code>ALLOW_SET_REACTIVATE_TIMER</code> (DispositionInfo) • <code>ALLOW_SET_REDIAL_TIMER</code> (DisposeOptionsInfo) In this case, the agent should be prompted for a timer value.
<code>type</code>	<code>string</code>	Possible types of disposition: • <code>DNC</code>: Add the numbers to the Do Not Call list. • <code>DND</code>: Do not redial the numbers in this campaign. • <code>FINAL</code>: The number is not dialed again in the campaign. • <code>REDIAL</code>: Redial after a specified time.

DispositionLayoutGroupInfo

Information about groups of dispositions defined by the administrator in the VCC.

Name	Type	Description
<code>children</code>	<code>Object[]</code>	Array of child dispositions in the group, listed in the order defined in the campaign profile.
<code>name</code>	<code>string</code>	Group name defined by the administrator in the VCC that may be shown to agents. In addition, you may use these names to differentiate between the sort options defined by the administrator. These names are not designed to be shown to agents:

Name	Type	Description
		• <code>__DISPOSITION_MENU_CAMPAIGN_PROFILE__</code>: Contains the children listed in the order defined in the campaign profile. • <code>__DISPOSITION_MENU_CAMPAIGN__</code>: Contains all other children, which you may display in any order.

DispositionsInfo

Information about all available dispositions.

Name	Type	Description
dispositions	DispositionInfo []	Array of dispositions.
layout	Object[]	Tree-like layout of grouped dispositions, which are objects of SimpleIdInfo or DispositionLayoutGroupInfo .

DispositionWSInfo

Information about modified and new dispositions.

Name	Type	Description
id	string	Disposition ID.
name	string	Disposition name.

DomainObjectKeyInfo

Information about a key in the translation table or object to be translated.

Example

To translate the name for Disposition ID=123, use this key:

```
{ objectType: 'DISPOSITION', objectId: '123', field: 'NAME'}
```

Name	Type	Description
field	I18nObjectField	Field to be translated.
objectId	string	Object ID.
objectType	I18nObjectField	Type of object to be translated.

DomainObjectTranslationInfo

Translated value for one `DomainObjectKeyInfo` in JSON format.

Example

```
{
  key: { objectType: 'DISPOSITION', objectId: '123', field: 'NAME'},
  value: 'translated value'
}
```

Name	Type	Description
key	DomainObjectKeyInfo	Possible fields: • name • description
value	string	Object value.

DomainSettingsInfo

Information about the domain settings.

Name	Type	Description
settings	map<string, string>	Map of the key and value pairs for each setting.

EchoCallInfo

Information about an echo call.

Name	Type	Description
echoCall	boolean	Whether the current call is an echo call.

EditTopicBody

Information about a topic for social posts.

Name	Type	Description
topicName	string	Topic name.

Event

Information about an event in the subscription request.

Name	Type	Description
fields	string[]	List of fields to be included in the subscription. These fields are chosen from the list of fields in the Event Schema
filters	FieldSchema []	List of filters to be applied on the fields in the event. These filters are chosen from the list of filters in the EventSchema .
name	string	Name of the event.
transform	Transform	The transform directive for an event. Only one directive should be applied.

EventSchema

Describes the event schema.

Name	Type	Description
description	string	Description of the event schema.
fields	Maps of HttpDelivery	Event fields.
filters	FieldSchema []	List of filters to be applied on the fields in the event. These filters are chosen from the list of filters in the EventSchema .
name	string	Name of the event schema.

EWTInfo

Information about the estimated waiting time for a call in a queue.

For business hours, use the weekday and special schedules as follows:

- If today is part of the weekday schedules, and the business is closed, display the weekday message with the weekday email settings.
- If today is part of the special schedules, display the special message with the special email settings.

Name	Type	Description
businessHours	BusinessHoursDailyInfo	Information about business hours.
ewt	int	Estimated waiting time for a call in a queue.
groupId	long	SCC group ID for the item.
mediaType	int	Channel of the interaction expressed as a number: • SOCIAL=1 • NOTE=100 • CHAT=1000

Name	Type	Description
		• AGENT_CHAT=1010 • EMAIL=2000 • CALL=3000 • VM=4000
orgId	long	Domain ID.
resultCode	int	Possible values: • EWT_RESULT_CODE_INVALID_GROUP: -3 • EWT_RESULT_CODE_INVALID_PROFILE: -4 • EWT_RESULT_CODE_INVALID_TYPE: -2 • EWT_RESULT_CODE_NO_AGENTS_LOGGED_IN: -1 • EWT_RESULT_CODE_AGENTS_LOGGED_IN: -6 Indicates the following scenarios: ◦ Agents are logged in, but no results are available. ◦ No Estimated Waiting Time (EWT) has been captured due to no activity in the last hour. • EWT_RESULT_CODE_PARAM_ERROR: -5 • EWT_RESULT_CODE_SUCCESS: 0

ExceptionParameters

Possible context values for exceptions. Other error codes are described with the errors and other data types.

Name	Type	Description
callVariableName	string	Call variable name.
commentExceedsMaxLength	string	Maximum length of voicemail

Name	Type	Description
		comments (250 characters) exceeded.
clientVersion	string	Client version.
serverVersion	string	Server version.
lockoutLimit	boolean	Largest number of unsuccessful login attempts set by the administrator before an account is locked.
contextCode	string	Code used in several errors, such as INVALID_ACCOUNT.
contextErrorReason	string	Exception context error reason.
lookupResult	string	Search result.
notPermittedChannel	string	Channel is not permitted.
userId	string	User ID.
userRole	string	User role.
areSecurityAnswersRequired	boolean	Whether the user has answered all security questions.
isPasswordChangeRequired	boolean	Whether the user needs to change password.
canChangePassword	boolean	Whether the user has permission to change password. If false, the user must ask an administrator to do so.
loginPageUrl	string	URL of page where the user can change password and set security questions.

ExchangeMessage

Information about a message.

Name	Type	Description
creationTime	long	Creation time of the message.

Name	Type	Description
guid	string	Conversation ID for a group of messages.
messageId	string	Message ID.
messageRead	boolean	Whether the message was read.
msgBody	string	Content of the message.
originatorId	string	ID of the writer of the message.
senderId	string	Sender ID.
tenantId	long	Domain ID.
type	string	Can be set to <code>im</code> , <code>broadcast</code> , or no value (for non-readable messages).
userId	string	Duplicate of <code>senderId</code> .
users	string[]	List of users.

ExchangeMessageBody

Information about a message.

Name	Type	Description
exchangeName	string	Exchange name.

ExternalCallDestinationInfo

Information about the external destination of a call.

Name	Type	Description
autoResolveDialingRules	boolean	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. When set to <code>true</code> , this flag overrides <code>checkMultipleContacts</code> flag. Applied

Name	Type	Description
		only when a call is made and ignored during call transfers and conferences. Dialing rules are identified by looking up contacts with a limit of five for a number. Dialing rules are checked for each matched contact. If at least one dialing rule of any matched contact does not permit the call, the call is discarded. The default value of this flag is false.
campaignId	string	Campaign ID to which the call belongs.
checkMultiple Contacts	boolean	Whether to check for multiple contacts when making a call. This field is ignored during transfers and conferences. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set this flag to true, and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002. 2 Show to the agent the list of contacts. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user chooses none, set the flag to false so that the dialing rules that apply to the contact are ignored. 4 Resend the request.
contactId	string	Optional related contact ID.
number	string	External phone number
skipDNCCheck	boolean	Whether to skip checking the DNC list.: 1 Set the flag to false, and send the request. 2 If the server returns one of these errors, proceed as indicated:

Name	Type	Description
		◦ <code>NUMBER_IN_DNC_LIST(10006)</code>: Show an error dialog to warn the agent that the number is in the DNC list. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE(1001)</code>: Ask if the agent still wants to perform the operation.
		3 If the user confirms the request, set the flag to true and resend the request.

ExternalDestinationInfo

Information about the external destination of a call.

Name	Type	Description
<code>checkMultipleContacts</code>	<code>boolean</code>	Whether to check for multiple contacts when making a call. This field is ignored during transfers and conferences. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set this flag to true, and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002. 2 Show to the agent the list of contacts. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user chooses none, set the flag to false so that the dialing rules that apply to the contact are ignored. 4 Resend the request.
<code>contactId</code>	<code>string</code>	Optional related contact ID.
<code>number</code>	<code>string</code>	External phone number

Name	Type	Description
skipDNCCheck	boolean	Whether to skip checking the DNC list. Use the flag as follows: 1 Set the flag to false, and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST(10006)</code>: Show an error dialog to warn the agent that the number is in the DNC list. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE(1001)</code>: Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to true and resend the request.

ExternalTransferDestinationInfo

Information about a call transferred to an external destination.

Name	Type	Description
destination	ExternalDestinationInfo	Information about the external destination.
dispositionId	string	Optional disposition ID for the transferred call. The default value is -23, which is the ID of the system disposition named <i>Transferred To 3rd Party</i>.
dispositionTimeout	long	Disposition time-out value in ms equal to or less than one year (366*24*60*60*1000). Use when the agent wants to change the default value. For details, see

Name	Type	Description
		DisposeOptionsInfo in DispositionInfo . Must be null if the disposition does not have one of these disposition flag: DisposeOptionsInfo or DispositionFlag .
timeout	int	Number of ms until the call is answered by the recipient. If the time-out expires, the call is returned to the agent as a parked call. 0 (zero) indicates unlimited.
warm	boolean	Whether to transfer the party in warm mode. Warm mode does not apply to parked calls. • True: The agent speaks to the transfer recipient before completing the transfer. • False: The agent transfers the party on hold immediately.

F9RuntimeException

Error codes and context parameters.

Name	Type	Description
context	string	Context parameters for the error.
id	long	Error codes listed in Five9 Error Codes .

FieldViewInfo

In Agent Desktop Plus, UI appearance, such as width and label, of a field, such as contact field or call variable. The complete field layout comprises an ordered list of field views.

The fields are displayed in a rectangle panel: the first field is placed at the left top corner, the next field is placed to the right of the previous one in the same row. When the row is full, the next field is placed in the next row located under the previous row.

Example:

```
{
  "editable": "true",
  "label": "Primary",
  "relatedField": {id: "1007", type: "CONTACT"},
  "width": "100"
}
```

Name	Type	Description
editable	boolean	Whether the field can be edited.
id	string	Field view identifier.
label	string	User interface label for the field.
relatedField	ReasonCodeWSInfo	Source of call variable or contact field data.
width	int	Field width from 0 to 100%.

FeatureFlagInfo

Information for a feature flag.

Name	Type	Description
name	string	The name of this feature.
value	object	The value for this feature flag.

FeatureFlagRequest

A feature flag request.

Name	Type	Description
name	string	Additional name-value pairs that are used for form data delivery.
type	FeatureType	Text format.

FeatureType

Enumeration with the feature flags.

Description
• Boolean: The feature type is <code>boolean</code>. • String: The feature type is <code>string</code>. • Number: The feature type is <code>number</code>. • JSON: The feature type is <code>JSON</code>.

FieldInfo

The schema for the event or group fields.

Name	Type	Description
filters	Filter[]	List of filters.
formula	string	Aggregate function defined on a column within the statistics schema.
name	string	User-defined field name that is displayed in the results payload.

FieldSchema

The schema for the event or group fields.

Name	Type	Description
aggregates	string[]	Enumeration of supported aggregate types. Allowed values are <code>AVG</code> , <code>COUNT</code> , <code>MIN</code> , <code>MAX</code> , and <code>SUM</code> . Used in WFO requests only
description	string	Description of the field schema
filters	string[]	List of fields filters.
name	string	Name of the field schema. Used in WFO requests only.

FilterSettingsSelectionType

Enumeration with the selection type to filter queues or agent groups.

Description

- `ALL`: Show statistics for all the queues or agent groups.
- `MY`: Show statistics for the user's queues or agent groups.
- `SPECIFY`: Show statistics for the specified queue or agent groups.

Five9ExceptionDetail

Details about an error. The fields that you see depend on the error. The exception details enable the client to submit multiple errors at the same time.

Name	Type	Description
context	Map	Map of string values containing additional error information that depends on <code>errorCode</code> . For a list of possible fields that contain additional information

Name	Type	Description
		about the problem, see ExceptionParameters .
		Example: When an agent cannot log in, the <code>context</code> parameter of the event indicates the <code>userId</code> . In other cases, <code>context</code> can contain browser information, a clicked HTML button or link, a JavaScript error, or a failed line number.
<code>errorCode</code>	<code>long</code>	Client-specific code to be tracked by automated systems.
<code>message</code>	<code>string</code>	Error message for client developers or other technical staff. Do not show to agents.
<code>rateLimit</code>	RateLimit	Limit criteria for the time interval.
<code>source</code>	<code>string</code>	Cause of the problem.
<code>timestamp</code>	<code>long</code>	Server-side time stamp of the error in ms, Epoch time.

Five9ExceptionDetailWrapper

Information about an error.

Name	Type	Description
<code>exceptions</code>	FilterSettingsSelectionType []	Array of exception details.

ForceLoggingConfigInfo

Information about logging the agent's session.

Name	Type	Description
<code>enabled</code>	<code>boolean</code>	Whether to enable the agent permission that controls client-side logging.
<code>untilTimestamp</code>	<code>long</code>	Expiration UTC time in ms when logging will be disabled.

FullStateInfo

Information about an agent's complete state, including the current state and the state to apply at the end of the call.

Name	Type	Description
currentState	PresenceInfo	Current state of the agent.
currentStateTime	long	Time in ms since the current state was set.
isGracefulModeOn	boolean	Whether the graceful agent state transition mode is enabled.
pendingState	PresenceInfo	State to be set after the current call ends. This field is null when the agent is not processing a call or does not change after a call unless the agent has requested a change.
pendingStateDelayTime	long	Delay before changing the current state to the pending one.

GamificationDisposition

Array of disposition information returned in [EVENT GAMIFICATION DISPOSITION STAT](#).

Name	Type	Description
countAverage	float	Average number of calls in the system finalized with the current disposition.
countBest	int	Maximum number of calls in the system finalized with the disposition.
countMe	int	Calls finalized with the current disposition by the agent.
id	string	Disposition ID.
name	string	Disposition name.

GamificationSkill

Array of skill group information returned in [EVENT GAMIFICATION SKILL STAT](#).

Name	Type	Description
calls	int	Number of calls assigned to the skill group.
description	string	Description of the skill group.
id	string	Skill group ID.
longest	long	Duration of the longest call in ms for the skill group.
messageOfTheDay	string	Message of the day for the skill group.
name	string	Skill group name.
queuedCallbacks	int	Number of callbacks assigned to the skill group.

GracefulAgentStateTransitionSettingsChangedEvent

Information about the Graceful Agent State Transition mode settings.

Name	Type	Description
isEnabled	boolean	Whether Graceful Agent State Transition is enabled.
orgId	long	Domain ID.

HelpRequestDestinationInfo

Information about the users who receive a help request. The supervisor fields are mutually exclusive: you may use only one in each request.

Name	Type	Description
allAdministrators	boolean	All administrators receive the request.
allSupervisors	boolean	All supervisors receive the request.
groupSupervisors	string	Supervisors in <code>groupId</code> receive the request.
mySkillsSupervisors	boolean	Supervisors with agent skills receive the request.
skillSupervisors	string	Supervisors with <code>skillId</code> receive the request.

HttpDelivery

Directives for delivering to the HTTP end point.

Name	Type	Description
additionalAttributes	Map of strings	Additional attributes that are used for HTTP delivery. These are name-value pairs.
headers	Map of strings	HTTP headers (name-value) pairs.
method	string	Required enumeration of HTTP methods to use for delivering response.
url	string	Required end point URL.

I18nObjectField

Possible object fields to be translated.

Description
Possible values:
- NAME - DESCRIPTION

I18nObjectType

Possible object types that can be translated.

Description
• Possible values: • CAMPAIGN • CONNECTOR • CONTACT_FIELD • DISPOSITION • FIELD_VIEW: Contact field views. • REASON_CODE • SKILL • SPEED_DIAL • Types that cannot be translated: ◦ LIST ◦ CALL_TYPE ◦ EVENT_TYPE ◦ MEDIA_TYPE ◦ SEGMENT_TYPE ◦ IVR_MODULE_TYPE ◦ OUTREACH_IND ◦ WORK_ITEM_STATUS ◦ CALL_VARIABLE ◦ MEDIA_VENDOR ◦ INTERACTION_TYPE ◦ MEDIA_SOURCE ◦ COUNTRY_NAME

IdInfo

Information about reference IDs to enable future API expansion.

Name	Type	Description
id	string	ID of the referenced object.
id	string	ID of history view returned by Agent Interactions . To create iterations of the history view, use this value in the <code>viewId</code> field of subsequent requests.
missedCalls	int	Number of missed calls for selected period and criteria. Applies only to agent activity.
personalCalls	int	Number of personal calls for selected period and criteria. Applies only to agent activity.
records	SkillVMStateChangeInfo []	Array of a portion of history records from the view. The list contains the same or fewer records than the InteractionHistoryViewOptions field of <code>InteractionHistoryViewOptions</code> .

InteractionFilterInfo

Information about the filter criteria to apply when searching for a subscription.

Name	Type	Description
agents	string[]	List of agents.
campaigns	string[]	List of campaigns.
interactions	string[]	List of interactions.
skills	string[]	List of skills.
states	string[]	List of states.

InteractionHistoryViewInfo

Information about the state of a history view.

Name	Type	Description
hasMore	boolean	Whether the history contains more records.
id	string	ID of history view returned by Agent Interactions . To create iterations of the history view, use this value in the <code>viewId</code> field of subsequent requests.
missedCalls	int	Number of missed calls for selected period and criteria. Applies only to agent activity.
personalCalls	int	Number of personal calls for selected period and criteria. Applies only to agent activity.
records	SkillVMStateChangeInfo []	Array of a portion of history records from the view. The list contains the same or fewer records than the InteractionHistoryViewOptions field of <code>InteractionHistoryViewOptions</code> .

InteractionHistoryViewOptions

Information about the options used to create a history view.

Name	Type	Description
campaignIds	string[]	Array of campaign IDs from which to select records. The default is an empty array, which means that records associated with any campaign are selected, including those without a campaign and those associated

Name	Type	Description
		with a campaign already deleted. To include records without a campaign, use 0. Note: IDs of deleted campaigns are not retrieved by <code>/orgs/{orgId}/campaigns\</code>.
includeDialAttempts	boolean	Whether to select dial attempts. • true: Include dial attempts that were given system dispositions by the dialer. Agent must have <code>CAN_SHOW_DIAL_ATTEMPTS</code> permission. • false: Default and if omitted. Used by Contacts. Ignored by Agent Interactions.
limit	int	Maximum number of records returned for each iteration. The allowed values are from 1 to 50. The default value is 50.
mediaTypes	integer[]	Array of media types by which records should be selected. • <code>SOCIAL: 1</code> • <code>NOTE: 100</code> • <code>CHAT: 1000</code> • <code>AGENT_CHAT: 1010</code> • <code>EMAIL: 2000</code> • <code>CALL: 3000</code> • <code>VM: 4000</code>
onlyMissed	boolean	(Optional) Whether to return only missed interactions. False by default.
period	string	Period of time for which records should be selected: • <code>CURRENT_SESSION</code> • <code>TODAY</code> • <code>YESTERDAY</code> • <code>LAST_7_DAYS</code> • <code>LAST_WEEK</code>

Name	Type	Description
		- LAST_14_DAYS - LAST_30_DAYS - LAST_60_DAYS (default)

InteractionInfo

Information about an interaction.

Name	Type	Description
channelType	string	Type of interaction: - CALL - CHAT - EMAIL - SOCIAL - TEXT - VOICE_MAIL
interactionId	string	Interaction ID.

InteractionSessionInfo

Information about a session.

Name	Type	Description
acwTime	long	Duration of after-call work.
ani	string	ANI
callType	string	Applies only when <code>channelType=CALL</code> . For all other channel types, the field is null. - AUTODIAL - FORWARD - INBOUND

Name	Type	Description
		• INBOUND_VM • INTERNAL • INTERNAL_CAMPAIGN • INTERNAL_IVR • INTERNAL_SKILL • INTERNAL_VM • MANUAL • OUTBOUND • OUTBOUND_VM • PREVIEW • QUEUE_CALLBACK • STATION • TEST_AUTODIAL • TEST_MANUAL • TEST_OUTBOUND • THIRDPARTY_CONFERENCE • THIRDPARTY_CONSULT • THIRDPARTY_TRANSFER • UNKNOWN • VISUAL
campaignId	string	Campaign ID.
channelType	string	Type of channel: • CALL • CHAT • EMAIL • SOCIAL • TEXT • VOICE_MAIL
comments	string	Comments entered by the agent during the call.
contactId	string	Contact ID.
dispositionId	string	Disposition ID.
dnis	string	DNIS
receipt	string	Interaction receipt:

Name	Type	Description
		• MISSED: Interaction not accepted or rejected. • RECEIVED: Interaction accepted.
sessionId	string	Session ID.
startTimestamp	long	Call start time in Epoch ms.
talkTime	long	Talk duration in ms.

InteractionType

Information about the email draft.

Name	Type	Description
value	string	Type of the interaction, such as text and chat.

LeaveConferenceInfo

Information about options for leaving a conference.

Name	Type	Description
dispositionId	string	Optional ID of the disposition to set. • Must not be null if CallInfo is INITIATOR_DISPOSITION. • Can be specified if CallInfo is INITIATOR_DECIDES_WHO_DISPOSITION and dispositionId is null.
dispositionTimeout	long	Optional disposition time-out value in ms equal to or less than one year (366*24*60*60*1000). Use when the agent wants to change the default value if dispositionId is not null. For details, see

Name	Type	Description
		DisposeOptionsInfo in DisposeOptionsInfo . Must be null if the disposition does not have one of these disposition flag: DisposeOptionsInfo or DispositionFlag .
isToTransferCallOwnership	boolean	Do not use. Whether to transfer call ownership of the conference call if the administrator has enabled this campaign feature. In the Campaign Administrator's guide, this feature is named <i>pass on the disposition-setting responsibility</i>. Set the value of this field according to the value of CallInfo in <code>callInfo</code>: • <code>LAST_AGENT_DISPOSITION</code>, and the conference participant is an agent: <code>true</code>. • <code>INITIATOR_DISPOSITION</code>: <code>false</code>. • <code>INITIATOR_DECIDES_WHO_DISPOSITION</code>: <code>true</code> or <code>false</code>. If false, the disposition selected is the value of <code>dispositionId</code>.
transferToCallSessionId	string	Optional call session ID of the agent who will become new conference owner. This agent will specify a disposition when the conference ends. Must not be null if CallInfo is set to <code>INITIATOR_DECIDES_WHO_DISPOSITION</code>.

LimitedSetInfo

Information about values allowed in drop-down lists and similar menus in which users are shown a specific set of values.

Enter values as a backslash-separated list of IDs of predefined values, for example: 5\2\12. For more information about predefined values, see [PlayerTrackInfo](#).

Name	Type	Description
allowedValues	PlayerTrackInfo []	Array of allowed values.
multiSelection	boolean	Whether to allow agents to select one or more values simultaneously: • True: Agents can select multiple values. • False: Agents can select only one value.

ListWSInfo

Information about modified and new dialing lists.

Name	Type	Description
id	string	Dialing list ID.
name	string	Dialing list name.

LocaleInfo

Information about a region or country.

All localization data types will be modified in the future.

Name	Type	Description
id	string	ID of the locale.
locale	string	Java locale name.

LoggedInProfileAgent

Information about a profile for a logged-in agent.

Name	Type	Description
agentLoggedIn	boolean	Whether the agent is logged in.
chatbotEnabled	boolean	Whether to enable the chatbot to escalate a chat to a live agent.
emailRequired	boolean	Whether the agent's email address is required.
enableCustomerRequestChatTranscript	boolean	Whether to allow sending the customer's chat transcript.
noServiceMessage	string	User friendly message displayed to customers when the chat service is not available; defined in the Text Channels Administrator's Console in each profile.
profileId	string	Profile ID.
profileName	string	Profile name.
restrictions	Map<string, object>	List of restrictions to apply on the agent. • MAX_NAME_LENGTH • MAX_EMAIL_LENGTH • MAX_QUESTION_LENGTH

LoginState

List of possible states for a logged-in user to needs to create an agent session to start working as an agent. This procedure goes through several states.

Description
• <code>ACCEPT_NOTICE</code>: The agent must read and accept a maintenance notice. See these requests: Maintenance, Maintenance, and Maintenance. • <code>RELOGIN</code>: The agent is logging in again, which may occur due to a maintenance change of data center. At this state, the agent session does not exist. To recreate the session, use Reason Codes instead of Reason Codes. After the agent logs in again, use Reason Codes to reconnect the station. • <code>SELECT_SKILLS</code>: The agent needs to select queues. See Queues and Queues. • <code>SELECT_STATION</code>: This is the initial state. To create an agent session, use Reason Codes. To close a session, use Reason Codes. • <code>SPECIFY_CLIENT_TIMEZONE</code>: API client needs to specify the local time zone to continue working. See Supervisor Sessions. • <code>WORKING</code>: The agent is ready to work.

LogoutRestriction

Possible reasons that prevent the agent from logging out.

Description
List of possible restrictions: • <code>ACCEPTED_VM</code>: The agent has accepted a voicemail message. • <code>ACTIVE_CALL</code>: The agent has an active call. • <code>IN_PENDING_STATE</code>: The agent is in pending state. Interaction are scheduled. • <code>PARKED_CALL</code>: The agent has one or more parked calls. • <code>QUEUED_CALL</code>: The agent has one or more calls in the personal queue.

LongCollectionValue

List of values.

Name	Type	Description
value	long[]	List of values, such as callback IDs.

MaintenanceHostInfo

Array of possible hosts where your domain may reside.

Description

- `IDLE_MAINTENANCE`: Migration to the maintenance host is not occurring. Users are on the maintenance host.
- `IDLE_PRIMARY`: Migration to the primary host is not occurring. Users are on the primary host.
- `MIGRATION_MAINTENANCE`: Migration to the maintenance host is occurring. Users are on the maintenance host.
- `MIGRATION_PRIMARY`: Migration to the primary host is occurring. Users are on the primary host.

MaintenanceNoticeInfo

Information about a maintenance notice.

Name	Type	Description
accepted	boolean	Describes the state of the notice. • GET requests to <code>/agents/...</code> always return this field set to false. • PUT request (<code>/agents/.../accept</code>) always returns this field set to true. If the request fails, this field is not returned.

Name	Type	Description
annotation	string	Short description of the notice in the <code>text</code> field.
id	string	Notice ID.
text	string	HTML content of the notice.

MaintenanceNotifyReason

Possible reasons for maintenance.

Description

- **ANNOUNCED:** Maintenance migration will start after the specified time.
- **CANCELED:** Maintenance migration has been canceled.
- **CAN_MIGRATE:** Maintenance migration has started, and users can be migrated.
- **COMPLETED:** Maintenance migration is completed.
- **STARTED:** Maintenance migration has started.

MaintenanceState

Current maintenance state.

Description

- **ANNOUNCED:** Maintenance will start after the specified time.
- **CANCELED:** Maintenance has been canceled.
- **COMPLETED:** Maintenance has been completed.
- **READY_FOR_MIGRATION:** Ready for maintenance.
- **STARTED:** Maintenance has started.

ManualCallSettingsChangedEvent

Information about a manual call in a campaign.

Name	Type	Description
defaultCampaignId	string	Default campaign ID.
selectAllowed	boolean	Whether the agent is allowed to select a campaign.
selectNoneAllowed	boolean	Whether the agent is allowed to select the None option in the campaign menu.

ManualConnectorInfo

Information about a manual connector that the agent may open during a call or call preview.

Name	Type	Description
id	string	ID of the connector to request a pending connector.
description	string	Description of the connector.
name	string	Name of the connector.

MediaType

Information about the type of media or social channel, such as phone, chat, and email.

Name	Type	Description
icon	string	File name of the icon.
id	long	ID of the media type.
maxSize	int	Maximum size of the media message.

Name	Type	Description
messageDisplay	string	Displayed header of message.
outbound	int	Whether to reply to message in social media type: • 0: No • 1: Yes
relationButton	int	Whether to reply only if related, such as a Twitter follower: • 0: Disabled (reply always allowed) • 1: Enabled
relationDisplay	string	Display the type of relationship, such as a Twitter follower.
replyDisplay	string	Display header for outbound email reply message.
type	string	Method for choosing an item: • 1: Cherry pick • 2: AID
url	string	URL of the social media type.

MediaTypeConstants

Types of media types.

- MEDIA_TYPE_CHAT = "1000"
- MEDIA_TYPE_EMAIL = "2000"

MessageBodyItem

Information about an item in the message.

Name	Type	Description
analyze	string	Not used.
key	string	ID of a message body attribute (Key/Value pair).
value	string	Value of a message body attribute (Key/Value pair).

MessageDirection

Possible options for the direction of a message.

Description
<code>INCOMING</code>: The user receives a message. <code>OUTCOMING</code>: The user sends a messages.

MessageType

Possible types of messages.

Description
<code>AGENT_GROUP_BROADCAST</code>: Broadcast message sent to specified agent group <code>BROADCAST</code>: Broadcast message sent to all users <code>HELP_REQUEST</code>: Help request <code>INFO</code>: Message sent to specified users <code>SKILL_BROADCAST</code>: Broadcast message sent to specified set of skills

Metadata

Information about data centers and the location of the services for the logged-in user.

Name	Type	Description
dataCenters	DataCenterInfo	Information about the active data center.
freedomUrl	string	Freedom Web application URL.

MonitoredCampaignsInfo

Information about the campaigns to monitor.

Name	Type	Description
campaignIds	string[]	Set of campaign IDs.

MoveCallbackInfo

Information about the callbacks to move.

Name	Type	Description
agentIdTo	string	ID of the agent that will receive the callbacks.
callbacksIds	string[]	Array of callback IDs.

MultipartBody

Information about the content of an issue reported by the agent.

The payload is binary data transferred as multipart/form-data. The part containing the file to be uploaded should be named `file`. For details about multipart/form-data, see [Apache CXF Javadoc](#).

NlpTag

Information about a list of Natural Language Processing tag results.

Name	Type	Description
category	string	List of an organization's NLP categories or clusters.
sentiment	double	Real time NLP score between (worst) -1.0 to (best) +1.0, including the limits.

NlpTagRequest

Information about the object representation of the NLP tag request that is passed to the POST request.

Name	Type	Description
correlationID	long	Transaction ID provided by the API client that the NLP engine returns unchanged in the response. Enables the API client to execute the operation asynchronously and may be used by customer support to troubleshoot failed transactions.
items	NlpTagRequestItem []	Array of items, which enables the API client to batch multiple lists of interactions for NLP classification.
tenantID	long	SCC tenant ID.
timeout	int	Time-out in seconds for the NLP Engine. If the request takes longer than this value, the response is empty.

NlpTagRequestItem

Information about a Natural Language Processing tag request item that contains the interaction key and text to be analyzed and classified by the NLP engine.

Name	Type	Description
interactionID	long	Interaction ID or key for the social item ID record. The interaction ID is also used to reference the response NLP tags in the NLP response.
interactionText	string	Interaction text to be analyzed and classified.

NlpTagResponse

Information about a Natural Language Processing tag response returned in JSON format.

Name	Type	Description
correlationID	long	Transaction ID. If the API client contains a callback handler, this ID can be used to correlate the response to a previous request.
nlpTags	Map (String, MonitoredCampaignsInfo)	Map of NLP tag objects. The key is the interaction ID in NlpTagRequestItem ; the value is the object that contains the category (Cluster) and the sentiment.
status	int	Zero is the request is successful. Empty response otherwise.
tenantID	long	

Note

Information about a note.

Name	Type	Description
agentId	string	Agent ID.
author	string	Name of the email author.
authorId	boolean	Author ID.
creationTime	long	Time that the note was created.

Name	Type	Description
id	string	Note ID.
modificationTime	long	Time that the note was modified.
name	string	Name of the email author.
note	string	Content of the note.
socialItemId	string	Social item ID.
tenantId	long	Tenant ID.

NoteBody

Information about the content of a note.

Name	Type	Description
authorId	string	Author ID.
modificationTime	long	Latest modification time of the note.
note	string	Content of the note.

ObjectType

VCC configuration objects that can be modified. This data type is returned in the payload of events.

Example: A queue was updated.

```
[{"socket event received", "7", {
  "context":
    {"eventId": "7", "eventReason": "UPDATED", "messageId": "1021",
    "userId": null, "correlationId": "ID:46-14467679200315104",
    "userName": null, "timeStamp": 1446767920042, "tenantId": 331,
    "broadcast": true},
  "payLoad": {"objectType": "SKILL",
    "objectIds": ["1659"]}
}]
```

Description

Objects that can occur in an event for agents:

- `AGENT_GROUP`: Agent group.
- `CAMPAIGN`: Campaign.
- `CAV`: Call value.
- `CONFIG`: Configuration.
- `CONNECTOR`: Connector.
- `CRM_FIELD`: Contact field.
- `DISPOSITION`: Disposition.
- `PROFILE`: Campaign profile.
- `PROMPT`: Prompt.
- `REASONCODE`: Reason code.
- `SKILL`: Queue.
- `SPEEDDIAL`: Speed dial.

Objects

Information about configuration objects.

Name	Type	Description
<code>objectIDs</code>	<code>string[]</code>	Array of IDs of configuration objects. In the <code>ObjectType</code> example, the ID of the modified campaign profile is 1659.
<code>objectType</code>	<code>ObjectType</code>	Type of configuration object.

Org

Information about configuration objects.

Name	Type	Description
<code>orgId</code>	<code>string</code>	Domain ID.
<code>orgName</code>	<code>string</code>	Domain name.

OutboundCampaignListStatsInfo

Information about the outgoing campaign statistics.

Name	Type	Description
abandonedCallsCount	long	Number of abandoned calls.
availableRecordsCount	long	Number of records available for dialing.
callsToAgentRatio	double	Average call-to-agent ratio.
callsToAgentTargetRatio	double	Target call-to-agent ratio.
contactedCallsCount	long	Number of calls that were assigned to an agent.
dialedWithASAPRequestRecordsCount	long	Number of records that were dialed from the ASAP queue.
dialedWithoutTimerRecordsCount	long	Number of records that were dialed from the normal queue without redial timer.
dialingAttemptsCount	long	Number of dialing attempts.
dispositionedRecordsCount	long	Number of records that were given a final disposition.
listId	string	List ID or empty string for totals row.
noPartyContactSystemCallsCount	long	Number of records that were assigned a No Answer, Busy, Answering Machine, or Operator Intercept dispositions.
redialedWithTimerRecordsCount	long	Number of records that were dialed from the redial queue with a redial timer.
skippedInPreviewCallsCount	long	Number of records that were skipped in preview.
totalRecordsCount	long	Number of records in the list.
unreachableRecordsCount	long	Total number of currently unreachable records.

OrganizationInfo

Information about a domain.

Name	Type	Description
isGracefulStateTransitionMode	boolean	Whether the Graceful Agent State Transition mode is enabled.
name	string	Domain name.
sccTenant	Tenant	SoCoCare information.
version	UserSyncRecordInfo	Build version.

OutgoingCallFailedEvent

Information about the last outgoing call that failed.

Name	Type	Description
address	string	Address of the outgoing call in extended format, which is the phone number to which the call was made, for example: - Agent: The address is <code>agent:AgentName</code>. - Skill: The address is <code>skill:SkillName</code>. For other addresses, use a colon (:) as delimiter to extract the destination name.
addressType	AddressType	Possible types of addresses (phone numbers) to which the outgoing call was made.
callInfo	CallInfo	Detailed call information.
dialResult	DialError	Reason for the failure.

ParkedCallInfo

Information about a parked call.

Name	Type	Description
customer	string	Customer name.
campaignId	string	Campaign ID for the call.
parkedSince	long	Time stamp when the call was parked.
skillId	string	Queue ID.

PasswordCredentials

Information about the user's login credentials.

Name	Type	Description
password	string	Password.
tenantName	string	Domain name.
username	string	User's name.

PasswordPolicy

Information about password requirements.

Description
<code>CANNOT_CONTAIN_USERNAME</code>: Password cannot contain user name or part of user name. <code>CANNOT_BE_GUESSABLE</code>: Password cannot be guessed easily. <code>COUNT_OF_ALLOWED_SPECIAL_SYMBOLS</code>: Number of allowed special symbols. <code>MIN_COUNT_OF_CAPITAL_LETTERS</code>: Minimum number of capital letters. <code>MIN_COUNT_OF_DIGIT_CHARS</code>: Minimum number of digits.

Description

- `MIN_COUNT_OF_SPECIAL_SYMBOLS`: Minimum number of special (punctuation) characters.
- `MIN_PASSWORD_LENGTH`: Minimum password length.

PendingConnectorInfo

Information about executing a connector in the client in a two-steps process:

- Each time that a manual or automatic connector is triggered, a *pending* connector is created. In a pending connector, all parameters are replaced by their values.
- The client executes the pending connector with the appropriate GET or POST request.

Automatic connectors do not involve agent interaction. These connectors are automatically triggered, depending on your configuration, for example: when the call is accepted or disconnected or when a disposition is set. These connectors are automatically added to the queue of pending connectors. Manual connectors are triggered by agents. When the agent decides to execute a connector, the client should make the corresponding request to create a pending connector.

For more information about pending connectors, see [Connectors](#).

Name	Type	Description
<code>connectorId</code>	<code>string</code>	ID of the connector for which this information is created. Used for logging and debugging.
<code>ctiDisplayMode</code>	<code>string</code>	Method for presenting the connector execution results to agents who use the Java client (CTI Web user interface): • <code>CURRENT_WINDOW</code> • <code>DO_NOT_DISPLAY</code> • <code>NEW_WINDOW</code>
<code>displayMode</code>	<code>string</code>	Method for presenting the connector execution results to agents who use the Web client:

Name	Type	Description
		• CURRENT_WINDOW • DO_NOT_DISPLAY • NEW_WINDOW
httpMethod	string	HTTP method used for the request: • GET • POST
id	string	ID of the pending connector. The ID is unique for each execution of the connector.
payload	string	HTTP request payload of type application/x-www-form-urlencoded.
reusedSingleTab	boolean	Whether to reuse a tab when connectors are executed in the web agent. If true, when <code>displayMode</code> is set to <code>NEW_WINDOW</code> , reuse the same browser tab where the previous connectors were executed.
url	string	Connector URL.
useCORS	boolean	Whether to use CORS when connectors are executed in the web agent. If true, when <code>displayMode</code> is set to <code>DO_NOT_DISPLAY</code> , use CORS.

PermissionEnum

Complete list of permissions for administrators, supervisors, agents, reports, media types, general user, and domain.

Description

- AGENT_AUTO_RECORD
- CAN_ACCESS_ALL_CONTACT_RECORDS
- CAN_ACCESS_DASHBOARD
- CAN_ADD_DNC

Description

- CAN_BARGE_IN_MONITOR
- CAN_BARGE_IN_MONITOR_CHATS
- CAN_CHANGE_DATA_FIELDS
- CAN_CHANGE_DISPLAY_LANGUAGE
- CAN_CHANGE_DISPLAY_LANGUAGE_IN_SUPERVISOR
- CAN_CHANGE_PASSWORD
- CAN_CHANGE_PREVIEW_PREFS
- CAN_CONFIGURE_AUTO_ANSWER
- CAN_CREATE_CALLBACKS
- CAN_CREATE_CHAT
- CAN_CREATE_CONFERENCE_WITH_AGENT
- CAN_CREATE_CONFERENCE_WITH_CAMPAIGN
- CAN_CREATE_CONFERENCE_WITH_EXTERNAL
- CAN_CREATE_CONFERENCE_WITH_SKILL
- CAN_CREATE_CONFERENCE_WITH_SPEED_DIAL
- CAN_DELETE_VOICEMAIL_SESSION
- CAN_DIAL_DNC
- CAN_EDIT_AGENT_SKILLS
- CAN_EDIT_CONTACT_SESSIONS
- CAN_EDIT_NUMBER_CONTACT_FIELDS
- CAN_GET_DIALPAD_BEFORE_CONNECTION
- CAN_MAKE_CALLS_TO_AGENT
- CAN_MAKE_CALLS_TO_EXTERNAL
- CAN_MAKE_CALLS_TO_SKILL
- CAN_MAKE_CALLS_TO_SPEED_DIAL
- CAN_MAKE_RECORDINGS
- CAN_MAKE_TEST_CALLS
- CAN_MANAGE_AGENT_SCRIPTS
- CAN_MANAGE_SKILL_AVAILABILITY
- CAN_MONITOR_AGENTS
- CAN_MONITOR_CAMPAIGNS
- CAN_MONITOR_CHAT_SESSIONS
- CAN_MONITOR_IDLE_AGENTS
- CAN_MONITOR_STATIONS

Description

- CAN_MONITOR_USER_SESSIONS
- CAN_PARK_CALL
- CAN_PERFORM_CONTACT_LOOKUP
- CAN_PICK_SALESFORCE_OBJECT_FOR_CALL_LOG
- CAN_PLACE_CALL_ON_HOLD
- CAN_RECEIVE_VM2EMAIL_NOTIFICATION
- CAN_REJECT_CALLS
- CAN_REMOVE_CONTACTS
- CAN_REVIEW_VOICE_RECORDINGS
- CAN_RUN_SUPERVISOR
- CAN_RUN_JAVA_AGENT
- CAN_RUN_JAVA_CLIENT
- CAN_RUN_JAVA_SUPERVISOR
- CAN_RUN_WEB_AGENT
- CAN_PROCESS_SKILL_VOICEMAIL
- CAN_PROCESS_VOICEMAIL: No longer used. Instead, see CAN_PROCESS_SKILL_VOICEMAIL.
- CAN_RECEIVE_TRANSFERS
- CAN_RECEIVE_VM2EMAIL_ATTACHMENT
- CAN_RUN_WEB_CLIENT
- CAN_RUN_WEB_SUPERVISOR
- CAN_SEE_OTHER_SESSIONS
- CAN_SELECT_SYS_RECYCLE_DISPOSITION
- CAN_PLAY_AUDIO_FILES_TO_CALLER
- CAN_SEND_MESSAGES
- CAN_SEND_MSG_ATTACHMENTS
- CAN_SEARCH_EMAILS
- CAN_SELECT_LANGUAGE
- CAN_SEARCH_EMAILS_ONLY_ASSIGNED_SKILLS
- CAN_SEARCH_EMAILS_ONLY_ASSIGNED_TO_USER
- CAN_LOCK_OPEN_INTERACTIONS_IN_SEARCH_RESULTS
- CAN_SHOW_DIAL_ATTEMPTS
- CAN_SILENT_MONITOR
- CAN_SILENT_MONITOR_CHATS

Description

- CAN_SKIP_NUMBERS_IN_PREVIEW
- CAN_START_CAMPAIGNS
- CAN_STOP_CAMPAIGNS
- CAN_RESET_CAMPAIGNS
- CAN_TCPA_CLICK_TO_CALL: To use this permission, your domain must be enabled. Contact your campaign administrator.
- CAN_TCPA_CUT_AND_PASTE: To use this permission, your domain must be enabled. Contact your campaign administrator.
- CAN_TRANSFER_CHATS_TO_AGENTS
- CAN_TRANSFER_CHATS_TO_SKILLS
- CAN_TRANSFER_EMAILS_TO_AGENTS
- CAN_TRANSFER_EMAILS_TO_SKILLS
- CAN_TRANSFER_SOCIALS_TO_AGENTS
- CAN_TRANSFER_SOCIALS_TO_SKILLS
- CAN_TRANSFER_TO_AGENT
- CAN_TRANSFER_TO_CAMPAIGN
- CAN_TRANSFER_TO_EXTERNAL
- CAN_TRANSFER_TO_SKILL
- CAN_TRANSFER_TO_SPEED_DIAL
- CAN_TRANSFER_VOICEMAIL
- CAN_USE_CALL_FORWARDING
- CAN_USE_CONNECTORS
- CAN_USE_SALESFORCE_EMAILS
-
- CAN_VIEW_BILLING_INFO
- CAN_VIEW_DATA_FOR_ALL_AGENT_GROUPS
- CAN_VIEW_DATA_FOR_ALL_SKILLS
- CAN_VIEW_MISSED_CALLS
- CAN_VIEW_SOCOCARE_CHAT_METRICS
- CAN_VIEW_SOCOCARE_EMAIL_METRICS
- CAN_VIEW_SOCOCARE_SOCIAL_METRICS
- CAN_VIEW_SOCOCARE_CASE_METRIC
- CAN_MANAGE_COMPLIANCE_DATA
- CAN_MONITOR_EMAILS

Description

- CAN_TRANSFER_EMAILS
- CAN_SEARCH_EMAILS
- CAN_SEARCH_EMAILS_ONLY_ASSIGNED_SKILLS
- CAN_SEARCH_EMAILS_ONLY_ASSIGNED_TO_USER
- CAN_LOCK_OPEN_INTERACTIONS_IN_SEARCH_RESULTS
- IS_MESSAGING_API_ENABLED
- IS_CHAT_SMS_ENABLED
- IS_CHAT_SOCIAL_ENABLED
- CAN_MANAGE_SMS_OPTIN
- CAN_UNLOCK_EMAIL_INTERACTIONS_IN_AID_MODE
- CAN_SMS_OPT_IN_OUT
- CAN_WHISPER_MONITOR
- CAN_WRAPUP_CALL
- ENABLE_RESPONSIVE_DESIGN_UX
- FORCE_CHANGE_PWD_FLAG: Whether the user is required to change the password at the next login.
- FREEDOM_ENABLED: Whether the user is enabled to use the Plus applications.
- IS_ACTIVE_FLAG: Whether the user is active.
- IS_CASE_MEDIA_ENABLED
- IS_CHAT_MEDIA_ENABLED
- IS_EMAIL_MEDIA_ENABLED
- IS_FORCE_LOGGING_MODE
- IS_REASON_CODES_ENABLED
- IS_SOCIAL_MEDIA_ENABLED
- IS_TCPA_MODE
- IS_ON_MAINTENANCE
- IS_VIDEO_MEDIA_ENABLED
- IS_VOICE_MEDIA_ENABLED
- UNIFIED_COMMUNICATION
- USER_ACCESS_IS_IN_VDI_MODE (The menu item in the VCC is *User Cannot Manually Install Softphone*).
- WEB_ONLY: Whether the user is enabled to use the web application instead of the Java application.
- WEBRTC_ENABLED

PersonalGreetingInfo

Information about an agent's personal greeting.

Name	Type	Description
hasGreeting	boolean	Whether the agent has a personal greeting.

PersonalVoicemailInfo

Information about a personal voicemail.

Name	Type	Description
campaignId	string	Campaign that the voicemail belongs to.
comment	string	Voicemail comment.
created	long	Creation timestamp.
id	string	Voicemail ID.
number	string	Number from which the voicemail was received.
recordings	ReasonCodeWSInfo []	Collection of voicemail recordings.
recordingsDuration	long	Total duration of all the voicemails in milliseconds.
state	PersonalVoicemailState	Personal voicemail state.

PersonalVoicemailSortingField

Enumeration with the personal voicemail sorting field.

Description

- `CAMPAIGN_FK`: Campaign ID.
- `COMMENT`: VM comment.
- `CREATED`: Created timestamp.
- `LENGTH`: Recording length.
- `NUMBER`: Remote number.

PersonalVoicemailState

Enumeration with personal voicemail state.

Description

- `NEW`: New voicemail.
- `PROCESSED`: Voicemail was marked as read.

PersonalVoicemailViewOptions

Options for a voicemail view.

Name	Type	Description
<code>ascending</code>	<code>boolean</code>	Whether to perform an ascending sort. Default is false (perform a descending sort).
<code>limit</code>	<code>int</code>	Maximum number of records to return for each database query. Allowed values are 1 to 300.
<code>sortField</code>	PersonalVoicemailSortingField	Field to use for sorting records.

PhoneNumberFormatInfo

Information about the format of phone numbers.

Example:

Format	United States	Russia
NORTH_AMERICAN	925 201 2000	011 7 831 257 7787
E164	+1 925 201 2000	+7 831 257 7787

Name	Type	Description
format	string	Phone number format required for all calls: <code>NORTH_AMERICAN</code>: Default format = North American Numbering Plan (NANP). <code>E164</code>: international public telecommunication numbering plan.
locale	PhoneNumberLocaleInfo	Details about the home locale of the data center: US or UK.

PhoneNumberLocaleInfo

Information about a phone number locale when dialing from this country.

Name	Type	Description
countryCode	string	Country code, for example: 1 for US and 44 for UK. For more information, see List of ITU-T Recommendation E.164 Assigned Country Codes .
countryName	string	Name of the country or region, for example: North American Region.
internationalPrefix	string	Prefix to access international phone numbers when dialing from this locale, for example:

Name	Type	Description
		011 for US and 00 for UK. For more information, see Dialing Procedures (International Prefix, National (Trunk) Prefix And National (Significant) Number) (In Accordance With Itu-t Recommendation E.164 (11/2010)) .
<code>nationalPrefix</code>	<code>string</code>	Prefix for national phone numbers when dialing in this country or region, for example: 0 for UK.

PhoneNumberLocalizationOptionsInfo

Options for localizing phone numbers when presenting them to users or exporting them. By default, the locale is that of the user's browser. For example, if the country is France, the data center is in UK. Therefore, the `locale` field describes the UK phone number format.

Name	Type	Description
<code>locale</code>	PhoneNumberFormatInfo	Country or region to use when localizing phone numbers.
<code>localizeContactsAndConnectors</code>	<code>boolean</code>	Whether to localize phone numbers when they are exported: <code>true</code> or <code>false</code> .
<code>localizeNumberDisplay</code>	<code>boolean</code>	Whether to localize phone numbers when they are displayed to users: <code>true</code> or <code>false</code> .

PlayerStateInfo

Information about the state of the audio player.

Name	Type	Description
status	string	Status of the audio player: • NON_PLAYING • PLAYING • PAUSED
trackInfo	PlayerTrackInfo	Information about the track being played. Null when the status is NON_PLAYING.

PlayerTrackInfo

Information about an audio track.

Name	Type	Description
duration	long	Track duration in ms.
elapsedTime	long	Duration in ms of the track that has been played.
trackId	string	Track ID.
trackType	string	Track type: • SKILL_PROMPT • RECORDING

PredefinedValueInfo

Information about VCC data, such as a contact field, that can be predefined in an array. For more information about the possible VCC data types, see *Data Types* in the Contacts chapter of the [Basic Configuration Administrator's Guide](#).

Name	Type	Description
enabled	boolean	Whether a predefined value is available for selection by agents in the user interface: • <code>True</code>: A predefined value is available. • <code>False</code>: A predefined value is not available or is hidden.
id	string	Unique identifier of the value in a predefined list. For more information, see DraftInfo .
order	long	Order of precedence of predefined values. Values with a lower number are displayed in the user interface before values with a higher number.
value	string	User interface label of predefined value.

PresenceInfo

Information about ready channels for an agent.

Name	Type	Description
notReadyReasonCode Id	string	Required ID of the Not Ready reason code. It cannot be null.
readyChannels	string[]	Array of channels from which the agent is ready to receive an interaction: • <code>CALL</code> • <code>CHAT</code> • <code>EMAIL</code> • <code>SOCIAL</code>: Social network, such as Facebook. • <code>TEXT</code> • <code>VOICE_MAIL</code>

PresenceNotifyReason

Information about presence events. The reason is described in the [WebSocket Events](#) field.

Description

- **AFTER_CALL_WORK_TIME_EXPIRED:** The after-call work time was exceeded.
- **AGENT:** The agent updated the state.
- **AUTO_NOT_READY:** The agent was set to the Not Ready state because a call that was offered was not answered before the timeout.
- **CALL_FINISHED:** The call ended. As the result, the delayed state change was applied.
- **HOOK_STATE_ERROR:** A call was offered to the agent, but the station was not connected.
- **INITIAL:** The agent's state was reset to the initial value (log in or reconnect).
- **INTERACTION_NOT_ANSWERED:** The agent was set to the Not Ready state because an interaction that was offered was not answered before the timeout.
- **NO_STATION:** The agent was set to the Not Ready state because a call was offered, but the agent was not logged into a station.
- **PERMISSION_REMOVED:** The agent's state was changed because a permission was removed.
- **PREVIEW_END_NOT_READY:** The agent was set to the Not Ready state because a preview call that was offered was not answered or declined before the timeout.
- **REASON_CODE_DISABLED:** The agent's state was changed because a reason code was disabled.
- **SUPERVISOR:** The supervisor changed the agent's Ready for Voicemail state.
- **TASK_COMPLETION:** The agent was switched to the Task Completion state to complete unfinished tasks.

PreviewAcceptBody

Information about a preview accept body.

Name	Type	Description
mediaType	string	Type of preview media.
profileId	long	Preview profile ID.
type	string	Type of preview.

PreviewInfo

Information about a call preview.

Name	Type	Description
beforeTimeoutTime	long	Number of ms remaining before the automatic action is applied. For more information, see the <code>timeout</code> field. You may also see these values: - Unlimited preview: -1 - Immediate automatic call: 0
campaignId	string	Campaign ID.
contact	ContactInfo	Contact associated with the preview.
id	string	Preview ID.
restrictions	DialError []	Array of dialing restrictions.
state	string	State of the preview: <code>FINISHED</code>: The preview session is finished. <code>ON_CALL</code>: The agent has made a call for the preview session. <code>PREVIEW</code>: The agent has received the preview. <code>POSTPONED</code>: The preview session is inactive. <code>RENEWING</code>: A call associated with the preview session has been disposed with a non-final disposition, such as <code>Busy</code>.
timeout	long	Maximum preview time in ms. If this time expires, one of these actions occurs, depending on your configuration: the contact is dialed, or previewing ends

Name	Type	Description
		and the agent is switched to Not Ready state. You may also see these values: • Unlimited preview: -1 • Immediate automatic call: 0
variables	Map<string, string>	String of preview variables. For more information about data types, see DraftInfo .

PreviewNotifyReason

Information about preview events, such as ID 8 ([Agent Events](#)), 9 ([Agent Events](#)), and 10 ([Agent Events](#)). For more information about events, see [WebSocket Events](#). The reason is described in the [WebSocket Events](#) field.

Description

- **AFTER_CALL_WORK_TIMEOUT:** A disposition was automatically set for the call because the After-Call Work time limit has been reached.
- **AUTO_DIAL_FAILED:** The preview task was finished because the call attempt failed.
- **CALL_ADDED_TO_CONFERENCE:** The call associated with the preview was added to conference.
- **CALL_CREATING:** Call associated with the preview is under construction.
- **CALL_CREATED:** The call associated with the preview was created.
- **CALL_DISPOSING:** A disposition is to be selected for the call associated with the preview.
- **CALL_PARKED:** The call associated with the preview was parked.
- **CALL_TRANSFERRED:** The call associated with the preview was transferred.
- **CONTACT_UPDATED:** The agent has updated the preview contact.
- **CREATED:** A preview task was created for the agent.
- **DECLINED:** A preview task was declined and finished.
- **EXPIRED:** A preview task has expired.
- **FINISHED:** A preview task was processed and finished.
- **POSTPONED:** A preview task was postponed by another interaction.

Description

- **RENEWED:** A preview task was renewed.
- **RESTRICTIONS_CHANGED:** Preview restrictions were changed.
- **RESUMED:** A preview task became active.
- **TIMEOUT:** A preview timer expired.
- **TIMER_STARTED:** A preview timer started.
- **TIMER_STOPPED:** A preview timer stopped.
- **UPDATED:** A preview task was updated.
- **WITHDRAWN:** A preview task was withdrawn by the system.
- **WITHDRAWN_BY_SWITCH_NOT_READY:** A preview task was withdrawn because the agent changed state to NotReady.

PreviewState

Possible preview session states.

Description

- **FINISHED:** Preview session is finished.
- **ON_CALL:** Agent is on call for the preview session.
- **POSTPONED:** Preview session is inactive.
- **PREVIEW:** Agent has received the preview.
- **RENEWING:** Call associated with preview session was disposed with non-final disposition, such as Busy.
- **WAITING_CALL:** Agent has requested a call for the preview session and is waiting for it.

PubSubDelivery

The directives for delivering to PubSub topics.

Name	Type	Description
topics	strings[]	Required list of PubSub topic names. Represented only by topic names within same project.

QuestionInfo

Information about a worksheet question.

Name	Type	Description
answerCriteria	AlertNotificationMethod []	Array of answer criteria that determine the question that should follow the current question.
dataRestrictions	RestrictionsInfo []	Array of restrictions that apply to the data in the question.
dataType	string	Possible data types for answers: • BOOLEAN • CURRENCY • DATE • DATE_TIME • EMAIL • NUMBER • PERCENT • PHONE • STRING • TIME • TIME_PERIOD • URL
description	string	Description of the question.
finishAllowed	boolean	Whether the question enables the agent to finalize the worksheet. Use this option to ensure that agents cannot prematurely close the worksheet before having answered all the questions. This field corresponds to the VCC

Name	Type	Description
		option Allow Finish. A worksheet may have one or more questions with <code>finishAllowed = true</code> . If false, the agent cannot click the Finish button for that question.
id	string	ID of the question.
name	string	Name of the question.
orderNumber	string	Order number of the question.
viewType	string	View type of an answer: • COMBOBOX • LIST • BUTTONS • SINGLE_LINE • MULTI_LINE

QueueCallbackInfo

Information about a queue callback.

Name	Type	Description
callType	string	Possible call types: • AGENT • AGENT_PREVIEW • AUTODIAL • INBOUND • INBOUND_VOICEMAIL • INTERNAL • INTERNAL_VOICEMAIL • OUTBOUND • OUTBOUND_PREVIEW

Name	Type	Description
		• OUTBOUND_VOICEMAIL • QUEUE_CALLBACK • TEST • TEST_PREVIEW • VISUAL
callbackNumber	String	Phone number to use for the callback as requested by the caller. By default, these numbers are equal. However, the caller may request to be called at a different number. For example, the caller may have reached the contact center from the home phone but may request a callback to the mobile phone number.
campaignId	String	Campaign ID.
contact	ContactInfo	Contact information.
dnis	string	DNIS number.
id	string	Queue callback ID.
recordingAvailable	boolean	Whether a recording is attached to the queue callback. True if the customer's recording is attached to the queue callback.
remoteNumber	string	Phone number of the caller who requested a callback.
state	string	Possible queue callback states: • DIALING: Dialing the number. Waiting for the INCOMING_TASK event of a manual call. • ANSWERING: Waiting for the agent to answer or reject the queue callback. • REJECTED: Callback is rejected.
variables	Map<string, string>	Array of callback variables. For more information about data types, see DraftInfo .

QueueCallbackNotifyReason

Possible reasons for queue callback events, such as ID 21 ([Agent Events](#)), 22 ([Agent Events](#)), and 23 ([Agent Events](#)). The reason is in the [WebSocket Events](#) field.

Description

- **CREATED:** A queue callback was created.
- **DELETED:** A queue callback was deleted.
- **STATE_CHANGED:** The state of a queue callback was changed.

QueuedCallInfo

Information about a call in a queue.

Name	Type	Description
callType	CallContactInfo	Call type.
campaignId	string	Campaign ID.
customer	string	Customer title.
isCallback	boolean	Whether the call is a callback.
priority	int	Priority of call.
queueDuration	long	Voicemail queue waiting time in milliseconds.

QueuedVoicemailInfo

Information about a voicemail in a queue.

Name	Type	Description
audioDuration	long	Voicemail audio record duration in milliseconds.

Name	Type	Description
campaignId	string	Campaign ID.
customer	string	Customer title.
queueDuration	long	Voicemail queue waiting time in milliseconds.

RandomMonitorWSInfo

Information about random monitoring of agents and campaigns.

Name	Type	Description
agentId	string	ID of agent being monitored.
campaignId	string	ID of campaign being monitored.

RateLimit

Information about HTTP Status Code 429: Too many requests sent to the server.

Stop using the API until the time specified in `resetEpochSeconds`. If you ignore the reset time, it continues to increase.

Name	Type	Description
errorCode	string	Client-specific code to be tracked by automated systems.
httpStatusCode	int	HTTP Status Code 429: Too many requests.
message	string	Description of the error.
rateLimit	long	Number of requests allowed in the specified time interval.
rateLimitPeriod	string	Time unit for the interval: • SECOND • MINUTE • HOUR

Name	Type	Description
		DAY Name changed from <code>rateLimit</code> to <code>rateLimitPeriod</code> in Version 10.
<code>rateLimitType</code>	string	Types of limit exceeded: - TOO_MANY_REQUESTS - TOO_MANY_CONCURRENT_REQUESTS
<code>resetEpochSeconds</code>	long	Number of seconds UTC Epoch time when the rate limit is reset.

ReasonCodeInfo

Information about a reason code.

Example:

```
{
  id: "-2"
  name: "Logout"
  selectable: false
}
```

Name	Type	Description
<code>id</code>	string	Reason code ID.
<code>name</code>	string	Optional name of the reason code.
<code>selectable</code>	boolean	(Optional) Whether the agent can select the reason as Not Ready reason code. Ignored in the request payload. - True: Agents can manually select the reason code. When updating the presence with the <code>setPresence</code> method, specify the <code>id</code> value in the PresenceInfo field of <code>PresenceInfo</code>. - False: The system automatically sets the reason code. The client may display this reason code to users.

ReasonCodeWSInfo

Information about modified and new reason codes.

Name	Type	Description
id	string	Reason code ID.
name	string	Reason code name.

RecordingInfo

Information about a voicemail recording.

Name	Type	Description
created	long	Time stamp of creation (Epoch time in ms).
id	string	Recording ID.
length	long	Duration of recording in ms.
name	string	Name of recording.

RecordingsViewInfo

Information for a recording view.

Name	Type	Description
currentPage	long	Current page of records.
hasMore	boolean	Whether there are more records in the view.
id	string	View ID.
records	CallContactInfo []	Collection of call recordings.
recordsTotal	long	Total number of records.

RecordingsViewOptions

Recording view options.

Name	Type	Description
limit	int	Maximum number of records to return for each database query. Allowed values are 1 to 300.
sortField	RecordingField	Field to use for sorting records.
ascending	boolean	Whether to perform an ascending sort. Default is false (perform a descending sort).

RelatedFieldInfo

Information about a field.

Example:

```
{
  id: "1007",
  type: "CONTACT"
}
```

Name	Type	Description
id	string	ID of the entity to which the field is connected.
type	string	Type of entity: - CONTACT: Contact field. - CALL_VARIABLE: Call variable field.

RequestEmailBody

Information about an email message.

Name	Type	Description
body	string	Content of the email message.
customFields	MessageBodyItem[]	List of message body items.
emailAddress	string	Email address of recipients.
groupId	int	SCC Group ID equivalent to skill ID in the VCC. SCC profiles must be explicitly assigned to an SCC group.
groupName	string	Group name.
name	string	Customer's name or alias.
profileId	long	Profile ID.
profileName	string	Profile name.
subject	string	Subject of the email message.
tenantId	long	Tenant ID.
tenantName	string	Tenant name.

RequestEmailInfo

Information about an email message.

Name	Type	Description
emailId	string	Email ID.

ResourcesUpdateInfo

Information about updated organization resources.

Name	Type	Description
causeObjectIds	string[]	Array of object IDs that caused the update.
causeObjectType	NoteBody	Type of the object that caused the update.
resourceURLs	string[]	Array of resources affected by the object update.

RestrictionInfo

Information about a single restriction. For more information, see [DraftInfo](#).

Name	Type	Description
type	string	Type of restriction for the <code>value</code> field: CURRENCY_TYPE: Currency sign. Required for currency. The possible values are 0 (Dollar), 1 (Euro), and 2 (Pound). DATE_FORMAT: Date shown in UI: <code>yyyyMMdd</code>, <code>MM/dd/yyyy</code>, <code>MM-dd-yyyy</code>, <code>MMddyy</code>, <code>MMM dd, y</code>, <code>dd MMM</code>, <code>ddMM</code>, <code>MMdd</code>. DEFAULT_VALUE: Default value for field used for worksheet questions and call variables. Not used in CRM fields. MAX: See MIN. MIN: Minimum (or maximum) allowed value depending on <code>field_type</code> (number, percentage, date, time, <code>date_time</code>, currency, and <code>time_period</code>) or length (string, email address, and URL). MULTISET: List of predefined items. Applies to string, email address, URL, number, percentage, and currency. PRECISION: Total number of digits. Positive integer less than 17. Required for number, percentage, and currency. REGEXP: Regular expression that must be followed by a <code>value</code>. Applies to string, email address, URL, and phone. REQUIRED: Value must be set. Applies to any data type except boolean. SCALE: Number of digits after the decimal point. Positive integer less than 16. Required for number, percentage, and currency. SET: Items of predefined values. Applies to string, email address, URL, number, percentage, and currency. TIME_FORMAT: Time shown in UI: <code>HH:mm:ss.SSS</code>, <code>HH:mm:ss</code>, <code>HH:mm</code>, <code>hh:mm a</code>, <code>HH, hh a</code>, <code>H:mm</code>, <code>h:mm a</code>. TIME_PERIOD_FORMAT: Time period shown in UI: <code>hh:mm:ss.SSS</code>, <code>hh:mm:ss</code>, <code>hh:mm</code>, <code>hh, mm:ss.SSS</code>, <code>mm:ss</code>, <code>mm, ss.SSS</code>, <code>ss, SSS</code>
value	string	Value of the restriction that depends on the <code>type</code> field.

RestrictionsInfo

Information about a set of restrictions.

Example:

```
{
  limitedSetInfo: null
  restrictions: []
}
```

Name	Type	Description
limitedSetInfo	LimitedSetInfo	Information about allowed values. If the value is <code>null</code> , no limits exist.
restrictions	ResourcesUpdateInfo []	Array of restrictions to verify the user's input and format the output. The array is empty if no restrictions exist.

ReturnCallExternalOptionInfo

Information about returning a call recorded by an external caller.

Name	Type	Description
autoResolveDialingRules	boolean	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. When set to <code>true</code> , this flag overrides <code>checkMultipleContacts</code> flag. Applied only when a call is made and ignored during call transfers and conferences. Dialing rules are identified by looking up contacts with a limit of five for a number. Dialing rules are checked for each matched contact. If at least one dialing rule of any matched contact does not permit the call, the call is

Name	Type	Description
		discarded. The default value of this flag is false.
checkMultipleContacts	boolean	Whether to check for multiple contacts when making a call. This field is ignored during transfers and conferences. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set this flag to true, and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002: Q MULTIPLE CONTACTS SELECT. 2 Show to the agent the list of matched contacts. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user chooses none, set the flag to false so that the dialing rules that apply to the contact are ignored. 4 Resend the request.
contactId	string	Optional contact ID. Use this field only if the previous attempt to reply to the same voicemail message throws exception Q MULTIPLE CONTACTS SELECT (1002).
number	string	Optional number to call. If the voicemail originator is a contact with multiple numbers, the agent must select a number to call. If the contact is known (<code>activeContact</code> in <code>VoiceMailInfo</code>), the call is made to this number. Otherwise the voicemail number (<code>number</code>) is used.
skipDNCCheck	boolean	Whether to skip checking the DNC list.

Name	Type	Description
		Use this flag as follows: 1 Set the flag to false, and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST(10006)</code>: Show an error dialog to the agent. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE(1001)</code>: Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to true and resend the request.

ReturnMissedCallOptions

Information about the options available when returning a call.

Name	Type	Description
<code>autoResolveDialingRules</code>	<code>boolean</code>	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. When set to <code>true</code> , this flag overrides <code>checkMultipleContacts</code> flag. Applied only when a call is made and ignored during call transfers and conferences. Dialing rules are identified by looking up contacts with a limit of five for a number. Dialing rules are checked for each matched contact. If at least one dialing rule of any matched contact does not permit the call, the call is discarded. The default value of this flag is <code>false</code> .
<code>contactId</code>	<code>string</code>	Optional contact ID that may be present in the missed call information. The field

Name	Type	Description
		is null if no contact is specified.
sessionId	string	Session ID of the missed call obtained from agent history records returned in InteractionHistoryViewInfo by the Agent Interactions and Agent Interactions requests.
checkMultipleContacts	boolean	Optional. Whether to check for multiple contacts when making a call. To ensure that the agent selects the correct contact, use the flag as follows: 1 Set this flag to true (default), and send the request. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error ID 1002: Q MULTIPLE CONTACTS SELECT. 2 Show to the agent the list of matched contacts. 3 If the user selects a contact, use it in the <code>contactId</code> field. or If the user chooses none, set the flag to false so that the dialing rules that apply to the contact are ignored. 4 Resend the request.
skipDNCCheck	boolean	Optional. Whether to skip checking the DNC list for the phone number of the missed call. Use this flag as follows: 1 Set the flag to false (default), and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST(10006)</code>: Show an error dialog to the agent. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE(1001)</code>: Ask if the agent still

Name	Type	Description
		wants to perform the operation.
		3 If the user confirms the request, set the flag to true and resend the request.

RollingPeriod

Enumeration with the time period for the list and campaign statistics.

Description
• MINUTES5: 5 minutes • MINUTES10: 10 minutes • MINUTES15: 15 minutes • MINUTES30: 30 minutes • HOUR1: 1 hour • HOUR2: 2 hours • HOUR3: 3 hours • TODAY: 24 hours

SendSocialBody

Information about a social interaction.

Name	Type	Description
authorHandle	string	Author's handle.
authorId	string	Author's ID.
authorName	string	Author's name.
msgType	int	Type of message: chat, IM, broadcast • 1: Cherry picking • 2: AID

Name	Type	Description
profileId	long	Profile ID.
replyMsg	string	Content of the message.

SessionEventType

List of possible statistics event types.

Name	Description
ACD_CREATED ACD_ENDED	Automatic call distributor is a call participant. Multiple participants may be involved in a single session. This participant is created or ended for the session.
AGENT_CREATED AGENT_ENDED	Agent participant is created or ended.
AGENTVM_CREATED AGENTVM_ENDED	Participant for agent voicemail is created or ended.
ANSWERED	Call was answered.
CALL_CREATED CALL_ENDED	Call was created or ended.
CONTACT_UPDATED	Contact was updated.
DIAL_COMPLETED DIAL_STARTED	Dialing has started or is completed.
DISPOSED	Call disposition was set.
INTERACTION_CREATED INTERACTION_ENDED	Interaction was created or ended.
IVR_CREATED IVR_ENDED	IVR participant is created or ended.
HOLD PUT_ON_HOLD	Call is on hold. Call was placed on hold.
MERGED UNMERGED	Participants can be merged. For example, a call that is created and routed to an IVR module is merged.

Name	Description
OFFERED	Interaction was offered.
REJECTED	Interaction was rejected.
PARKED	Call was parked.
RETRIEVED_ FROM_PARK	Call was retrieved from park.
PREVIEW_ CREATED	Preview was created or ended.
PREVIEW_ENDED	
SESSION_ CREATED	Session was created or ended.
SESSION_ENDED	
SKILLVM_ CREATED	Business voicemail was created or ended.
SKILLVM_ENDED	
TEXT_CREATED	Text message was created or ended.
TEXT_ENDED	
TRANSFER_ COMPLETED	Transfer was completed or ended.
TRANSFER_ INITIATED	

SessionExpirationInfo

Settings for the expiration of a user's session.

Name	Type	Description
expirationMode	string	Method to use for the expiration of the agent's session: • <code>NEVER_EXPIRE</code>: Should never expire regardless of agent activity. • <code>TRACK_ACTIVITY</code>: Track agent's activity and close the session if the agent is inactive for a certain period of time.
maxInactivityTime		Number of ms until the session expires because of the user's inactivity.
pingInterval	long	Number of ms after which the session expires if

Name	Type	Description
		the client has not sent a request to the server.
timeToWarnBefore Logout	long	Number of ms to warn the user before the session expires.

SessionHistoryInfo

Information about an agent session.

Name	Type	Description
callType	ContactFieldInfo	Call type.
campaignId	string	Campaign ID.
comments	string	Comments.
dispositionId	string	Disposition ID.
dnis	string	DNIS.
number	string	Telephone number.
skillId	string	Queue ID.
startTime	long	Time of call creation in milliseconds Epoch time.
talkDuration	long	Talk duration in ms.
wrapupDuration	long	Wrap-up duration in ms.

SessionStartCode

Possible error causes that may occur when a session is created. This parameter is available in `contextCode`. This information may be useful to the client.

Description
• <code>AMBIGUOUS_USERNAME</code>: More than one user have the same user name. • <code>BDC_SWITCHOVER_IN_PROGRESS</code>: Maintenance in progress. Try to log in again after a

Description

few seconds. Show a message about moving to another data center.

- `CAN_NOT_INIT_STATION`: The station is inactive.
- `DOMAIN_DISABLED`: The domain is disabled.
- `DOMAIN_NOT_ACTIVE`: Similar to `NOT_ACTIVE_DOMAIN`.
- `DUPLICATE_LOGIN`: See error [Five9 Error Codes](#).
- `DUPLICATE_LOGIN_INVALID_REASON`: Internal error.
- `EMBEDDED_SOFTPHONE_NOT_ALLOWED`: The station ID cannot be used with the softphone station type.
- `EXPIRED_ACCOUNT`: The account is expired.
- `FORBIDDEN`: Application usage is forbidden.
- `INCORRECT_ACCOUNT`: An internal problem occurred with the user's account.
- `INCORRECT_AUTOLOGIN_HASH`: An internal error.
- `INCORRECT_CREDENTIALS`: The user name or password is incorrect.
- `INCORRECT_DOMAIN`: An internal domain error occurred.
- `INCORRECT_PARTITION`: An internal partition problem occurred.
- `INCORRECT_PROVIDER`: An internal provider problem occurred.
- `INCORRECT_SESSION_TYPE`: An internal error occurred.
- `INCORRECT_STATION_ID`: Unknown station ID.
- `INCORRECT_STATION_TYPE`: Incorrect station type specified for this station ID.
- `INCORRECT_USER_ROLE`: The user with the given role is not permitted to start a session.
- `INSUFFICIENT_FUNDS`: Insufficient funds in the customer's account.
- `INTERNAL_ERROR`: An internal error occurred.
- `INVALID_ACCOUNT_INVALID_REASON`: An internal error occurred.
- `INVALID_VERSION`: An internal error occurred.
- `LACK_OF_SECURITY_ATTRIBUTES`: Insufficient security attributes, such as security questions.
- `LOGIN_DISABLED`: Login is disabled.
- `MAINTENANCE_COMPLETED`: Re-logging into primary host during maintenance migration cannot be performed because migration has ended.
- `MANY_DOMAIN`: An internal domain error occurred.
- `MAX_AGENT_COUNT_REACHED`: Maximum number of logged-in agents is reached.
- `MAX_MOBILE_SVISOR_COUNT_REACHED`: The maximum mobile supervisor count has been reached.
- `MAX_SVISOR_COUNT_REACHED`: The maximum supervisor count has been reached.

Description

- **MAX_SVISOR_PLUS_COUNT_REACHED:** The maximum supervisor plus count has been reached.
- **NO_DOMAIN:** An internal domain error occurred.
- **NO_LOGIN_PROPS:** No login properties are specified.
- **NO_PASSWORD:** An empty password is specified.
- **NO_USERNAME:** No user name is specified.
- **NOT_ACTIVE_ACCOUNT:** The customer's account is inactive.
- **NOT_ACTIVE_DOMAIN:** The domain is inactive.
- **NOT_ALLOWED_TO_USE:** The application cannot be used.
- **PASSWORD_EXPIRED:** See error [Five9 Error Codes](#).
- **PROHIBITED_IP:** An internal IP address error occurred.
- **SERVER_ERROR:** A server error occurred.
- **SERVER_UNAVAILABLE:** The server is unavailable.
- **SERVER_UNAVAILABLE_INVALID_REASON:** An internal error occurred.
- **SESSION_WITH_ACTIVE_CALL:** The agent tried to log out during a call. See error [Five9 Error Codes](#).
- **STATION_IS_IN_USE:** The station is in use.
- **USER_LOCKED_OUT:** See error [Five9 Error Codes](#).
- **USER_NOT_ACTIVE:** The user is inactive.
- **WRONG_DATA_CENTER:** An internal data center problem occurred.

SetSettingsBody

Information about user filter settings that may be queried or updated.

Name	Type	Description
autoLock	int	1: Enabled (true), locks the offered interactions when selecting them. 0: Disabled
chatACDType	int	Method for selecting an item: • 1: Cherry pick mode • 2: AID mode

Name	Type	Description
	long[]	Array of clusters.
dateRangeEnd	long	End of the date range.
dateRangeStart	long	Beginning of the date range.
dispositions	long[]	Array of dispositions for filtering.
emailACDType	int	Method for selecting an item: • 1: Cherry pick mode • 2: AID mode
forUserId	long	Not used.
forUsername	string	Not used.
fromUsername	string	Not used.
includeMine	int	Not used.
isFIFO	int	Whether cherry-picked interactions are either FIFO (true), or LIFO (false): • 0: No = LIFO • 1: Yes = FIFO
lockByDate	long	Date that the agent locked the item.
lockByUserId	long	ID of the agent who locked the item.
priorities	long[]	Array of priorities to set in filter: • -1: Disable Filter. • 1, 2, and /or 3: Set appropriate filters.
profiles		Array of profiles.
refreshRate	int	Not used.
sentiments	long[]	Array of sentiments.
signature	string	Agent's personalized signature.
signatureEnabled	int	Whether the agent is allowed to use a personalized signature.
socialACDType	int	Method for selecting an item: • 1: Cherry pick mode • 2: AID mode
sortInfluence	int	Method for sorting social influence: • 0: Do not sort by social influence. • 1: Sort by social influence.
spams	long[]	Array of spam messages.

SimpleIdInfo

Information about a disposition ID.

Name	Type	Description
id	string	ID value.

SkillCallDestinationInfo

Information about making a call to a skill group.

Name	Type	Description
skillId	string	Skill ID.

SkillFilterInfo

Information about a queue.

Name	Type	Description
channel	ChannelType	Types of channels. Possible types are listed below: • CALL • CASE • CHAT • EMAIL • SOCIAL • TEXT • VOICE_MAIL

SkillInfo

Information about a queue.

Name	Type	Description
id	string	Queue ID.
name	string	Queue name.

SkillLevelInfo

Information about a queue and its priority.

Name	Type	Description
skillId	string	Queue ID.
level	string	Agent's priority for receiving calls sent to the queue. Level 1 is the highest priority.

SkillStatsSnapshotInfo

Information about ACD statistics for a skill group in event ID 29 ([EVENT SKILL STATS SNAPSHOT SUBSCRIPTION UPDATE](#)).

Name	Type	Description
inQueueCallCount	int	Number of calls in the queue.
inQueueCallbackCount	int	Number of callbacks in the queue.
longestTimeInQueueSec	int	Number of seconds of the item longest in the queue.
skillId	string	ID of the default queue that routes calls to agents regardless of their queues. To indicate no queue, use 0 (zero).

SkillTransferDestinationInfo

Information about the destination skill and how the transfer should occur.

Name	Type	Description
recordVoicemail	boolean	Whether to record a voicemail message if no transfer destination is available.
recordVmImmediately	boolean	Whether to record a voicemail message immediately if no agent is available.
skillIds	string[]	Array of destination queue IDs.
timeout	int	Number of ms until the transferred call is answered. If the time expires, a message is recorded if <code>recordVoicemail</code> is true. Otherwise, the call is returned to the agent as a parked call. Zero (0) indicates unlimited time.
warm	boolean	Whether to transfer the party in warm mode. • <code>True</code>: The agent speaks to the transfer recipient before completing the transfer. • <code>False</code>: The agent transfers the party on hold immediately.

SkillVoicemailState

Enumeration containing voicemail states.

Description

- NONE
- QUEUED
- ACCEPTED
- DELETED
- PROCESSED

SkillVoicemailViewOptions

Options for a voicemail view.

Name	Type	Description
ascending	boolean	Whether to perform an ascending sort. Default is false (perform a descending sort).
limit	int	Maximum number of records to return for each database query. Allowed values are 1 to 300.
sortField	PersonalGreetingInfo	Field to use for sorting records.

SkillVMStateChangeInfo

Options for a voicemail state change.

Name	Type	Description
newState	SkillTransferDestinationInfo	New voicemail state.
voicemails	Map<String, SkillTransferDestinationInfo >	Map the string to the voicemail states.

SkillWSInfo

Information about modified and new queues.

Name	Type	Description
id	string	Queue ID.
name	string	Queue name.

SnoozeAllRequest

Information about multiple postponed callbacks.

Name	Type	Description
untilTimeStamp	long	Date and time in ms.
callbackIds	long[]	List of callbacks IDs.

SocialItem

Information about a social item.

Name	Type	Description
agentName	string	Agent's name.
analyticsProvider	int	Third-party provider of web analytics.
assignedTime	int	Time when the item was assigned to the agent.
attachments	HistoryEmailAttachment	List of email attachments.
author	string	Not used.
authorAccount	string	Author's social medium account. • Chat and email: Same as <code>author</code>. • Social media: author account ID. For example, John Doe is the author, but the author account is <code>jdoe</code> in Facebook.
authorEnterpriseScore	string	Not used.
authorId	string	Author's ID.

Name	Type	Description
authorInfluenceScore	string	Influence score of the author, from 0 to 100.
authorLocale	string	Region or country of the author.
authorLocationName	string	Region or country of the author's location.
authorName	string	Author's name.
authorTimzone	string	Author's time zone.
Note spelling		
autoIssue	string	NLU tag for the cluster.
classification	string	Classification.
clusterId	int	Cluster ID.
createTime	long	Time of creation.
comment	string	Comments added to the social item.
contactId	string	Contact ID.
datePublished	long	Publication date of the social item.
decisionTime	int	During preview, time when the agent decides to engage in or withdraw from a chat.
description	string	Additional description of the social item.
detectedIssue	int	Error.
disposition	string	Disposition name.
dispositionId	long	Disposition ID.
dispositionTime	long	Time when the disposition was set for SCC items only. This field does not apply to voice items.
escalatedToVideo	int	Whether the chat session was escalated to a video session: • 0: No

Name	Type	Description
		• 1: Yes
ewProfileId	string	Engagement Workflow profile ID.
from	string	For calls and voicemail: ANI For SCC: Author who sent the item.
fullData	string	Content of the social item.
gotAuthor	int	Not in use.
iconURL	string	URL of an icon.
id	string	Item ID.
influenceScore	int	Influence score from 0 to 100.
initialVideo	int	Whether or not the chat started as a video call: • 0: Not started. • 1: Started.
issue	string	Not used.
lang	string	Language of the social item.
lastDispositionId	long	Disposition ID.
likeCount	int	Number of <i>likes</i> added to the social item.
linkCaption	string	Caption link for social items.
linkURL	string	Link to the original social item, such as a tweet or Facebook post.
manualIssue	string	Manual cluster set by the agent in case the NLU did not set it correctly.
manualSentiment	string	NLU sets the sentiment. If the setting is incorrect, you can change it manually to negative, neutral, or positive.

Name	Type	Description
manualSpam	string	NLU sets the spam option. If the setting is incorrect, you can change it manually.
mediaType	int	• SOCIAL=1 • NOTE=100 • CHAT=1000 • AGENT_CHAT=1010 • EMAIL=2000 • CALL=3000 • VM=4000
name	string	Name of author.
nbaTask	int	(NBA) Next best action. The program reviews the item. If the item matches a rule, the program sets a NBA task and time.
nbaTime	int	See <code>nbaTask</code> .
nluTask	int	Not in use. (NLU) Natural Language Understanding. The program reviews the item. If the item matches a rule, the program sets a NLU task and time.
nluTime	int	Not in use. See <code>nluTask</code> .
notes	Note []	Information about notes.
open	boolean	Whether the item is open or closed.
parentId	string	Parent ID. If this item is part of a conversation, the parent is present to indicate a thread.
personId	string	Unique author ID.
pictureURL	string	URL of an image.
place	string	Location.

Name	Type	Description
previewChat	int	Whether a social item is a preview chat: true or false.
previewEngaged	int	Whether a social item is engaged by the agent: true or false.
profile	string	Profile name.
profileId	int	Profile ID.
profileName	string	Profile name.
publicationId	string	Publication ID of the Telligent forum.
publishedDate	int	Use datePublished instead.
receptionStatus	string	Status of the call: - UNKNOWN - MISSED: Agent did not answer a call in the personal queue. - MISSED_RETURNED: Missed call returned by agent. - RECEIVED: Call received by agent (not missed).
remoteNumber	string	Phone number called by the agent.
replies	SocialItemReply[]	Information about the replies to the social item.
replyData	string	Text content of the reply.
resDate	int	Time in ms when someone responded to the item.
rulesTask	int	The program reviews the item. If the item matches a rule, the program sets a task and time.
rulesTime	int	See rulesTask above.
sentiment	string	Description of the

Name	Type	Description
		sentiment of the customer, such as happy, sad, or neutral.
sentimentScore	string	Sentiment score: • -1: Negative • 0: Neutral • 1: Positive
socialItemId	string	Social item ID.
source	string	Source of the social item, such as Twitter, Facebook, chat, or email.
spam	string	Whether or not the item is spam.
spamScore	string	Probability between 0 (100% not spam) and 1 (100% spam).
startTime	long	Time when the social item was started. For example, for voice interactions, the start time is in seconds, Epoch time.
submediaType	int	Type of chat: • 1 = Standard • 2 = Proactive • 3 = Preview
tag	string	Tag.
talkTime	long	Duration of the conversation in seconds.
tenantId	int	Tenant ID.
title	string	Title of the social item.
to	string	Recipient of the social item. For example, DNIS for calls and voicemail.
topicName	string	Topic name of the social item.

Name	Type	Description
topicThreadId	string	Topic thread ID.
url	string	URL of the social item.
videoURL	string	URL of the video in the social item.
wasResponded	int	Response received by the sender: • 1: Responded • 0: Not responded.
workedById	string	ID of the agent who worked on the item.
wrapTime	long	Time when the social item ended. Calls: Number of seconds allowed for after-call work time (ACW) (from disconnecting the call to setting a disposition). Other voice interactions, such as voicemail and preview: Does not apply. Null or zero.

SocialItemReply

Information about a reply to a social item.

Name	Type	Description
attachments	HistoryEmailAttachment []	List of email attachments.
authorId	string	ID of the author.
bccAddresses	string	Blind-copy addresses.
ccAddresses	string	Copy addresses.
fname	string	First name of user who sends the reply.

Name	Type	Description
id	string	ID of the social item reply.
lname	string	Last name of user who sends the reply.
parentId	string	ID of the previous social item to which this item is a response.
profileId	string	Profile ID.
replyText	string	Content of the reply.
replyTime	string	Time of the reply.
tenantId	string	Tenant ID.
title	string	Title of the reply.
toAddresses	string	Email addresses.
userId	string	User ID.

SoftphoneDefaultFlagsChangedEvent

Information about updated softphone settings in event ID 69 ([EVENT_SOFTPHONE_DEFAULT_FLAGS_CHANGED](#)).

Name	Type	Description
enableAcousticEchoCancellation	boolean	Whether to improve voice quality by preventing or removing echoes during calls.
enableAutoGainControl	boolean	Whether to adjust the automatic gain control, which is the amplification of the microphone to make the sound even during calls.
overrideUserLevelSettings	boolean	Whether to override the automatic gain control and acoustic echo cancellation options set by the user in the softphone.

SoftphoneType

Enumeration containing softphone types.

Description

- COUNTERPATH
- PJSIP

SoftphoneRegistrationInfo

Information about softphone registration.

Example:

```
{
  codecs: ["G723/8000/1", "G729/8000/1", "PCMU/8000/1", "PCMA/8000/1"]
  enableAcousticEchoCancellation: false
  enableAutoGainControl: true
  license: "180ACFS5ZEED4F869MP3N0229"
  overrideUserLevelSettings: true
  password: "ou8AxiJY"
  protocol: "udp"
  ptime: 20
  rtcpXrInterval: 60
  rtpPortRangeStart: 8000
  rtpPortRangeStop: 8015
  silenceSuppression: true
  sipPortRangeStart: 5060
  sipPortRangeStop: 5067
  sipProxyServers: ["<domain>:5080", "<domain>:5080"]
  softphoneType: "COUNTERPATH"
  stunAddress: ["domain>:2080", "<domain>:2080"]
  username: "551"
  webRTCgwAddress: ["<domain>:1080", "<domain>:1080"]
}
```

Name	Type	Description
codecs	string[]	Array of voice and VoIP codec programs for the station in this format: Name/Rate/Channels, for example: • G723/8000/1 • G729/8000/1 • PCMA/8000/1 • PCMU/8000/1
enableAcousticEchoCancellation	boolean	Ignored by the PJSIP softphone. Whether to enable acoustic echo cancellation.
enableAutoGainControl	boolean	Ignored by the PJSIP softphone. Whether to enable automatic gain control.
license	string	Ignored by the PJSIP softphone. Optional softphone license.
overrideUserLevelSettings	boolean	Ignored by the PJSIP softphone. Whether to override the options that the agent selects for automatic gain control and acoustic echo cancellation in the softphone.
password	string	SIP account password generated when the station is created.
protocol	string	Connection protocol: • <code>tls</code>: Secure connection (SRTP). • <code>udp</code>: Other connections.
pTime	int	Codec <code>pTime</code> value: Non-zero attribute for a media stream in the SIP protocol; packet interval that the answerer would like to receive.
rtcpXrInterval	int	RTCP-XR required interval in seconds. The value of this

Name	Type	Description
		parameter is NULL if RTCP-XR is disabled.
rtpPortRangeStart	int	Beginning of the range allowed for RTP ports.
rtpPortRangeStop	int	End of the range allowed for RTP ports.
silenceSuppression	boolean	Whether or not to suppress silence.
sipPortRangeStart	int	Beginning of the range allowed for SIP ports.
sipPortRangeStop	int	End of the range allowed for SIP ports.
sipProxyServers	string[]	Array of available SIP proxy servers. The first two items in the list are the main and the backup servers, respectively. Item value is set to NULL if it is not defined.
softphoneType	string	Softphone type: • COUNTERPATH • PJSIP
stunAddress	string[]	Array of STUN servers for the connection. The first two items in the list are the primary and the backup servers, respectively. Parameter value is set to NULL by default.
turnAddress	string[]	Array of TURN servers for the connection. The first two items in the list are the primary and the backup servers, respectively. The value of Parameter value is set to NULL by default.
username	string	User name for connection (SIP station ID).
webRTCGWAddress	string[]	Array of webRTC gateway

Name	Type	Description
		servers for the connection. The first two items in the list are the primary and the backup servers, respectively. Parameter value is set to NULL by default.

SpeedDialCallDestinationInfo

Information about the destination speed dial and how the transfer should occur.

Name	Type	Description
<code>autoResolveDialingRules</code>	<code>boolean</code>	Indicates whether the server should resolve state dialing rules automatically for multiple contacts. When set to <code>true</code> , this flag overrides <code>checkMultipleContacts</code> flag. Applied only when a call is made and ignored during call transfers and conferences. Dialing rules are identified by looking up contacts with a limit of five for a number. Dialing rules are checked for each matched contact. If at least one dialing rule of any matched contact does not permit the call, the call is discarded. The default value of this flag is <code>false</code> .
<code>campaignId</code>	<code>string</code>	Campaign ID.
<code>checkMultipleContacts</code>	<code>boolean</code>	Whether to check for multiple contacts when making a call. This field is ignored during transfers and conferences. If the value of the <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply, the response contains error Q MULTIPLE CONTACTS SELECT

Name	Type	Description
		(1002). To ensure that the agent selects the correct contact, use the flag as follows: 1 Set this flag to true, and send the request. If the phone number matches multiple contacts, the server returns the error. 2 Show to the agent the matched contacts. 3 If the user selects a contact, apply it to <code>contactId</code>. or If the user chooses none, set the flag to false so that the dialing rules are ignored. 4 Resend the request.
<code>contactId</code>	<code>string</code>	Use this field only if the previous attempt to call the same speed dial number throws exception Q_MULTIPLE_CONTACTS_SELECT (1002). For more information, see <code>checkMultipleContacts</code> .
<code>skipDNCCheck</code>	<code>boolean</code>	Whether to skip checking the DNC list. Use the flag as follows: 1 Set the flag to false, and send the request. 2 If the server returns one of these errors, proceed as indicated: ◦ <code>NUMBER_IN_DNC_LIST</code> (10006): Show an error dialog to warn the agent that the number is in the DNC list. ◦ <code>Q_NUMBER_IN_DNC_LIST_FORCE</code> (1001): Ask if the agent still wants to perform the operation. 3 If the user confirms the request, set the flag to true and resend the request.
<code>speedDialId</code>	<code>string</code>	ID of a speed dial number.

SpeedDialInfo

Information about a speed dial ID.

Name	Type	Description
description	string	Speed dial description.
id	string	Speed dial ID.
name	string	Speed dial name.
number	string	Speed dial phone number.

SpeedDialTransferDestinationInfo

Information about the destination speed dial and how the transfer should occur.

Name	Type	Description
destination	SpeedDialCallDestinationInfo	Information about the speed dial destination.
dispositionId	string	Disposition ID of the transferred call.
dispositionTimeout	long	Disposition time-out value equal to or less than one year (366*24*60*60*1000). Use when the agent wants to change the default value. For details, see DisposeOptionsInfo in DispositionInfo . Must be null if the disposition does not have one of these disposition flag: DispositionFlag or DispositionFlag

Name	Type	Description
		<u>DispositionFlag</u> .
timeout	int	Number of ms until the call is answered by the recipient. If the timeout expires, the call is returned to the agent as a parked call. 0 (zero) indicates unlimited.
warm	boolean	Whether to transfer the party in warm mode. • <code>True</code>: The agent speaks to the transfer recipient before completing the transfer. • <code>False</code>: The agent transfers the party on hold immediately.

StashItemInfo

Information about a stash item.

Name	Type	Description
category	string	Item category.
value	string	Item value. The value is not validated and must be provided by the client.

StationState

Enumeration of station states. Possible values are listed below:

- **CONNECTED:** Station is connected.
- **CONNECTING:** Station is being connected.
- **DISCONNECTED:** Station is not connected.

StationInfo

Information about a station.

Example:

```
{
  state: "DISCONNECTED"
  stationId: "551"
  stationType: "SOFTPHONE"
}
```

Name	Type	Description
state	string	Current state of the agent's station: • CONNECTED: Station is connected. • CONNECTING: Station is being connected. • DISCONNECTED: Station is not connected.
stationId	string	Station identifier: Softphone ID, PSTN number, or gateway address.
stationType	string	Station type: • PSTN • SOFTPHONE • GATEWAY • EMPTY

StatisticRequest

Model for managing statistics requests.

Name	Type	Description
deliveryDirective	HttpDelivery	The delivery directive for the Subscription. Only one directive can be applied to a Subscription.
fields	F9RuntimeException []	List of event group fields.
groupBy	string[]	List of column names on which to sort and apply the formula defined with F9RuntimeException .
statisticsName	string	Name of the statistic, such as WFM_CHAT and WFM_EMAIL.
timeInterval		Time range on which the subscription operates.

StatisticType

Enumeration with the statistic types.

Description
• ACD_STATUS: ACD status. • AGENT_AUXILIARY_STATISTIC: Agent auxiliary statistics. • AGENT_STATE: Agent state statistics. • AGENT_STATISTIC: Agent statistics. • AUTODIAL_CAMPAIGN_STATISTICS: Autodial campaign statistics. • CAMPAIGN_STATE: Campaign state statistics. • OUTBOUND_CAMPAIGN_DIALING_LIST: Status of lists used in the campaign. • OUTBOUND_CAMPAIGN_MANAGER: Outbound campaign manager statistics. • OUTBOUND_CAMPAIGN_STATISTICS: Outbound campaign statistics. • INBOUND_CAMPAIGN_STATISTICS: Inbound campaign statistics. • STATIONS: VCC station configuration statistics. • USER_SESSION: User session statistics.

StatisticTypeData

Enumeration of the statistics data types.

Description

- `ACD_STATUS`: ACD status.
- `AGENT_STATE`: Agent state statistics.
- `AGENT_STATISTICS`: Agent statistics.
- `CAMPAIGN`: Campaign statistics.
- `INTERACTION_STATE`: Interaction state statistics.
- `UNKNOWN`: Unknown.

StatisticsField

Information about the statistics field.

Name	Type	Description
name	string	Field name.
type	StatisticsFieldType	Statistics field type.

StatisticsFieldType

Enumeration with the statistics field types.

Description

- `AGENT_STATE`: Agent state.
- `AGENT_TASKS`: Agent tasks.
- `BOOLEAN`: Boolean value (true or false).
- `CALL_TYPE`: Call type.

Description

- `CALL_TYPE_COUNTER`: Call statistics for each call type.
- `CAMPAIGN_CURRENT_ACTION`: Current campaign action.
- `CAMPAIGN_MODE`: Campaign mode.
- `CAMPAIGN_STATE`: Campaign state.
- `CAMPAIGNS_COUNTER`: Call statistics for each campaign.
- `COMBO_ID`: Combination ID.
- `DISPOSITIONS`: Disposition statistics as a set of `dispositionId`:
`statisticValue`
- `DURATION`: Time period.
- `ID`: Object ID.
- `INTEGER`: Integer.
- `MEDIA_AVAILABILITY`: Media availability.
- `MONEY`: Money.
- `PERCENTAGE`: Percentage.
- `RATIO`: Ratio.
- `STRING`: String.
- `TIMESTAMP`: Date and time in ms epoch time.
- `USER_ROLE_TYPE`: User role type for the session.

StatisticsRange

Enumeration of time periods to use as statistics filters.

Description

- `CURRENT_DAY`: Current day.
- `CURRENT_MONTH`: Current month.
- `CURRENT_SHIFT`: Current day shifted by the number of hours specified in [StatsFilterSettingsInfo](#).
- `CURRENT_WEEK`: Current week.
- `LIFETIME`: All times.
- `ROLLING_HOUR`: Last hour divided into five minute intervals.

StatisticsSchema

Information about the statistics schema.

Name	Type	Description
allowedFilters	StatisticTypeData []	Filters permitted for the statistic type.
fields	StatisticTypeData []	Collection of statistics fields.
statisticType	StatisticTypeData	Statistic type.

StatsFieldType

Enumeration of the statistics field types.

Description
• AGENT_PRESENCE: Agent presence. • AGENT_STATE: Agent state. • CALL_TYPE: Call type. • CALL_TYPE_COUNTER: Call statistics for each call type. • CAMPAIGN_CURRENT_ACTION: Current campaign action. • CAMPAIGN_MODE: Campaign mode. • CAMPAIGN_STATE: Campaign state. • CAMPAIGNS_COUNTER: Call statistics for each campaign. • COMBO_ID: Combination ID. • DISPOSITIONS_COUNTER: Disposition statistics. • DURATION: Time period. • ID: Field ID. • INTEGER: Integer. • MEDIA_AVAILABILITY: Media availability. • MONEY: Money. • PERCENTAGE: Percentage. • RATIO: Ratio. • STRING: String.

Description

- `TIMESTAMP`: Date and time.
- `USER_ROLE_TYPE`: User role type for the session.

StatsFilterSettingsInfo

Information about the statistics filter settings.

Name	Type	Description
groups	string[]	Array of agent groups. You set this when <code>groupsSelectionType</code> is set to <code>SPECIFY</code> .
groupsSelectionType	FilterSettingsSelectionType	Selection type to filter agent groups.
range	StatisticsRange	Statistics range.
rollingTimePeriod	RollingPeriod	Rolling period for list and campaign statistics.
shiftHours	integer	Number of hours to shift when <code>range</code> is set to <code>CURRENT_SHIFT</code> .
skills	string[]	Array of queues available when <code>skillsSelectionType</code> is set to <code>SPECIFY</code> .
skillsSelectionType	FilterSettingsSelectionType	Selection type to filter the queues.
subscribedHourOffset	int	Offset for the subscribed hour.
timeZone	string	Domain's time zone. Default value is null.
timeZoneID	string	Time zone identifier: • Region ID from the IANA Time Zone

Name	Type	Description
		Database (TZDB), for example, Europe/London or America/New_York. • Offset ID with a prefix, for example, GMT+2 or UTC+01:00. The allowed prefixes are UTC, GMT, and UT. • Offset ID without prefix, for example, +1,-1,+05:00,-0500, and z for UTC time.
useAdminTimeZone	boolean	Whether to use the admin time zone setting.

StatsFilterSettingsWsInfo

Information about the statistics filter settings.

Name	Type	Description
groups	string[]	Array of agent groups. You set this when groupsSelectionType is set to SPECIFY.
groupsSelectionType	FilterSettingsSelectionType	Selection type to filter agent groups.
skills	string[]	Array of queues. You set this when skillsSelectionType is set to SPECIFY.
skillsSelectionType	FilterSettingsSelectionType	Selection type to filter the queues.

StatsMetadataFieldInfo

Information about a statistics field.

Name	Type	Description
name	string	Field name.
type	StatisticTimeInterval	Field type.

StatsMetadataInfo

Information about the statistics metadata.

Name	Type	Description
dataSource	StatisticRequest	Statistic type.
fields	StatsMetadataFieldInfo []	Array of statistics metadata field information.
resource	StatsResourceType	Statistics resource type.

StatsResourceType

Enumeration with the statistics resource types.

Description
• AGENT: Agent statistics. • AGENT_AUXILIARY: Agent auxiliary statistics. • CAMPAIGN: Campaign statistics. • DIALING_LIST: Statistics for dialing lists used in the campaign. • GROUP: Group statistics. • SKILL: Queue statistics. • STATION: VCC station statistics. • USER: User statistics.

StreamingOutputInfo

Information about a call recording stream.

Name	Type	Description
bytes	bytes[]	Array of bytes.
display	boolean	Whether to display the stream.
download	boolean	Whether to download the file.
file	File	Recording file.
mediaType	MediaType	Media type.
range	string	Range in bytes for returning partial content. Value must be in the RFC 261 <code>byte-ranges-specifier</code> format.

SubscriptionDetailsData

Information about a subscription.

Name	Type	Description
id	string	Subscription ID.
statisticType	StatisticTypeData	Statistic type.
fields	string[]	Collection of fields.
filters	Map<string, FieldInfo >	Map of strings and filters.
timeRange	TimeRangeData	Time range data.

Subscription

Information about a subscription.

Name	Type	Description
createdTimestamp	string	The UTC timestamp on which the subscription was created.
delivery	DashboardSubscriptionInfo	Delivery directive for the subscription. Only one directive can be applied to a subscription.
eventGroup	EventGroup	The event group for the subscription.
events	Event []	List of events in the subscription.
id	integer	Unique identifier of the subscription.
lastUpdatedTimestamp	string	UTC timestamp on which the subscription was last updated.
domainId	string	Domain ID.
status	string	Status of the subscription.
userId	string	ID of the user for whom the subscription has been created.

SubscriptionIdInfo

Subscription ID information.

Name	Type	Description
subscriptionId	string	Map of metadata for each event group.

SubscriptionRequest

Model for creating and updating subscriptions.

Name	Type	Description
delivery	HttpDelivery	The delivery directive for the Subscription. Only one directive can be applied to a subscription.
eventGroup	EventGroup	Required name of the subscription's event group.
events	HttpDelivery	Required list of events in the subscription.

SubscriptionStartAction

Information required for starting a subscription

Name	Type	Description
delivery	HttpDelivery	The delivery directive for the subscription. Only one directive can be applied to a subscription.

SubscriptionInfo

Information about the delivery of statistics or other information to which the client can subscribe. For example, if a client subscribes to a specific delivery, it receives events that contain updates of the corresponding information.

To find all available deliveries, use [Statistics](#). In the first request to a subscribed event, use the name field to obtain a subscribed event. In subsequent requests to the subscribed event of the same name, use the `id` field.

Example:

```
{ "id": "1", "name": "agentsReadyPresencesSubscription", "subscribed": true,
  "parameters": { "DURATION": 3600000 }
```

Name	Type	Description
id	string	Subscription ID.
name	string	Optional name of the subscribed event: - agentsReadyPresencesSubscription: EVENT_AGENTS_READY_PRESENCES_SUBSCRIPTION_UPDATE (15) - skillStatsSnapshotSubscription: EVENT_SKILL_STATS_SNAPSHOT_SUBSCRIPTION_UPDATE (29)
parameters	Map<SubscriptionParameter, Object>	Subscription parameters. SubscriptionParameter: DURATION is the time (ms) after which the subscription is expired. The default is an hour.
subscribed	boolean	Whether the agent is subscribed.

SubscriptionUpdateReason

Information about an updated subscription.

Description
- SUBSCRIBED: A subscription is created for the agent. - UNSUBSCRIBED: An agent's subscription is removed. - EXPIRED: An agent's subscription is terminated.

SupervisorAgentGroupInfo

Information about an agent group.

Name	Type	Description
id	string	Agent group ID.
name	string	Agent group name.
users	IdInfo []	Array of IDs for the users in the group.

SupervisorAgentInfo

Information about agents for supervisors.

Name	Type	Description
canReceiveTransfer	boolean	Whether the agent is available to receive a transferred interaction.
enabledChannels	Map< ChannelType , CategoryInfo >	Map of the agent's enabled channels and corresponding channel information.
firstName	string	Agent's first name.
fullName	string	Agent's full name.
email	string	Agent's email.
hasUserProfile	boolean	Whether the user has a profile.
id	string	Agent ID.
lastName	string	Agent's last name.
monitors	SupervisorAgentMonitorInfo	List of monitors.
skills	SupervisorAgentMonitorInfo	List of agent's queues.
userName	string	Agent's user name.

SupervisorAgentMonitorInfo

Information about agent monitoring for supervisors.

Name	Type	Description
monitorMode	AgentMonitorInfo	Type of monitoring.
supervisorId	string	ID of supervisor who is monitoring an agent.

SupervisorAgentMonitorWSInfo

A `SupervisorAgentMonitorWSInfo` object is sent when the `EVENT_MONITORING_STATE_UPDATED` event occurs. The object contains the ID of the agent who is being monitored, the ID of the monitoring supervisor, and the type of agent monitoring.

Name	Type	Description
agentId	string	ID of agent being monitored.
monitorMode	AgentMonitorInfo	Type of monitoring.
supervisorId	string	ID of supervisor that is monitoring the agent.

SupervisorAgentSkillInfo

Information about agent queues for supervisors.

Name	Type	Description
id	string	Queue ID.
isActive	boolean	Whether the user is an active member of the queue.
level	long	Applies to an agent. The level determines the agent's priority for receiving calls that are sent to the queue. Level 1 is the highest priority.
name	string	Queue name.

SupervisorCampaignInfo

Information about a campaign for a supervisor.

Name	Type	Description
extension	string	Internal extension for the campaign. Omitted if no extension is assigned.
id	string	Campaign ID.
lists	string[]	Array of dialing list IDs for the campaign. The field is specified for outbound and autodial campaigns. The field is not specified for an inbound campaign.
name	string	Campaign name.
skills	string[]	Array of queue IDs for the campaign. Can be omitted if no queues are configured.
state	CampaignStateType	Current state of the campaign.
type	CampaignListWSInfo	Campaign type.

SupervisorCampaignProfileInfo

Information about a campaign profile for supervisors.

Name	Type	Description
id	string	Campaign profile ID.
name	string	Campaign profile name.

SupervisorDispositionInfo

Information about a disposition for a supervisor.

Name	Type	Description
description	string	Description of the disposition.
flags	DispositionFlag []	List of disposition flags.
id	string	Disposition ID.
isVCC	boolean	Whether this is a VCC-based disposition.
isSCC	boolean	Whether this is a SCC-based disposition.
name	string	Name of the disposition.

SupervisorDispositionBody

Information about a supervisor disposition.

Name	Type	Description
agentID	string	Agent ID.
dispositionId	string	Disposition ID.
isClose	string	Whether the disposition is closed.

SupervisorTransferToAgentBody

Information about an interaction that a supervisor transfers to an agent.

Name	Type	Description
fromUserId	string	ID of the supervisor transferring the interaction.
interactions	string[]	List of interactions.
toUserId	string	ID of the agent to whom the interactions is transferred.

SupervisorTransferToGroupBody

Information about the interactions that a supervisor transfers to a group.

Name	Type	Description
fromUserId	string	ID of the supervisor transferring the interaction.
interactions	string[]	List of interactions transferred from a supervisor to a group.
toGroupId	string	ID of the group to which the interaction is transferred.

SupervisorListInfo

Information about a dialing list for a supervisor.

Name	Type	Description
id	string	Dialing list ID.
name	string	Name of the dialing list.

SupervisorReasonCodeInfo

Information about a reason code.

Name	Type	Description
id	string	Reason code ID.
name	string	Name of the reason code.

SupervisorUserInfo

Information about a logged-in user.

Name	Type	Description
email	string	User's email address.

Name	Type	Description
extension	string	User's extension.
fullName	string	User's full name.
id	string	User ID.
loggedIn	boolean	Whether the user is ready to receive internal chat messages.
permissions	PermissionEnum []	Permissions assigned to the user. Only permissions that can be configured for a user profile are included.
roles	string[]	User's roles.
skillLevels	SimpleIdInfo []	Queues assigned to the user and the user's level for each queue.
userName	string	User's login name.
userProfileSet	boolean	Whether the user is assigned to a user profile.

SupervisorUserProfileInfo

Information about the profile of a user.

Name	Type	Description
id	string	Profile ID.
name	string	Name of the user profile.
users	string[]	IDs of users in the group.

SurveyBody

Information about a survey.

Name	Type	Description
fromMedia	int	Origin of the survey: • 1: Social • 1000: Email • 2000: Chat
itemId	string	ID of an item in the survey.
profileId	long	Profile ID.
profileName	string	Profile name.
score	int	Survey ranking score: how a customer ranks a support interaction.
templateAnswer	string	Template for the survey response.
templateId	int	Template ID.
templateQuestion	string	Template question.
tenantId	long	Tenant ID.
tenantName	string	Tenant name.

SurveyRequestInfo

Information about an item in the survey.

Name	Type	Description
itemId	string	ID of an item in the survey.
msgType	int	Type of routing for the message: • 1: Cherry picking. • 2: AID.
status	int	Not Used.

SwitchoverMetadata

Information about the maintenance state.

Name	Type	Description
maintenanceState	MaintenanceNotifyReason	Current maintenance state.
onPrimary	boolean	True if the agent or supervisor is on the primary domain, false if the agent or supervisor is on the backup domain.
timerToNextMaintenanceState	long	If a new maintenance state is scheduled, then this parameter value is set to the time period before the maintenance starts, otherwise the parameter value is set to zero.

Tenant

Identity of a domain.

Name	Type	Description
id	long	Domain ID.
name	string	Domain name.

Name	Type	Description
allowEmailsOnCall	boolean	Whether email are allowed during calls.
vccDispositionOnly	int	VCC disposition.
allowChatsOnCall	boolean	Whether chats are allowed during calls.
allowCallsOnChat	boolean	Whether calls are allowed during chat.
enableFreedomGetItems	boolean	Whether the GetItem method is can be executed.

TestCallInfo

Information about a test call to an agent.

Name	Type	Description
agentId	string	Agent ID to call.
campaignId	string	Campaign ID for the call. If you set the string to null, no campaign is used.
number	string	Number from which the call was made. If you set the string to null, a random number is generated.

TestSkillCallInfo

Information about a test call to the specified queues.

Name	Type	Description
callsCount	integer	Number of calls to send to the queues.
campaignId	string	Campaign ID for the call.
priority	integer	Call priority between 0 and 100. 0 is the highest priority.
skills	string[]	Array of queue IDs to send the call.
timeout	integer	Wait time in milliseconds for a call response.

TextSearchRequestInfo

Search criteria for text interactions.

Name	Type	Description
limit	int	Sets the amount of search results returned when the interaction matches the fields map.
map	Map<string, object>	List of key value pairs used for text interaction search.
minimalData	boolean	Whether the minimal (excluding interaction fullBody) data should be returned for each interaction.
offset	int	Returns search results starting from the offset value. For example, setting the offset to 10 returns results from the ten interactions found.

TextTransform

Directives for transforming to text-based content.

Name	Type	Description
format	string	Required text format.
template	string	Template for generating data. This parameter is mandatory for all formats, except <code>application/json</code>

ThirdPartyConfig

Information about third-party variables that can be used in an agent's session.

Name	Type	Description
config	Map<string, string>	Key-value pairs of configuration values. For more information about data types, see DraftInfo .

TimeRangeData

Information about time and the time zone.

Name	Type	Description
timezone	string	Time zone of the data.
startHour	long	Beginning hour for the data in epoch time.
startMinute	long	Beginning minute for the data.
duration	long	Time interval for the data.
startTimestamp	long	Beginning date time.
endTimestamp	long	End date time.
timePeriod	string	Time period, such as DAY.

TimezoneInfo

Information about a time zone.

Name	Type	Description
timezoneId	string	Time zone ID.

Token

Information about the authorization and authentication token received after a successful login.

Name	Type	Description
context	Map<string, string>	Optional context information. For more information about data types, see DraftInfo .
metadata	Metadata	Information about data centers and the location of the services.

Name	Type	Description
orgId	long	Domain ID.
sessionId	string	Session ID.
tokenId	string	Token ID for the user session.
userId	string	User ID.

Topic

Information about the topic of an interaction, which may be useful in reports.

Name	Type	Description
creationTime	long	Creation time of topic.
deletionTime	long	Deletion time of topic.
modificationTime	long	Modification time of topic.
tenantId	long	Tenant ID.
topicId	string	Topic ID.
topicName	string	Name of topic.

UnifiedCommunicationInfo

Information about available integrations.

Name	Type	Description
config	map<string, string>	Configuration specific to unified communication.
type	string	Type of the unified communication system, such as Microsoft Lync.

UnifiedCommunicationSettingsInfo

Information about unified communication settings.

Name	Type	Description
integrations	UnifiedCommunicationInfo []	List of available integrations.
type	UnifiedCommunicationType	Do not use. Instead, use the <code>integrations</code> field. Type of the unified communication system: NONE MICROSOFT: Microsoft Lync.
ucDomain	string	Do not use. Instead, use the <code>integrations</code> field. Domain used by the unified communication system.
usedForInternalMessaging	boolean	Do not use. Instead, use the <code>integrations</code> field. Whether to use the unified communication system for internal chat instead of the Five9 Plus internal chat.

UpdateReplayRequestStateBO

Model for managing the state of the replay request.

Name	Type	Description
state	string[]	State of the replay request. Possible state are WAITING, IN_PROGRESS, COMPLETED, FAILED, and CANCELLED.

UserFilter

Information about a user's options.

Name	Type	Description
ACD_ACD_QUEUE	int	Number of items in the queue.
ACD_CHERRY_PICKING	int	Agent is allowed to select interactions instead of being assigned specific interactions.
autoLock	int	Whether the agent can lock an item automatically: 1 (yes) or 0 (no).
chatACDType	int	Whether the agent is in ACD mode for chat: 1 (yes) or 0 (no).
chatTerminateMessage	string	Custom message added in the SCC administrator's console that is displayed to the customer at the end of a chat session on behalf of the agent when the chat is assigned to this profile.
chatWelcomeMessage	string	Greeting added in the SCC administrator's console that is displayed to the customer at the start of a chat session on behalf of the agent when the chat is assigned to this profile.
clusterId	long	Cluster ID.
clusters	int[]	Array of clusters.
currentStatusId	string	ID of the user's current state.
dateRangeEnd	long	End of the date range.

Name	Type	Description
dateRangeStart	long	Filter settings: start of the date range to filter items based on dates.
dispositionId	long	Disposition ID.
dispositions	int[]	Array of dispositions.
emailACDType	int	Whether the agent is on ACD for email.
includeMine	int	Whether to include the agent's items in the search conducted by this agent.
isFIFO	boolean	Whether cherry-picked interactions selected are either FIFO (true), or LIFO (false).
isSentiment	int	Whether the item is a sentiment: 1 (yes) or 0 (no).
isSpam	int	Whether the item is spam: 1 (yes) or 0 (no).
lockByDate	int	Date when the item was locked.
lockByUserId	int	ID of the user who locked the item.
loginStatus	string	Login state of agent.
maxChat	string	Maximum number of concurrent chat sessions that the agent can lock and process.
maxEmail	string	Maximum number of concurrent email items that the agent can lock and process.
maxSocial	string	Maximum number of concurrent social items that the agent can lock and process.
name	string	Name of agent.
priorities	int[]	Array of priorities.
priority	int	Priority of the items.
profileId	long	Profile ID.
profiles	int[]	Array of profiles.
refreshRate	int	Refresh rate of the items.
sentiments	int[]	Array of sentiment values.
showProfiles	string	Array of profiles to show.
signature	string	Agent's email signature text for email and chat.
signatureEnabled	int	Whether the agent's email signature is enabled:

Name	Type	Description
		0: Disabled. 1: Enabled.
socialACDType	int	Agent in ACD mode for social items.
sortInfluence	int	Order items by author influence.
spams	int[]	Array of spam items.
timeZone	string	User's time zone.
userId	long	User ID.
username	string	User name.

UserSessionInfo

Information about a user session.

Name	Type	Description
fullName	string	User's full name.
role	string	Role used to start session.
sessionId	string	Session ID.
sessionStart	long	Epoch time in milliseconds when the session started.
station	string	Session station.
userName	string	User name for session log in.

UserInfo

Information about a logged-in user.

Name	Type	Description
active	boolean	Whether the user's account is active.
avatarUrl	string	Avatar URL.

Name	Type	Description
email	string	Email address.
extension	string	User's extension.
fullName	string	Optional user's first and last names.
id	string	User ID.
loggedIn	boolean	Whether the user is ready to receive internal chat messages.
name	string	Required unique login name.
role	string	Role of the logged-in user: • DomainAdmin • DomainSupervisor • Agent
timeZoneID	string	Time Zone ID.
ucId	string	Unified communication ID, for example, a Skype for Business ID such as syoung@qa59.local.com.
ucPhoneNumber	string	Phone number of the unified communication user.

UserSyncInfo

Information about a VCC user record to be synchronized.

Name	Type	Description
records	UserSyncRecordInfo []	Array of VCC users to be synchronized.

UserSyncRecordInfo

Information about a VCC user record to be synchronized.

Name	Type	Description
active	boolean	Whether the user is active:

Name	Type	Description
		TRUE: Active FALSE: Inactive
email	string	User's email address.
firstname	string	User's first name.
lastname	string	User's last name.
phonenumbe	string	User's phone number.
ucid	string	User's unified communication ID.

UserSyncResponseInfo

Information about success or failure of a synchronization operation.

Name	Type	Description
description	string	Details about the results.
status	string	Possible values: - SUCCESS - FAIL - MAX_RECORDS_EXCEEDED

UserWSInfo

Information about modified and new users.

Name	Type	Description
fullName	string	User name.
id	string	User ID.
userName	string	User's login name.

UserProfileWSInfo

Information about a new or modified user profile.

Name	Type	Description
id	string	User profile ID.
name	string	User profile name.
users	string[]	List of ids of users belonging to the group.

VersionInfo

Versions of the VCC and SCC servers.

Example:

```
{
  "name": "PdM",
  "version": {
    "vccVersion": "93.5031.0",
    "sccVersion": null,
    "agentVersion": "93.5031.0",
    "agentCommonVersion": "93.5031.0",
    "supervisorVersion": "93.5031.0",
    "clientCommonVersion": "93.5031.0",
    "buildVendor": "Five9",
    "buildDate": "1456456320000",
    "copyright": "Copyright (c) 2001-2019 Five9 Inc. All
Rights
Reserved.",
    "vccBuildId": "25022016-dh01_nn-93.5031.0",
    "vccBuildEdition": "Service Edition",
    "vccBuildSaEdition": "Enterprise Edition"
  },
  "sccTenant": null
}
```

Name	Type	Description
agentCommonVersion	string	Version of AgentCommon library.
agentVersion	string	Version of the agent library.
buildDate	string	Date of the build in ms Epoch time.
buildVendor	string	VCC build vendor.
clientCommonVersion	string	Version of ClientCommon library.
copyright	string	Text content of the copyright.
sccVersion	string	Version of the SoCoCare server.
supervisorVersion	string	Version of the Supervisor library.
vccBuildEdition	string	Edition of the VCC build.
vccBuildId	string	ID of VCC server build.
vccBuildSaEdition	string	SA edition of VCC build.
vccVersion	string	Version of the VCC server.

VoicemailContactInfo

Information about a voicemail contact.

Name	Type	Description
firstName	string	Contact's first name.
lastName	string	Contact's last name.
multiple	boolean	Whether multiple contacts were found.

VoicemailCountInfo

Information about the number of personal voicemail messages.

Name	Type	Description
newItems	int	Number of new personal voicemail messages.
totalItems	int	Total number of personal voicemail messages.

VoicemailInfo

Information about voicemail messages.

Name	Type	Description
activeContact	ContactInfo	Information about the contact. Example: <pre>"activeContact":{ "id":"471", "modificationTime":1442441756207, "fields":{ {"1007":"9253707649"}, "accounts":[], "notes":[]},</pre>
campaignId	string	Campaign ID.
comment	string	Optional comment up to 250 characters. Example: "comment":"","
contact	VoicemailContactInfo	Contact information. Null when no contact is found.
contactLookupResult	ContactInfo	Contact lookup information for skill voicemail messages. Example: <pre>"contactLookupResult":{ {"cursor":"...YW5nLlN0cmZz...==", "contacts":[{"id":"471", "modificationTime":1442441756207, "fields":{ {"1007":"9253707649"}, "accounts":[], "notes":[]}}, "hasMore":false},</pre>
created	long	Time stamp of creation in ms Epoch time. Example: payload of event 24 (EVENT_VOICEMAILS_CREATED)

Name	Type	Description
		"created":1442442160852
id	string	ID of the voicemail message.
length	long	Duration of the voicemail in ms, which is the sum of the durations of all recordings. See the <code>recordings</code> field. Example: "length":10600
number	string	Phone number from which voicemail was received. Example: "number":"9255551212"
recordings	ReasonCodeWSInfo []	Array of voicemail recordings. Example: "recordings":[{"id":"144", "created":1442442149933, "length":10600, "name":"Main recording"}],
state	string	State of the voicemail task: - NEW: - Skill message: The agent was offered a message but has not yet accepted it. - Personal message: The agent has not yet heard the message. - PROCESSING: The agent accepted a skill voicemail message and has not postponed it. - POSTPONED: The agent postponed an accepted skill voicemail message because of an incoming call, which takes precedence over a voicemail message. - PROCESSED: The agent processed a skill voicemail message or heard a personal message. - REJECTED: The agent rejected a new skill message.
type	string	Type of voicemail message:

Name	Type	Description
		- PERSONAL - SKILL Example: "type": "SKILL",
variables	Map<string, string>	Array of variables. For more information about data types, see DraftInfo . Example: <pre>"variables": { "1": "Inbound Voicemail", "2": "Inbound Service", "3": "2015-10-26 23:38:48.396"}</pre>

VoicemailLookupResultInfo

Information about the result of a search.

Name	Type	Description
cursor	string	Current cursor position in the array of personal voicemail messages. Do not change this value.
items	VoicemailInfo[]	Array of voicemail items returned by a search.

VoicemailNotifyReason

Information about voicemail events: ID 24 ([EVENT VOICEMAILS CREATED](#)), 25 ([EVENT VOICEMAILS DELETED](#)), and 26 ([EVENT VOICEMAILS UPDATED](#)).

Description
- ACCEPTED: The agent accepted the offered skill message. - ACTIVE_CONTACT_SELECTED: The agent has selected a contact. - ACTIVE_CONTACT_UPDATED: The agent has updated the active contact.

Description

- **COMMENTS_CHANGED:** The agent updated comments in a voicemail message.
- **CONTACT_CHANGED:** The agent updated the contact information.
- **CREATED:** The agent created a voicemail message.
- **DELETED:** The agent deleted a voicemail message.
- **DISPOSED:** The agent set a disposition.
- **EXPIRED:** The offered skill voicemail expired.
- **MARKED_AS_READ:** The agent marked read a message.
- **POSTPONED:** The agent postponed an offered skill message because of an incoming call. The agent cannot process the message until the call is completed.
- **REJECTED:** The agent rejected a voicemail message.
- **RESUMED:** The agent accepted and did not postpone the skill voicemail. In this state, the agent can process the message.
- **REVOKED:** The voicemail message was removed by the system.
- **TRANSFERRED:** The voicemail message was transferred.
- **UPDATED:** The agent updated a message.
- **WITHDRAWN:** An offered skill message was withdrawn by the system.

VoicemailState

Enumeration with the voicemail state.

Description

- **NEW:** Skill voicemail is currently offered to the agent but not yet accepted by the agent. For a personal voicemail, this is an unread state.
- **POSTPONED:** Accepted skill voicemail is postponed due to an incoming call. The agent cannot operate on the voicemail until the call is completed.
- **PROCESSED:** Personal voicemail has been read or a skill voicemail has been processed.
- **PROCESSING:** Skill voicemail has been accepted by the agent and has not been postponed. In this state, the agent can process the voicemail.
- **REJECTED:** Skill voicemail is rejected.

VoicemailsViewInfo

Information about a voicemail view.

Name	Type	Description
currentPage	long	Current page number of records.
hasMore	boolean	Whether the view has more records.
id	string	View ID. Used to iterate the view records.
records	T[]	Subset of records returned by the view. The number of records returned is less than or equal to the number of records in <code>VoicemailsViewInfo</code> limit. Valid collection types are <code>SkillVoicemailInfo</code> and <code>PersonalVoicemailInfo</code> .
recordsTotal	long	Total number of records.

VoicemailsTransferDestinationInfo

Information about the destination of the voicemail transfer. Use either `agentId` or `skillId`.

Name	Type	Description
agentId	string	Agent ID who receives the transfer.
skillId	string	Skill ID who receives the transfer.

VoicemailType

Enumeration with the voicemail type.

Description
- PERSONAL: Personal voicemail. - SKILL: Queue voicemail.

VoicemailsTransferDestinationInfo

Information about the destination of the voicemail transfer. Use either `agentId` or `skillId`.

Name	Type	Description
<code>agentId</code>	<code>string</code>	Agent ID who receives the transfer.
<code>skillId</code>	<code>string</code>	Skill ID who receives the transfer.

VoicemailType

Enumeration with the voicemail type.

Description

- `PERSONAL`: Personal voicemail.
- `SKILL`: Queue voicemail.

WorksheetInfo

Information about answers to worksheet questions.

Name	Type	Description
<code>answers</code>	<code>Map<string, string></code>	Map in which the key is a question ID and the value is an answer. For information about questions, see QuestionInfo . For information about data types, see DraftInfo .
<code>duration</code>	<code>long</code>	Time in ms already spent by the agent in completing the worksheet. If an agent uses several iterations, the content of this field is the sum of the durations of all iterations.
<code>finished</code>	<code>boolean</code>	Whether the worksheet is completed.

Name	Type	Description
id	string	Unique identifier of the worksheet.
version	long	Object version used to prevent concurrent modifications.

WebSocket Events

Events are returned in the response as JSON-formatted strings to notify you that a configuration change or an action occurred.

Each event string comprises two main parameters: `context` and `payload`, which are described in this chapter.

Example


Event ID 11:

Raw string

```
10/28/2015 08:42:34,792 [14460469107891jd5r6pp7] [INF]
["socket event received","11",{"context":
{"eventId":"11","eventReason":"UPDATED","mes-
sageId":"210","userId":"2848","correlationId":"ac90f5db-4b71-
4085-88f2 -e46419716d-
d1","userName":"syoun@example.com","timeStamp":14460469548
10,"tenantId":331},"payload":{"skillIds":["1","2"]}}]
```

Formatted context and payload

```
{
  "context":{
    "eventId":"11",
    "eventReason":"UPDATED",
    "messageId":"210",
    "userId":"2848",
    "correlationId":"ac90f5db-4b71-4085-88f2 -
e46419716dd1",
    "userName":"syoun@example.com",
    "timeStamp":14460469548 10,
    "tenantId":331
  },
  "payload":{
    "skillIds":[
      "1",
      "2"
    ]
  }
}
```



Manage WebSocket Session Timeouts and Reconnections

When your WebSocket connection closes, the system starts an asynchronous session clean up process. Understanding this process helps you manage reconnections. Use these guidelines to implement the right reconnection logic and minimize unnecessary login prompts.

Session Cleanup Timing

- The system runs a cleanup process every minute to remove inactive sessions.
- If a WebSocket remains closed for more than 170 seconds, the session is removed.
- Because cleanup timing varies, the system always removes sessions between 2 and 4 minutes after a WebSocket disconnects.

Reconnection Behavior

- Within 3 minutes, you can reuse your token to reconnect.
- After 4 minutes, the session is **fully removed**, and you must sign in again through SSO.

Check If a Session Is Still Active

- Call the `/metadata` API to check session status.
- Try to open a WebSocket connection. If you receive a `401 Unauthorized` response, the session has expired.

The following sections describe the WebSocket events:

Context

The context contains the attributes that summarize an event. Some events do not use all of the attributes.

Attribute	Description
isBroadCast	This field will be removed. Ignore it.
correlationId	ID returned when the event generated is part of a larger transaction, such as JMS message ID (VCC) or transaction ID (UI).
eventId	ID of the event.
eventReason	Most events can have only one reason. However, some events may be caused by the reasons defined in these data types: CallLoggingSettingsChangedEvent, PreviewNotifyReason, QueueCallbackNotifyReason, and VoicemailLookupResultInfo. For example, <code>EVENT_PREVIEW_DELETED</code> may be caused by any of the reasons in <code>PreviewNotifyReason</code>. The list below contains only the reasons that are not defined in the above data types. • <code>AGENT</code>: something happened to this agent, or the agent caused the event. • <code>DIAL_RESULT_BUSY</code> • <code>DIAL_RESULT_NO_ANSWER</code> • <code>EDITABLE_INFO_UPDATED</code> • <code>INITIAL</code>: first event with this ID for the session; returned before the user selects an option. • <code>JMS Server unavailable</code> • <code>null</code> • <code>OTHER</code> • <code>RESTORED</code> • <code>SUBSCRIBED</code>
messageId	Integer value assigned to the message. The values may not be sequential or unique.
tenantId	Domain ID that received the message.

Attribute	Description
timeStamp	Time stamp of the event in ms Epoch time.
tokenId	Null for broadcast messages. Can be null for personal messages in some cases.
userId	Database ID of the user.
userName	Name of the logged-in user.
userRole	Role of the logged-in user.

Payload

The payload contains the parameters and values that are returned for each event. The data types are `int` and `long`.

A WebSocket event is sent when an object is created or modified. In both cases, the same payload is used. The following data types are used to notify the client application about the object creation or modification. The data types are used to create objects that are used with the WebSocket payload.

- [AgentGroupWSInfo](#)
- [AgentWSInfo](#)
- [CampaignFlag](#)
- [CampaignListWSInfo](#)
- [CampaignOutOfNumbersWSInfo](#)
- [CampaignProfileWSInfo](#)
- [CampaignWSInfo](#)
- [DispositionWSInfo](#)
- `InvalidatedResourceInfo`
- [ListWSInfo](#)
- [RandomMonitorWSInfo](#)
- [ReasonCodeWSInfo](#)
- [SkillWSInfo](#)
- [StatsFilterSettingsWsInfo](#)
- [SupervisorAgentMonitorWSInfo](#)
- [UserWSInfo](#)

The following table shows specific attributes that apply to the [Agent Events](#) and [InteractionMessages](#) events.

Attribute	Description
<code>includedIds</code>	User IDs that are included in the conference. For example, <code>"includedIds": ['141', '142']</code> .
<code>excludedIds</code>	User IDs that are excluded from the conference. For example, <code>"excludedIds": ['138', '139', '140']</code> .
<code>excludedReasons</code>	Reasons for the exclusion of the user IDs in the <code>excludedIds</code> attribute. There is one <code>excludedReasons</code> code for each user ID in <code>excludedIds</code> . The <code>excludedReasons</code> codes are as follows: 0: A system error has occurred. -3: The user is logged out. -5: The maximum number of chats has been reached. For example, <code>"excludedReasons": ['-3', '0', '-5']</code> . When combined with <code>"excludedIds": ['138', '139', '140']</code> , the <code>excludedIds</code> user ID of 138 is matched with the <code>excludedReasons</code> code of -3. 139 is matched with 0. 140 is matched with -5.

Agent Events

The agent events are listed alphabetically below.

WebSoc ket Events	Description
<code>AGENT_EVENTS</code>	ID: 10001 Description: Example: <pre>"context": { "tenantId": "241", "eventId": 10001, "eventReason": 1, ... }, "payload": { "status": 1, "messageId": 1000, "includedIds": ['141', '142'], "excludedIds": ['138', '139', '140'], "excludedReasons": ['-3', '0', '-5'] }</pre>
<code>DuplicateCon</code>	ID: 1020 Description: Duplicate WebSocket connection. The duplicate connection is

Websocket Events	Description
connection	immediately closed by the server with reason code 3000 (Duplicate Connection). Example: <pre>"context":{"eventId":"1020","eventReason":null,...}, "payload":null</pre>
EVENT_ACTIVE_SKILL_UPDATED	ID: 11 Data type: int Description: List of active skills that was changed by the user or the administrator either at the beginning or during a session. The possible reason is <code>UPDATED</code>. For information about the payload, see Data Types. Example: <pre>"context":{"eventId":"11","eventReason":"UPDATED",... "payload":{"skillIds":["1","2"]}}</pre>
EVENT_AGENT_ADDED_TO_SKILL	ID: 39 Data type: int Description: The administrator added a skill to the user's configuration. The possible reason is <code>OTHER</code>. The payload contains the name of the skill. For information about the payload, see SimpleIdInfo. Example: <pre>"context":{"eventId":"39","eventReason":"OTHER",... "payload":{"id":"21","name":"Test skill"}}</pre>
EVENT_AGENT_REMOVE_FROM_SKILL	ID: 19 Data type: int Description: Name of skill removed from user's list in the VCC skill menu. The possible reason is <code>OTHER</code>. The payload contains the ID of the removed skill. Example: <pre>"context":{"eventId":"19","eventReason":"OTHER",...}, "payload":"22"}</pre>
EVENT_AGENT_READY_PRESENT	ID: 15 Data type: int Description: List of ready agents was updated. This event may occur at any time during a call and a session. The possible reason is <code>UPDATED</code>. For information about the payload, see AddressType. Example: The logged-in agent, 2848, is ready for calls and voicemail. All other agents are logged out (o): <pre>"context":</pre>

WebSoc ket Events	Description
UPDATE	<pre>{ "eventId": "15", "eventReason": "UPDATED", "userId": "2848", ... }, "payload": { ... "2575": "o", "2778": "o", "2830": "o", "2838": "o", "2848": "c v", ... } }</pre>
EVENT_ AUDIO_ PLAYE R_ UPDATE D	ID: 41 Data type: int Description: State of the audio player was updated. The possible reason is UPDATED. This event is triggered when a recording or prompt has been played and by these requests: <code>/ {agentId}/interactions/calls/{callId}/audio/player/play_prompt, .../play_recording, .../pause, .../resume, and .../stop.</code> Example: Information about a recording or prompt. <code>trackInfo</code> is null when <code>status=NON_PLAYING</code>. <pre>{ "status": "PLAYING", "trackInfo": { "trackId": "prompt_id", "trackType": "SKILL_PROMPT", "elapsedTime": 12000, "duration": 25000 } }</pre>
EVENT_ CALL_ CREATE D	ID: 3 ID: 30 ID 30 is a duplicate of ID 3. Data type: int Description: The event contains all the information about a new outbound or inbound call that is not yet listed in the agent's list of interactions. The call may be created in these cases: • After a new call request, such as <code>getCalls</code>, <code>makeCall</code>, <code>makeTestCall</code>, or <code>getInteractions</code>. • When agents start a conference or add a participant or a skill. The <code>eventReason</code> field may contain one of these values: <code>CREATED</code>, <code>REJECTED</code>, <code>WITHDRAWN</code>, or <code>DISCONNECTED_BY_AGENT</code>. For more information, see CallLoggingSettingsChangedEvent. For information about the payload, see CallInfo. The CallInfo field may indicate possible further action.

WebSoc ket Events

Example:

```
"context":{"eventId":"3","eventReason":"CREATED",...}
"payload":
{"id":"F46117B37B86487484DDB7F059ABD296","campaignId":"2495",
"callType":"AGENT","state":"OFFERED",...}
```

EVENT_
CALL_
DELETE
D

ID: 5

ID: 31

Data type: int

Description:Returned when a call is ended and a disposition is selected. In this last case, the `dispositionId` field contains a value. The call is no longer listed in the agent's interactions. If the call was interrupted by the system, the reason may be `ABANDONED_BY_ADMIN`. A call may be deleted in these cases:

- Client disposes call: `/agents/{agentId}/interactions/calls/{callId}/dispose`
- Client transfers call to other agent: `/agents/{agentId}/interactions/calls/{callId}/transfer_to_agent`
- The client leaves.

For possible event reasons, see [CallLoggingSettingsChangedEvent](#). For information about the payload, see [CallInfo](#).

Example:

```
"context":{"eventId":"5","eventReason":"DISCONNECTED_BY_
AGENT",...}
"payload":
{"id":"72CCBCB2FC274D31B7353A2A5A6CB013","campaignId":null,"c
allType":"OUTBOUND",...}
```

EVENT_
CALL_
LOGGIN
G_
SETTIN
GS_
CHANGE
D

ID: 60

Data type: long

Description:Notifies client about changes in call logging. The value of `eventReason` is `UPDATED`. For more information, see [CallLoggingSettingsChangedEvent](#).

EVENT_
CALL_
QUALIT
Y_
UPDATE
D

ID: 52

Data type: long

Description:Call quality is changed because of network issues, for example. The possible reason is `UPDATED`. For information about the payload, see [CallQualityStatsInfo](#).

WebSoc ket Events	Description
EVENT_ CALL_ UPDATE D	ID: 4 Data type: int Description: Call state was updated, or the call ended. During a call, this event may be returned for other reasons, such as <code>RECORDING_ALLOWED</code> or <code>ON_HOLD</code>, which may affect the details of the call information. For possible event reasons, see CallLoggingSettingsChangedEvent. This websocket returns these types of payloads: - For the websocket event 'EVENT_CALL_UPDATED' returned for the reason 'COMMENTS_UPDATED', the payload contains the call ID and comment, as shown in the following example: Example: <pre>"payload":{"id": "BDF67EC3144C42E48D177AD3451C3F1E", "comment":"call comment"}</pre> - For information about the payload returned for other reasons for this event, see CallInfo. Example: The contact's phone is ringing. After the contact answers the phone, the next event with this ID contains <code>eventReason:CONNECTED</code> and <code>state:TALKING</code>. <pre>{"context":{"eventId":"4","eventReason":"UPDATED"},... "payload":{"id":"...","callType":"AGENT","state":"RINGING_ ON_OTHER_SIDE"},...</pre>
EVENT_ CALL_ VARIABLES_ DELETE D	ID: 67 Data type: long Description: Call variables deleted in the VCC administrator application. The <code>eventReason</code> is <code>REMOVED</code>. The payload contains the IDs of the deleted variables. For information about the payload, see CallVariableInfo.
EVENT_ CALL_ VARIABLES_ UPDATE D	ID: 66 Data type: long Description: Call variables updated in the VCC administrator application. The <code>eventReason</code> is <code>UPDATED</code>. The payload contains the IDs of the updated variables. For information about the call attributes changes, see CallVariableInfo.
EVENT_ CALLBACK_ CREATE D	ID: 53 Data type: long Description: Callback created. The <code>eventReason</code> is <code>CREATED</code>. For information about the payload, see CallbackInfo.

WebSoc ket Events	Description
	Example: <pre>{ "context": { "eventId": "53", "eventReason": "CREATED", ... "payload": { "id": "81", "campaignId": "2495", "completed": false, "dueDate": 14 46059220000, ...</pre>
EVENT_ CALLBA CK_ DELETE D	ID: 55 Data type: long Description: Callback deleted. The <code>eventReason</code> is REMOVED. For information about the payload, see CallbackInfo.
EVENT_ CALLBA CK_ UPDATE D	ID: 54 Data type: long Description: The call was returned, or the callback was updated. The <code>eventReason</code> is UPDATED. For information about the payload, see CallbackInfo. Example: <pre>"context": { "eventId": "54", "eventReason": "UPDATED", ... "payload": { "id": "81", "campaignId": "2495", "completed": true, "dueDate": 144 6059220000, "comments": "", "number": "9253105170", "contactId": "4 41", "agentId": null }</pre>
EVENT_ CALLBA CKS_ DELETE D	ID: 82 Data type: long Description: List of callbacks that were deleted.
EVENT_ CALLBA CKS_ UPDATE D	ID: 83 Data type: long Description: The calls were returned, or the callbacks were updated. The <code>eventReason</code> is UPDATED. For information about the payload, see CallbackInfo.
EVENT_ CAMP GNS_ DELETE D	ID: 68 Data type: long Description: Campaigns deleted. The <code>eventReason</code> is Removed. The event contains the IDs of the deleted campaigns.
EVENT_ CAMP GNS_ UPDATE	ID: 59 Data type: long Description: List of campaigns updated. The <code>eventReason</code> is UPDATED. For

WebSoc ket Events	Description
D	information about the payload, see CampaignInfo .
EVENT_ CHANNE LS_ UPDATE D	ID: 56 Data type: long Description: List of available channels was updated. The eventReason is UPDATED. For information about the payload, see CategoryInfo .
EVENT_ CLICK_ TO_ DIAL_ REQUES T	ID: 74 Data type: long Description: New click-to-dial request. The eventReason is CREATED. For more information, see ExchangeMessage .
EVENT_ CLICK_ TO_ DIAL_ REQUES T_ FAILED	ID: 75 Data type: long Description: Click-to-dial request failed. The eventReason is CREATED. The payload contains an F9RuntimeException error.
EVENT_ CONFIG URATIO N_ UPDATE D	ID: 7 Data type: int Description: Duplicates event Agent Events. Use event 57 because event 7 will soon be removed. Description: The VCC administrator added, deleted, or modified a configuration item, such as a skill. The possible reasons are UPDATED or REMOVED. The payload contains the IDs of configuration items. This event is generated only for these objects: CONNECTOR, DISPOSITION, CAMPAIGN_PROFILE, SKILL, SPEEDDIAL, PROMPT, AGENT_GROUP, CONTACT_FIELD. See the objectType field in the payload. For information about the payload, see NoteBody . Specific events are generated for these objects: CAMPAIGN, REASONCODE, CALL_VARIABLE. Example: A skill with ID 21 was created. <pre>"context": { "eventId": "7", "eventReason": "UPDATED", "userName": null, ... }, "payload": { "objectType": "SKILL", "objectIds": ["21"] }</pre> Actions The client should request <code>/orgs/[skills campaigns]</code> .
EVENT_ CONTAC T_ UPDATE	ID: 77 Data type: int Description: The contact was updated. For more information, see

WebSoc ket Events	Description
D	ContactInfo .
EVENT_ DOMAI N_ USERS_ CAN_ MIGRAT E	ID: 84 Data type: int Description: Domain migration state changed to <code>READY_FOR_MIGRATION</code> . Users can be migrated between the primary and secondary destinations. Includes in ms the date and time when domain deployment was finished. See MaintenanceNotifyReason .
EVENT_ GAMIFI CATIO N_ AGENT_ STAT	ID: 200 Description: Type of interaction statistic. The possible values are <code>CALL</code> and <code>VOICE_MAIL</code> . The event returns an array of AgentCallDestinationInfo .
EVENT_ GAMIFI CATIO N_ DISPOS ITION_ STAT	ID: 201 Description: Disposition for the statistic. The event returns an array of GamificationDisposition .
EVENT_ GAMIFI CATIO N_ SKILL_ STAT	ID: 202 Description: Skill groups for the statistic. The event returns an array of GamificationDisposition .
EVENT_ GRACEF UL_ STATE_ TRANSI TION _SETTIN GS_ CHANGE S	ID: 79 Data type: long Description: The Graceful Agent State Transition settings were updated. For more information, see GamificationDisposition .
EVENT_ INCREM ENTAL_ STATS_ UPDATE	ID: 5012 Data type: long Description: Statistics incremental update has been received.

WebSoc ket Events	Description
EVENT_ INCREM ENTAL_ USER_ PROFIL ES_ UPDATE	ID: 5013 Data type: long Description: User profile incremental update has been received.
EVENT_ SKILL_ INTERA CTION S_ UPDATE	ID: 5014 Data type: long Description: Skill interactions update has been received.
EVENT_ PREVIE W_ CREATE D	ID: 8 ID: 2 ID 2 is a duplicate of ID 21 that will be removed in the future. Data type: int Description: Preview task created. For possible values of <code>eventReason</code> , see PreviewNotifyReason . For information about the payload, see PreviewAcceptBody .
EVENT_ INCOMI NG_ PREVIE W	
EVENT_ QUEUE_ CALLBA CK_ CREATE D	ID: 21 ID: 20 ID 20 is a duplicate of ID 21 that will be removed in the future. Data type: int Description: Queue callback was created. For possible values of <code>eventReason</code> , see QueueCallbackNotifyReason . For information about the payload, see QueueCallbackInfo .
EVENT_ INCOMI NG_ QUEUE_ CALLBA CK	
EVENT_ VOICEM AILS_ CREATE D	ID: 24 ID: 27 ID 27 is a duplicate of ID 24 that will to be removed in the future. Data type: int Description: The agent was notified about a new skill voicemail message: the voicemail state is <code>CREATED</code> . For possible reasons, see VoicemailLookupResultInfo . For information about the payload, see <code>VideoActionBody</code> .

WebSoc ket Events	Description
EVENT_ INTERA CTION_ SESSIO N_ CREATE D	ID: 32 Description: New interaction that can be triggered by many actions, such as when the client sets call disposition (/agents/{agentId}/interactions/calls/{callId}/dispose), ends a conference, or transfers a voicemail message. The possible reason is <code>CREATED</code>. For a list of current interactions, use these requests: /agents/{agentId}/history /agents/{agentId}/history/{viewId}/next Example: <pre>"context": {"eventId": "32", "eventReason": "CREATED", ...} "payload": { "sessionId": "F46117B37B86487484DDB7F059ABD296", "channelType": "CALL", "callType": "AGENT", "receipt": "RECEIVED"...}</pre>
EVENT_ INTERA CTION_ SESSIO N_ UPDATE D	ID: 6 Data type: int Description: Updated interaction.
EVENT_ LOGGIN G_ CONFI G_ CHANGE D	ID: 81 Data type: long Description: Force logging mode was updated.
EVENT_ LOGIN_ STATE_ UPDATE D	ID: 17 Data type: int Description: User's login state was updated. This event describes the progress of the user who is logging in again and for whom a new session is created. The possible reason is <code>UPDATED</code>. For information about the payload, see LoginState. Actions: 1 Obtain new metadata with /auth/metadata to reset the cookie if the route to resources was changed. 2 Reload the Web resources according to the information in the updated metadata. 3 If the station is disconnected, send a Reason Codes request until the

WebSoc ket Events

request is successful. This request may fail in some cases, such as when the new VCC server is not ready or has encountered errors. In these cases, resend the request after a few seconds.

4 If unsuccessful after 3 – 5 attempts, invalidate the session and redirect the user to a logged-out page that displays an error message about the inability to reconnect to the VCC server.

5 Display the login page to users.

Example:

```
"context": {"eventId": "17", "eventReason": "UPDATED", ...
"payload": "SELECT_SKILLS" }
```

EVENT_
LOGOU
T_
REASO
N_
CODES_
DELETE
D

ID: 51

Data type: long

Description: Logout reason codes disabled. The event contains the list of deleted reason codes. The possible reason is `REMOVED`. For information about the payload, see [RateLimit](#).

EVENT_
LOGOU
T_
REASO
N_
CODES_
UPDATE
D

ID: 50

Data type: long

List of logout reason codes updated. The event contains the list of updated reason codes. The possible reason is `UPDATED`. For information about the payload, see [RateLimit](#).

EVENT_
MAINT
NANCE_
ANNOUN
CED

ID: 37

Data type: int

Description: Maintenance was announced. The possible reason is `ANNOUNCED`. The payload contains the number of milliseconds until maintenance begins.

EVENT_
MAINT
NANCE_
COMPLE
TED

ID: 73

Data type: int

Description: Maintenance completed. The possible reason is `COMPLETED`. For information about the payload, see [LogoutRestriction](#); for information about the reason for the event, see [MaintenanceNotifyReason](#).

EVENT_
MAINT
NANCE_
START
ED

ID: 70

Data type: int

Description: Maintenance started. The possible reason is `STARTED`. For

WebSoc ket Events	Description
	information about the payload, see LogoutRestriction ; for information about the reason for the event, see MaintenanceNotifyReason . This event is optional. In rare cases, it may not be sent to the client if the user has already been placed in relogin state.
EVENT_ MAKE_ CALL_ FAILED	ID: 65 Data type: long Description: Call attempt failed. The possible reason is <code>STARTED</code> . For information about the payload, see OrganizationInfo . The event may be triggered by several requests, for example: <code>/agents/{agentId}/interactions/make_agent_call</code> <code>/agents/{agentId}/interactions/make_external_call</code>
EVENT_ MANUA L_ CALL_ SETTIN GS_ CHANGE D	ID: 61 Data type: long Description: Manual call settings changed. The possible reason is <code>UPDATED</code> . For information about the payload, see MaintenanceNotifyReason .
EVENT_ NO_ ANSWE R_ON_ TRANSF ERRED_ CALL	ID: 40 Data type: int Description: The agent has not answered a call transferred by another agent. The possible reason is <code>REMOVED</code> . The client should ignore the payload, which is meaningless in this case.
EVENT_ NOT_ READY_ REASO N_ CODES_ DELETE D	ID: 49 Data type: long Description: List of Not Ready reason codes was deleted. The possible reason is <code>REMOVED</code> . For information about the payload, see RateLimit . The event contains the list of deleted reason codes.
EVENT_ NOT_ READY_ REASO N_ CODES_ UPDATE D	ID: 48 Data type: long Description: List of Not Ready reason codes was updated. The possible reason is <code>UPDATED</code> . For information about the payload, see RateLimit . The event contains the list of updated reason codes.

WebSoc ket Events	Description
EVENT_ OPTION S_ UPDATE D	ID: 13 Data type: int Description: Agent options updated following PUT /agents/{agentId}/options. The possible reason is UPDATED. For information about the payload, see AgentMonitorInfo. Example: <pre>"context":{"eventId":"13","eventReason":"UPDATED",...}, "payload":{"options":["TONE_ON_INCOMING_INBOUND_CALL", "TONE_ON_INCOMING_PREVIEW_CALL", "AUTO_ANSWER_INBOUND_AUTODIAL_CALLS", "AUTO_ANSWER_OUTBOUND_CALLS", "AUTO_ANSWER_INTERNAL_CALLS", "SHOW_SELECT_SKILLS", "ALERT_ON_OVERDUE_CALLBACK", "ALERT_ON_INCOMING_MESSAGE", "ESTIMATED_END_OF_CALL_COUNTER"], "userFilter":null}</pre>
EVENT_ PENDIN G_ CONNEC TOR_ CREATE D	ID: 33 Data type: int Description: Pending connector created. The possible reason is CREATED. For information about the payload, see PayloadAcd Release with UCB.
EVENT_ PENDIN G_ CONNEC TOR_ DELETE D	ID: 34 Data type: int Description: Pending connector deleted. The possible reason is REMOVED. For information about the payload, see PayloadAcd Release with UCB.
EVENT_ PERMIS SIONS_ UPDATE D	ID: 14 Data type: int Description: User's permissions updated. The possible reason is UPDATED. For information about the payload, see PermissionEnum.
EVENT_ PRESEN CE_ UPDATE	ID: 12 Data type: int Description: Agent's presence information was updated. At the beginning of a

WebSoc ket Events	Description
D	session, eventReason is <code>Initial</code>, and readyChannels is empty. After the agent selects one or more channels, eventReason is <code>AGENT</code>. For possible reasons, see PresenceInfo. For information about the payload, see Five9ExceptionDetailWrapper. Example: <pre>... {"context":{"eventId":"12", "eventReason":"AGENT", ... "payLoad":{"currentState":{"readyChannels":["CALL","VOICE_ MAIL"]} ...</pre>
EVENT_ PREVIEW_ DELETE	ID: 9 Data type: int Description: Preview deleted. For possible reasons, see PreviewNotifyReason. For information about the payload, see PreviewAcceptBody.
EVENT_ PREVIEW_ UPDATE	ID: 10 Data type: int Description: Preview updated. For possible reasons, see PreviewNotifyReason. For information about the payload, see PreviewAcceptBody.
EVENT_ QUEUE_ CALLBACK_ DELETE	ID: 23 Data type: int Description: Queue callback was deleted. For possible values of eventReason, see QueueCallbackNotifyReason. For information about the payload, see QueueCallbackInfo.
EVENT_ QUEUE_ CALLBACK_ UPDATE	ID: 22 Data type: int Description: Queue callback was updated. For possible values of eventReason, see QueueCallbackNotifyReason. For information about the payload, see QueueCallbackInfo.
EVENT_ RESOURCE_ INVALIDATED	ID: 57 Data type: int Description: This event is returned if one or more resources have been updated. The possible reason is <code>UPDATED</code>. For information about the payload, see ResourcesUpdateInfo. The payload contains the URLs of the updated resources. Each URL contains the ID of an updated entity or an asterisk if all entities have been updated. To request entities data, use <code>GET /orgs/</code>

WebSoc ket Events

{orgId}/campaigns, for example.

Example: A new queue was enabled or disabled to route voicemail messages. This event occurs when no call is in progress, and no audio files are created, modified, or deleted. The request contained the [Prompts and Recordings](#) method.

```
"context":
{"eventId": "57", "eventReason": "UPDATED", "userId": null, "userNa
me": null}, ...
"payload": {"resourceURLs":
["/agents/*/interactions/calls/*/audio"],
"causeObjectType": "SKILL", "causeObjectIds": ["21"]}
```

EVENT_
SKILL_
STATS_
SNAPSH
OT

ID: 29

Data type: int

Description: User's skill statistics updated. Provides a snapshot of ACD statistics for a skill. For each skill assigned to the agent, the statistics contains the number of calls and queue callbacks in the queues and the interaction with the longest time (seconds) in queue. This event may occur at any time during a call and a session. The possible reason is `UPDATED`. For information about the payload, a map with key (string) and value, see [SimpleIdInfo](#).

This event is sent only if the client has created a subscription. See `/agents/{agentId}/subscriptions` and `/agents/{agentId}/subscriptions/{subscriptionId}`.

Example: Skills 1 and 2:

```
"1":
{"skillId": "1", "inQueueCallCount": 0, "inQueueCallbackCount": 0,
"longestTimeInQueueSec": 0},
"2":
{"skillId": "2", "inQueueCallCount": 0, "inQueueCallbackCount": 0,
"longestTimeInQueueSec": 0}
```

EVENT_
SOFTPH
ONE_
DEFAULT
T_
FLAGS_
CHANGE
D

ID: 69

Data type: long

Description: Softphone default flags changed. The possible reason is `UPDATED`. For information about the payload, see [SocialItemReply](#).

EVENT_
STATIO
N_
NEEDS_
_

ID: 42

Data type: int

Description: Station needs to be restarted. The possible reason is `UPDATED`.

WebSoc ket Events	Description
RESTART	The client should ignore the payload, which is meaningless in this case.
EVENT_ STATIO N_ UPDATE D	ID: 18 Data type: int Description:The status of the station was updated, for example, from connected to disconnected. The possible reason is <code>UPDATED</code>. For information about the payload, see StashItemInfo. Example: <pre>{ "context": { "eventId": "18", "eventReason": "UPDATED", ... "payload": { "stationId": "555", "stationType": "SOFTPHONE", "state": "DISCONN ECTED" } ...</pre>
EVENT_ SUBSCR IPTIO N_ UPDATE D	ID: 16 Data type: int Description:User subscription was updated with <code>/agents/{agentId}/subscriptions</code> or <code>/agents/{agentId}/subscriptions/{subscriptionId}</code>. For the possible values of <code>eventReason</code>, see SubscriptionUpdateReason. For information about the payload, see SubscriptionStartAction. Example: <pre>{ "context": { "eventId": "16", "eventReason": "SUBSCRIBED", ... "payload": { "id": "1", "name": "agentsReadyPresencesSubscription", "subscrib ed": true, "parameters": { "DURATION": 3600000 } }</pre>
EVENT_ SWITCH ED_TO_ BACKU P_HOST	ID: 71 Data type: int Description:Switch to the backup host. This event applies to you if you are enabled for the geographic redundancy feature. The possible reason is <code>UPDATED</code>. The client should ignore the payload, which is meaningless in this case.
EVENT_ SWITCH ED_TO_ PRIMAR Y_HOST	ID: 72 Data type: int Description:Switch back to the primary host. This event applies to you if you are enabled for the geographic redundancy feature. The possible reason is <code>UPDATED</code>. The client should ignore the payload, which is meaningless in this case.
EVENT_	ID: 58

WebSoc ket Events	Description
TRANSFER_FAILED	Data type: long Description: Transfer failed. The possible reason is <code>OTHER</code> . For information about the payload, see OrganizationInfo .
EVENT_VOICEMAILS_DELETE	ID: 26 Data type: int Description: Voicemail message deleted. The <code>eventReason</code> may be <code>WITHDRAWN</code> , <code>DISPOSED</code> for a skill voicemail or <code>TRANSFERRED</code> for a personal voicemail message. For other possible reasons, see VoicemailLookupResultInfo . For information about the payload, see <code>VideoActionBody</code> .
EVENT_VOICEMAILS_UPDATE	ID: 25 Data type: int Description: User accepts skill voicemail: the voicemail state is <code>ACCEPTED</code> . For possible reasons, see VoicemailLookupResultInfo . For information about the payload, see <code>VideoActionBody</code> .
EVENT_DASHBOARD_SUBSCRIPTION_CREATE	ID: 62 Data type: long Description: Dashboard subscription has been created.
EVENT_DASHBOARD_SUBSCRIPTION_DELETE	ID: 63 Data type: long Description: Dashboard subscription has been deleted.
EVENT_DASHBOARD_SUBSCRIPTION_UPDATE	ID: 64 Data type: long Description: Dashboard subscription has been updated.
FARM_EVENT	ID: 1004

Websocket Events	Description
	Data type: long Description: The domain was assigned to another farm.
Five9ExceptionDetails	ID: 1 Description: Item requested, such as settings, was not found.
InteractionMessages	ID: 10000 Description: INTERACTION_EVENTS= 10000 Example: <pre>"context":{"eventId":10000,"eventReason":1...}, "payload":{"body":{"total":0,"items": []},"messageId":1100,"includedIds": ['141','142'],'excludedIds': ['138','139','140'],'excludedReasons':['-3','0','-5']...}</pre>
JMS_SERVER_UNAVAILABLE	ID: 1003 Data type: long Description: The server cannot receive events. Actions: The client application should display this message and try to restart the session.
Pong	ID: 1202 Description: Response to a Ping REST. Actions: The client does not receive this event for more than two successive requests, or two successive requests fail, the client should reload the UI and reestablish the WebSocket connection.
SERVER_MAINTENANCE_SWITCHOVER_RELOGIN	ID: 1001 Data type: long Description: Domain moved to another server. The user is allowed to complete the current task before the domain is moved. The event reason is UPDATED. The payload contains this message: <i>Server maintenance switchover. Please reconnect.</i> Actions: 1 Obtain new metadata with <code>/auth/metadata</code> to reset the cookie if the route to resources was changed. 2 Reload the Web resources according to the information in the updated metadata. 3 If the station is disconnected, send a Reason Codes request until the

WebSoc ket Events

request is successful. This request may fail in some cases, such as when the new VCC server is not ready or has encountered errors. In these cases, resend the request after a few seconds.

- 4 If unsuccessful after 3 – 5 attempts, invalidate the session and redirect the user to a logged-out page that displays an error message about the inability to reconnect to the VCC server.
- 5 Display the login page to users.

SERVE
R_
MAINTENANCE_
SWITCH
OVER

RELOGI
N_
FORCED

ID: 1002

Data type: long

Description: Domain moved to another VCC server. A system disposition is set for the agent's task, and the agent is moved immediately. Otherwise, the error code 5001 Service Migrated is displayed for all API requests. The event reason is `UPDATED`. The payload contains this message: *Server forced maintenance switchover. Please reconnect.*

Actions:

- 1 Obtain new metadata with `/auth/metadata` to reset the cookie if the route to resources was changed.
- 2 Reload the Web resources according to the information in the updated metadata.
- 3 send a [Reason Codes](#) request until the request is successful. This request may fail in some cases, such as when the new VCC server is not ready or has encountered errors. In these cases, resend the request after a few seconds.
- 4 If unsuccessful after 3 – 5 attempts, invalidate the session and redirect the user to a logged-out page that displays an error message about the inability to reconnect to the VCC server.
- 5 Display the login page to users.

SERVE
R_
UNAVAI
LABLE

ID: 1000

Data type: long

Description: Communication to VCC server was lost. The client should ignore the payload, which is meaningless in this case.

Actions: Restart the session.

Example:

```
"context":{"eventId":"1000","eventReason":"UPDATED",...},
"payload":"Server unavailable: connection to VCC is lost.
Please reconnect."
```

WebSoc ket Events	Description
Server Connec ted	ID: 1010 Description: successful WebSocket connection. Example: <pre>{ "context": { "eventId": "1010", "eventReason": "Successful WebSocket Connection, ..." "payload": null }</pre>
EVENT_ ECHO_ CALL_ DELETE D	ID: 36 Data type: int Description: Echo call deleted. The possible reason is REMOVED. The client should ignore the payload, which is meaningless in this case. Example: <pre>"context": { "eventId": "36", "eventReason": "REMOVED", "messageId": "72", "use rId": "2848", "correlationId": null, "userName": "syoung@example.c om", "timeStamp": 1446600830468, "tenantId": 331, ... }, "payload": "CONNECT"</pre>

Supervisor Events

The supervisor events are listed in the following table.

WebSocket Events	Description
EVENT_STATS	ID: 5000 Data type: long Description: Statistics data has been received.
EVENT_DISPOSITIONS_ INVALIDATED	ID: 5002 Data type: long Description: Disposition has been removed or created, or disposition name has been changed.
EVENT_SKILLS_INVALIDATED	ID: 5003 Data type: long Description: Skill has been removed or created, or queue name has been changed.

WebSocket Events	Description
EVENT_AGENT_GROUPS_INVALIDATED	ID: 5004 Data type: long Description: Account group has been removed or created, or account group name has been changed.
EVENT_CAMPAIGNS_INVALIDATED	ID: 5005 Data type: long Description: Campaign has been removed or created, or campaign name has been changed.
EVENT_USERS_INVALIDATED	ID: 5006 Data type: long Description: User has been removed or created, or user full name has been changed.
EVENT_REASON_CODES_INVALIDATED	ID: 5007 Data type: long Description: Reason code has been removed or created, or reason code name has been changed.
EVENT_CAMPAIGN_PROFILES_INVALIDATED	ID: 5008 Data type: long Description: Campaign profile was removed or created, or campaign profile name was changed.
EVENT_CAMPAIGN_OUT_OF_NUMBERS	ID: 5009 Data type: long Description: Campaign has no more numbers to call.
EVENT_LISTS_INVALIDATED	ID: 5010 Data type: long Description: Dialing list was removed or created, or dialing list name was changed.
EVENT_CAMPAIGN_LISTS_CHANGED	ID: 5011 Data type: long Description: Dialing lists were removed from or added to a campaign.
EVENT_FILTER_SETTINGS_UPDATED	ID: 6001 Data type: long

WebSocket Events	Description
	Description: Statistics filter settings were updated by an administrator's actions. The actions can be changes to permissions or user groups, or a user was included/excluded to/from user groups or queues.
EVENT_AGENTS_INVALIDATED	ID: 6002 Data type: long Description: User was removed or created, or user name, full name, or email was changed.
EVENT_PERMISSIONS_UPDATED	ID: 6003 Data type: long Description: User permissions were updated.
EVENT_RESET_CAMPAIGN_DISPOSITIONS_COMPLETED	ID: 6004 Data type: long Description: Reset operation for outbound campaign dispositions was completed.
EVENT_MONITORING_STATE_UPDATED	ID: 6005 Data type: long Description: User monitoring state was updated.
EVENT_RANDOM_MONITORING_STARTED	ID: 6006 Data type: long Description: Agent monitoring was started.
EVENT_FDS_REAL_TIME	ID: 6007 Data type: long Description: Real time event from Five9 Data Services for ACD queue event occurred.
EVENT_INCREMENTAL_INTERACTIONS	ID: 6008 Data type: long Description: Real time event from Five9 Data Services for ACD queue events.

Errors

[HTTP Status Codes](#)
[Five9 Error Codes](#)

For detailed information about the content of errors, see [ExceptionParameters](#), [FilterSettingsSelectionType](#), and [Five9ExceptionDetailWrapper](#).

HTTP Status Codes

When receiving a response, the client should first analyze the status code. For example, if the status code is 435 (application error), the client can obtain information in the [FilterSettingsSelectionType](#) object in the response body. This object contains the `errorCode` field and may also contain some of the following fields:

- `message`: Reason of the error intended for the developer. Do not show the error to users.
- `context`: Information specific to the `errorCode` value. For specific information, see each error code.

Example

The response to a request to place a call on hold ([Places a Call on Hold](#)) returns HTTP Status Code 435 because the call is already on hold. The response body contains this exception:

```
{
  "five9ExceptionDetail": {
    "timestamp": 1453196986696,
    "errorCode": 3,
    "message": " Call is already on hold.",
    "context": {"contextCode": "CALL"}
  }
}
```

This table contains the HTTP codes that you may see.

Code	Name	Description
200	Successful request	The request was accepted. This status code occurs only if the request is expected to return data in the response body.
204	No content	The request was accepted. This status code occurs only if the request is not expected to return data (void) in the response body.
400	Bad Request	The server cannot process the request because its syntax is malformed.
401	Unauthorized	The user is not logged in, or the credentials are invalid.
403	Forbidden	The user is not permitted to make the request.
404	Not Found	The specified URL is incorrect.
429	Too many requests	For a description of the parameters in the error, see RateLimit . To resolve the issue, wait a few minutes, and resend your request.
435	Processing error	If HTTP status code = 435 (application error) is returned, you may see in the response body one of the codes in Five9 Error Codes .
500	SERVER_ERROR	An internal error prevents the server from fulfilling the request.

Five9 Error Codes

Error codes that are returned with HTTP status code 435 are grouped as follows:

- -1: Internal error. The client should show a common error message.
- 0 – 999: Client errors that appear when the API is used incorrectly or during race conditions. The client does not need to show an error message to users.

Example

```
{\"five9ExceptionDetail\":{\n  \"timestamp\":1446585347217,\n  \"errorCode\":2,\n  \"message\":\"No voice mail with id 100 found\",
```

```
\ "context\": {\ "contextCode\": \"VOICEMAIL\",  
  \ "objectId\": \ "logging_settings\" }  
}
```

Example

Race condition: A user tries to place a call on hold. However, while the request is executed, the call is remotely disconnected. No error message is necessary. The client is notified about the event. The user may also be notified.

- 1000 – 9999: Errors that require some interaction with the client, such as showing a Yes/No option to the user. Five9 recommends that you handle client-side error as follows:
 - Implement specific handlers for each request. If a request returns an error with a code between 1000 and 9999, the error is documented in the Throws section. A method may return multiple error codes.
 - Implement a common handler to cover all errors that are not handled by a specific handler.

Example

The client requests an external call ([Calls](#)) and receives error code 1001 (Five9 Error Codes). If the user has permission to dial a number in the DNC list, the client should ask the user to confirm whether to call the number. If the user confirms, the client should call the number. Similarly, if the request was a call transfer, the client should transfer the call after obtaining the user's confirmation.

- 10000 – 99999: Errors that require only to show a message. For example, an error may occur when a user tries to log into an account. For more information about the `context` parameter of the error, see [FilterSettingsSelectionType](#).

Example

10006 (`NUMBER_IN_DNC_LIST`). The number is in the DNC list; the user is not permitted to call the number. In this case, showing a message to the user is sufficient, for example: The number that you entered is on the

DNC List. You do not have permission to dial this number.

The following table lists the error codes.

ID	Name	Description
-1	INTERNAL_ERROR	An internal error occurred due to corrupted data or invalid server state, for example.
0	SERVER_UNAVAILABLE	The VCC server is unavailable. For more information, see Five9 Error Codes below and SessionStartCode .
1	NOT_AUTHORIZED	The action is not permitted.
2	OBJECT_NOT_FOUND	An object cannot be found or is not in the correct state. <code>F9RuntimeException.context</code> specifies the type of object. • <code>contextCode</code>: Possible types of object: ◦ ACTIVE_CALL ◦ AGENT ◦ AGENT_GROUP ◦ CALL ◦ CALL_RECORDING ◦ CALL_SESSION ◦ CALLBACK ◦ CAMPAIGN ◦ CAMPAIGN_PROFILE ◦ CONNECTOR ◦ DASHBOARD_OBJECT ◦ MAINTENANCE_NOTICE ◦ <code>objectId</code>: ID of the missing object. ◦ <code>objectName</code>: Name of the missing object. ◦ PREVIEW ◦ PROMPT_FILE ◦ QUEUE_CALLBACK ◦ REASON_CODE ◦ RECORDING_FILE ◦ SESSION ◦ SKILL

ID	Name	Description
		◦ STASH_ITEM ◦ STATION ◦ SUBSCRIPTION ◦ USER_AVATAR ◦ VOICEMAIL ◦ VOICEMAIL_VIEW
3	WRONG_STATE	The operation was attempted in the wrong state, for example, if the client attempts to make a preview call after the preview time has expired, or the call has already been accepted. Possible states: • AGENT: Agent state, excluding LOGIN. Returned when agent readiness is incorrect. or tasks are incomplete. • CALL: Call state. • Campaign: Campaign state. • LOGIN: Login state. • MAINTENANCE: Maintenance state. • PREVIEW: Preview state. • QUEUE_CALLBACK: Queue callback state. • STATION: Station state. • VOICEMAIL: Skill voicemail state.
4	INVALID_PARAMETER_VALUE	One of the parameters is invalid. For example, users cannot assign callbacks to themselves: <code>agentId</code> cannot be the same as <code>CallbackInfo.agentId</code> .
5	LIMIT_REACHED	The request cannot be performed because a limit has been reached.
6	INVALID_REQUEST	One or more parameters are incorrect or missing or the user tries to acquire a license that is already acquired.
7	OUT_OF_RANGE	One or more parameters are out of range.
8	CANNOT_FORCE_LOGOUT_WHEN_TALKING	A user who is handling a call cannot be logged out.
9	CALL_HAS_NO_CONTACT	A user cannot add comments or complete a worksheet unless the call is associated with a contact. This error

ID	Name	Description
		occurs when the call is inbound, or the system cannot identify the caller's phone number.
10	SKILL_VOICEMAIL_HAS_NO_CONTACT	A user cannot enter comments for a skill voicemail unless the call is associated with a contact. This error occurs when a call is inbound, or the system cannot identify the caller's phone number.
11	UNSUPPORTED	This API request is not supported.
12	RETRY_LATER	The server is unavailable.
1001	Q_NUMBER_IN_DNC_LIST_FORCE	The number is in the DNC list. Show to users a Yes/No option about calling or transferring to number in DNC. This error may occur in each request that can dial an external number.
1002	Q_MULTIPLE_CONTACTS_SELECT	The <code>number</code> field matches multiple contacts, and the system cannot determine which dialing rules to apply. Show to users a dialog about calling or transferring a number. See also ExchangeMessage .
2007	NO_ROLES_ASSIGNED	No role was assigned to the user. Roles are assigned in the user's profile in the Administrator application.
2008	NO_PERMISSIONS_ASSIGNED	No permissions were assigned to the user.
2009	EXISTING_SESSION_USE_FORCE_LOGIN	The user is already logged in. Log the user out of the existing session, and create a new session.
2010	NO_VALID_APPLICATION_ROLE_ASSIGNED	The user does not have a valid application role. Error name was changed in.
2011	USER_ACCOUNT_NOT_ACTIVE	The login failed because the account is inactive.
2013	USER_PWD_CHANGE_NEEDED	The user must change the password.
2014	USER_SECURITY_QUESTION_CHANGE_NEEDED	The user must set a security answer.
2015	EXISTING_SESSION_ON_ACTIVE_CALL	The user cannot log out of the session during an active call.
2016	CAN_NOT_RUN_WEB_CLIENT	The user is not allowed to use the Five9 Web client. Contact your administrator.
2017	CAN_NOT_RUN_WEB_CLIENT_RUN_JAVA_AGENT	The user is not allowed to use the Five9 Java client. Contact your administrator.

ID	Name	Description
2018	FREEDOM_NOT_ENABLED	The user is not allowed to access the Desktop Plus application. Contact your system administrator.
2019	SFAGENT_APP_CONCURRENCY_EXCEEDED	The number of allowed users for any integration was exceeded. The error contains one of these indicators: - SF: Salesforce - SAML: Single sign-on - ADT: Agent Desktop Toolkit - NS: NetSuite - RN: Oracle Service Cloud - MSDC: Microsoft Dynamics CRM - ZD: Zendesk Contact your system administrator.
2020	SAML_AUTH_FAILED	SAML authentication failed by the server.
2021	CONTINUOUS_LOGIN_FAILED	The user provided incorrect credentials or the user account is locked. Contact your administrator.
2022	WARN_INVALID_REQUEST_ADDRESS	The computer's IP address is not within the trusted IP range. Contact your administrator.
2023	CANT_GET_DB_CONNECTION	Five9 Server Unavailable. If you have confirmed that your network is functional, please contact Five9 Support.
5001	SERVICE_MIGRATED_RETRY_REQUEST	The service was migrated. Resend your request. If the client does not receive events 1001 or 1002 (maintenance mode), or 1005 (geographic redundancy), or the metadata and UI were not refreshed, errors 435 and 5001 are returned. At that time, the server stops processing requests and inform the user about the service migration. Follow the instructions in the events mentioned above.
5002	SERVICE_UNAVAILABLE	The service is unavailable.
5003	SERVICE_ERROR	A service error occurred.
5999	UNABLE_TO_ACQUIRE_DISTRIBUTED_LOCK	The server is unable to access the locked resources before the time-out.
10000	INVALID_ACCOUNT	The account is inactive or an error occurred when the user attempted to log in as the specified role, such as agent. <code>F9RuntimeException.context</code> contains a

ID	Name	Description
		SessionStartCode that provides more details.
10001	PASSWORD_EXPIRED	The password is expired.
10002	ACCOUNT_LOCKED	The account was locked by the system. Contact your administrator.
10003	DUPLICATE_LOGIN	The user is already logged in. Alternately, if force login was used, the user is on a call.
10005	CALL_NOT_IN_TIME	The call was made outside the dialing hours. Details are available in the <code>context</code> field of the exception: <code>allowedToCallAtTimestamp</code> : UTC time stamp when calling the number is allowed. <code>isNeverAllowedToCall</code> : Whether the number can ever be called.
10006	NUMBER_IN_DNC_LIST	The phone number is in the DNC list.
10011	ALREADY_ON_FARM	The user is already in the desired farm.
10012	USER_HAS_ACTIVE_TASK	The user must complete a task before migration.
11001	FAILED_TO_REMOVE_CONTACT	The contact cannot be deleted.
11002	SIMILAR_CONTACT	A more detailed or duplicate record exists when the API tries to create or update a contact. Example: The API tries to create this contact: first name: Alex, number: 1234, State: CA However, this contact exists: first name: Alex, last name: Spear, number:1234, State: CA The error occurs because the existing contact is more detailed.
11003	INCORRECT_CONTACT_FIELD_VALUE	The value of the contact field is incorrect.
11004	CONTACT_DOES_NOT_EXIST	The contact ID does not exist. Search for the contact with another field, or create a contact.
11005	CONTACT_OBSOLETE	The contact was modified by the system.
11006	FIELD_DOES_NOT_EXIST	The request contains a field that was deleted or never existed.
11007	UNMODIFIABLE_	The contact field cannot be modified.

ID	Name	Description
	CONTACT_FIELD	
11008	CRM_SERVICE_FAILURE	The CRM service has failed.
11009	CRM_SERVICE_UNAVAILABLE	The CRM service is unavailable.
11010	NO_CAMPAIGN_SCRIPT	The campaign has no script.
11011	SOCIAL_SERVICES_UNAVAILABLE	Social services are unavailable.
11012	DUPLICATE_CHAT_ID	A chat social item with this ID already exists.
12001	RESTART_STATION_FAILED	The station cannot be restarted.
12002	STATION_BUSY	The station is busy. Hang up or restart the station.
12003	STATION_RESTARTING	The station is being reconnected.
12004	CALLER_DISCONNECTED	The connection was lost, or the caller hung up.
12007	PASSWORD_MATCH_PREVIOUS	The new password is the same as the previous one.
12008	PASSWORD_MIN_CAPITAL_LETTERS	The new password does not contain enough uppercase letters.
12009	PASSWORD_MIN_DIGITS	The new password does not contain enough digits.
12010	PASSWORD_MIN_LENGTH	The new password does not contain enough characters.
12011	PASSWORD_MIN_SPECIAL_CHARACTERS	The new password does not contain enough symbols.
12012	CANNOT_LOG_OUT_DURING_ACTIVE_CALL	The user tried to log out during a call, which occurs if you request the <code>session_start</code> or <code>session_stop</code> method during a call.
12013	CANNOT_LOG_OUT_WHEN_PARKED_CALLS	The user tried to log out while one or more calls are parked.
12014	CANNOT_LOG_OUT_AFTER_ACCEPTING_VOICEMAIL	The user tried to log out after having accepted a voicemail message.
12015	CANNOT_DO_FOR_TEST_CALL	The operation cannot be performed for a test call.
12016	INVALID_WAV_FILE_FORMAT	The user cannot play file a greeting because the WAV

ID	Name	Description
		file format is invalid.
12017	VOICEMAIL_MAX_COMMENT_LENGTH_EXCEEDED	The user tried to save the voicemail comments that are longer than 250 characters.
12018	WRONG_PASSWORD	The password is invalid.
12019	CONSULTANT_DISCONNECTED	The transfer consultant was disconnected.
12020	MUST_BE_NOT_READY_TO_MAKE_ECHO_CALL	To make an echo call, the user must be in the Not Ready state.
12021	INVALID_PHONE_NUMBER	The phone number is invalid.
12022	NO_RECIPIENTS_AVAILABLE	No administrator or supervisor was on duty to answer the agent's help request.
12023	NOT_A_NUMBER_FIELD	The user tried to call by using a field that does not contain a number.
12024	NUMBER_IS_RESTRICTED_FOR_CALL	The phone number is restricted by dialing rules, DNC, or other reasons.
12025	INCORRECT_CONTACT_RECORD_NO_NUMBER_FIELDS	The contact record does not contain a phone number field.
12026	INVALID_FILE_FORMAT	The user tried to upload a file in an invalid format, or the file contains malformed data.
12027	PSTN_BILL_RATE_NOT_FOUND	The PSTN bill rate for the external number was not found.
12028	INVALID_STATION_ID	The station number is invalid.
12029	HAS_ACTIVE_TASK	The requested action cannot be performed because the user has an active task.
12030	AGENT_NOT_TRANSFERABLE	The user does not have permission to receive transfers.
12031	PREVIEW_HAS_NO_NUMBERS_TO_CALL	The phone numbers of this contact cannot be dialed because of restrictions.
12032	INVALID_CONTACT_RECORD	Validation of the contact record failed because one or more field values are incorrect or invalid when a contact record is created or updated. For more information, see DataValidationErrorType .

ID	Name	Description
12033	EMAIL_ATTACHMENT_ID_NOT_FOUND	The ID of the file attachment was not found.
12034	EMAIL_ATTACHMENT_FILE_NOT_FOUND	The file attachment was not found.
12035	NOT_ALLOWED_TO_CHANGE_LANGUAGE	The user is not allowed to change the display language.
12036	UNSUPPORTED_LANGUAGE	This language is not supported.
12037	INVALID_WORKSHEET_ANSWERS	The worksheet answers are invalid. The context contains a map of the question ID and the corresponding validation error. For more information, see DataValidationErrorType .
12038	PREVIEW_HAS_ACTIVE_CALL	During an outbound campaign in preview dialing mode that has a survey option, the user tried to make a second call from the same preview while the customer is completing the survey.
12039	CANNOT_LOG_OUT_WHEN_QUEUED_CALLS	The user cannot log out while the personal queue contains calls.
12040	PASSWORD_NOT_ALLOWED_SPECIAL_CHARACTERS	The password contains special characters that are not allowed.
12041	PASSWORD_CANNOT_CONTAIN_USERNAME	The password cannot contain part or all the user name.
12042	AGENT_IS_NOT_LOGGED_IN	The agent is not logged in.
12043	INVALID_AGENT_RECORDING_STATE	The agent recording state is invalid.
12044	AGENT_DOES_NOT_HAVE_PERMISSION	The agent does not have the permission for the operation.
12045	AGENT_IS_NOT_IN_CORRECT_STATE	The agent has an incorrect state for the operation.
12046	JAVA_AGENT_CANNOT_BE_READY_FOR_NON_VOICE_CHANNELS	The Java agent can be set to ready only for calls and voicemail.
12047	PASSWORD_IN_BLACK_LIST	Password is in the exclusion list.
13001	MAX_RUNNING_CAMPAIGNS	The maximum number of campaigns are already running.
13002	PROHIBITED_	The campaign has a prohibited dialing mode.

ID	Name	Description
	CAMPAIGN_DIALING_MODE	
13003	AUTODIAL_CAMPAIGN_SUPPRESSED	The campaign is configured for autodial, but the campaign is suppressed.
13004	FORCE_LOGOUT_ERROR	Error when attempting to force the logout of a session.
13005	CANNOT_FORCE_LOGOUT_SELF	Error when attempting to force the logout of the user's own session.
13006	MONITOR_AGENT_FAILED	Error when attempting to start or stop agent monitoring.
13007	AGENT_IS_NOT_READY_FOR_CALLS	Error when attempting to make a test call to an agent who is not ready or on a call.
13008	ALERT_NOT_FOUND_OR_NOT_ACCESSIBLE_TO_USER	The alert is not found or not accessible to the user.
13009	ALERT_UPDATED_BY_OTHER_SESSION	The alert was updated by another user session.
13010	USER_TRIES_TO_MODIFY_ALERT_CREATED_BY_OTHER_USER	The user tried to modify an alert created by another user.
13011	USER_TRIES_TO_MODIFY_ALERT_INFO_FOR_OTHER_USER	The user tried to modify the alert information for another user.
13012	USER_DOES_NOT_HAVE_RIGHTS_TO_DELETE_ALERT	The user tried to delete an alert created by another user.
13013	OBJECT_LOCKED_BY_ANOTHER_USER	The user tried to perform an action on an object locked by another user.
13014	BATCH_OPERATION_ERROR	The user tried to perform actions on several objects and some of the actions failed.
13019	AGENT_HAS_PROFILE	Cannot update an agent because the agent belongs to a user profile.
13020	CATEGORY_NOT_FOUND	The widget settings category was not found.
13021	CATEGORY_UPDATED_BY_OTHER_SESSION	The widget settings category was updated by another user session.

ID	Name	Description
13022	CATEGORY_KEY_NOT_FOUND	The key for the widget settings category was not found.
13023	CATEGORY_ITEM_NOT_FOUND	The item for widget settings category was not found.
13024	CANNOT_SEND_EMAIL	Unable to send email message.
13025	NO_EMAIL_CONFIGURED	No email message notification is configured.
13026	WORKSHEET_NOT_FOUND	Specified worksheet was not found.
13027	WORKSHEET_UPDATED_BY_OTHER_SESSION	Specified worksheet being updated was updated in another session.
13031	AGENT_CHANNEL_NOT_PERMITTED	Required agent channel is not enabled by the administrator.
13032	DIALING_LIST_EMPTY	Campaign cannot be started because the dialing list is missing or empty.
13033	NUMBER_NOT_IN_SMS_OPTIN_LIST	Number is not in opt-in list.
13034	SMS_CHAT_WITH_CUSTOMER_EXISTS	Chat with the same number already exists.
13035	SMS_MESSAGE_DELIVERY_FAILED	SMS delivery failed.
13036	EMAIL_ATTACHMENT_ACCESS_FORBIDDEN	Access to e-mail attachment is forbidden.
13037	DRAFT_DOES_NOT_EXIST	Draft does not exist.
13038	CAMPAIGN_IS_NOT_CONFIGURED_FOR_SMS	VCC Campaign does not have outbound SMS settings.
13039	WORKSHEET_ALREADY_EXISTS	Worksheet being created already exists.
13040	SMS_OPEN_DISPOSITION_NOT_ALLOWED	Only closed dispositions allowed for outbound SMS.

Events Subscription Service Errors

Error codes and messages that you may see while making Events Subscription service API calls are listed in the following table:

HTTP Error Code	HTTP Error Message	Application Error Code	Application Error Message
404	NOT_FOUND	EVTSUBSSVC-40400001	No subscriptions found with status: <Id>
404	NOT_FOUND	EVTSUBSSVC-40400002	No subscription found for ID <Id>
404	NOT_FOUND	EVTSUBSSVC-40400003	Schema not found.
500	BAD_REQUEST	-	-
400	BAD_REQUEST	EVTSUBSSVC-40000001	The subscription with ID <Id> is already active
400	BAD_REQUEST	EVTSUBSSVC-40000002	The subscription with ID <d> does not contain delivery directives.
400	BAD_REQUEST	EVTSUBSSVC-40000003	The subscription with ID <Id> has invalid [state] state.

WFO Statistics Service Errors

Error codes and messages that you may see while making WFO Statistics service API calls are listed in the following table.

HTTP Error Code	HTTP Error Message	Application Error Code	Application Error Message
400	BAD_REQUEST	wfosubs-40000001	Subscription <ID> does not contain a delivery directive.
400	BAD_REQUEST	wfosubs-40000002	SubscriptionId in path variable and request body do not match.
400	BAD_REQUEST	wfosubs-40000003	Invalid DeliveryDirective.
400	BAD_REQUEST	wfosubs-40000004	Invalid TimeInterval.
400	BAD_REQUEST	wfosubs-40000005	Invalid StatisticType.
400	BAD_REQUEST	wfosubs-40000006	Invalid GroupBy Field.
400	BAD_REQUEST	wfosubs-40000007	Field validation error.

HTTP Error Code	HTTP Error Message	Application Error Code	Application Error Message
400	BAD_REQUEST	wfosubs-40000008	Field validation error.
404	NOT_FOUND	wfosubs-40400001	Subscription <ID> not found.
409	CONFLICT	wfosubs-40900001	Subscription <ID> is already started.
409	CONFLICT	wfosubs-40900002	Subscription <ID> is already stopped.
503	SERVICE_UNAVAILABLE	wfosubs-50300001	Could not connect to provisioning service.

Use Cases

This chapter contains example method calls for the Five9 Agent and Supervisor REST APIs.

[Agent REST API Examples](#)
[Supervisor REST API Examples](#)

Agent REST API Examples

These examples show the sequence of requests and responses that occur when an agent logs in, selects a station, audio devices, and skills, and changes state. At the end of the sequence, the agent is ready to work.

[Login](#)
[Get the Permissions](#)
[Get the Station](#)
[Get the Login State](#)
[Gets the Options](#)
[Get the Channels](#)

Login

This request logs the user in:

POST /auth/login

This request is also described in [Constructing Requests and Responses](#).

Request

The body of the request is a JSON-formatted structure that contains the agent's credentials and additional options to create a session. The payload type is `application/json`.

Example

```
{
  "passwordCredentials": {
    "username": "syoun@infodev.com",
    "password": "XXXXXXXX"
  },
  "policy": "None"
}
```

Response

A successful response contains detailed information about the domain, the agent, and metadata in an authorization token that is stored in the browser and is used in all subsequent requests during the session.

Example

```
{
  "tokenId": "XXX",
  "orgId": "1",
  "userId": "13368",
  "context": {
    "farmId": "81"
  },
  "metadata": {
    "freedomUrl": "https://qaapp01d.five9lab.com",
    "dataCenters": [
      {
        "name": "SCL",
        "uiUrls": [
          {
            "host": "qaapp01.five9lab.com",
            "port": "443",
            "routeKey": "XXX",
            "version": "1.1714.0"
          }
        ]
      }
    ],
    "apiUrls": [
      {
        "host": "qaapp01.five9lab.com",
        "port": "443",
        "routeKey": "XXX",
        "version": "1.1714.0"
      }
    ]
  }
}
```

```
    ],
    "loginUrls": [
      {
        "host": "qafrm-
login011.scl.five9lab.com",
        "port": "8080",
        "routeKey": "XXX",
        "version": "1.1714.0"
      }
    ],
    "active": true
  }
]
```

Get the Permissions

This request gets the agent permissions:

GET /agents/{agentId}/permissions

Request

The request is a URL without body. The agent's ID is 2345.

Example

```
https://api.five9.com:443/appsvcs/agents/2345/permissions
```

Response

The response contains a JSON-formatted list of the agent's permissions.

Example

```
[
  "CAN_RESET_ABANDON_CALL_RATE",
  "CAN_PLAY_AUDIO_FILES_TO_CALLER",
  "IS_EMAIL_MEDIA_ENABLED",
```

```
"CAN_ACCESS_DASHBOARD",  
...  
]
```

Get the Station

This request gets the station:

GET /agents/{agentId}/station

Request

The request is a URL without body.

Example

```
https://api.five9.com:443/appsvcs/agents/2345/station
```

Response

The response contains a JSON-formatted `StationInfo` structure.

Example

```
StationInfo {  
    "state": "CONNECTING",  
    "stationId": "1097867",  
    "stationType": "SOFTPHONE"  
}
```

Get the Login State

This request gets the login state:

GET /agents/{agentId}/login_state

Request

The request is a URL without body.

Example

```
https://api.five9.com:443/appsvcs/agents/2345/login_state
```

Response

The response contains the JSON-formatted value of `LoginState`. In this case, the agent is selecting skills.

Example

```
{"LoginState":"SELECT_SKILLS"}
```

Gets the Options

This request gets the options:

```
GET /agents/{agentId}/options
```

Request

The request is a URL without body.

Example

```
https://api.five9.com:443/appsvcs/agents/2345/options
```

Response

The response contains a JSON-formatted `AgentOptionsInfostructure`.

Example

```
Response payload: ",{
  "options":["TONE_ON_INCOMING_INBOUND_CALL",
             "TONE_ON_INCOMING_PREVIEW_CALL",
             .
             .
             "ALERT_ON_INCOMING_MESSAGE",
             "ESTIMATED_END_OF_CALL_COUNTER"
            ],
  "userFilter":null
}
```


Get the Channels

This request gets the channels:

```
GET /agents/{agentId}/channels
```

Request

The request is a URL without body.

Example

```
https://api.five9.com:443/appsvcs/agents/2345/channels
```

Response

The response contains a JSON-formatted `ChannelInfo` structure.

Example

```
ChannelInfo {  
    "maxAllowedInteractions": 1,  
    "type": "CALL",  
    "intelligentRouting": false  
}
```

Supervisor REST API Examples

These examples show the sequence of requests and responses that occur when a supervisor logs in, starts a session, and retrieves information.

[Login](#)

[Start a Session](#)

[Get the Queues](#)

[Get the Station](#)

[Get the Login State](#)

[Get the Agents](#)

Login

This request logs the user in:

POST /auth/login

For the method description, see [Logs In the User](#).

Request

The body of the request is a JSON-formatted structure that contains the supervisor's credentials and additional options to create a session. The payload type is `application/json`.

Example

```
Method call: POST
https://api.five9.com:443/appsvcs/rs/svc/auth/login

Body: {"passwordCredentials":
{"username": "Test.User@five9.com", "password": "XXX"}, "appKey": "web-
ui", "policy": "AttachExisting"}
```


Response

A successful response contains detailed information about the domain, the supervisor, and metadata in an authorization token that is stored in the browser and is used in all subsequent requests during the session.

Example

```
{
  "tokenId": "19b45248-fbc0-11e7-b06d-005056909e3f",
  "orgId": "1",
  "userId": "13368",
  "context": {},
  "metadata": {
    "freedomUrl": "https://five9.com",
    "dataCenters": [
      {
        "name": "SCL",
        "uiUrls": [
          {
            "host": "five9.com",
            "port": "443",
```

```
        "routeKey": "XXX",
        "version": "100.344.0"
      },
      {
        "host": "five9.com",
        "port": "443",
        "routeKey": "XXX",
        "version": "100.344.0"
      }
    ],
    "apiUrls": [
      {
        "host": "five9.com",
        "port": "443",
        "routeKey": "XXX",
        "version": "100.344.0"
      },
      {
        "host": "five9.com",
        "port": "443",
        "routeKey": "XXX",
        "version": "100.344.0"
      }
    ],
    "loginUrls": [
      {
        "host": "five9.com",
        "port": "8080",
        "routeKey": "XXX",
        "version": "100.344.0"
      },
      {
        "host": "five9.com",
        "port": "8080",
        "routeKey": "XXX",
        "version": "100.344.0"
      }
    ],
    "active": true
  }
]
},
"roles": [
  "DomainAdmin",
  "DomainSupervisor",
  "Agent",
  "Reporting"
]
```



Start a Session

This request starts a session:

```
PUT /supervisors/{supervisorId}/session_start
```

For the method description, see [Starts a Supervisor's Session](#).

Request

The body of the request is a JSON-formatted structure that contains the options to create a session. The payload type is `application/json`.

Example

```
Method call: PUT
https://api.five9.com:443/supsvcs/rs/svc/supervisors/13368/session_start
Body: {"stationId":"","stationType":"EMPTY"}
```

Response

A successful response is empty.

Get the Queues

This request gets the queues assigned to the supervisor:

```
GET /supervisors/{supervisorId}/skills
```

For the method description, see [Gets the Supervisor's Queues](#).

Request

The request is a URL without body.

Example

```
GET
https://api.five9.com:443/supsvcs/rs/svc/supervisors/13368/skills
```

Response

The response contains a JSON-formatted list of the supervisor's queues.

Example

```
[
  {
    "id": "272",
    "name": "SolutionSales"
  },
  {
    "id": "271",
    "name": "ServiceSupport"
  }
]
```

Get the Station

This request gets the station:

```
GET /supervisors/{supervisorId}/station
```

For the method description, see [Gets the Supervisor's Station](#).

Request

The request is a URL without body.

Example

```
GET
https://api.five9.com:443/supsvcs/rs/svc/supervisors/13368/station
```

Response

The response contains JSON-formatted `StationInfo` structure.

Example

```
{
  "stationId": null,
  "stationType": "EMPTY",
  "state": "DISCONNECTED"
}
```

Get the Login State

This request gets the login state:

```
GET /supervisors/{supervisorId}/login_state
```

For the method description, see [Gets the Supervisor's Login State](#).

Request

The request is a URL without body.

Example

```
GET
https://api.five9.com:443/supsvcs/rs/svc/supervisors/13368/login_
state
```

Response

The response contains the JSON-formatted `LoginState` structure. In this example, the supervisor is working.

Example

```
{ "WORKING" }
```

Get the Agents

This request gets the agents:

```
GET /supervisors/{supervisorId}/agents
```

For the method description, see [Gets Information About all Agents](#).

Request

The request is a URL without body.

Example

```
GET
https://api.five9.com:443/supsvcs/rs/svc/supervisors/13368/agents
```

Response

The response contains a list of JSON-formatted `SupervisorAgentInfo` structures.

Example

```
[
  {
    "id": "128",
    "userName": "jsmith",
    "firstName": "John",
    "lastName": "Smith"
  },
  {
    "id": "138",
    "userName": "sjones",
    "firstName": "Steve",
    "lastName": "Jones"
  },
  ...
]
```