



Projeto Python

Cláudio Ignat 2024332

Pedro Jesus 2024364

André Rosa 2024520

CTeSP Desenvolvimento Software
1ºB






Tema do Projeto - Ollama CLI / GUI

Interface de Linha de Comandos (CLI) e Interface Gráfica (GUI) para interação com o **Ollama** - Uma ferramenta local de Modelos de Linguagem (LLM)

Usando Python e Flask, este projeto permite aos utilizadores:

- Executar e consultar modelos Ollama diretamente a partir do terminal.
- Aceder a uma interface web simples para conversar com os modelos.
- Experimentar diferentes prompts e analisar as respostas geradas pelo modelo.

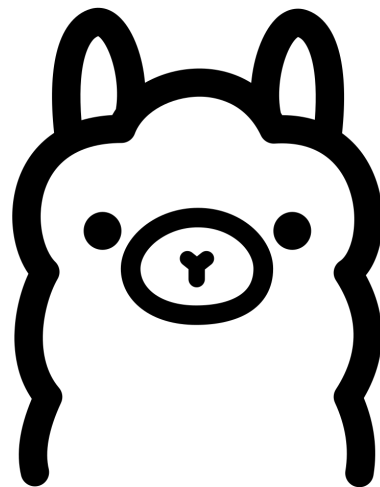



Requisitos


- Ollama instalado localmente (<https://ollama.com/download>)
- Baixar os modelos necessários (Na terminal, *ollama pull mistral*, *ollama pull codellama:7b*)
- Python 3.8 ou superior
- Instalar dependências de Python (Na terminal, *pip install flask requests*)
- Rodar o servidor Flask (Na terminal, *python ollama_web.py*)
- Aceder ao Site: <http://localhost:5000>

Interface de Linha de Comandos (CLI)

```
Windows PowerShell
Iniciando Ollama Web Chat...
Verificações iniciais:
Ollama conectado
Modelos disponíveis: mistral:latest, deepseek-rl:latest
Modelos recomendados instalados: mistral:latest
Modelos recomendados não instalados: codellama:7b
Para instalar:
ollama pull codellama:7b
Modelo mistral disponível
Acesse: http://localhost:5000
* Serving Flask app 'ollama_web'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5000
* Running on http://192.168.1.242:5000
Press CTRL+C to quit
* Restarting with stat
Iniciando Ollama Web Chat...
Verificações iniciais:
Ollama conectado
Modelos disponíveis: mistral:latest, deepseek-rl:latest
Modelos recomendados instalados: mistral:latest
Modelos recomendados não instalados: codellama:7b
Para instalar:
ollama pull codellama:7b
Modelo mistral disponível
Acesse: http://localhost:5000
* Debugger is active!
* Debugger PIN: 103-830-935

127.0.0.1 - - [23/Jul/2025 23:42:36] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [23/Jul/2025 23:42:37] "GET /static/favicon.ico HTTP/1.1" 404 -
127.0.0.1 - - [23/Jul/2025 23:42:40] "GET /models HTTP/1.1" 200 -
Enviando mensagem para mistral...
Resposta recebida em 142.40 segundos
```

Interface Gráfica (GUI)

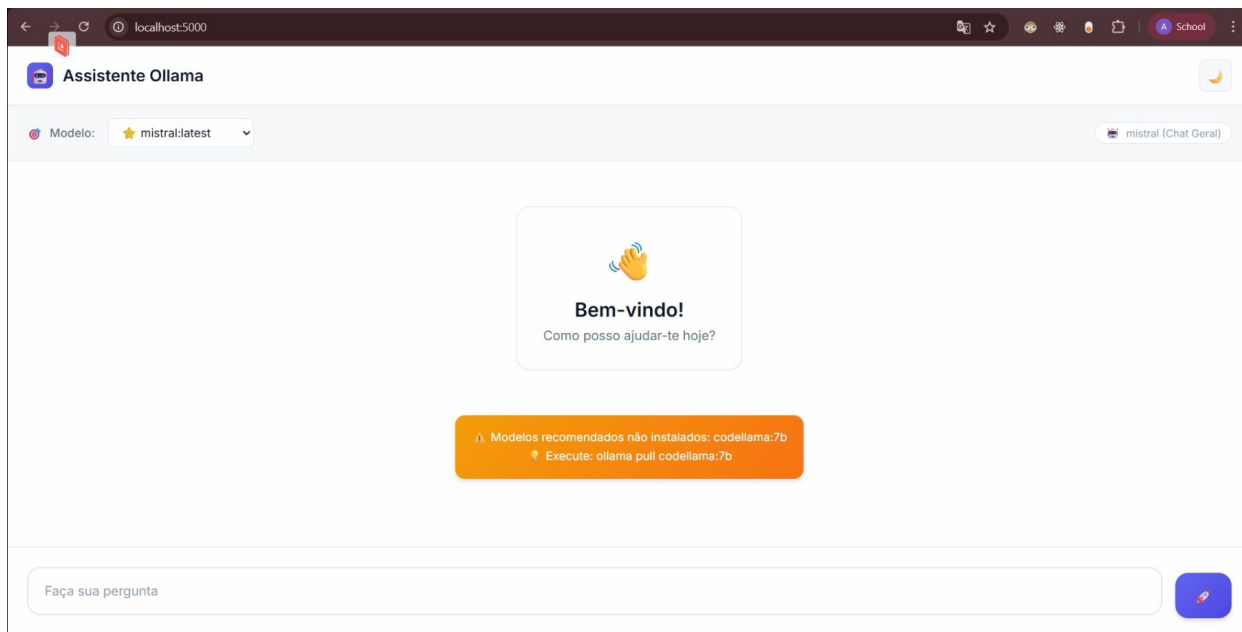



Assistente Ollama



Modelo: 🌟 mistral:latest ▾



mistral (Chat Geral)

Array Invert on Javascript using map

To invert an array (swap the keys and values) in JavaScript, you can use the Map function or the `array.map()` method along with `Object.entries()`. Here's an example:

```
function arrayInvert(arr) {  
  return Object.fromEntries(  
    arr.map(([key, value]) => [value, key])  
  );  
}  
  
let array = [{"k1", "v1"}, {"k2", "v2"}, {"k3", "v3"}];  
console.log(arrayInvert(array));  
// Output: { v1: 'k1', v2: 'k2', v3: 'k3' }
```

In this example, we define a function `arrayInvert()`, which takes an array of arrays (each sub-array contains a key and value), and returns the inverted object. The `Object.fromEntries()` method is used to create an object from an array of key-value pairs. The `map()` method is used to transform each sub-array into an array containing its corresponding key and value swapped.

If you want to work with native JavaScript arrays, you can convert the inverted object back to an array using the spread operator:

```
let invertedObject = arrayInvert(array);  
console.log([...Object.entries(invertedObject)]);  
// Output: [ ['v1', 'k1'], ['v2', 'k2'], ['v3', 'k3'] ]
```

This will give you an array with the keys and values swapped, but as individual arrays instead of objects.

Faça sua pergunta



Assistente Ollama

Modelo: ★ mistral:latest

mistral (Chat Geral)

Array Invert on Javascript using map

To invert an array (swap the keys and values) in JavaScript, you can use the `Map` function or the `array.map()` method along with `Object.entries()`. Here's an example:

```
function arrayInvert(arr) {  
  return Object.fromEntries(  
    arr.map(([key, value]) => [value, key])  
  );  
}  
  
let array = [['k1', 'v1'], ['k2', 'v2'], ['k3', 'v3']];  
console.log(arrayInvert(array));  
// Output: { v1: 'k1', v2: 'k2', v3: 'k3' }
```

In this example, we define a function `arrayInvert()`, which takes an array of arrays (each sub-array contains a key and value), and returns the inverted object. The `Object.fromEntries()` method is used to create an object from an array of key-value pairs. The `map()` method is used to transform each sub-array into an array containing its corresponding key and value swapped.

If you want to work with native JavaScript arrays, you can convert the inverted object back to an array using the spread operator:

```
let invertedObject = arrayInvert(array);  
console.log([...Object.entries(invertedObject)]);  
// Output: [ ['v1', 'k1'], ['v2', 'k2'], ['v3', 'k3'] ]
```

This will give you an array with the keys and values swapped, but as individual arrays instead of objects.

Faça sua pergunta



Assistente Ollama

Modelo: deepseek-r1:latest

deepseek-r1:latest

If you want to work with native JavaScript arrays, you can convert the inverted object back to an array using the spread operator:

```
let invertedObject = arrayInvert(array);
console.log([...Object.entries(invertedObject)]);
// Output: [ ['v1', 'k1'], ['v2', 'k2'], ['v3', 'k3'] ]
```

This will give you an array with the keys and values swapped, but as individual arrays instead of objects.

Modelo alterado para deepseek-r1:latest. Conversa reiniciada.
🔥 Modelo carregado com sucesso

Quem és tu?

I am your helpful assistant powered by DeepSeek-R1. 😊

You can think of me as an AI companion here to answer your questions, provide information, or simply chat about anything you're curious about.

If you need help with writing, translating languages, understanding complex topics, solving problems, or just want a friendly conversation—I'm here for that!

What would you like to talk about today?

Faça sua pergunta

