

Deploying your app

Upgrade and install software

(1/2)

- Start a terminal window on your computer
- Take note of the **external-address** of the VM (something like 129.192.82.44)
- Locate your private key and move it to the source folder for the project
- Fix file-permissions for the key:

```
chmod 600 ./test-key.pem
```

- Remote login to the VM using its external address:

```
ssh -i ./test-key.pem ubuntu@external-address
```

Tip! Use <https://tldr.inbrowser.app/> to learn what the various commands do

Upgrade and install software

(2/2)

— Update and install required software on the VM:

```
sudo apt update
```

```
sudo apt-get install python3 python3-pip python3-venv
```

```
python3 -m venv .venv
```

```
source .venv/bin/activate
```

```
pip install --upgrade pip
```

```
pip install python-openstackclient Flask
```



— Log out of the VM:

```
exit
```

Tip! Use <https://tldr.inbrowser.app/> to learn what the various commands do

Prepare the API credentials

- Log into Xerces <https://xerces.ericsson.net>
- Download the clouds.yaml file from the API Access page
- Move the clouds.yaml file to your working directory
- Add your password to clouds.yaml as shown in the figure

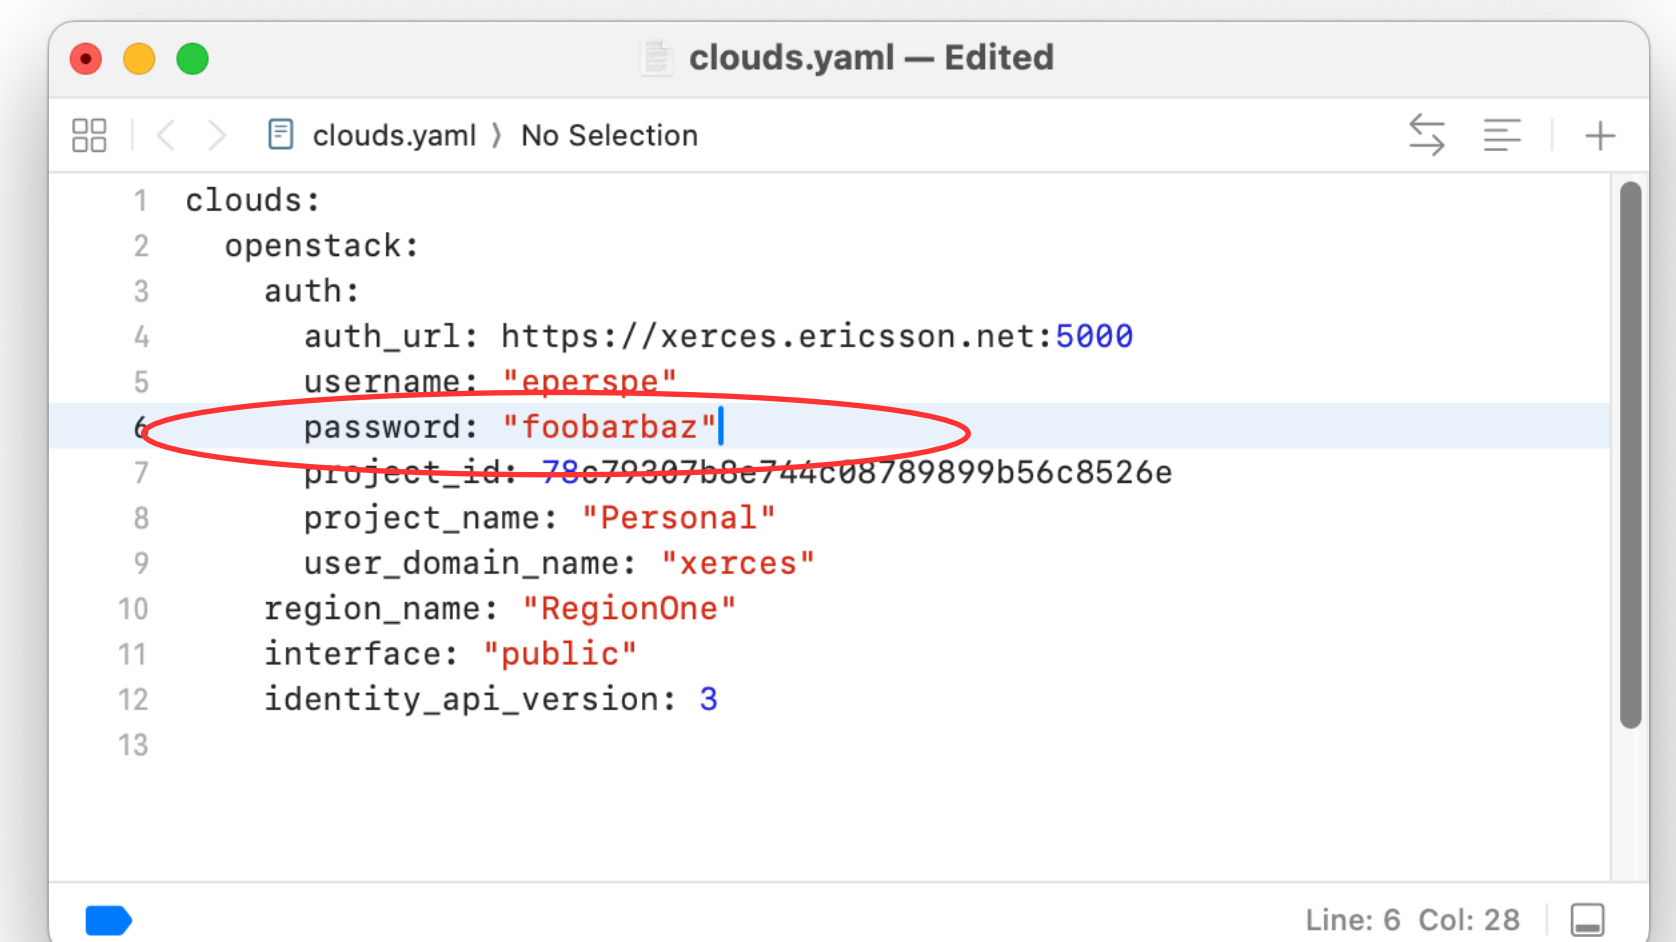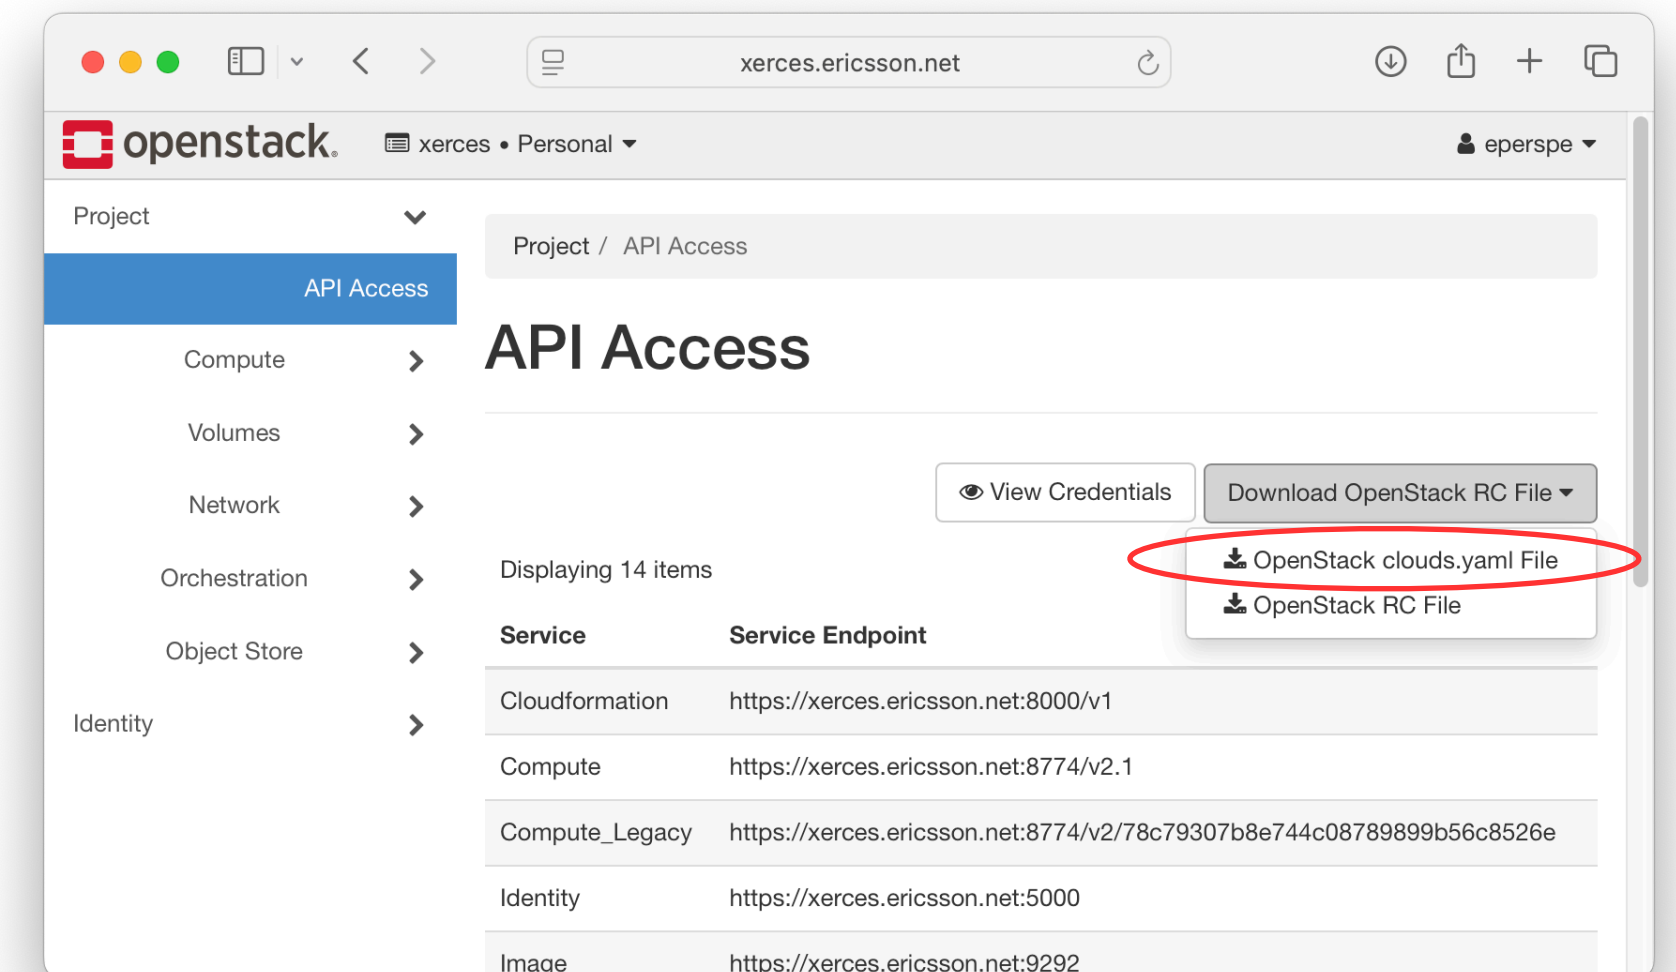

Upload and test your service

(1/2)

— Copy files to the VM using its **external address** (assuming the files are in the service/ directory):

```
scp -i ./test-key.pem -r service/ ubuntu@external-address:.
```

— Copy the API credentials to the VM:

```
scp -i ./test-key.pem clouds.yaml ubuntu@external-address:.
```

— Login to the VM:

```
ssh -i ./test-key.pem ubuntu@external-address
```

Tip! Use <https://tldr.inbrowser.app/> to learn what the various commands do

Upload and test your service

(2/2)

- Move clouds.yaml to ~/.config/openstack/clouds.yaml so it will be detected

```
mkdir -p ~/.config/openstack/  
mv clouds.yaml ~/.config/openstack/.
```

- Activate the virtual environment and start the server (for the demo project):

```
source .venv/bin/activate  
python3 service/flaskApp.py
```

- Point a web browser to http://external-address:5000 and reload a few times to verify that the count increases
- If it works, press Ctrl-C to stop the server and get to the prompt

Tip! Use <https://tldr.inbrowser.app/> to learn what the various commands do