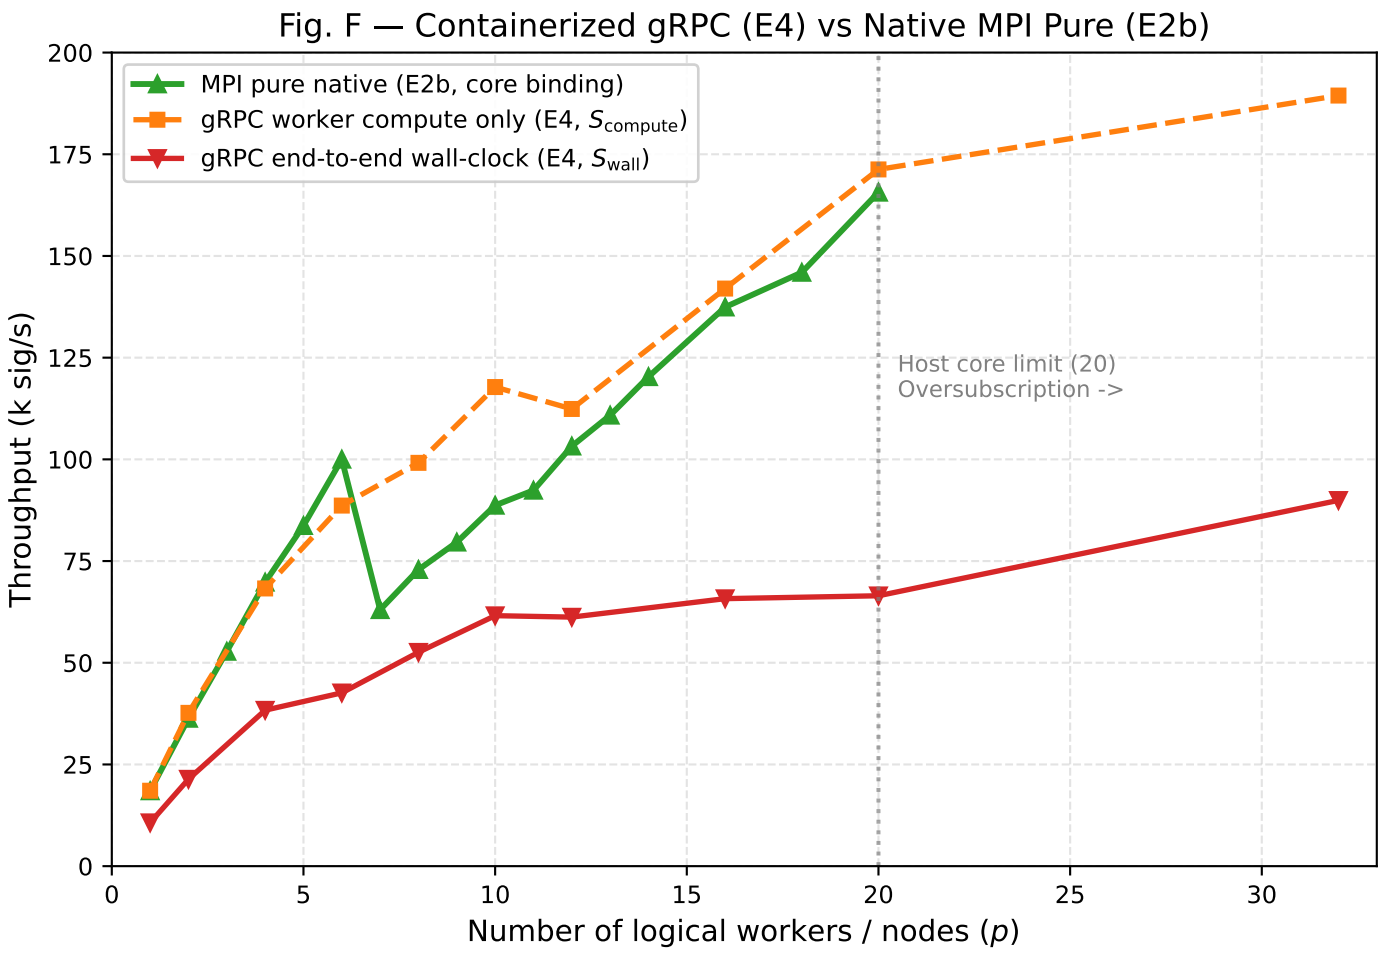
Fig. F — Containerized gRPC (E4) vs Native MPI Pure (E2b)
MPI pure native (E2b, core binding)
gRPC worker compute only (E4, $S_{compute}$)
gRPC end-to-end wall-clock (E4, S_{wall})
Host core limit (20)
Oversubscription ->
Throughput (k sig/s)
Number of logical workers / nodes (p)
0
25
50
75
100
125
150
175
200
0
5
10
15
20
25
30