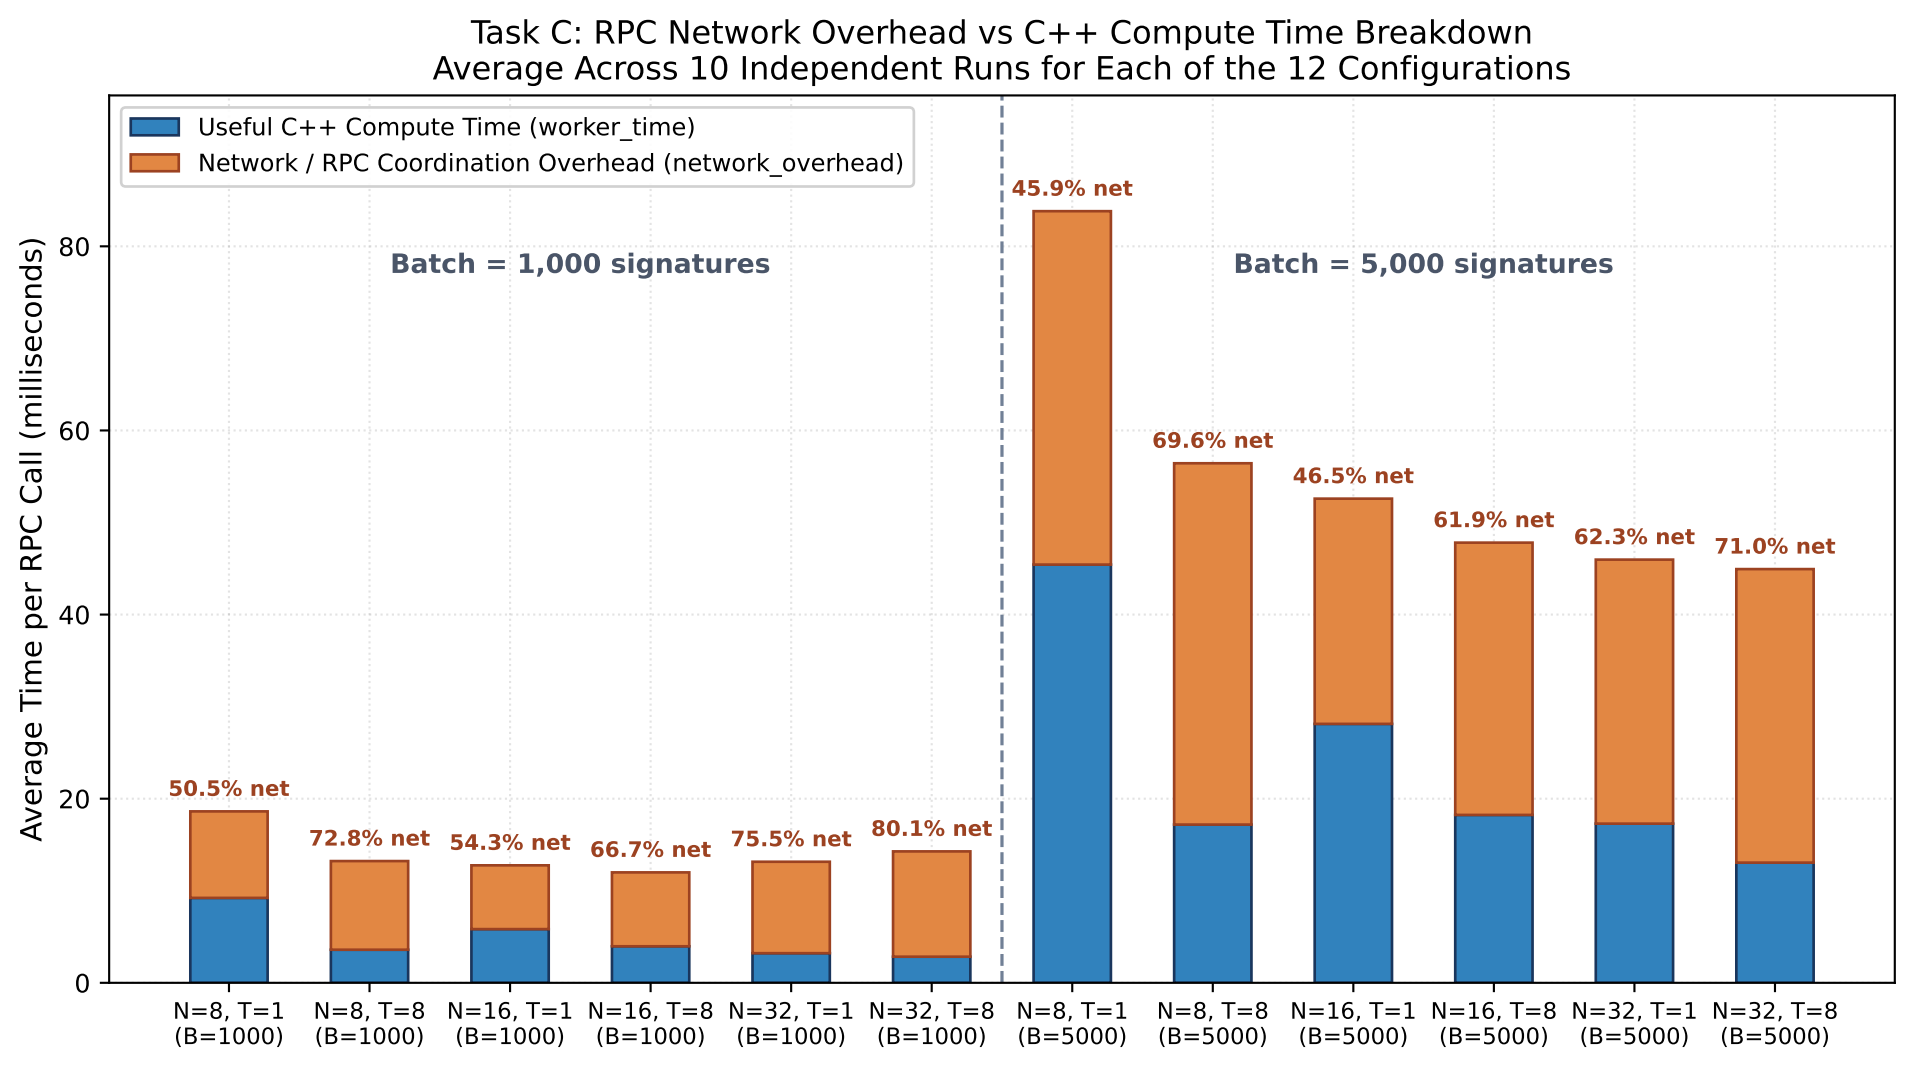
Task C: RPC Network Overhead vs C++ Compute Time Breakdown
Average Across 10 Independent Runs for Each of the 12 Configurations
Useful C++ Compute Time (worker_time)
Network / RPC Coordination Overhead (network_overhead)
Batch = 1,000 signatures
Batch = 5,000 signatures
Average Time per RPC Call (milliseconds)
0
20
40
60
80
50.5% net
72.8% net
54.3% net
66.7% net
75.5% net
80.1% net
45.9% net
69.6% net
46.5% net
61.9% net
62.3% net
71.0% net
N=8, T=1 (B=1000)
N=8, T=8 (B=1000)
N=16, T=1 (B=1000)
N=16, T=8 (B=1000)
N=32, T=1 (B=1000)
N=32, T=8 (B=1000)
N=8, T=1 (B=5000)
N=8, T=8 (B=5000)
N=16, T=1 (B=5000)
N=16, T=8 (B=5000)
N=32, T=1 (B=5000)
N=32, T=8 (B=5000)