

Impostazione del Runtime Environment

È necessario disporre dell'edizione "for Enterprise"

Eclipse IDE 2020-03 R Packages

**Eclipse IDE for Java Developers**
196 MB 86,914 DOWNLOADS
The essential tools for any Java developer, including a Java IDE, a Git client, XML Editor, Mylyn, Maven and Gradle integration

**Eclipse IDE for Enterprise Java Developers (includes Incubating components)**
400 MB 68,695 DOWNLOADS
Tools for developers creating Java Enterprise and Web applications, including a Java IDE, tools for Web Services, JPA and Data Tools, JSF, Mylyn, Maven and Gradle, Git, and more.
[Click here to file a bug against Eclipse Web Tools Platform.](#)
[Click here to file a bug against Eclipse Platform.](#)
[Click here to file a bug against Maven integration for web projects.](#)
[Click here to report an issue against Eclipse Wild Web Developer \(incubating\).](#)


Get **Eclipse**
Install your
Windows 64-bit
Mac Cocoa 64-bit
Linux 64-bit
Download
Download P

RELATED

- Comp
- Packa
- New a
- Install
- Docum
- Updati
- Forum

Aggiungere un nuovo Runtime Environment


Nelle preferenze del workspace (Window > Preferences), selezionare l'opzione "Server", quindi "Runtime Environments".

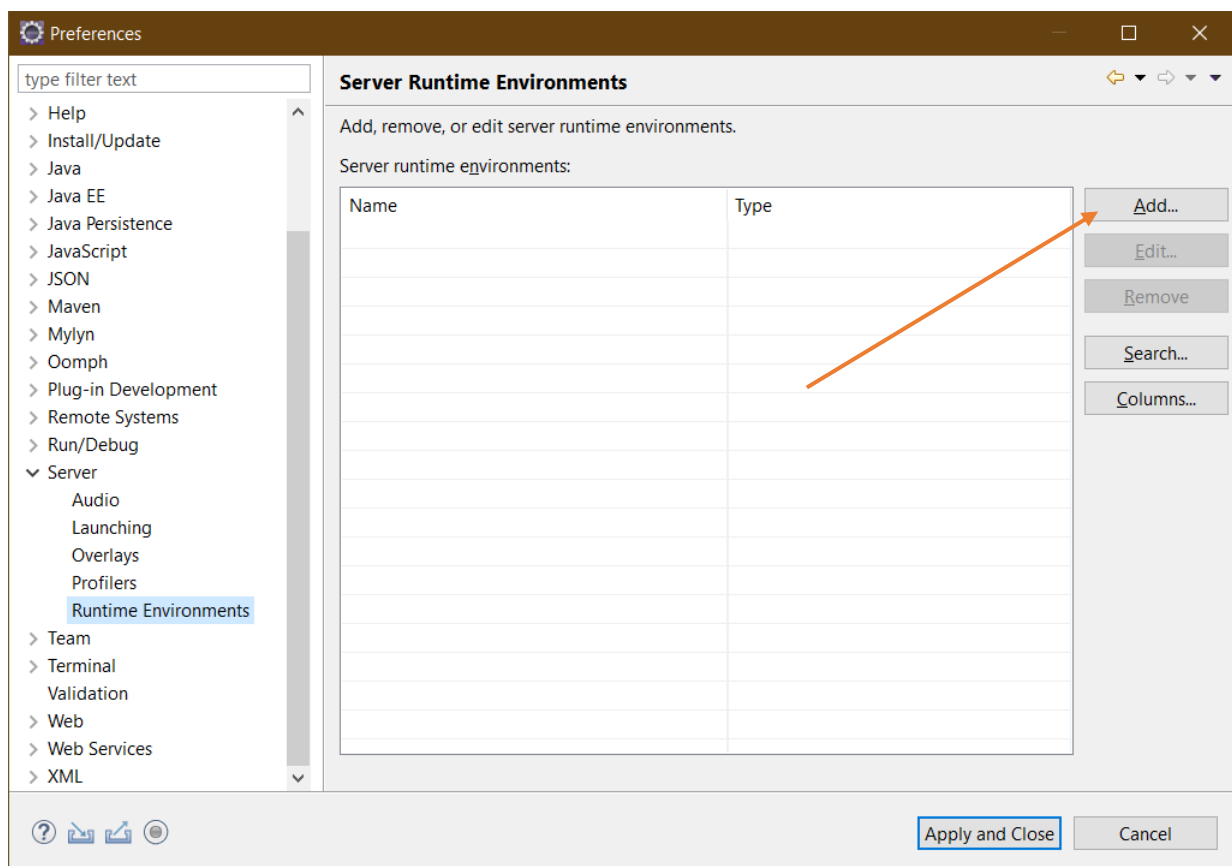

Premere il pulsante "Add".

Selezionare il tipo di runtime

Dopo aver scaricato un EE Server (per esempio Apache Tomcat) ed averlo scompattato in una cartella sul proprio computer, dalla finestra di dialogo di definizione di un nuovo “Runtime Environment”, selezionare produttore e prodotto in base al server scaricato.

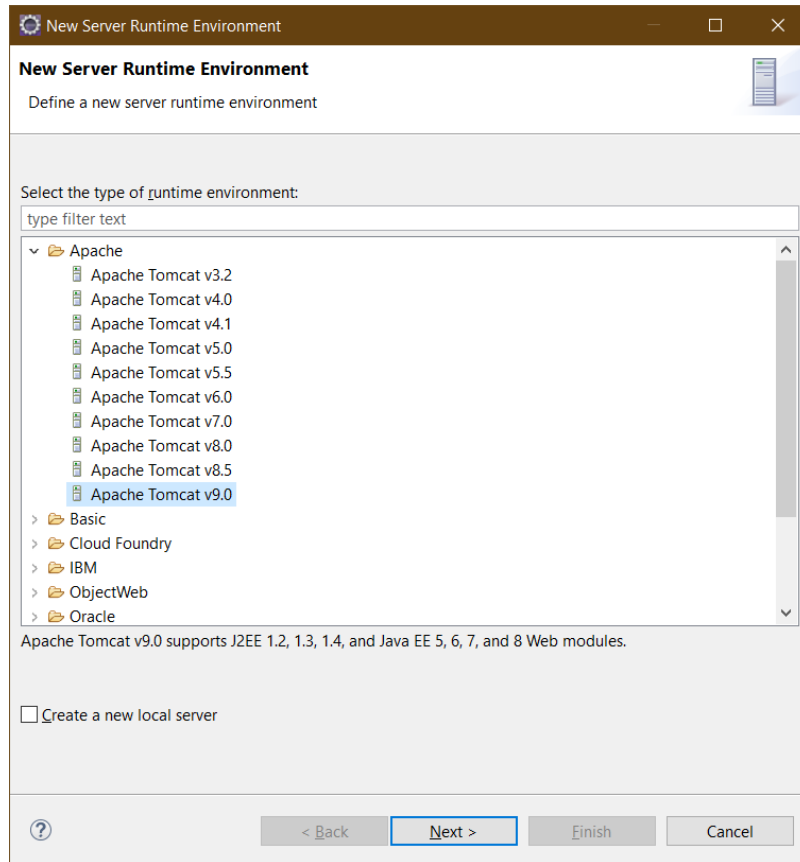

Individuare la cartella di installazione

