

a) Directed transaction multigraph and cycle tasks

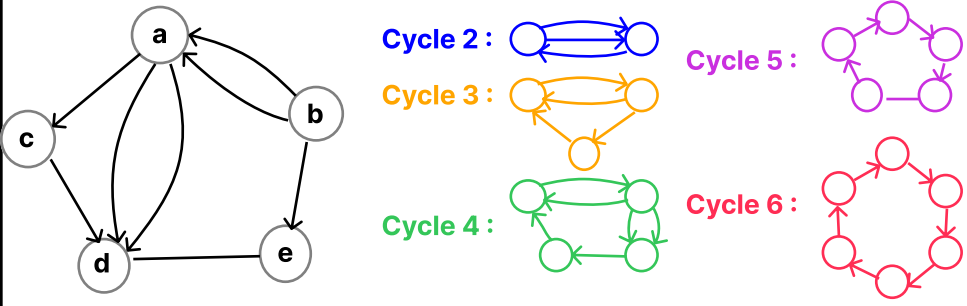


Repeated directed transactions between the same pair of nodes create parallel edges, yielding a directed **multigraph.**

b) q-controlled supervision heterogeneity

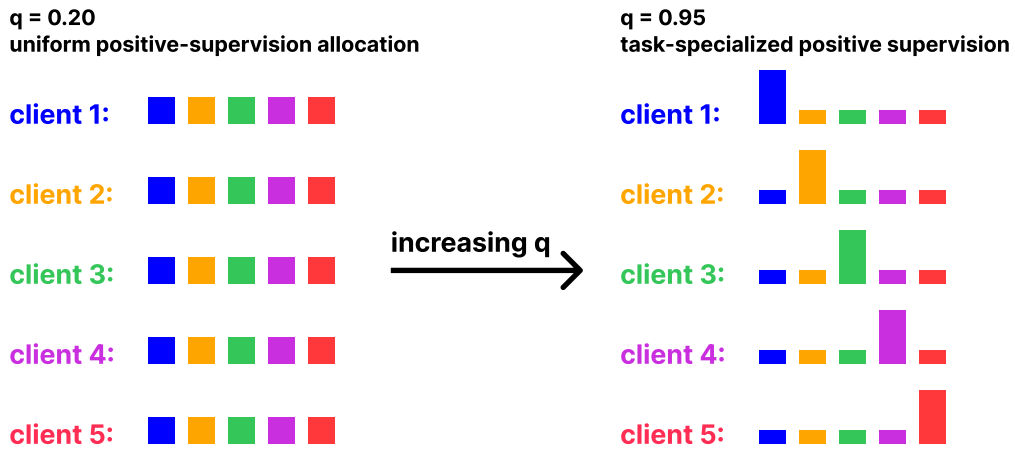

All clients predict all five tasks; bar height indicates the target share of visible positive supervision.

c) From client-level to task-specific routing

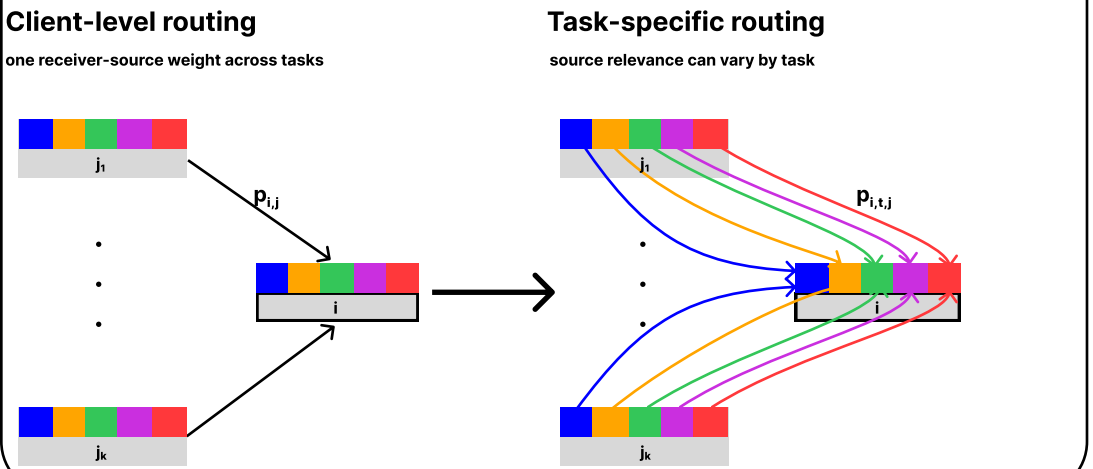

d) Support-aware task-specific routing

Example: Cycle-4 routing

