

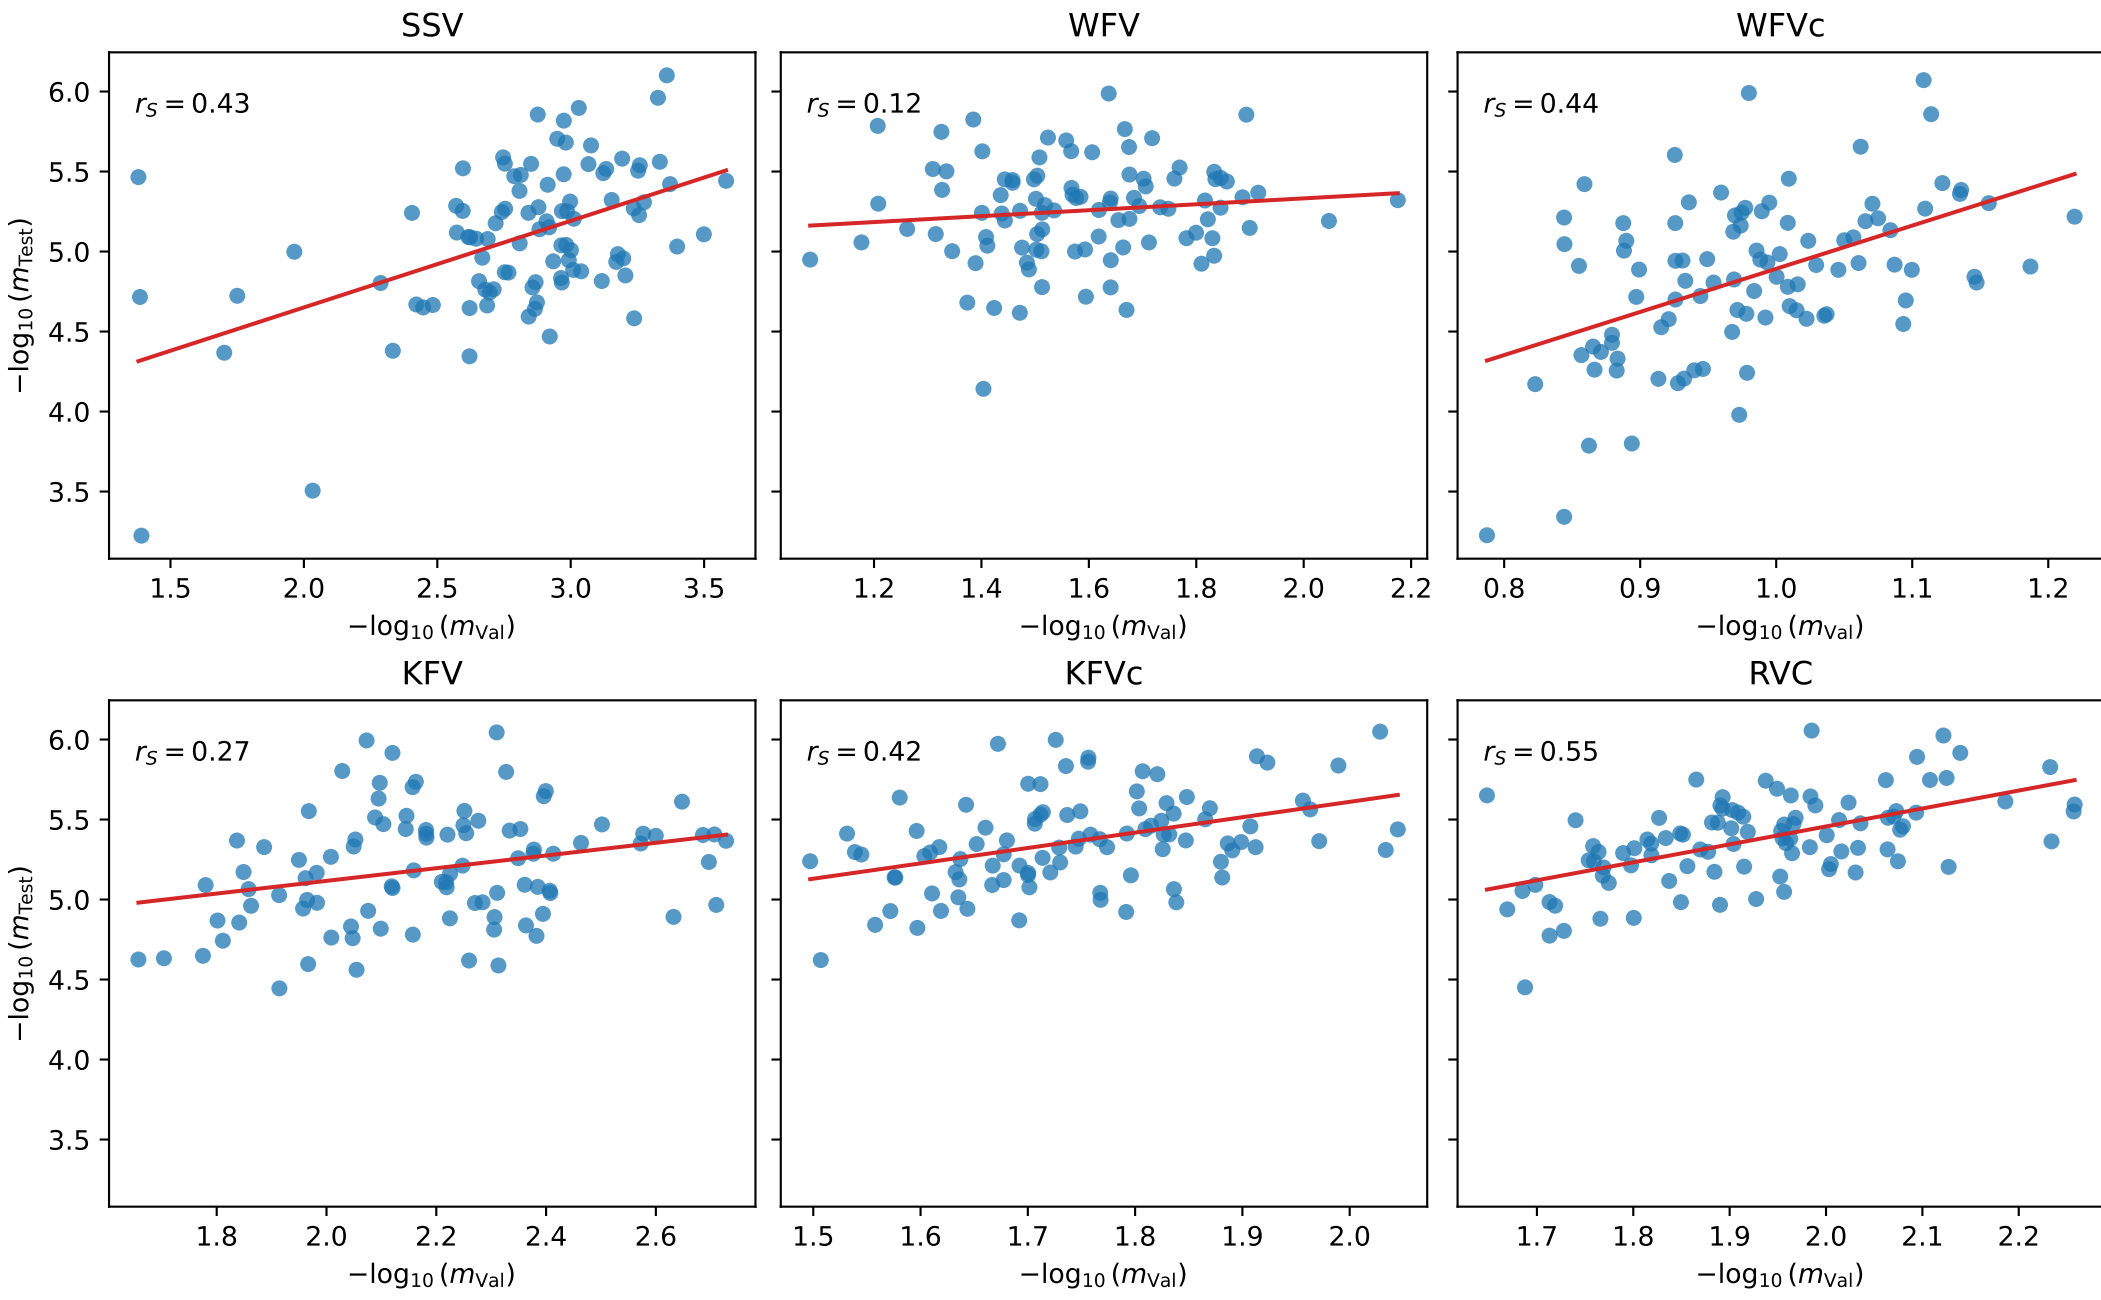


Lorenz 63, long dataset (24 LT), 96 reservoir seeds -- cf. Racca & Magri (2021) Fig. 8

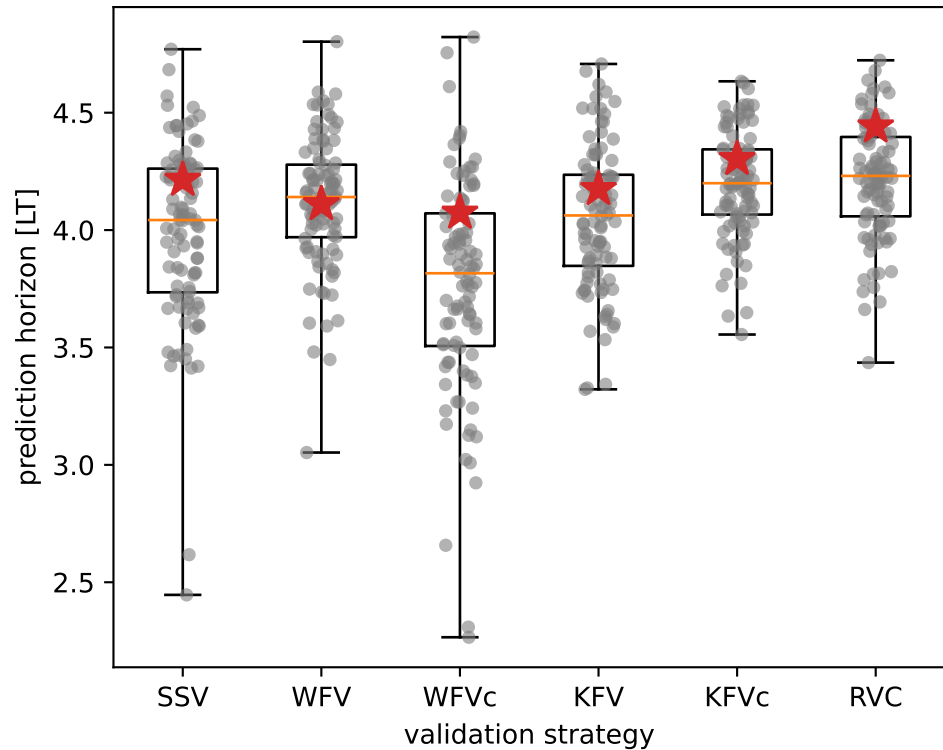

Lorenz 63, long dataset, ensemble of 96 reservoir seeds (50 test windows each)

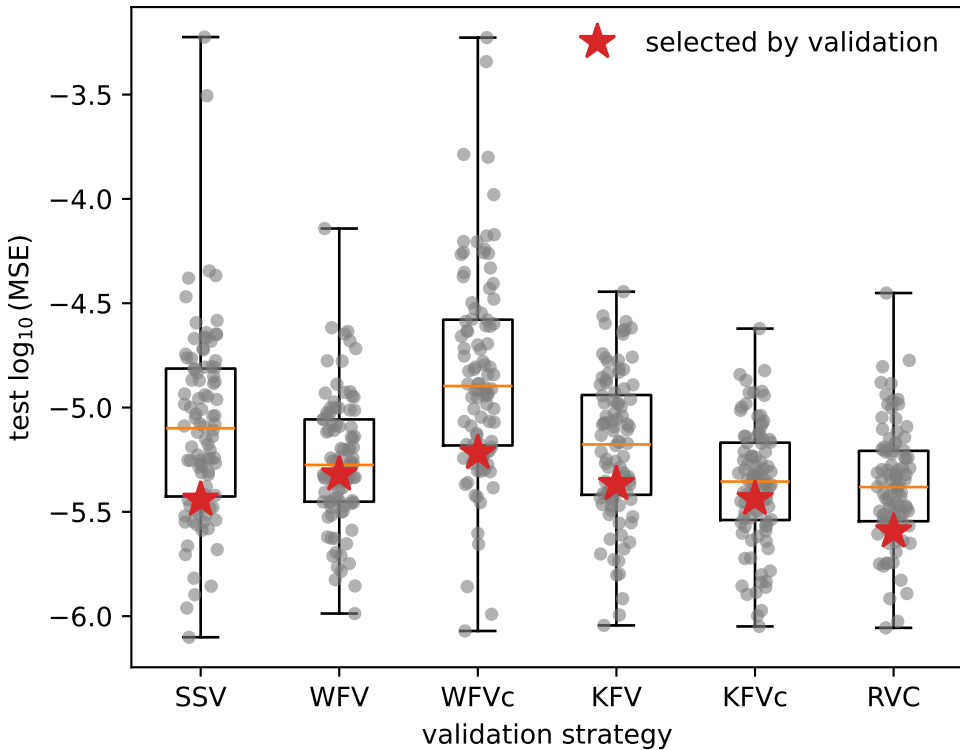

Spearman rank correlation r_S between m_Val and m_Test (96 reservoir seeds):

dataset	SSV	WFV	WFVc	WFVc*	KFV	KFVc	RVC
short	0.38	0.23	0.32	-	0.45*	0.13	0.40
long	0.43	0.12	0.44	-	0.27	0.42	0.55*

(* marks the row maximum; WFVc* is the paper's supplementary variant, not implemented)

Ensemble run: best of 96 seeds by validation score (the member `train(n_seeds=...)` keeps) vs the ensemble:

dataset	strategy	log10 m_test	median	beaten by	PH [LT]	median
short	SSV	-5.30	-4.96	10%	4.28	3.90
short	WFV	-5.15	-4.70	16%	4.38	3.68
short	WFVc	-5.23	-4.92	21%	4.35	3.81
short	KFV	-5.43	-4.98	9%	4.29	3.92
short	KFVc	-5.51	-5.11	4%	4.31	4.02
short	RVC	-5.85	-5.07	0%	4.61	4.06
long	SSV	-5.44	-5.10	24%	4.21	4.04
long	WFV	-5.32	-5.28	43%	4.11	4.14
long	WFVc	-5.22	-4.90	21%	4.07	3.82
long	KFV	-5.37	-5.18	35%	4.17	4.06
long	KFVc	-5.44	-5.35	36%	4.30	4.20
long	RVC	-5.59	-5.38	18%	4.44	4.23

('beaten by' = share of members with lower test error than the selected one; 0% = validation picked the true best)