

# Cited References Explorer (CRExplorer) Manual

(for Version 2.0 from May 2026)



## Software Development

Andreas Thor

HTWK Leipzig University of Applied Sciences

Zschochersche Str. 69

04299 Leipzig, Germany

Email: andreas.thor@htwk-leipzig.de

Marc Indelen

Sudetenstr. 31

85586 Poing, Germany

Email: marc@indelen.de

## Content Development

Lutz Bornmann

Science Policy and Strategy Department

Administrative Headquarters of the Max Planck Society  
Hofgartenstr. 8  
80539 Munich, Germany  
Email: bornmann@gv.mpg.de

Robin Haunschild  
Max Planck Institute for Solid State Research  
Heisenbergstr. 1  
70569 Stuttgart, Germany  
Email: R.Haunschild@fkf.mpg.de

**With further support of (alphabetically ordered)**

Loet Leydesdorff  
Amsterdam School of Communication Research (ASCoR)  
University of Amsterdam  
P.O. Box 15793  
1001 NG Amsterdam, The Netherlands  
Email: loet@leydesdorff.net

Werner Marx  
Max Planck Institute for Solid State Research  
Information Service  
Heisenbergstrasse 1  
70506 Stuttgart, Germany  
Email: w.marx@fkf.mpg.de

Rüdiger Mutz  
Universität Zürich  
Center for Higher Education and Science Studies  
Plattenstrasse 54  
8032 Zurich, Switzerland  
Email: ruediger.mutz@uzh.ch

# Introduction

The program CRExplorer can be used to analyse the cited references (CRs) data in a publication set retrieved from Web of Science (WoS) or other data sources. The program produces empirical results in a graphical or table format that can be included in papers or presentations (Thor et al., 2016a, 2016b). It is written in the Java programming language and, thus, runs on most hardware and operating system platforms. A Java variant with JavaFX (e.g., Oracle Java) is needed. The minimum required Java version is 21. The program can be used free of charge.

The program can be started from the command line. The user should go to the folder where the downloaded file `crexplorer.jar` is located and run:

```
java -jar crexplorer.jar
```


The program was primarily developed to identify those publications in fields, of topics, or by researchers which have been most frequently referenced. It is especially suitable to study the historical roots of fields, topics, or researchers by Reference Publication Year Spectroscopy (RPYS, e.g., Barth et al., 2014; Marx et al., 2014). RPYS was introduced by Marx et al., 2014 and “is based on the analysis of the frequency with which references are cited in the publications of a specific research field in terms of the publication years of these CRs. The origins show up in the form of more or less pronounced peaks mostly caused by individual publications that are cited particularly frequently” (p. 751). Many RPYS studies using CRExplorer have been published in recent years: A search in the WoS found more than 150 papers applying the method [date of search with `'ts = (RPYS or "reference* publication year* spectroscopy" or "cited reference" analysis" or CRExplorer)'` : 12 March 2026].

As support for collecting the complete set of publications on a topic or on a specific field, the user can inspect the documents which are listed by members of groups in Mendeley (see [www.mendeley.com](http://www.mendeley.com)). For example, there exists an altmetrics group listing most of the publications on this topic. CRExplorer reads, analyses, and edits the CRs of the collected publications which are previously retrieved from WoS, Scopus (Elsevier), or other sources. In order to analyze the CRs, the user can consult (1) a graph for identifying most frequently cited reference publication years (RPYs) and (2) a table of CRs which account for specific RPYs. Field-normalization of citation impact measurement is ensured in the analysis by the first step of the CRs analysis: the selection of the publication set on which citation impact is measured.

CRExplorer includes a disambiguation feature which clusters and merges variants of the same CR. This means that the program can also be used as a tool for preparing CR data for other programs, e.g., VOSviewer ([van Eck & Waltman, 2010](#)) or metaknowledge ([McLevey & McIlroy-Young, 2017](#)). For this purpose, the data are exported in WoS or Scopus format and imported in other programs for further processing. Furthermore, the data can be transferred from one format into another: Imports from Scopus can be exported as WoS files and imports from WoS can be exported as Scopus files ([Thor et al., 2016b](#)).

## Example – analyzing the discovery of the *greenhouse effect*

For demonstrating the potential of CRExplorer, Figure 1 shows the citation classics concerning the discovery of the *greenhouse effect*, a basic component of climate change. As dataset, we downloaded from the Web of Science 3,244 publications containing the term *greenhouse effect* in the title or in the abstract or as a keyword (date of searching: October 27th, 2016; analyses using more recent datasets yield similar results because we focus on citation classics). These papers contain 81,126 cited references (CRs) to publications which have appeared over 379 years. Figure 1 – as produced by CRExplorer – shows three distinct peaks during the 19th century and a few further peaks during the first half of the 20th century.

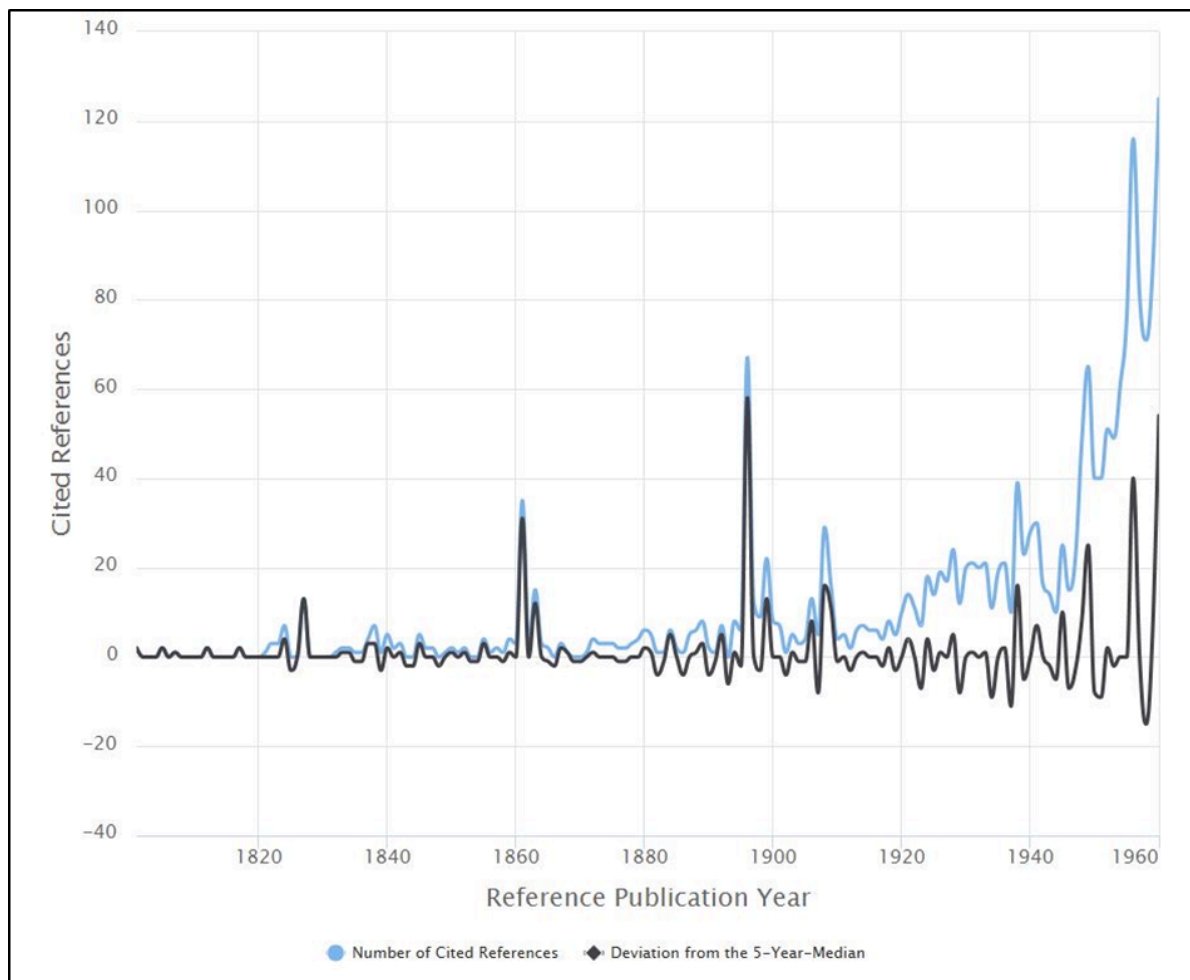

*Figure 1. Citation classics concerning the discovery of the greenhouse effect and appearing as peaks in the spectrogram provided by CRExplorer*

The first three pronounced peaks go back to the following publications: [Fourier's \(1827\)](#) paper, entitled "Mémoire sur les températures du globe terrestre et des espaces planétaires", can be seen as the first decisive publication. Fourier found that the earth is warmer than expected. He attributed this to the phenomenon that the earth's atmosphere is transparent for solar radiation but not for the infrared radiation from the ground. Thus, he discovered the (natural) greenhouse effect. [Tyndall's \(1861\)](#) study, entitled "On the absorption and radiation of heat by gases and vapours, and on the physical connexion of radiation, absorption, and conduction", proved that the earth's atmosphere has a greenhouse effect. He concluded that water vapour is the principal gas controlling air temperature. [Arrhenius \(1896\)](#), entitled "On the influence of carbonic acid in the air upon the temperature of the ground", is the first study with a calculation of how changes in the levels of carbon dioxide in the atmosphere can alter the surface temperature through the greenhouse effect.

The subsequently following peaks can be assigned to the works of [Chamberlin \(1899\)](#), [Arrhenius \(1908\)](#), [Callendar \(1938, 1949\)](#), and [Plass \(1956\)](#): [Chamberlin \(1899\)](#) proposed the possibility that changes in climate could result from changes in the concentration of atmospheric carbon dioxide – thereby supporting the theory of [Arrhenius \(1908\)](#). The book by [Arrhenius \(1908\)](#) was directed at a general audience. [Callendar \(1938\)](#) developed the first complete theory of climatic change and stated in 1938 that carbon dioxide caused the warming trend of the preceding decades (see also [Callendar, 1949](#)). He presented evidence that both temperature and the CO<sub>2</sub> level in the atmosphere had been rising over the past half-century. [Plass \(1956\)](#) calculated the transmission of radiation through the earth's atmosphere and predicted that doubling the CO<sub>2</sub> level would bring a 3-4 °C rise. He was the first to use a computer for climate modeling.

The small study about the discovery of the *greenhouse effect* demonstrates that the analysis of CRs using CRExplorer is able to identify early citation classics in the climate change literature. These classics deal with the possibility that climatic change results from changes in the concentration of atmospheric carbon dioxide. RPYS reveals that the discovery of the earth's greenhouse effect and the role of carbon dioxide and water vapor as greenhouse gases are no recent findings, but dates back to the beginning of the nineteenth century.

# User Interface

The screen of CRExplorer has two parts (see Figure 2): **data visualization** on the left side of the screen and **table view** on the right side. The **status bar** informs continuously about the number of (shown) CRs, the number of clusters, and the range of RPYs (cited publications) and PYs (citing publications).

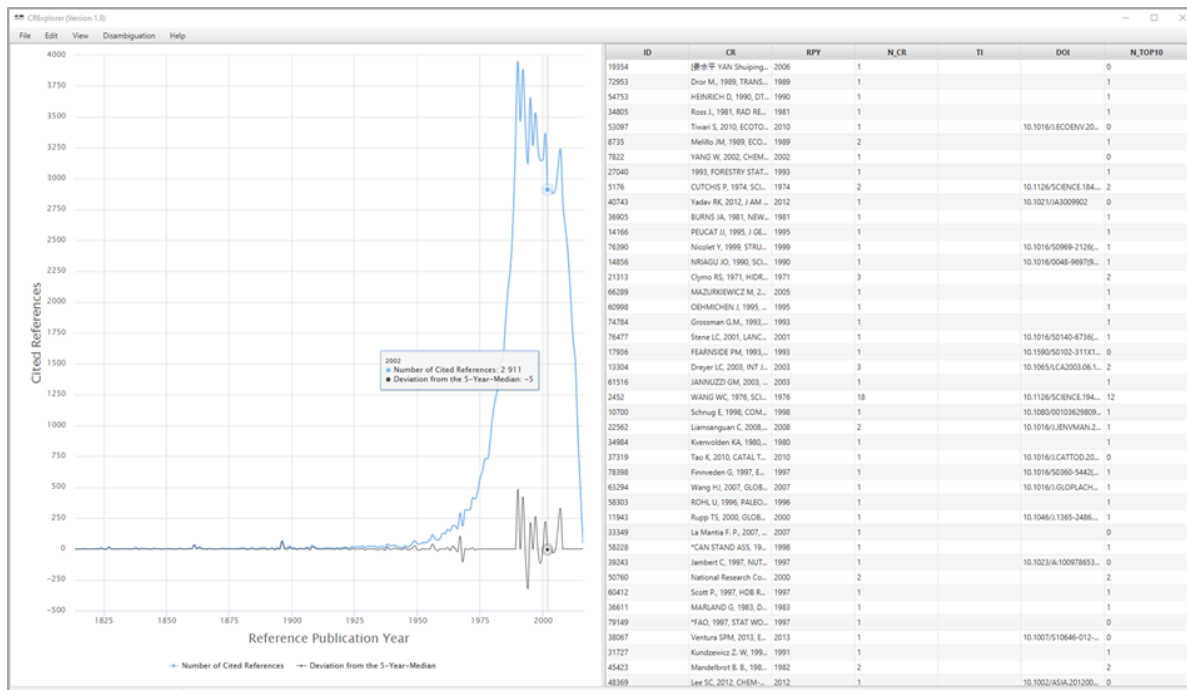


Figure 2. Screenshot of CRExplorer

## Data visualization

The visualization on the screen shows the number of CRs per RPY as **JFreeChart** or **HighCharts** (see Figure 2). One of these chart types can be chosen by the user (see section 4.1). Furthermore, the figure visualizes the deviation of the number of CRs in each year (Y) from the median for the number of CRs in the X previous, the current, and the X following years (X can be set under Settings, see section 4.1.6). The default is the deviation from the 5-Year-Median ( $Y-2$ ;  $Y-1$ ;  $Y$ ;  $Y+1$ ;  $Y+2$ ). This deviation from the X-year median provides a curve smoother than the one in terms of absolute numbers. If there is no CR in a specific RPY, the number of CRs of this RPY is set to zero

for the calculation of the deviation from the median. Using the X-year median deviation curve, peaks in the data can be identified more easily than with the number of CRs curve, since each year is compared with its adjacent years.

Hovering the mouse cursor over a data point on one of the curves in the graph opens a small pop-up window showing the corresponding RPY, the sum of the CRs in this year (**Number of Cited References**), and the **Deviation from the X-Year Median**. Thus, the years of peaks in the curves and their impact can be identified easily.

By clicking on **Number of Cited References** or **Deviation from the X-Year Median**, respectively, the corresponding curve in the graph appears or disappears.

Using the mouse (and pressing simultaneously the control button), one can mark an area on the graph and restrict the visualized graph to the marked area. The user can recall the initial graph (and thus dissolve any changes) by right-clicking on the graph or by clicking on the button **Reset zoom**. This can also be accomplished via the **View** menu, see section 4.3.

## Table view

The table lists all CRs included in the analysis: The table initially shows the CRs as found in the WoS or another dataset. The data in the columns of the table can be sorted in ascending or descending order. It is also possible to sort by multiple columns: For example, if one wants to sort by column X and then by column Y, click firstly on column Y and then on column X.

To show all bibliographic details of a specific CR, select it in the table, and press the space bar. Four areas of columns can be distinguished:

### 1) Cited References

- **ID**: Every CR receives a unique identification number (column ID).
- **CR (Cited Reference)**: Original CR from the imported dataset.
- **RPY (Reference Publication Year)**: Publication year of the CR.
- **N\_CR (Number of Cited References)**: The number of times the CR has been cited.
- **AU (Author)**: First author.
- **AU\_A**: All author names if available in the input file, e.g., from Scopus.
- **AU\_L (Last Name)**: Last name of the first author.
- **AU\_F (First Name Initial)**: Initial of the first name of the first author.
- **J (Source)**: Showing journal title, volume, issue, and first page in case of journal papers. Other information is shown in case of other document types.



- **J\_N (Source Title):** Showing mostly the journal title or the abbreviated book title. Other information is shown in case of other document types.
  - **J\_S (Title Short):** The column contains the first letters of the words in Source title if there is more than one word. If there is only a single word, this word appears here.
  - **VOL (Volume):** Volume of the CR.
  - **PAG (Page):** First page of the CR.
  - **DOI:** DOI of the CR.
- 

## 2) Indicators

- **PERC\_YR (Percent in Year):** The proportion of the number of times a CR has been cited among the number of all CRs in the same RPY.
- **PERC\_ALL (Percent over all Years):** The proportion of the number of times a CR has been cited among the number of CRs over all RPYs.
- **N\_PYEARS (Number of Citing Years):** Several CRs are cited in more than one publication with different publication years. N\_PYEARS shows the number of different publication years in which the CR has been cited.
- **PERC\_PYEARS (Percentage of Citing Years):** The publication set which is analyzed by CRExplorer includes as a rule publications from different publication years. PERC\_PYEARS shows the percentage of years (citing years), in which the CR was cited at least once. Thus, N\_PYEARS is divided by the maximal number of citing years (i.e., all publication years with at least one mention of a CR from the specific RPY).
- **N\_TOP50, N\_TOP25, N\_TOP10 (top 50%, 25%, 10% Cited Reference):** These indicators can be used to identify those CRs which have been cited more frequently in the citing years than other CRs in the dataset ([Thor, et al., 2018](#)). In order to identify these CRs, thresholds are computed which identify the top 50%, top 25%, and top 10% in one citing year. In the first step of the computation, the citations in one citing year are sorted in ascending order. In the second step, the thresholds for the top 50%, 25%, and 10% are determined in a given year. In the third step, those CRs are identified which are above the three thresholds. In the fourth step, the numbers of citing years are counted in which the CRs are above the thresholds. These numbers yield N\_TOP50, N\_TOP25, and N\_TOP10.
- **Sequence and Type:** In order to identify statistically the citation dynamic of CRs over time, we apply Configural Frequency Analysis (CFA, [Stemmler, 2014](#); [von Eye, 2002](#)). CFA is a categorical statistical procedure to reveal configurations in multivariate cross-classifications (i.e., contingency tables). CRExplorer cross-classifies the CRs for a certain RPY and the publication year for the citing publications. In the case of systematic citation dynamics (e.g., if

a publication belongs to the “sleeping beauty” type) citations in the cells deviate strongly from the expected values. Expected values are cell frequencies, which would occur if there is no relationship between or independency of the row (CRs) and the column variable (publication year). The approach of calculating expected values and deviations from these values is explained in detail in [Thor et al., 2018](#)).

To reveal specific sequences over time, CRs are considered with on average (“0”;  $z=1$ ), above average (“+”;  $z>1$ ), and below average (“-”;  $z<-1$ ) citation impact in citing years. For example, the sequence [---+++000] means that the CR has been cited below average in the first three citing years, above average in the next three years, and on average in the last three citing years. Based on the sequences, types of CRs in terms of different citation dynamics or sequences of symbols (“+”, “-”, “0”) are identified, which are labelled as follows (see Table 1):

- “sleeping beauty” with low or no citations over a longer initial period and high citations later (type 1)
- “constant performer” with a constant and considerable amount of citations over time (type 2)
- “hot paper” with high citations directly after the publication and low citations later (type 3)
- “life cycle” with very different citation impact across the time period (type 4).

If CRs belong to more than one type, all types are indicated in the table.

| Type of sequence            | Definition                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sleeping beauty (type 1)    | Publication which has been cited below average in two of the first three citing years (“-”; $z<-1$ ) and above average (“+”; $z>1$ ) in the following citing years at least once                                                                                                                                            |
| Constant performer (type 2) | Publication which has been cited in more than 80% of the citing years at least once. In more than 80% of the citing years it has been cited at least on the average level (“0”; $-1\leq z\leq 1$ ) or (“+”; $z>1$ )                                                                                                         |
| Hot paper (type 3)          | Publication which has been cited above average (“+”; $z>1$ ) in two of the first three citing years after publication                                                                                                                                                                                                       |
| Life cycle (type 4)         | Publication which has been cited in at least two of the first four years on the average level (“0”; $-1\leq z\leq 1$ ) or lower (“-”; $z<-1$ ), in at least two years of the following years above average (“+”; $z>1$ ), and in the last three years on the average level (“0”; $-1\leq z\leq 1$ ) or lower (“-”; $z<-1$ ) |

*Table 1. Definition and default parameters for identifying different types of sequences*

---

### 3) Clustering (for the disambiguation of CR variants)

- **ClusterID (CID2)**: Each cluster of the standardization procedure (see section 4.4) is uniquely identified by its ClusterID, i.e., all CRs of a cluster are marked with a corresponding ClusterID. Thus, the results of the similarity computation can be inspected using the column ClusterID.
  - **ClusterSize (CID\_S)**: The number of CRs in each cluster.
- 

### 4) Searching

**Score from Search Process (SEARCH\_SCORE)**: The column contains the value 1 for CRs including the string used by the user for searching and the value 0 otherwise (see section 4.3).

## Working with data visualization and table view together

Clicking on a data point in the graph (on the left side of the screen), the CRs data in the table (on the right side of the screen) is sorted by **Reference Publication Year** and **Number of Cited References / Percent in Year**, respectively (in descending order). Furthermore, the first CR with the highest percentage in the particular year is marked. Since the data is sorted by the **Number of Cited References / Percent in Year**, respectively, one can inspect the most important CRs which are responsible for a peak.

# Options panel

## File

### Open

CRExplorer uses an internal file format ".cre", which can be used as a "working format" and for the exchange of working files. The file contains all data including changes by the user. Using Microsoft Windows, one can double click on any .cre file and thus run CRExplorer automatically. Note that the available memory on the computer decreases the more datasets have been opened and without terminating CRExplorer in-between. Thus, memory is not freed when a new dataset is loaded.

### Import

**Web of Science:** CRExplorer opens one or several datasets from Web of Science (WoS). The datasets should be downloaded using the option **Save to Other File Formats**. As **Record Content** select **Full Record and Cited References** and as File Format select **Other Reference Software**. The records have to be searched in the WoS Core Collection in order to be able to save full records including the cited references (CRs).

**Scopus:** CRExplorer opens one or several datasets from Scopus. The file format **CSV** (including citations, abstracts, and references) should be chosen for downloading records.

Before loading the WoS or Scopus data into CRExplorer, the program analyses the file(s) which the user would like to import. When the analyses are finished, some basic information on the full dataset (we would like to call it "population") are presented to the user in a window (in fields with grey background): number of non-distinct CRs, minimum/maximum reference publication year (RPY), number of (citing) publications, minimum/maximum publication year (of the citing publication), number of CRs without RPYs, and number of (citing) publications without publication year.

**Crossref file:** CRExplorer opens one or several datasets from Crossref (see <https://www.crossref.org/>). In addition, cited references data can be directly imported into CRExplorer by using the search interface for Crossref data (**Crossref search**). The search can be run based on (1) a list of DOIs provided by the user (whitespace-separated) or (2) an ISSN (e.g., 0138-9130 for the journal *Scientometrics*). The range of RPYs can be set to restrict the set of imported data.

**CSV-file:** Datasets in csv format can be imported. The format is the same as for the csv export. The same column header names must be used. However, not all columns need to be provided in the csv-file to be imported: At least, the columns **CR**, **RPY**, and **N\_CR** should be provided. If no column **N\_CR** is provided, the program assumes that each provided reference occurs once. The column **ID** is ignored (even if it is provided) and a new unique ID will be assigned.

If the imported dataset from any data source (e.g., WoS) contains a lot of CRs from many publications, the full dataset cannot be completely imported because of restrictions by the available memory on the computer of the user. There are basically two options to deal with the problem: (1) It is possible to run the program in a database mode:

```
java -jar crexplorer.jar -db
```

In this mode, the processed data is stored in a local database on the computer of the user (instead of the main memory). CRExplorer consumes much less main memory then but needs longer time for certain operations. It is possible to control the location of the database file:

```
java -jar crexplorer.jar -db=DB_URL
```

DB\_URL is to be used as documented at <https://jdbc.postgresql.org/documentation/use>. An example DB\_URL is `jdbc:postgresql://localhost:5432/db_name?user=db_user`. Here, `db_name` and `db_user` are the database name and database user. Further information can be found at <https://github.com/andreas-thor/CRExplorer/blob/main/README.md>

(2) The user has the option to reduce the dataset by loading only a sample from the population of publications. The sample can be defined by importing CRs from specific RPYs and/or citing publication years. The range of the desired years can be included in the fields with the white background in the window. Additionally, the publications/CRs without year/RPYs can be excluded (by unmarking the corresponding ticks in the window).

Another possibility is to draw one of the following three types of samples from the population (see the examples and suggestions in [Haunschild et al., 2020](#)):

- **Random Sampling:** The number of CRs included by the user in the field with white background are randomly selected. For example, if the user wants to import 100 CRs out of 400 overall CRs, CRExplorer randomly selects 25% of all CRs.
- **Systematic Sampling:** The number of CRs filled in by the user is used to select the sample uniformly distributed over the list of all CRs of the citing publications. For example, if the user wants to import 100 CRs out of 400 overall CRs, CRExplorer systematically selects 25% of the list of all CRs by picking the 1st, 5th, 9th, and so on CR.

- **Cluster Sampling:** From the years which are in-between the minimum and maximum publication years (see above) one citing year is randomly selected. Then, all CRs in the papers published in this year are selected as sample and imported. The results of [Bornmann and Mutz \(2015\)](#) reveal that the restriction on all CRs from a recent citing year leads to very similar results as the consideration of all CRs from several citing years in references analysis. Note that the selection of one citing year in CRExplorer implicates that citation distributions over many citing years cannot be analyzed (see section 3.2).

Of course, the three sampling options can be combined with the selection of citing and/or cited years. Furthermore, many samples instead of one sample can be drawn from the population to optimize the RPYS results ([Haunschild et al., 2020](#)).

CRExplorer recommends a sample size to the user based on the available memory on the computer. This number is shown after **Estimated maximal Number which can be loaded in Memory**. If the user wants to draw a random or systematic sample, the user can decide which number of CRs is tried to be imported. This number can be filled in the corresponding white field in the window. In case of selecting the cluster sample option, the user cannot enter any number. The program undertakes the corresponding selections. If the user tries to import a number of CRs (sample or population), which is too large for the available memory on the computer (independent of the selected sampling strategy), an error message appears and the import is stopped.

The analysis of a sample instead of the population is only an opportunity to handle the restrictions, which are given by the computer of the user. It is always the best way in the cited references analysis to analyze the population (by running CRExplorer with the database option). If the user, however, decides to work with a sample instead of the population, inference statistics can be applied to draw conclusions from the sample to the population. For using inference statistics, the user can download the sample data as csv-file from CRExplorer (see section 4.1.5). Using statistics programs, such as Stata (see [www.stata.com](http://www.stata.com)) or R (see [www.r-project.org](http://www.r-project.org)), the user can apply inference statics to the exported (random) sample ([Cumming, 2012](#)). In the SSC Archive, the user finds the Stata command “plotrpys” which produces monochrome and colored graphs including 95% confidence intervals. These graphs can be used in connection with sample data (see section 4.1.5).

The number of CRs which are shown to the user in the info window after the analyses of the WoS files (or files from another source) refers to non-distinctive counting. Thus, CRs have been multiply counted, if CRs existed multiply in the dataset. In most of the cases, the user will observe a reduced number of CRs after importing the population or sample. The reason is that the CRs are distinctly counted after importing.

Note that the available memory on the computer decreases the more datasets have been imported without terminating CRExplorer in-between. Thus, memory is not freed when a new dataset is

imported.

## Save

The program saves the dataset in the internal file format “\*.cre”.

## Save as

The program saves the dataset in the internal file format “\*.cre” and asks for a file name.

## Export

**Web of Science:** The dataset is exported in the WoS format as specified in the import section (see section 4.1.2).

**Scopus:** The dataset is exported in the Scopus format as specified in the import section (see section 4.1.2).

Note that the export can only contain data from the import, when one transfers from Scopus to WoS. WoS files, for example, only consider the first authors while Scopus files include all authors in the CR field. If one transfers from WoS to Scopus, not all information can be provided, since this information is not available in downloads from WoS.

**CSV (Graph):** The graph data are exported for further processing in programs such as Excel, R, Stata, or GnuPlot. The export does not only include the sum of CRs per RPY (as presented in CRExplorer), but also the average. We provide Stata (plotrpys) and R (BibPlots) commands which produce monochrome and colored graphs. Both can be found in SSC Archive (in the case of Stata) and CRAN (Comprehensive R Archive Network, in the case of R), respectively.

**CSV (Cited References):** A table with CRs data is saved as a csv-file.

**CSV (Citing Publications):** A table with data on the citing publications is saved as csv-file.

**CSV (Cited References + Citing Publications):** A table with both CRs data and data on the citing publications is saved as a csv-file.

## Settings

### Table

In the sections **Cited References**, **Indicators**, **Clustering**, and **Searching** the columns can be selected which should be displayed in the table. It is also possible to select/deselect all columns.

These functions enable to restrict the columns to those which are needed for a specific analysis. In the section **Value Settings**, the **Number of Digits** for all numerical columns can be modified.

Furthermore, the **N\_PCT Range** can be adjusted. It might be a problem in computing **N\_TOP50**, **N\_TOP25**, and **N\_TOP10** that the citation counts in a citing year are inflated by zeros (and/or similar values). Thus, we included the option in the program to extend the number of citing years which are considered in calculating **N\_TOP50**, **N\_TOP25**, and **N\_TOP10**. If only the citing year itself should be considered in the analysis, the **NPCT Range** is set to 0. If it is set to 1, the thresholds for the top 50%, 25%, and 10% are computed based on citations from the preceding ( $t-1$ ) and succeeding ( $t+1$ ) citing years. This doubles the underlying dataset in the first and last citing year (since year  $t-1$  or  $t+1$ , respectively, do not exist) and triples it in all other years.

## Chart

**Chart Layout:** The user can select the lines which should be displayed: Number of Cited References, Deviation from the Median or both. The deviation of the number of CRs in each year  $Y$  from the median for the number of CRs in the previous, the current, and the following years can be set. The default is 2:  $Y-2$  ;  $Y-1$  ;  $Y$  ;  $Y+1$  ;  $Y+2$ . Thus, the user can change the number to any other number and can thus work with medians calculated based on different time windows. Furthermore, Stroke Size and Shape size for the lines in the chart as well as Label Font Size and Tick Font Size for the axes can be set.

**Chart Engines:** Two different chart types (**JFreeChart** and **HighCharts**) can be selected. Both types have the same functionality: The user can zoom into the graph and click on a peak whereby the underlying CRs are sorted and marked correspondingly in the table. However, both types are different in look and feel. **JFreeChart** is a static visualization, similar to graph types in Excel or GnuPlot; **HighCharts** is a dynamic, web-based ("modern") visualization. The underlying data of any graph can be downloaded with **File – Export – Graph CSV** and can be visualized in another software (e.g., Excel, R, or GnuPlot).

The **JFreeChart** can be saved in various formats by right-clicking on the graph. This is not possible with **HighCharts**. If the user wants to include the graph from **HighCharts** into another program (e.g., Microsoft Word), he or she should use programs such as the Snipping Tool (which is available in Microsoft Windows) or KSnapshot (which is available in KDE Linux) to cut the graph. If there are any problems with changing of chart types, try **View – Reset Chart** (see section 4.3.9) or restart CRExplorer.

## Exit

Leave CRExplorer.



## Edit

The user may restrict the CR analysis to a certain time period. Very early and most recent years are frequently not very helpful for the identification of the most frequently cited publications in the history. Although CRExplorer allows for the selection of periods in on-screen visualization, this selection does not lead to changes in the dataset. However, there are several ways of removing data from a dataset.

### Remove selected Cited References

Rows in the table can be marked and deleted using the menu item.

### Remove selected Cited References w/o Year

All CRs are removed without a year in the column RPY.

### Remove by Reference Publication Year.

The user can remove the data for specific RPYs.

### Remove by Number of Cited References

All CRs with a number of CR counts (column **N\_CR**) within the specified range are deleted. This kind of restriction is helpful in identifying publications from early RPYs with a substantial impact (and to suppress the noise of less cited publications). Furthermore, in RPYs with many sparsely cited publications the publications with substantial impact can be easier identified then.

### Remove by Percent in Year

CRs can be removed by using thresholds for the column PERC\_YR. Thus, it is possible to remove lowly CRs whereby “lowly” is defined in terms of the citation distribution in the RPYs.

### Retain Cited References by ID

One can select the citation environment of a specific CR (or of two or even more CRs) in the form of all co-cited CRs and analyze these CRs (e.g., for applying RPYS-CO, see [Marx et al., 2017](#)). The specific CRs can be prominent and seminal works which are used as a kind of marker or tracer references for a specific topic in a field. We assume that papers which cite the selected CRs are

potential candidates for citing also many other CRs relevant in a specific historical context. This method takes advantage of the fact that concurrently cited (co-cited) papers are more or less closely related to each other ([Small, 1977](#)).

By selecting **Retain Cited References by ID**, the CRs are restricted based on the IDs specified by the user (e.g., 20, 25, 40). Thus, only CRs are retained which are co-cited with the IDs (CRs) specified.

### Retain Publications citing Selected Cited References

The CRs are restricted based on the CRs marked by the user in the table. Thus, only CRs are retained which are co-cited with the CRs specified.

### Retain Publications within Citing Publication Year

The CRs are restricted based on the publication years of the citing publications. The user can specify the range of (citing) publication years. Thus, only CRs are retained which are cited or co-cited with the CRs in citing publications from the specified years.

### Copy Selected Cited References

The CR (CRs) which is (are) selected in the table is (are) copied to the clipboard for use in other programs (e.g., spreadsheet or word processing programs).

## View

### Info

The message box provides some basic information on the dataset: **Number of Cited References** and **Number of Cited References (shown)**. The user has the option to select data temporarily. Thus, the complete number of CRs and the temporarily selected number are shown. Furthermore, the user can cluster and merge CR variants, and the number of calculated clusters is shown. The message box also contains the **Range of Cited References Years**, the **Number of different Cited References Years**, the **Number of Publications** (including publications without CRs), the **Number of Citing Publications** (excluding publications without CRs), the **Range of Citing Publication Years**, and the **Number of different Citing Publication Years**.

### Cited Reference (Details)

An info box including all information from the columns appears for a selected CR.

## Citing Publications

The publications are shown which cite the CR (CRs) selected by the user.

## Show Cited References w/o Years

Scopus or WoS data sets contain CRs without RPY. As a rule, these CRs are not considered in the analyses of CRExplorer, but can be shown optionally in the table.

## Filter by Reference Publication Year

The graph is temporarily restricted to the minimum and maximum years included.

## Show Cited References of selected cluster(s) only

Restrict the CRs to only those which are in the same cluster(s) (used for disambiguation) as the selected CR(s).

## Search Cited References

CRs including the search string are sorted to the first positions in the tabular list of CRs. The column **Search\_Score** in the table contains the value 1 for CRs including the search string and the value 0 otherwise. The column **Search\_Score** itself can be used for sorting the data.

## Show all Cited References (currently X of Y)

All filters set by the user for filtering CRs are deactivated. If X in the menu item is smaller than Y, a filter is active.

## Reset Chart

The **JFreeChart** or **HighCharts** axes are reset to their maximum range.

## Disambiguation

The user has the possibility to detect variants of the same CR, cluster them, and merge their occurrences (number of CRs). The clustering uses the table with the list of CRs as input file. Three algorithms are available for clustering CRs: Levenshtein distance, cosine similarity, and Jaccard similarity. Since the clustering (and merging) is a complex process which needs a lot of computer resources, the user is advised to cluster only those data which is of interest.

The clustering and merging of the data is especially important for the Scopus data, since the CR data in Scopus is more heterogeneous than in WoS. Scopus data contains more information than WoS data (all authors and the titles of the referenced publication) which increases the probability of variants of the same CR. Furthermore, Scopus data may contain fragmented CR data which cannot be completely parsed into the bibliographic categories of CRExplorer (e.g., authors, titles, or volume numbers). The heterogeneous data of Scopus can be inspected best by sorting the list of CRs under the column **Authors**. A possible way of dealing with the heterogeneous CRs is to try their clustering and merging with CRs including complete information (if fragmented CRs are variants of these CRs).

## Cluster equivalent Cited References Levenshtein

In the first step of eliminating variants of CRs, variants of the same cited publication are identified. Two attributes are used for a first similarity computation: **Last name** of the first author and **Source title**. Based on this data, CRExplorer determines the pair-wise similarity of variants of CRs. The program computes the Levenshtein similarity (as provided by the [SimMetrics library](#)) of both attributes (see also [Wasi & Flaaen, 2015](#)). The Levenshtein similarity of two strings  $s_1$  and  $s_2$  is defined as  $\text{sim}(s_1, s_2) = 1 - \text{LD}(s_1, s_2) / \max(|s_1|, |s_2|)$ . Here  $|s|$  denotes the length of a string  $s$  and  $\text{LD}(s_1, s_2)$  is the Levenshtein distance which is defined as follows: The Levenshtein distance between two strings  $s_1$  and  $s_2$  is the minimal number of single-character edit operations (i.e., insertion, deletion, or substitution) required to transform string  $s_1$  into  $s_2$ . The Levenshtein distance is 0 for equal strings (no edit operations necessary) and equals  $\max(|s_1|, |s_2|)$  for totally different strings (substitute the first  $\min(|s_1|, |s_2|)$  characters and insert / delete the remaining characters). Therefore, for any two strings the Levenshtein similarity is between 0 to 1 where 0 corresponds to “totally different” and 1 to “identical”.

For two CRs  $o_1$  and  $o_2$ , CRExplorer computes the Levenshtein similarity of the first authors' last names as well as the similarity of the source titles. The two CRs  $o_1$  and  $o_2$  are considered as “matching” if the weighted average (ratio 2:1) of the two similarity values is equal to or greater than the threshold of 0.75 (this can be changed by the user, see below). The combination of multiple similarity values that are based on different attributes typically achieves a better match quality compared to a single similarity of the entire CR strings. First, it restricts the similarity computation

to relevant (and available) attribute values. Second, the combination allows for an appropriate weighting of attributes independent of their actual string length.

CRExplorer performs a clustering based on the matching results, i.e., the list of the matching CR pairs. Two CRs  $o_1$  and  $o_2$  are assigned the same cluster, if the pair  $(o_1, o_2)$  appears in the matching result or if there is a list of other CRs  $t_1, \dots, t_n$  so that  $(o_1, t_1), (t_1, t_2), (t_2, t_3), \dots, (t_{n-1}, t_n)$ , and  $(t_n, o_2)$  are all among the matching pairs. Each cluster is uniquely identified by its **ClusterID**, i.e., all CRs of a cluster are marked with a corresponding **ClusterID**. The results of the similarity computation can be inspected using the column **ClusterID** in the table. The number of CRs in each cluster is provided by the column **ClusterSize**.

## Cluster equivalent Cited References Jaccard

The Jaccard similarity is a set-based measure for comparing two strings. It has been often used in document similarity, clustering, and duplicate detection. For two sets  $A$  and  $B$ , the Jaccard similarity is defined as the ratio between the size of their intersection and the size of their union:

$$J(A, B) = \frac{|A \cap B|}{|A \cup B|}$$

For string comparison, each string is decomposed into so-called *shingles*, i.e. overlapping groups of characters or words of length  $k$ . These shingles form the sets  $A$  and  $B$ . The parameter  $k$  controls the sensitivity of the comparison: smaller values are more tolerant towards small variations, whereas larger values are more restrictive. Character-based shingles are especially useful for short strings such as author names, while word-based shingles are better suited for longer text fields such as journal titles or reference titles. The Jaccard similarity returns values between 0 and 1, where 0 means that the two sets have no common elements and 1 means that they are identical. Jaccard similarity compares cited references by measuring how strongly their shingles overlap. It is simple and effective for strings of different lengths, but it does not consider how often an element occurs and it is sensitive to changes in word or character order.

Enter a number for the parameter  $n$  and the algorithm mode (**Clustering Parameter**): **Number for the Parameter  $n$**  determines how many letters or words are grouped when using the algorithm. **Mode for the Algorithm** determines if the algorithm analyzes  $n$  letters or  $n$  words. For example, **Char** and "2" split input strings into string fragments with 2 characters such as "test" into "te", "es", and "st".

## Cluster equivalent Cited References Cosine

The cosine similarity is a vector-based measure that determines the similarity of two strings by measuring the angle between their vector representations in a feature space. In text comparison, strings are transformed into term-frequency vectors based on characters, character  $n$ -grams,

words, or word  $n$ -grams. For two vectors  $\vec{A}$  and  $\vec{B}$ , the cosine similarity is defined as:

$$\cos(\theta) = \frac{\vec{A} \cdot \vec{B}}{\|\vec{A}\| \cdot \|\vec{B}\|}$$

The cosine similarity returns values between 0 and 1, where 1 indicates maximum similarity and 0 indicates no similarity. In contrast to set-based measures, cosine similarity takes the frequency of features into account. This makes it more robust when the same terms or character sequences occur multiple times. Cosine similarity is particularly robust to differences in string length and performs well when cited references share many common elements but differ in abbreviation. The similarity comparison can be performed in a character-based or word-based mode. Character-based  $n$ -grams are well suited for short fields such as author names or abbreviated journal titles, whereas word-based  $n$ -grams are more appropriate for longer texts.

Enter a number for the parameter  $n$  and the algorithm mode (**Clustering Parameter**): **Number for the Parameter  $n$**  determines how many letters or words are grouped when using the algorithm. **Mode for the Algorithm** determines if the algorithm analyzes  $n$  letters or  $n$  words. For example, **Char** and "2" split input strings into string fragments with 2 characters such as "test" into "te", "es", and "st".

## Include RPY in Blocking Process

When the user selects this option, the automatic clustering of variants is restricted to variants within the same RPY, but not across RPYs. Thus, a reference to a first edition of a book and a reference to a later edition are not clustered by this routine. If the user wishes to combine editions of the same cited publication from different RPYs, they should disable **Include RPY in Blocking Process**.

## Merge clustered Cited References

In the second step of eliminating variants of CRs (subsequent to the clustering of variants), the ClusterID is used for the aggregation of variants, i.e., the values of the corresponding lines in the table are summed up per cluster.

Although the clustering and merging procedure can be helpful in aggregating variants of the same CR, this procedure itself is prone to error. For example, if there are several CRs from the same authors and published in the same journal in one year, these CRs can be clustered, although they refer to different publications. This aggregation error affects mainly journal papers. Books may be also prone to error in the clustering and merging procedure. The source title of the same book may contain different page numbers (included by the citing authors), the same book may be available

and cited in different languages, and the book titles may be differently abbreviated by the data providers.

For this reason, we strongly recommend that a user of the disambiguation procedure controls the results from the clustering and corrects wrong matches (especially for cited books). For the manual correction we have implemented some features in the program which support the user in post-processing the clustered results. Corresponding control buttons appear above the table, when the user starts the clustering process. The features can be used separately or in combination to change the cluster results before the merging of the CR variants is started. The effects of the features can be inspected by the values in **ClusterID** which has two components: The first value in the column (before the slash) shows the cluster numbers which result from the initial clustering process which was done automatically. The second value (after the slash) marks sub-clusters which change after using the features. Thus, the user should inspect the second value of the **ClusterID** to assess the results of the chosen post-processing.

The features implemented in the program are the following:

- **Slide control (Levenshtein similarity):** For matching similar CRs, the matching algorithm is initially used as similarity function with a threshold of 0.75. However, the user can change this afterwards by using the slide control which accepts values between 0.5 (shown as 50) and 1 (shown as 100). If the slider is moved in the direction of 50, less similar CRs are matched; by moving the slider in the direction of 100, the matching process becomes increasingly restricted.
- **Volume, Page, and DOI:** The user can select Volume, Page, and DOI in order to differentiate the clusters further. These selections affect the whole dataset and not only CRs which are marked by the user. Note that the Levenshtein approach is not applied to Volume, Page, and DOI; a precise match is required for these attributes.
- **Treat Missing Values as Equal:** If unchecked (false) the previous behavior is restored: CRs with missing values of metadata (Volume, Page, or DOI) that are checked are considered to be different. If checked (true), CRs with missing values for metadata (Volume, Page, or DOI) that are checked are considered to be the same. The use of this option should result in better clustering of books and conference papers. However, some CRs (e.g., arXiv papers or other preprints) might be clustered too generously if no title is present in the CR.
- **Manual generation of sub-clusters:** The tool offers three different ways for the manual changing of sub-clusters. They are named as Same, Different, Extract, and Undo. Most of the problems with the automated clustering procedure occur with false positives: The algorithm matches CRs, although they should be kept separate. For the manual separation of clusters, the user can apply Different or Extract. Different assigns different sub-cluster IDs to those CRs which are marked by the user manually (using the mouse click). Extract puts the marked CRs

in a separated sub-cluster. Same gives marked CRs the same sub-cluster-ID. Manual changes based on Same, Different, and Extract can be rolled back using the Undo button.

## Help

### Online Manual

The manual of CRExplorer is opened.

### Info

Some information is given by the program.



# Script Language

CRExplorer can be operated by using the menus (see section 3) or by using a tailored script language (see the explanations and examples in [Haunschild et al., 2020](#)). If a user wants to run a user-defined script name "myscript.crs", it is necessary that the program is downloaded and started from the command line via the following command (Windows users might replace `java` by `javaw`):

```
java -cp crexplorer.jar cre.Script myscript.crs (or java -cp crexplorer.jar  
cre.Script -db... in the database mode)
```

The script language allows the application of important program functions, which are exemplified as follows:

## Opening CRE file

See [Section Options-File-Open](#)

```
openFile (file: "folder/name/filename.cre")
```

## Import of WoS, Scopus or Crossref files

See [Section Options-File-Import](#)

```
importFile (  
  dir: "folder/name" or  
  file: "folder/name/filename" or  
  files: ["folder/name/f1", "folder/name/f2", ...],  
  type: "WOS" or "Scopus" or "CrossRef" or "CSV PUB",  
  RPY: [minimum year, maximum year, w/o RPY? true or false],  
  PY: [minimum year, maximum year, w/o PY? true or false],  
  Sampling: "Random" or "None" or "Systematic" or "Cluster",  
  offset: 3,  
  MAXCR: 1000  
)
```

The offset parameter is only relevant for systematic sampling. The parameter "moves" the selected CRs by a certain values. For example, if offset = 0, CR #1, #5, #9, #13, ... are selected. With

offset = 1, it is CR #2, #6, #10, #14, ....

## Search for Crossref data

See [Section Options-File-Import](#)

```
importSearch (  
  type: "CrossRef",  
  doi: "DOI1" or doi: ["DOI1", "DOI2", ...] or issn: "ISSN1"  
)
```

The parameters for filtering (RPY, PY) and sampling (Sampling, Offset, MaxCR) can also be used for `importSearch`.

## Save a CRE file

See [Section Options-File-Save](#)

```
saveFile (  
  file: "folder/name/filename.cre",  
  RPY: [minimum year, maximum year]  
)
```

## Export data in different file formats

See [Section Options-File-Export](#)

```
exportFile (  
  file: "folder/name/filename",  
  type: "WOS" or "SCOPUS" or "CSV_CR" or "CSV_PUB" or  
        "CSV_CR_PUB" or "CSV_GRAPH"  
)
```

## Remove CRs by RPY or by N\_CR

See Sections [Options-Edit-Remove selected Cited References w/o Year](#), [Options-Edit-Remove by Reference Publication Year](#), and [Options-Edit-Remove by Number of Cited References](#)

```
removeCR (  
  N_CR: [minimum value, maximum value],  
  RPY: [minimum value, maximum value]  
)
```

## Retain citing publications within PY

See [Section Options-Edit-Retain Publications within Citing Publication Year](#)

```
retainPub (  
  PY: [minimum value, maximum value]  
)
```

## Cluster equivalent CRs

See [Section Options-Disambiguation-Cluster equivalent Cited References](#)

```
cluster (  
  threshold: [value between 0.5 and 1],  
  volume: true or false,  
  page: true or false,  
  DOI: true or false,  
  MISSING_IS_EQUAL: true or false  
)
```

## Merge clustered cited references

See [Section Options-Disambiguation-Merge clustered Cited References](#)

```
merge ()
```

## Settings

```
set (  
  n_pct_range: 1,  
  median_range: 2)
```

## Loops

Users can expand the capabilities of CRExplorer by writing extensions ([Haunschild et al., 2020](#)). One CRExplorer extension is available at <https://github.com/andreas-thor/cre/blob/master/crs/packages/Loop.crs>. This extension simplifies loop programming in the CRExplorer script language by introducing the `forEach` and `forEachUnion` operators. The number of cycles is provided as the value of `count` or as range (`from`, `to`). The functions differ in their behavior after each loop cycle: `forEach` performs no further action whereas `forEachUnion` merges the CR data of each cycle to a final CR dataset.

```
forEach (
  count: 10 or
  from: 1, to: 10) {

  <script>
}

forEachUnion (
  count: 10 or
  from: 1, to: 10) {

  <script>
}
```

If the `count` parameter is provided, the script is executed `count` times. If the `from` and `to` parameters are provided, the script is executed ( `to-from+1` ) times and the script can use the internal variable `index` that contains the current loop number ( `from`, `from+1`, ..., `to` ).

The loop operators are especially useful for sampling the same publication set multiple times and merging the results. An application of the script language with the three different sampling techniques for the publication set of climate change research (more than 200,000 publications and approximately 11 million CRs) has been performed by ([Haunschild et al., 2020](#)).

# A practically oriented short guide to use CRExplorer

The following hints and rules of thumb may be helpful for the use of CRExplorer.

## Establishing a publication set

The publication set to be analysed may comprise the publications of specific authors, journals, research fields or any other publication corpora of interest. Based on our experience hitherto, we recommend that the size of the relevant publication set should not be much less than 100 papers for a meaningful CR analysis. On the other hand, a typical research field normally comprises much larger publication sets. Here, the size of the publication set used for the CR analysis is limited by more practical considerations; memory requirements increase with the number of CRs.

The sample under study does not need to comprise every relevant publication (e.g., related to a specific research field) and should not contain too many irrelevant papers at the same time. As a rule, some missing publications do not change the overall picture derived from CRExplorer analysis and the location of the peaks in the spectrogram (the graph produced by CRExplorer) will hardly be affected. On the other hand, the presence of too many irrelevant papers in the set increases the noise in the spectrogram and reduces the height and distinctness of the peaks.

After uploading the WoS records (or records from another source) into CRExplorer, one can analyse the complete range of RPYs, for example, in order to reconstruct the evolution of a research field as reflected by the references cited (by the members of the corresponding scientific community). Alternatively, one can focus on early references in order to investigate the origins and historical roots of a research field or one may wish to analyse recent RPYs (e.g., the last decade only) to reveal recently published highly-cited papers. The historical roots have been investigated in most of the studies published so far (see the publication list at [www.crexplorer.net](http://www.crexplorer.net)).

## Clustering of CRs

For a first overview, one is advised to sort the table of references by RPY in temporal order and concurrently by the reference counts. For example, this procedure helps to identify the earliest CRs and the number of references in more recent years. We suggest marking the following columns via the table settings: **Cited Reference**, **Reference Publication Year**, **Number of Cited References**, **Percent in Year**, **Percent over all Years**, **ClusterID**, and **ClusterSize**. The other columns can be ignored for the moment.

Note that the reference counts of all CRs within a specific RPY are mutually comparable since they can be considered as field-normalized given the common search string: all citing papers belong to the same set, i.e., papers from a single research field, topic or author. Thus, the CRs generally originate from the same citation culture.

In the next step, the equivalent references are clustered. This clean-up procedure (the so-called “disambiguation”) is needed because there are many incomplete and misspelled references among the CRs (in particular with regard to the source name, volume, and page numbers). The automatic clustering procedure of CRExplorer does not work absolutely correctly. For example, the program cannot differentiate between papers published by the same author in the same journal and year. In other words, different publications are identified by the program as variants of the same publication and are clustered. Using volume and page numbers for clustering reference variants routinely leads to satisfactory results in references sets mainly consisting of journal papers (see the options above the table of CRs in CRExplorer after activating the clustering function).

| ID    | Reference variant                                      | N  |
|-------|--------------------------------------------------------|----|
| 12156 | Arrhenius S., 1896, PHILOS MAG 5, V41, P237            | 50 |
| 333   | Arrhenius S, 1896, PHILOS MAG 5, V5, P237              | 22 |
| 4998  | Arrhenius S., 1896, NORDISK TIDSKRIFT, V14, P121       | 4  |
| 5002  | ARRHENIUS S, 1896, BIHANG TILL KUNGL SV, V22, P1       | 3  |
| 2553  | ARRHENIUS S, 1896, PHILOS MAG, V41, P267               | 2  |
| 4999  | ARRHENIUS S, 1896, PHILOS MAG, V41, P274               | 2  |
| 5587  | Arrhenius S., 1896, LONDON EDINBURGH DUB, V41, P237    | 2  |
| 50801 | Arrhenius Svante, 1896, LONDON EDINBURGH DUB, V5, P237 | 2  |
| 61256 | ARRHENIUS S, 1896, ON INFLUENCE CARBONI                | 1  |
| 70088 | ARRHENIUS S, 1996, PHIL MAG J SCI APR, P237            | 1  |

*Table 1. Reference variants of the Arrhenius (1896) paper with the number of occurrences.*

Using volume and page numbers may be problematic for papers where volume numbers are missing or where page numbers within the range of pages are cited (rather than the starting pages). The use of the DOIs (in addition to volume and page numbers) to cluster reference variants usually results in detecting fewer variants and incomplete clustering, because DOIs are not available in many cases or are not properly assigned to CRs. Therefore, CRExplorer offers the possibility of cleaning-up the data manually. However, the manual cleaning-up of a dataset is only feasible in the case of relatively low numbers of CRs in the sample. This is usually the case for references which are published earlier than 1900 (and sometimes also for references published before 1950). As an example for reference variants in the data, we show in Table 1 a list of CRs from our analysis of the discovery of the “greenhouse effect” presented in section 2. There are some reference variants of the Arrhenius (1896) paper which can be clustered and merged. One reference variant (ID 333) cites the journal (Philosophical Magazine) with incorrect volume number, two others (ID 4998 and 5002) cite the corresponding Swedish papers, further two variants (ID 2553 and 4999) do not cite the starting page number, three variants (ID 5587, 50801 and 70088) cite journal title variants, and two CRs (ID 61256 and 80494) cite the title of the paper rather than the journal title.

## Manual Cleaning

If manual cleaning-up is applied, we suggest ordering the table items by the number of references per cluster (**ClusterSize**). In a first step, the items of larger clusters (which usually comprise the majority of CRs) should be checked and cleaned-up. If the dataset contains a manageable number of clusters and the user needs a (more or less) completely cleaned-up dataset, clusters with a smaller cluster size (or even with cluster size one) should also be investigated. The items with cluster size one can best be checked after ordering the references alphabetically (second ordering criterion in the program after cluster size). If the referenced authors in the dataset are cited more or less correctly, the variants of the CR to be checked appear one after another. In order to cope with a large number of CRs when using CRExplorer, a substantial cut may be necessary to master the flood of references extracted from the publication set. In the case of very large reference sets it is helpful to exclude all references with reference count one. These references are usually the majority of the CR items within a given publication set, but are only a small fraction of the total of CR counts. These references should be excluded before one checks for reference variants and

inspects the spectrogram. However, the best strategy for manual cleaning depends on the publication set and the intended analysis.

## Inspection of the spectrogram

In many publication sets, the references to be analysed have been published over a long period with quite different publication and citation cultures: the average number of references per RPY increases substantially in the course of time. We may distinguish between the period of “little science” (prior to 1950) and the period of “big science” (since 1950) ([Marx, 2011](#)). In particular, the reference counts before the RPY 1900 are comparatively low. Whereas the average (and maximum) reference count (**Number of Cited References**) increases with the passage of time, the share of reference counts accounting for a specific reference in a single year (**Percent in Year**) tends to decrease. This is the result of the continuously increasing number of papers and CRs, respectively, leading to increasingly less pronounced peaks in the spectrogram.

The spectrogram may not exhibit distinct peaks unless the range of RPYs is limited by excluding the more recent period (**Edit – Remove by Reference Publication Year**). If the analysis aims to detect influential early works, it is reasonable to remove all references with RPYs later than 1950. With regard to the inspection and interpretation of the spectrogram, it might also be helpful to select two (or more) consecutive RPY periods (e.g., 1800-1900 and 1901-1950) rather than one single period. Thus, one would analyse the references and reveal the reference peaks using two or more separate spectrograms. This simplifies the analysis and interpretation.

After the clustering process, both the spectrogram and the table with the CRs can be further adjusted and revised by selecting a minimum reference count (**Edit – Remove by Number of Cited References**). Removing the many references with reference count 1 (or in the case of large data sets: 2-3) makes the spectrogram more pronounced and the table of references better manageable. During the inspection of the spectrogram the question typically arises, which specific peaks should be considered as distinct reference peaks for further analysis and discussion. This decision is rather arbitrary and depends on the specific data set and the maximum number of top references to be discussed. A minimum reference count of 10, for example, has proved to be reasonable for investigating referenced papers published prior to 1900 (e.g., if the analysis aims to detect influential early works).

For the identification of the peaks and the corresponding top references, both the overall number of CRs (red curve in the spectrogram of the **JFreeChart**) and the (absolute) deviation from the median (blue curve of the **JFreeChart**) can be considered. Normally, both curves deliver the same amount of information and can be used alternatively or concurrently. There may be cases for which one or the other curve might be better suited.



If one would like to analyse the recent evolution of a research field and focus on the more recent decades of the RPY, the spectrogram is less informative. The peaks are less pronounced, because each reference, although highly cited, comprises an increasingly smaller share of the reference counts of a RPY. This kind of analysis can best be performed via the table of references ordered concurrently by the RPY (**Reference Publication Year**) and the reference counts (**Number of Cited References**) (with the most CRs at the top).

## The RPYS-CO approach

CRExplorer allows the restriction of the CRs to only those which are co-cited with at least one selected CR using the menu items **Edit – Retain Publications citing Selected Cited References**. This restriction takes advantage of the fact that concurrently cited (co-cited) papers are more or less closely related to each other. One can select the citation environment of a specific reference (or of two or even more references) in the form of all co-cited references and analyse these references applying RPYS-CO. The specific reference should be a prominent and seminal work which is used as a kind of marker or tracer reference for a specific topic in a field. We assume that papers which cite the selected reference(s) are potential candidates for citing also many other references relevant in a specific historical context.

For example, if we are interested to refine the analysis of the discovery of the “greenhouse effect” with regard to the earliest roots, we could use the seminal paper by Arrhenius (1896), the most pronounced pre-1900 peak in Figure 1. Svante Arrhenius was the first scientist who calculated how changes in the levels of carbon dioxide in the atmosphere could alter the surface temperature through the greenhouse effect. He predicted that emissions of carbon dioxide from the burning of fossil fuels were large enough to cause global warming. His paper can be seen as a cornerstone in the evolution of climate change research.

By analysing the co-citations of Arrhenius (1896) as a marker reference, we investigate the discovery of the greenhouse effect and the specific role of carbon dioxide. This research topic marks the historical roots and origins of the current climate change research. As a result of applying RPYS-CO to the history of climate change research in a recent study ([Marx et al., 2017](#)) the decisive works of the French mathematician and physicist Joseph Fourier become more clearly visible. We get to know that his 1827 paper is a reproduction of his 1824 work, which is much more pronounced in the RPYS-CO spectrogram.

## Conclusions

In summary, the strategy for using CRExplorer strongly depends both on the size of the publication and reference set to be analysed and on the specific focus of the analysis (early or more recent works). The strategy has to be adapted to the specific goal of the analysis. CRExplorer can be applied for three main objectives: (1) the detection of the knowledge basis (i.e. the origins and historical roots) of research topics, (2) the investigation of influential works published more recently, and (3) the disambiguation of CRs data.

# References

Arrhenius, S. (1896). On the influence of carbonic acid in the air upon the temperature of the ground. *Philosophical Magazine and Journal of Science*, Series 5, 41, 237–276.

Arrhenius, S. (1908). *Worlds in the making: The evolution of the universe*. Harper and Brothers Publishers.

Barth, A., Marx, W., Bornmann, L., & Mutz, R. (2014). On the origins and the historical roots of the Higgs boson research from a bibliometric perspective. *The European Physical Journal Plus*, 129(6), 1–13. <https://doi.org/10.1140/epjp/i2014-14094-1>

Bornmann, L., & Mutz, R. (2015). Growth rates of modern science: A bibliometric analysis based on the number of publications and cited references. *Journal of the Association for Information Science and Technology*, 66(11), 2215–2222. <https://doi.org/10.1002/asi.23356>

Callendar, G. S. (1938). The artificial production of carbon dioxide and its influence on temperature. *Quarterly Journal of the Royal Meteorological Society*, 64, 223–237.

Callendar, G. S. (1949). Can carbon dioxide influence climate? *Weather*, 4, 310–314.

Chamberlin, T. C. (1899). An attempt to frame a working hypothesis on the cause of glacial periods on an atmospheric basis. *Journal of Geology*, 7, 545–584, 667–685, 751–787.

Cumming, G. (2012). *Understanding the new statistics: Effect sizes, confidence intervals, and meta-analysis*. Routledge.

Fourier, J. B. J. (1827). Mémoire sur les températures du globe terrestre et des espaces planétaires. *Mémoires de l'Académie Royale des Sciences*, 7, 569–604.

Haunschild, R., Marx, W., Thor, A., & Bornmann, L. (2020). How to identify the roots of broad research topics and fields? The introduction of RPYS sampling using the example of climate change research. *Journal of Information Science*, 46(3), 392–405. <https://doi.org/10.1177/0165551519852206>

Marx, W. (2011). Special features of historical papers from the viewpoint of bibliometrics. *Journal of the American Society for Information Science and Technology*, 62(3), 433–439. <https://doi.org/10.1002/asi.21471>

Marx, W., Bornmann, L., Barth, A., & Leydesdorff, L. (2014). Detecting the historical roots of research fields by Reference publication Year Spectroscopy (RPYS). *Journal of the Association for Information Science and Technology*, 65(4), 751–764. <https://doi.org/10.1002/asi.23057>

Marx, W., Haunschild, R., Thor, A., & Bornmann, L. (2017). Which early works are cited most frequently in climate change research literature? A bibliometric approach based on Reference Publication Year Spectroscopy. *Scientometrics*, 110(1), 335–353. <https://doi.org/10.1007/s11192-016-2160-0>

McLevey, J., & McIlroy-Young, R. (2017). Introducing metaknowledge: Software for computational research in information science, network analysis, and science of science. *Journal of Informetrics*, 11(1), 176–197. <https://doi.org/10.1016/j.joi.2016.11.004>

Plass, G. N. (1956). The carbon dioxide theory of climatic change. *Tellus*, 8(2), 140–154. <https://doi.org/10.1111/j.2153-3490.1956.tb01657.x>

Small, H. G. (1977). A co-citation model of a scientific specialty: A longitudinal study of collagen research. *Social Studies of Science*, 7(2), 139–166. <https://doi.org/10.1177/030631277700700203>

Stemmler, M. (2014). *Person-Centered Methods - Configural Frequency Analysis (CFA) and Other Methods for the Analysis of Contingency Tables*. Springer.

Thor, A., Bornmann, L., Marx, W., & Mutz, R. (2018). Identifying single influential publications in a research field: New analysis opportunities of the CRExplorer. *Scientometrics*, 116(1), 591–608. <https://doi.org/10.1007/s11192-018-2700-6>

Thor, A., Marx, W., Leydesdorff, L., & Bornmann, L. (2016a). Introducing CitedReferencesExplorer (CRExplorer): A program for reference publication year spectroscopy with cited references standardization. *Journal of Informetrics*, 10(2), 503–515. <https://doi.org/10.1016/j.joi.2016.01.002>

Thor, A., Marx, W., Leydesdorff, L., & Bornmann, L. (2016b). New features of CitedReferencesExplorer (CRExplorer). *Scientometrics*, 109(3), 2049–2051. <https://doi.org/10.1007/s11192-016-2077-6>

Tyndall, J. (1861). On the absorption and radiation of heat by gasses and vapours, and on the physical connection of radiation, absorption, and conduction. *Philosophical Magazine*, 4(22), 273–285.

van Eck, N. J., & Waltman, L. (2010). Software survey: VOSviewer, a computer program for bibliometric mapping. *Scientometrics*, 84(2), 523–538. <https://doi.org/10.1007/s11192-009-0146-1>

von Eye, A. (2002). *Configural frequency analysis. Methods, models, and applications*. Lawrence Erlbaum Associates.

Wasi, N., & Flaaen, A. (2015). Record linkage using Stata: Preprocessing, linking, and reviewing utilities. *Stata Journal*, 15(3), 672–697.