
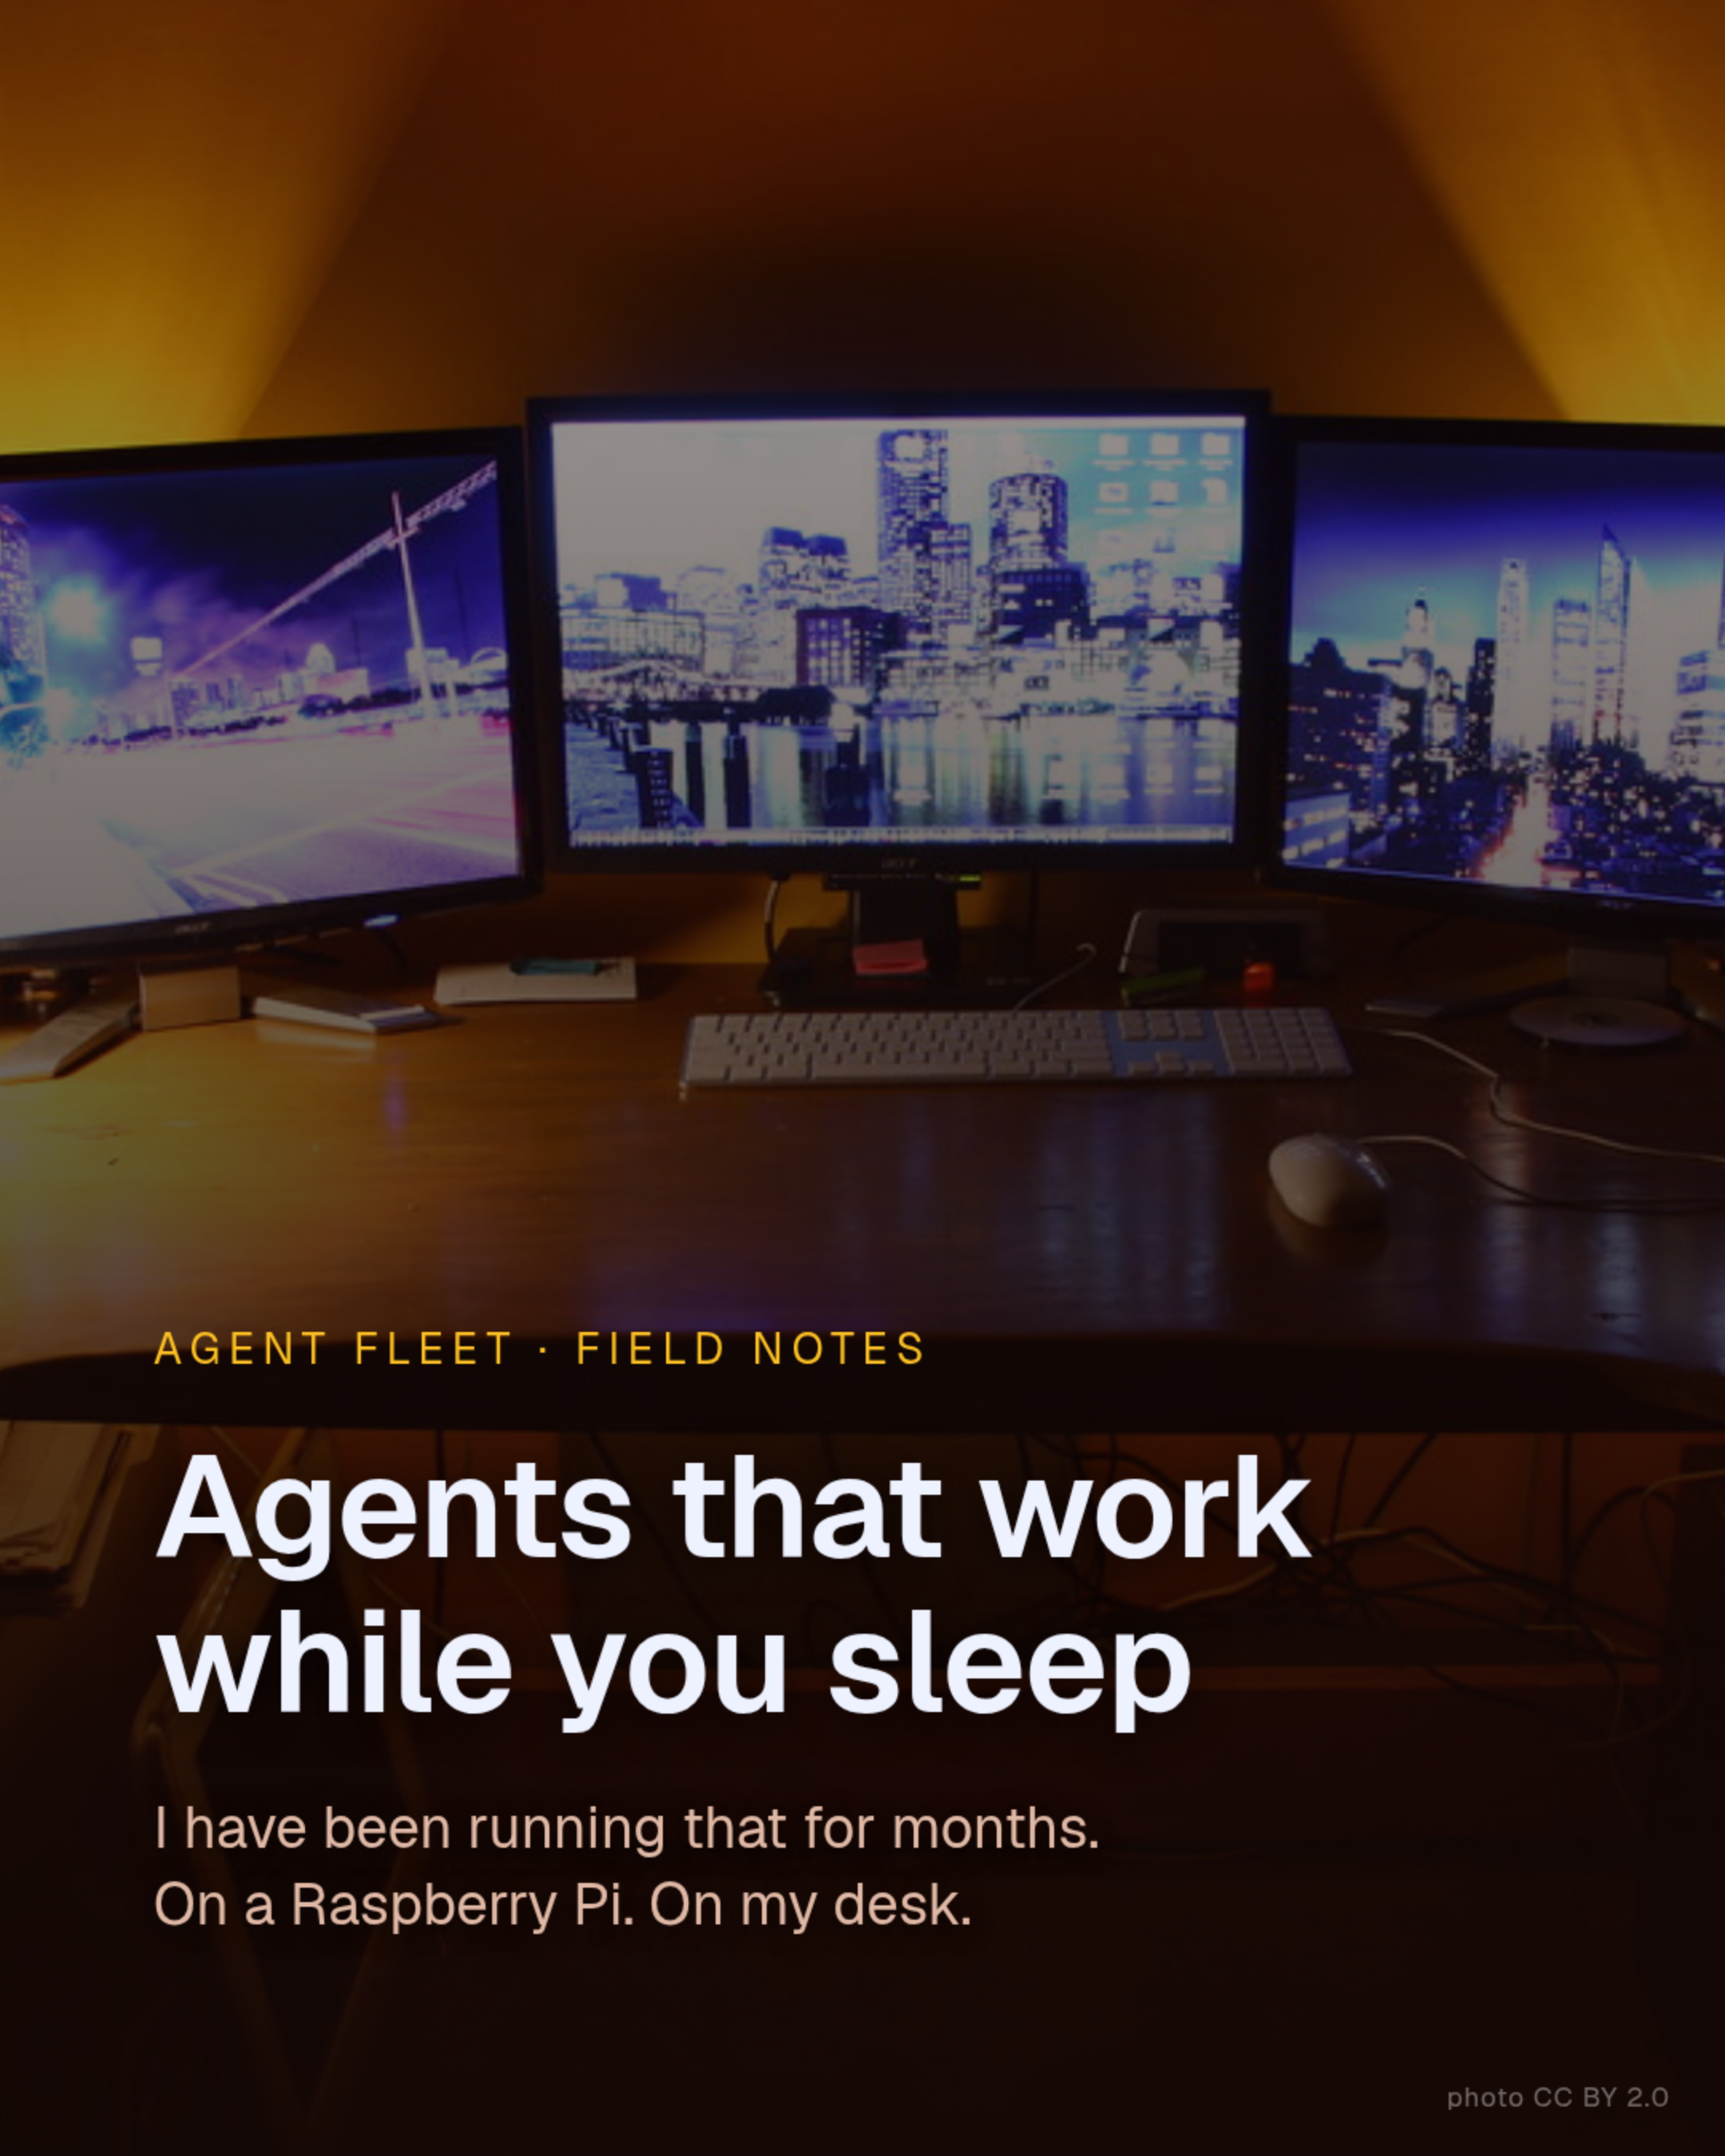


A photograph of a desk setup with three monitors. The left monitor shows a city street at night with a crane. The middle monitor shows a city skyline with many windows lit up. The right monitor shows a city skyline with a bridge. A keyboard and a mouse are on the desk in front of the monitors. The background is a warm, orange glow.

AGENT FLEET · FIELD NOTES

Agents that work while you sleep

I have been running that for months.
On a Raspberry Pi. On my desk.

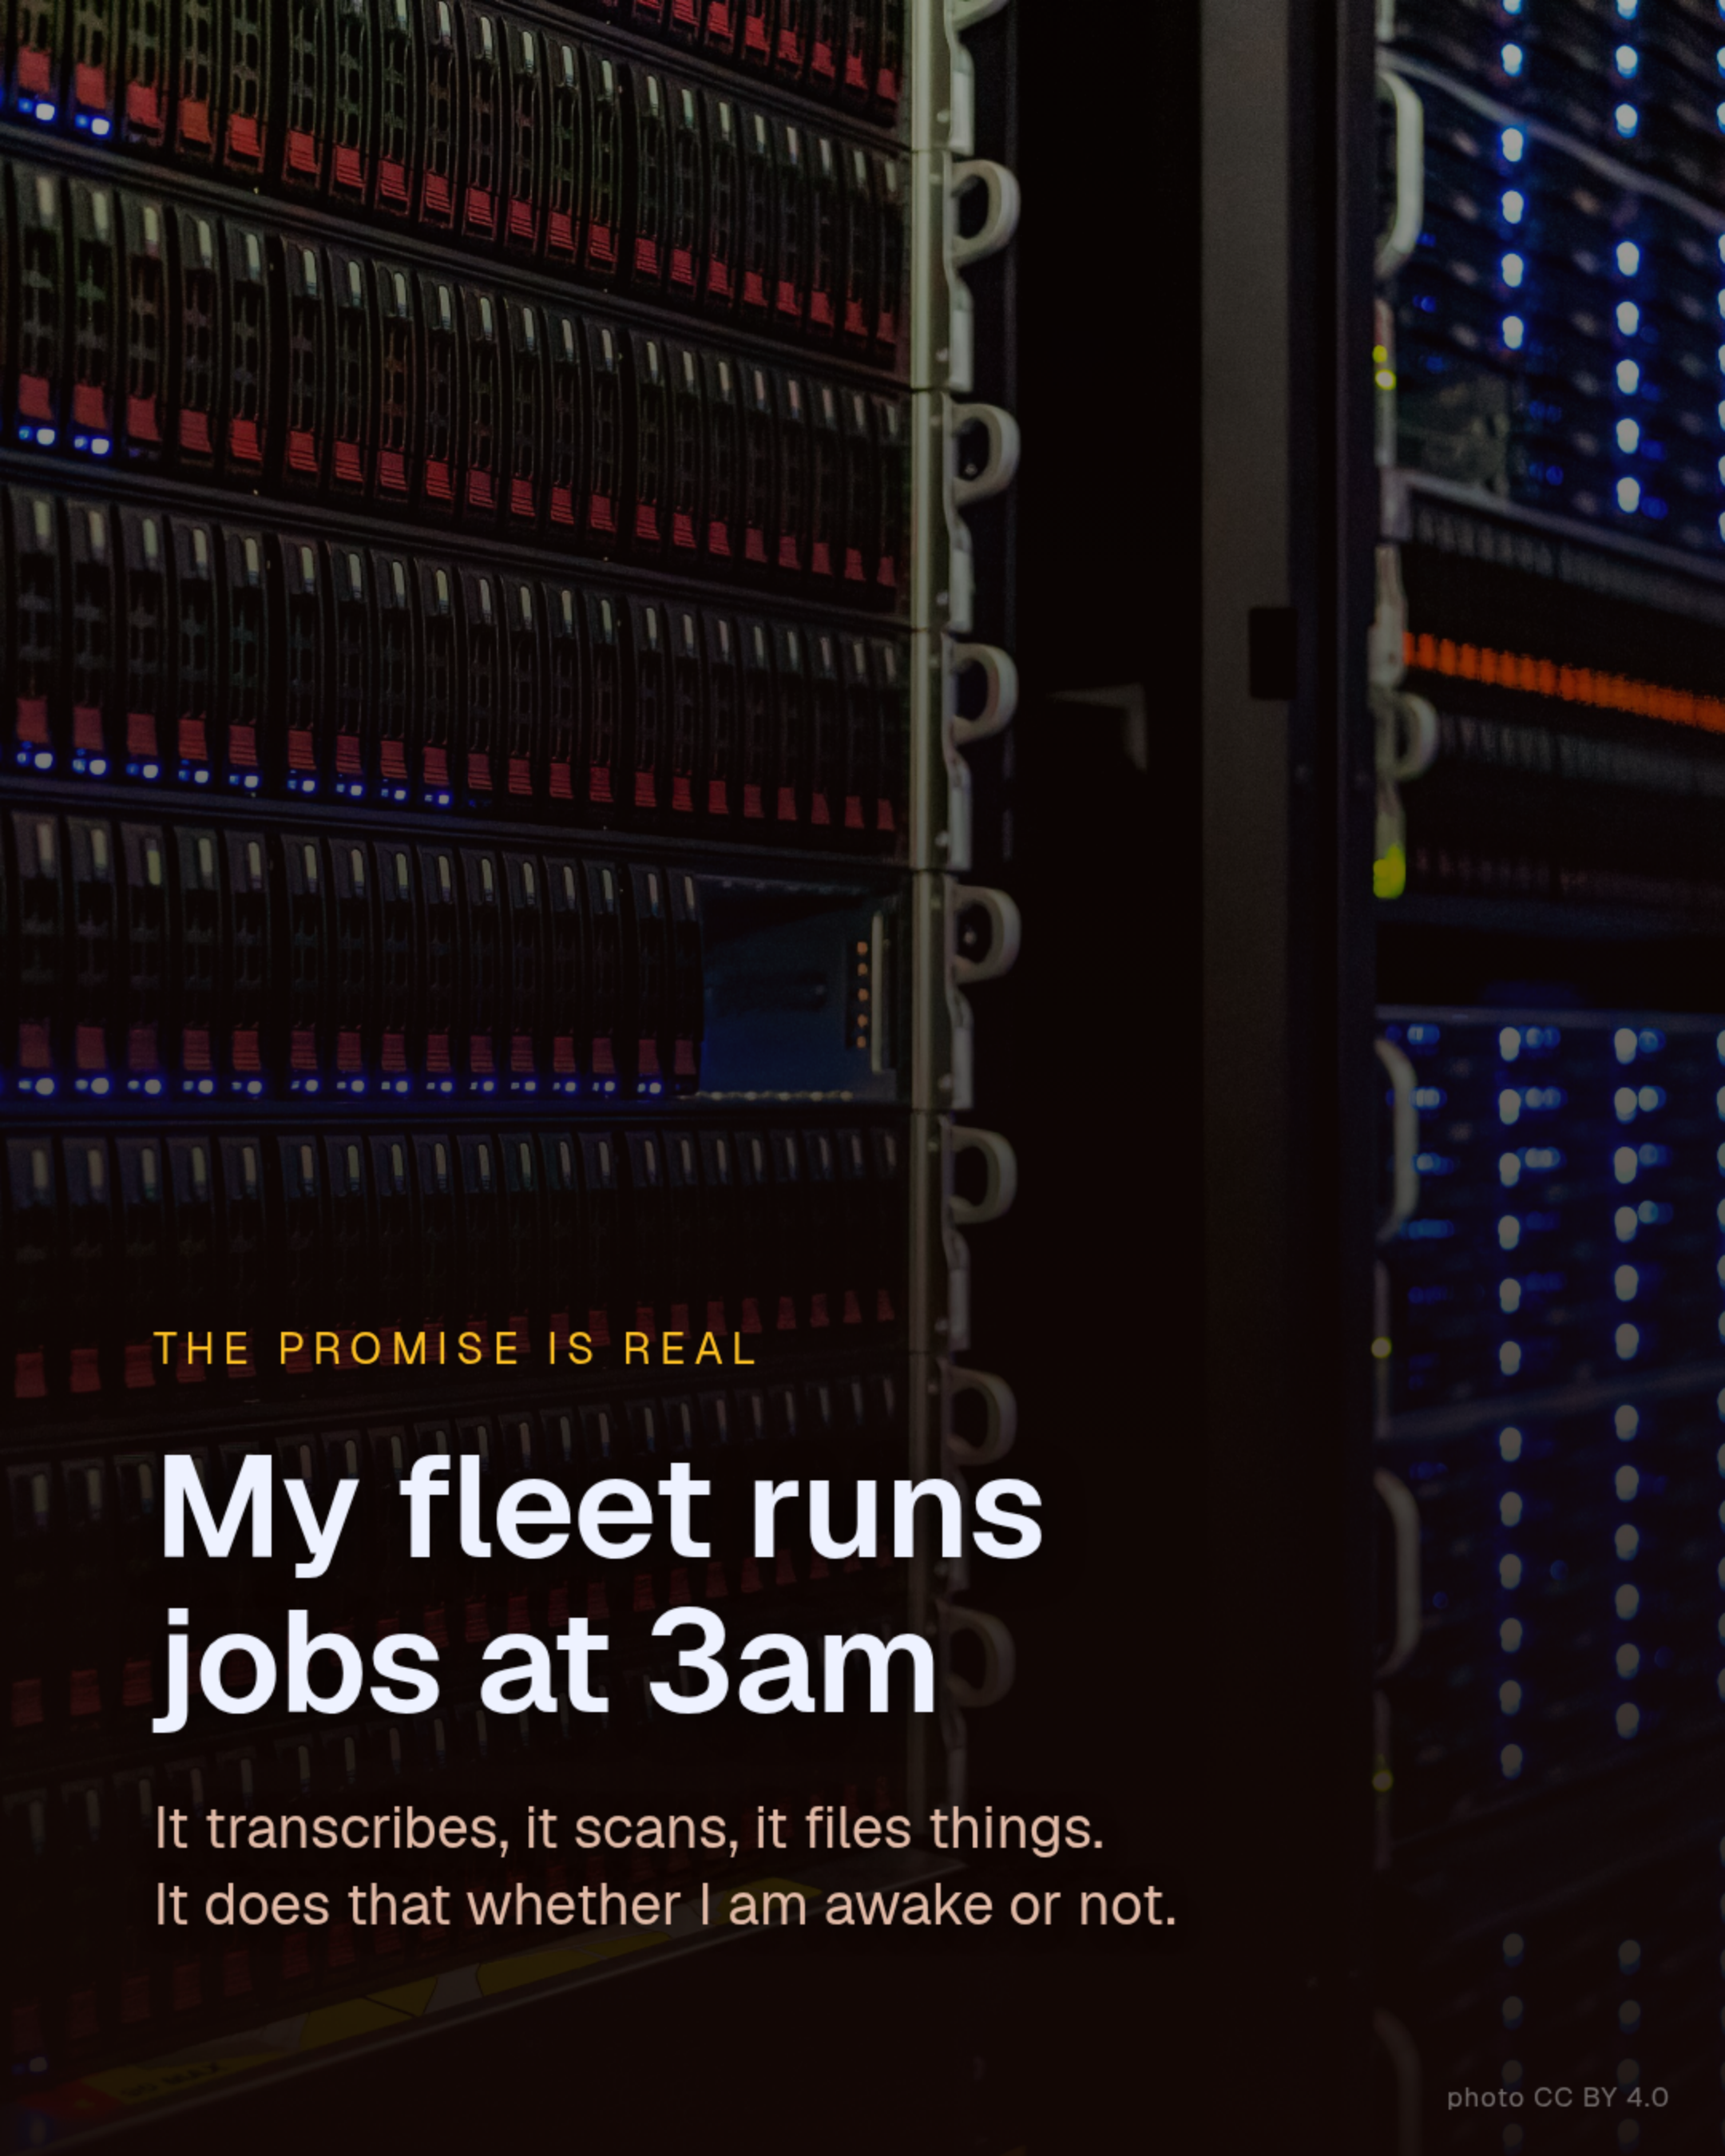

THE PROMISE IS REAL

My fleet runs jobs at 3am


It transcribes, it scans, it files things.
It does that whether I am awake or not.



THE PART NOBODY DEMOS

Then something broke at 3am


One agent filtered messages by its own name.
Nothing matched. It went quiet for **nine hours**.

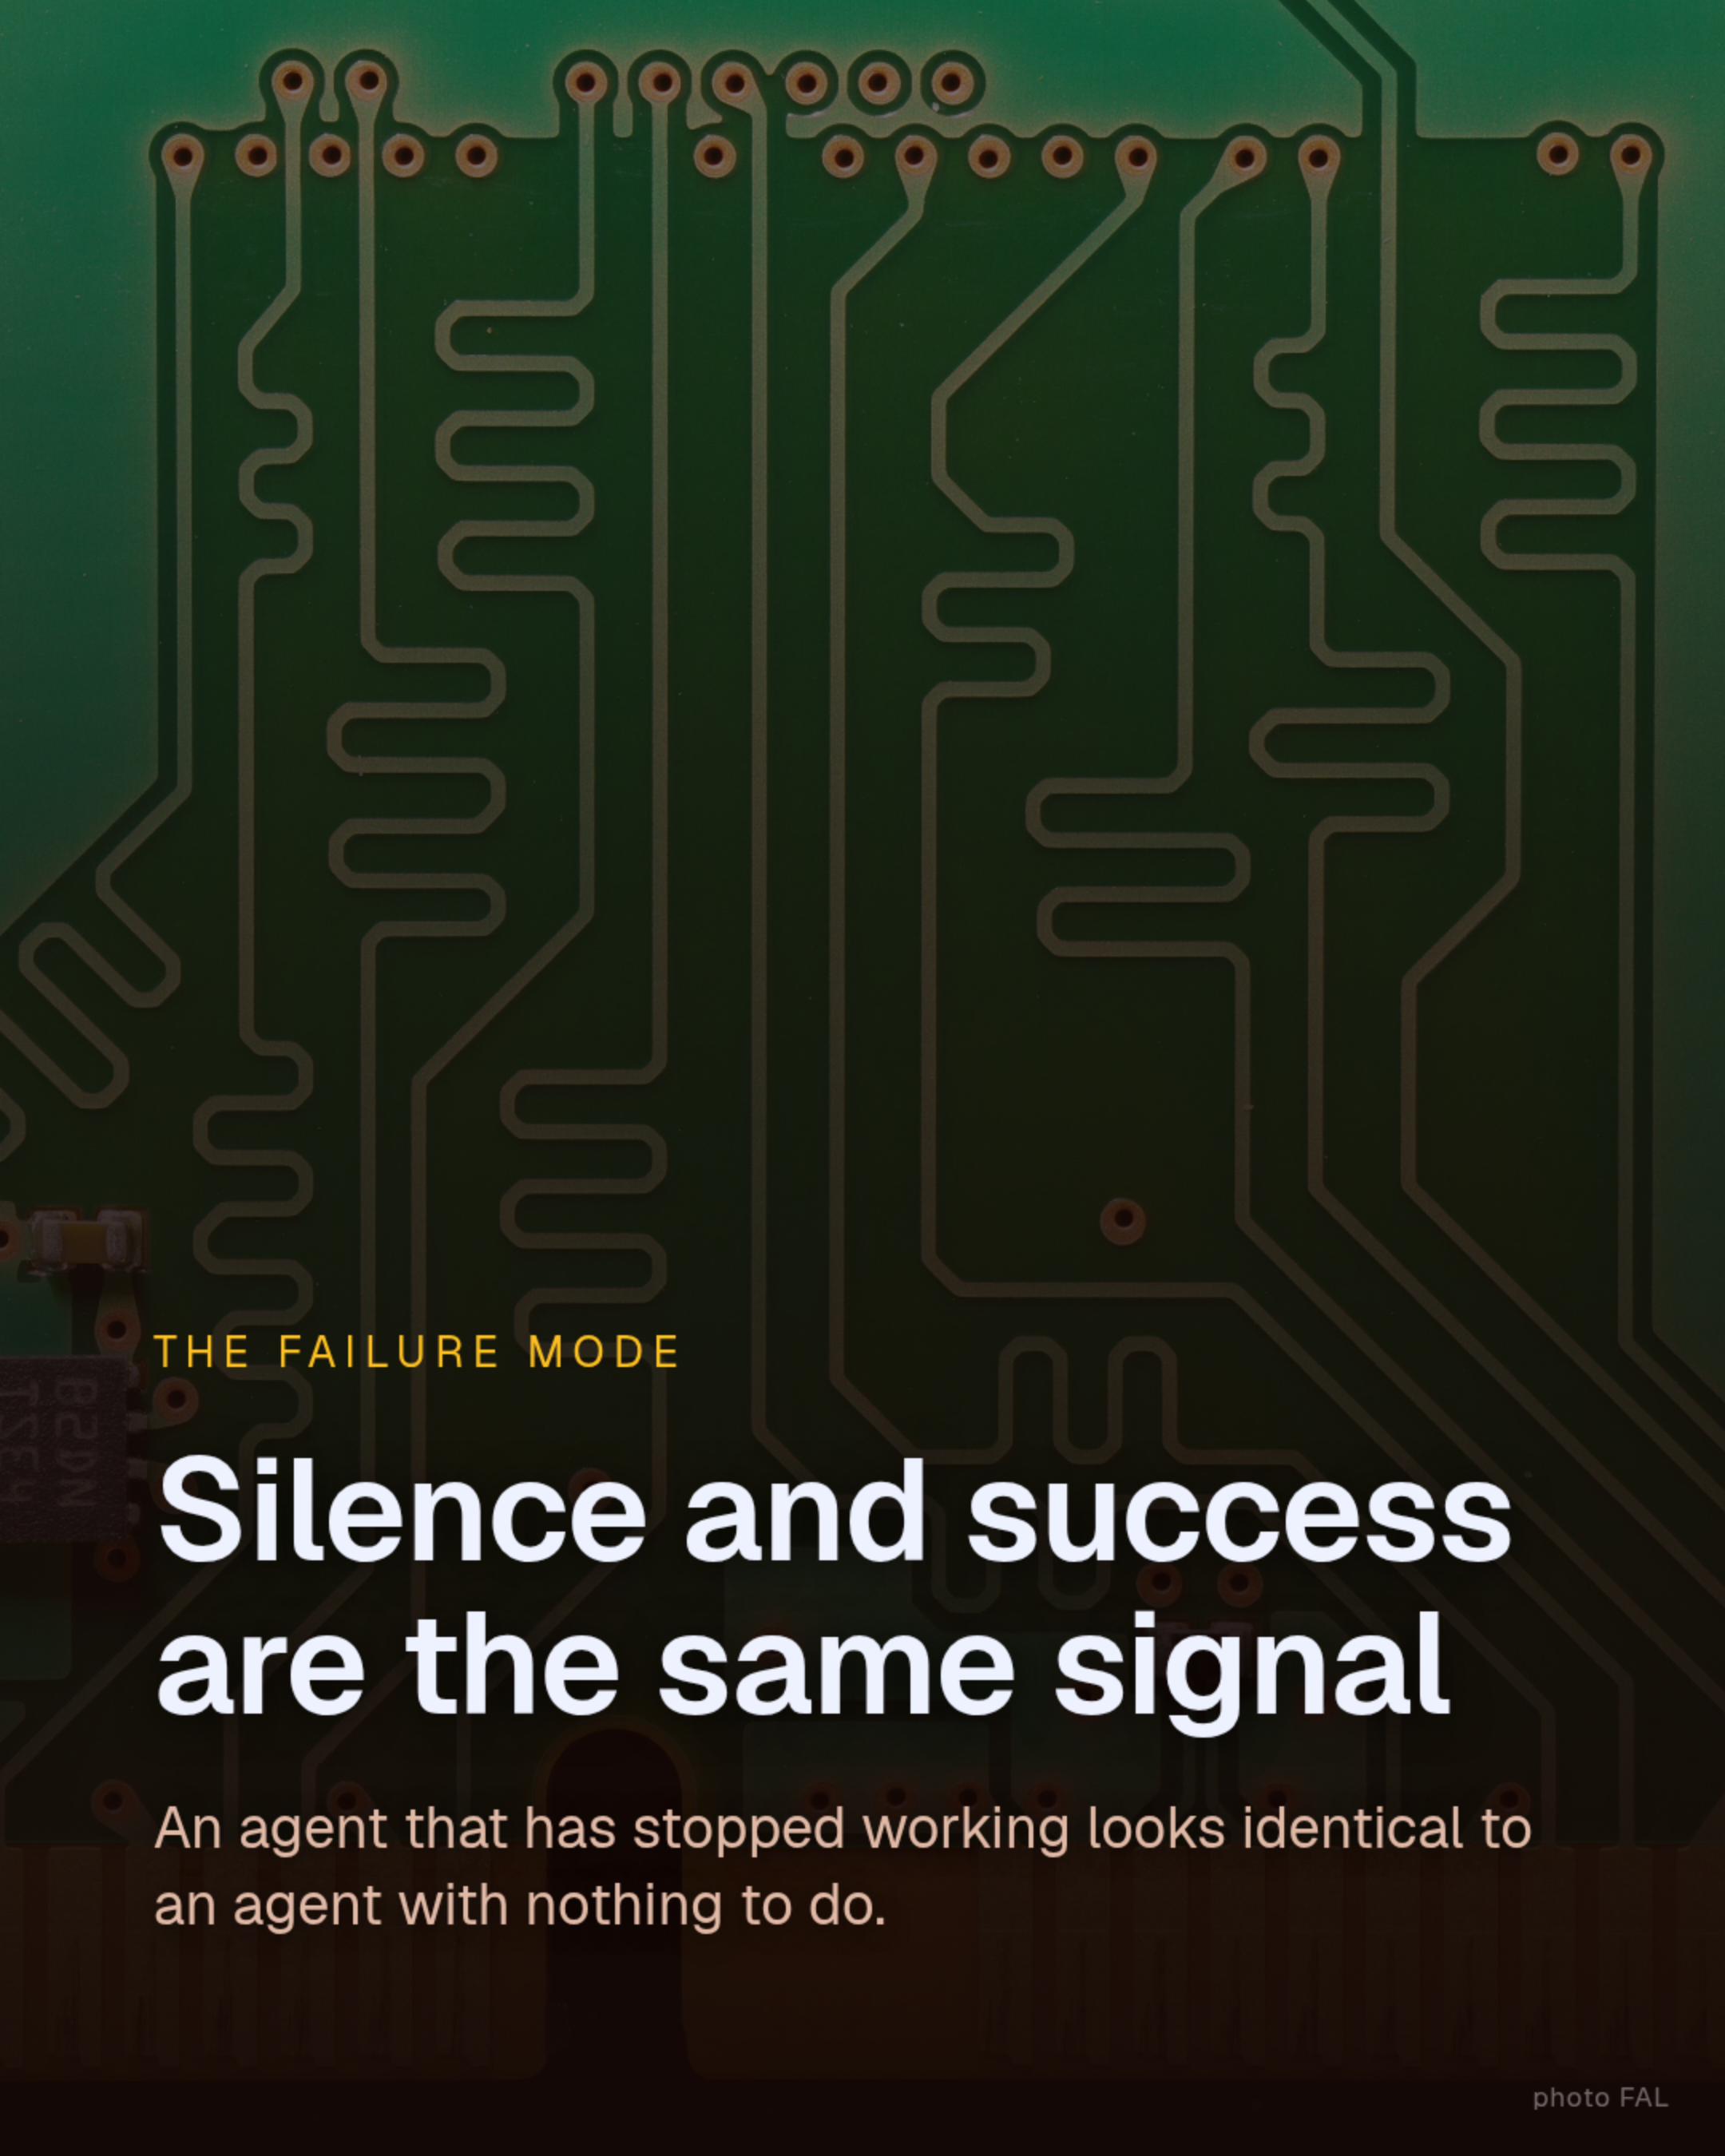

THE FAILURE MODE

Silence and success are the same signal


An agent that has stopped working looks identical to
an agent with nothing to do.

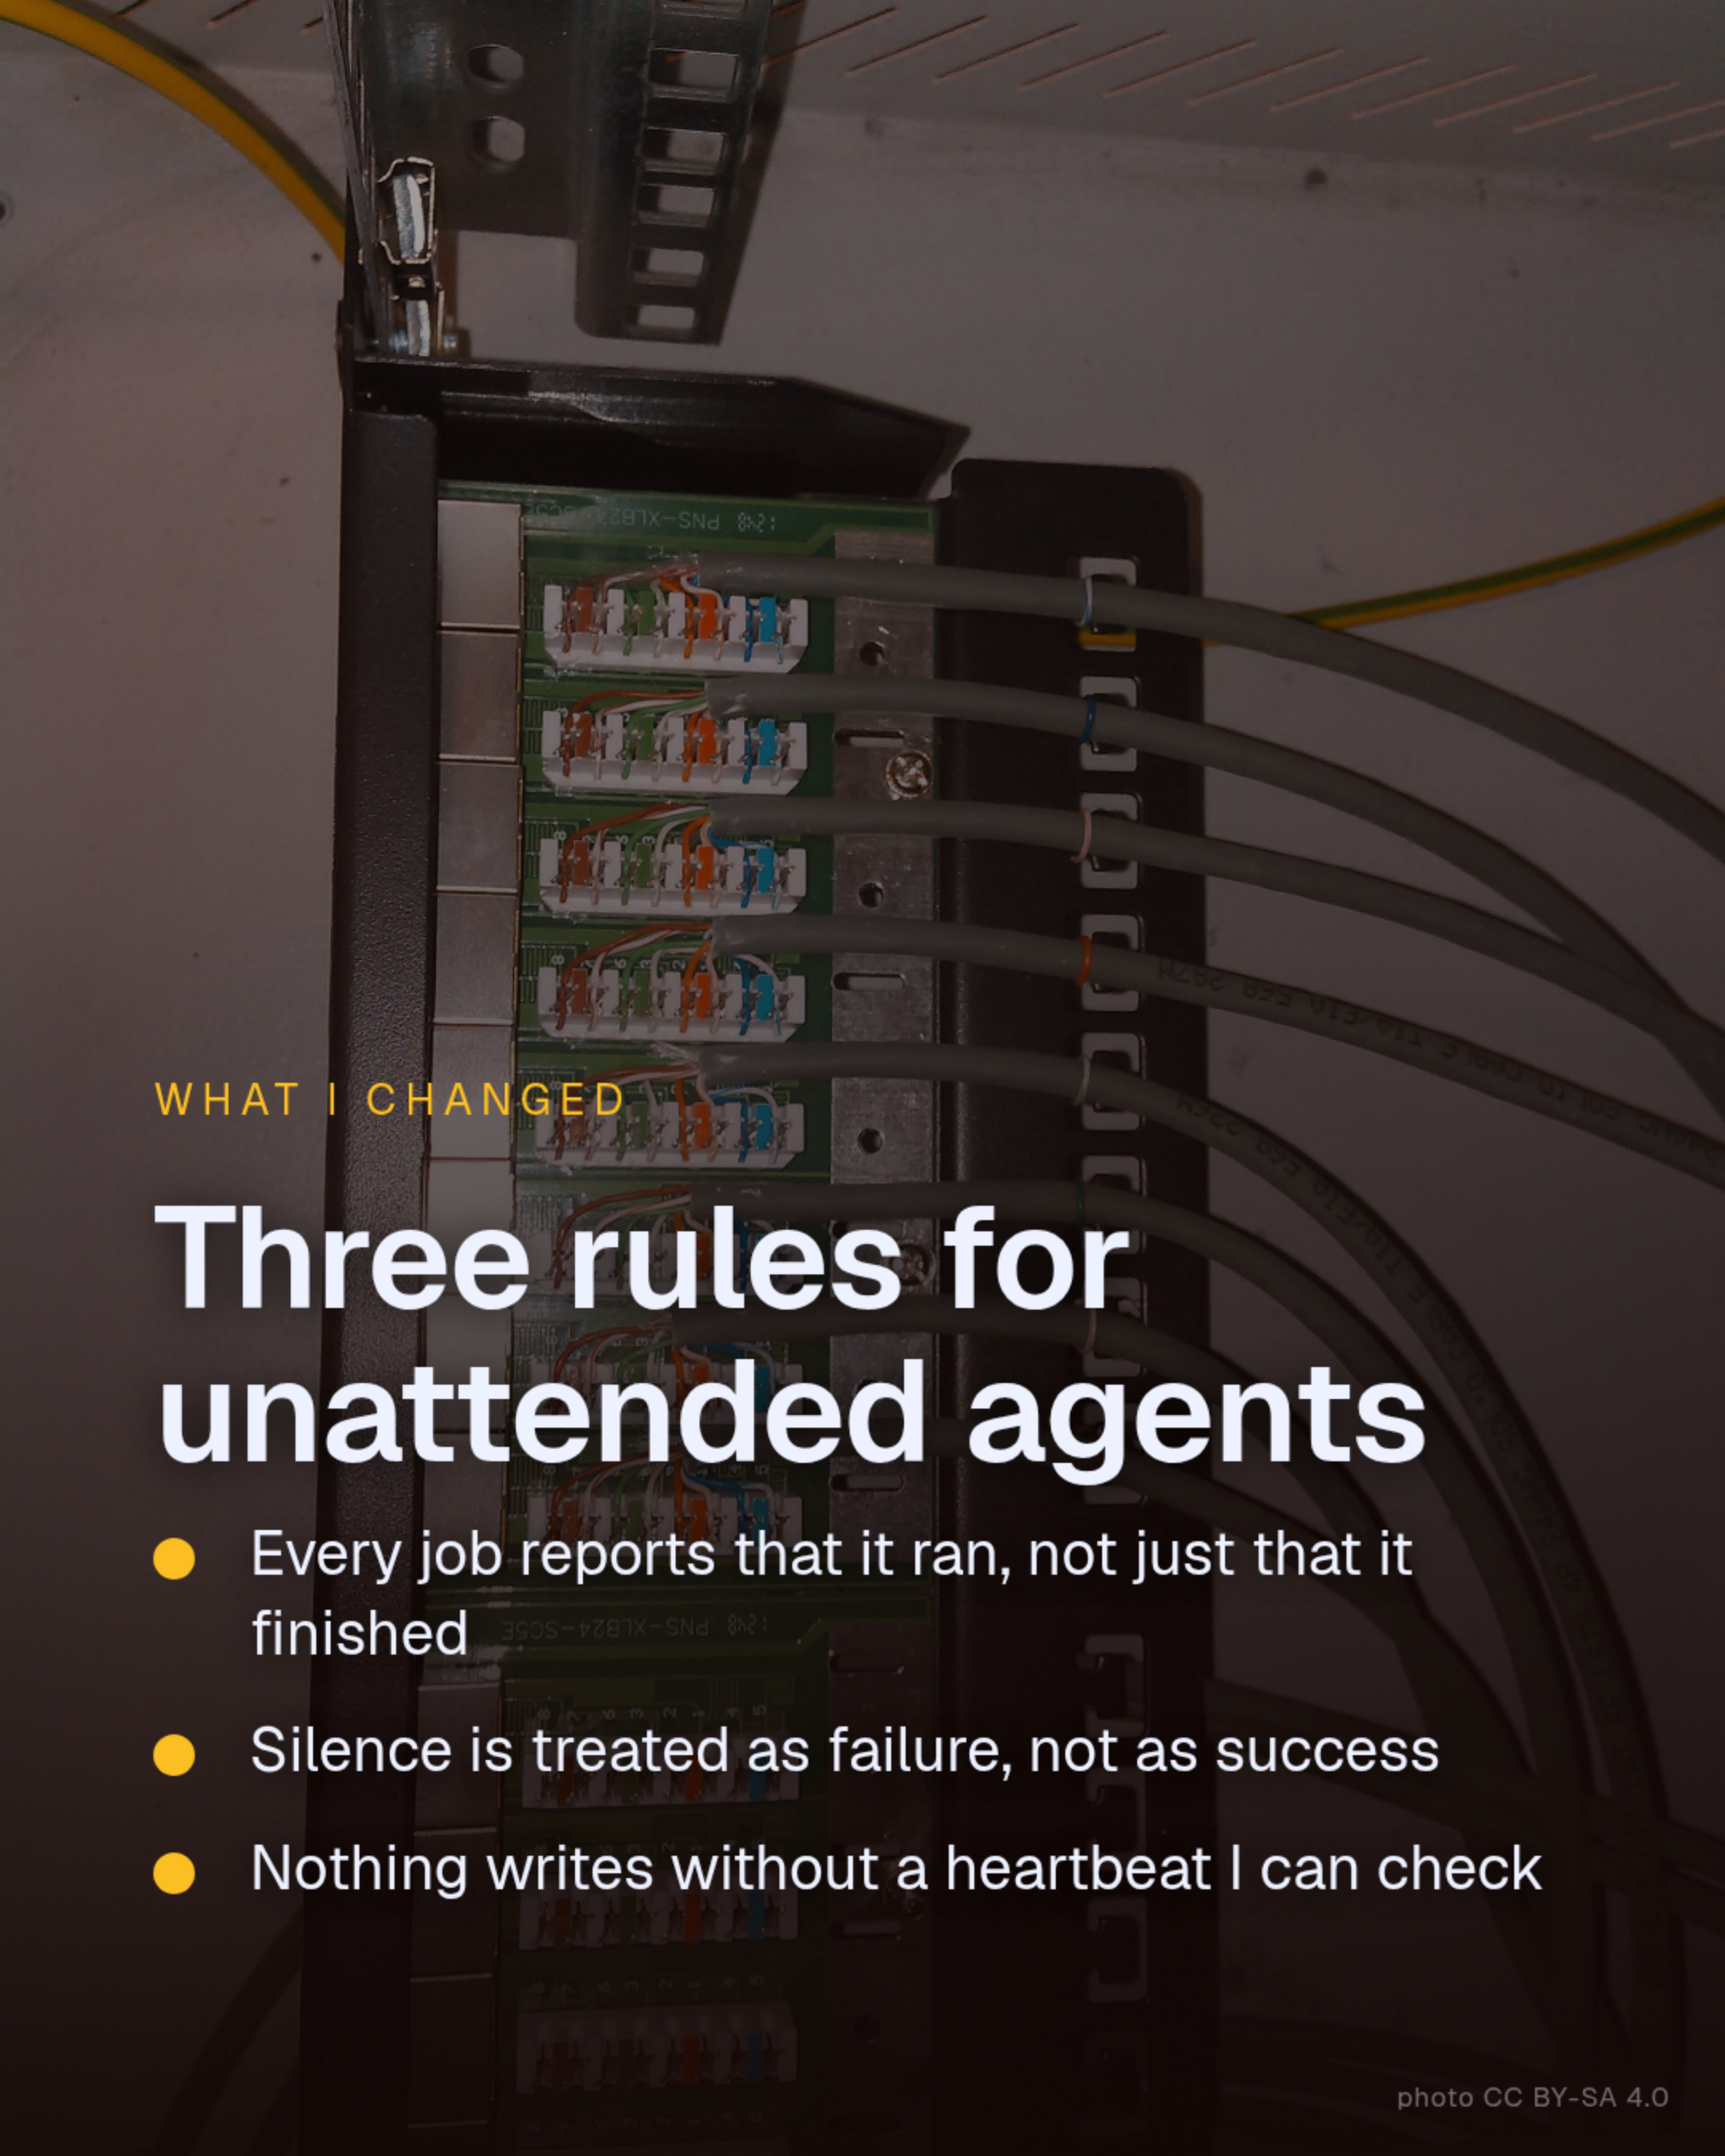

WHAT I CHANGED

Three rules for unattended agents

- Every job reports that it ran, not just that it finished
- Silence is treated as failure, not as success
- Nothing writes without a heartbeat I can check

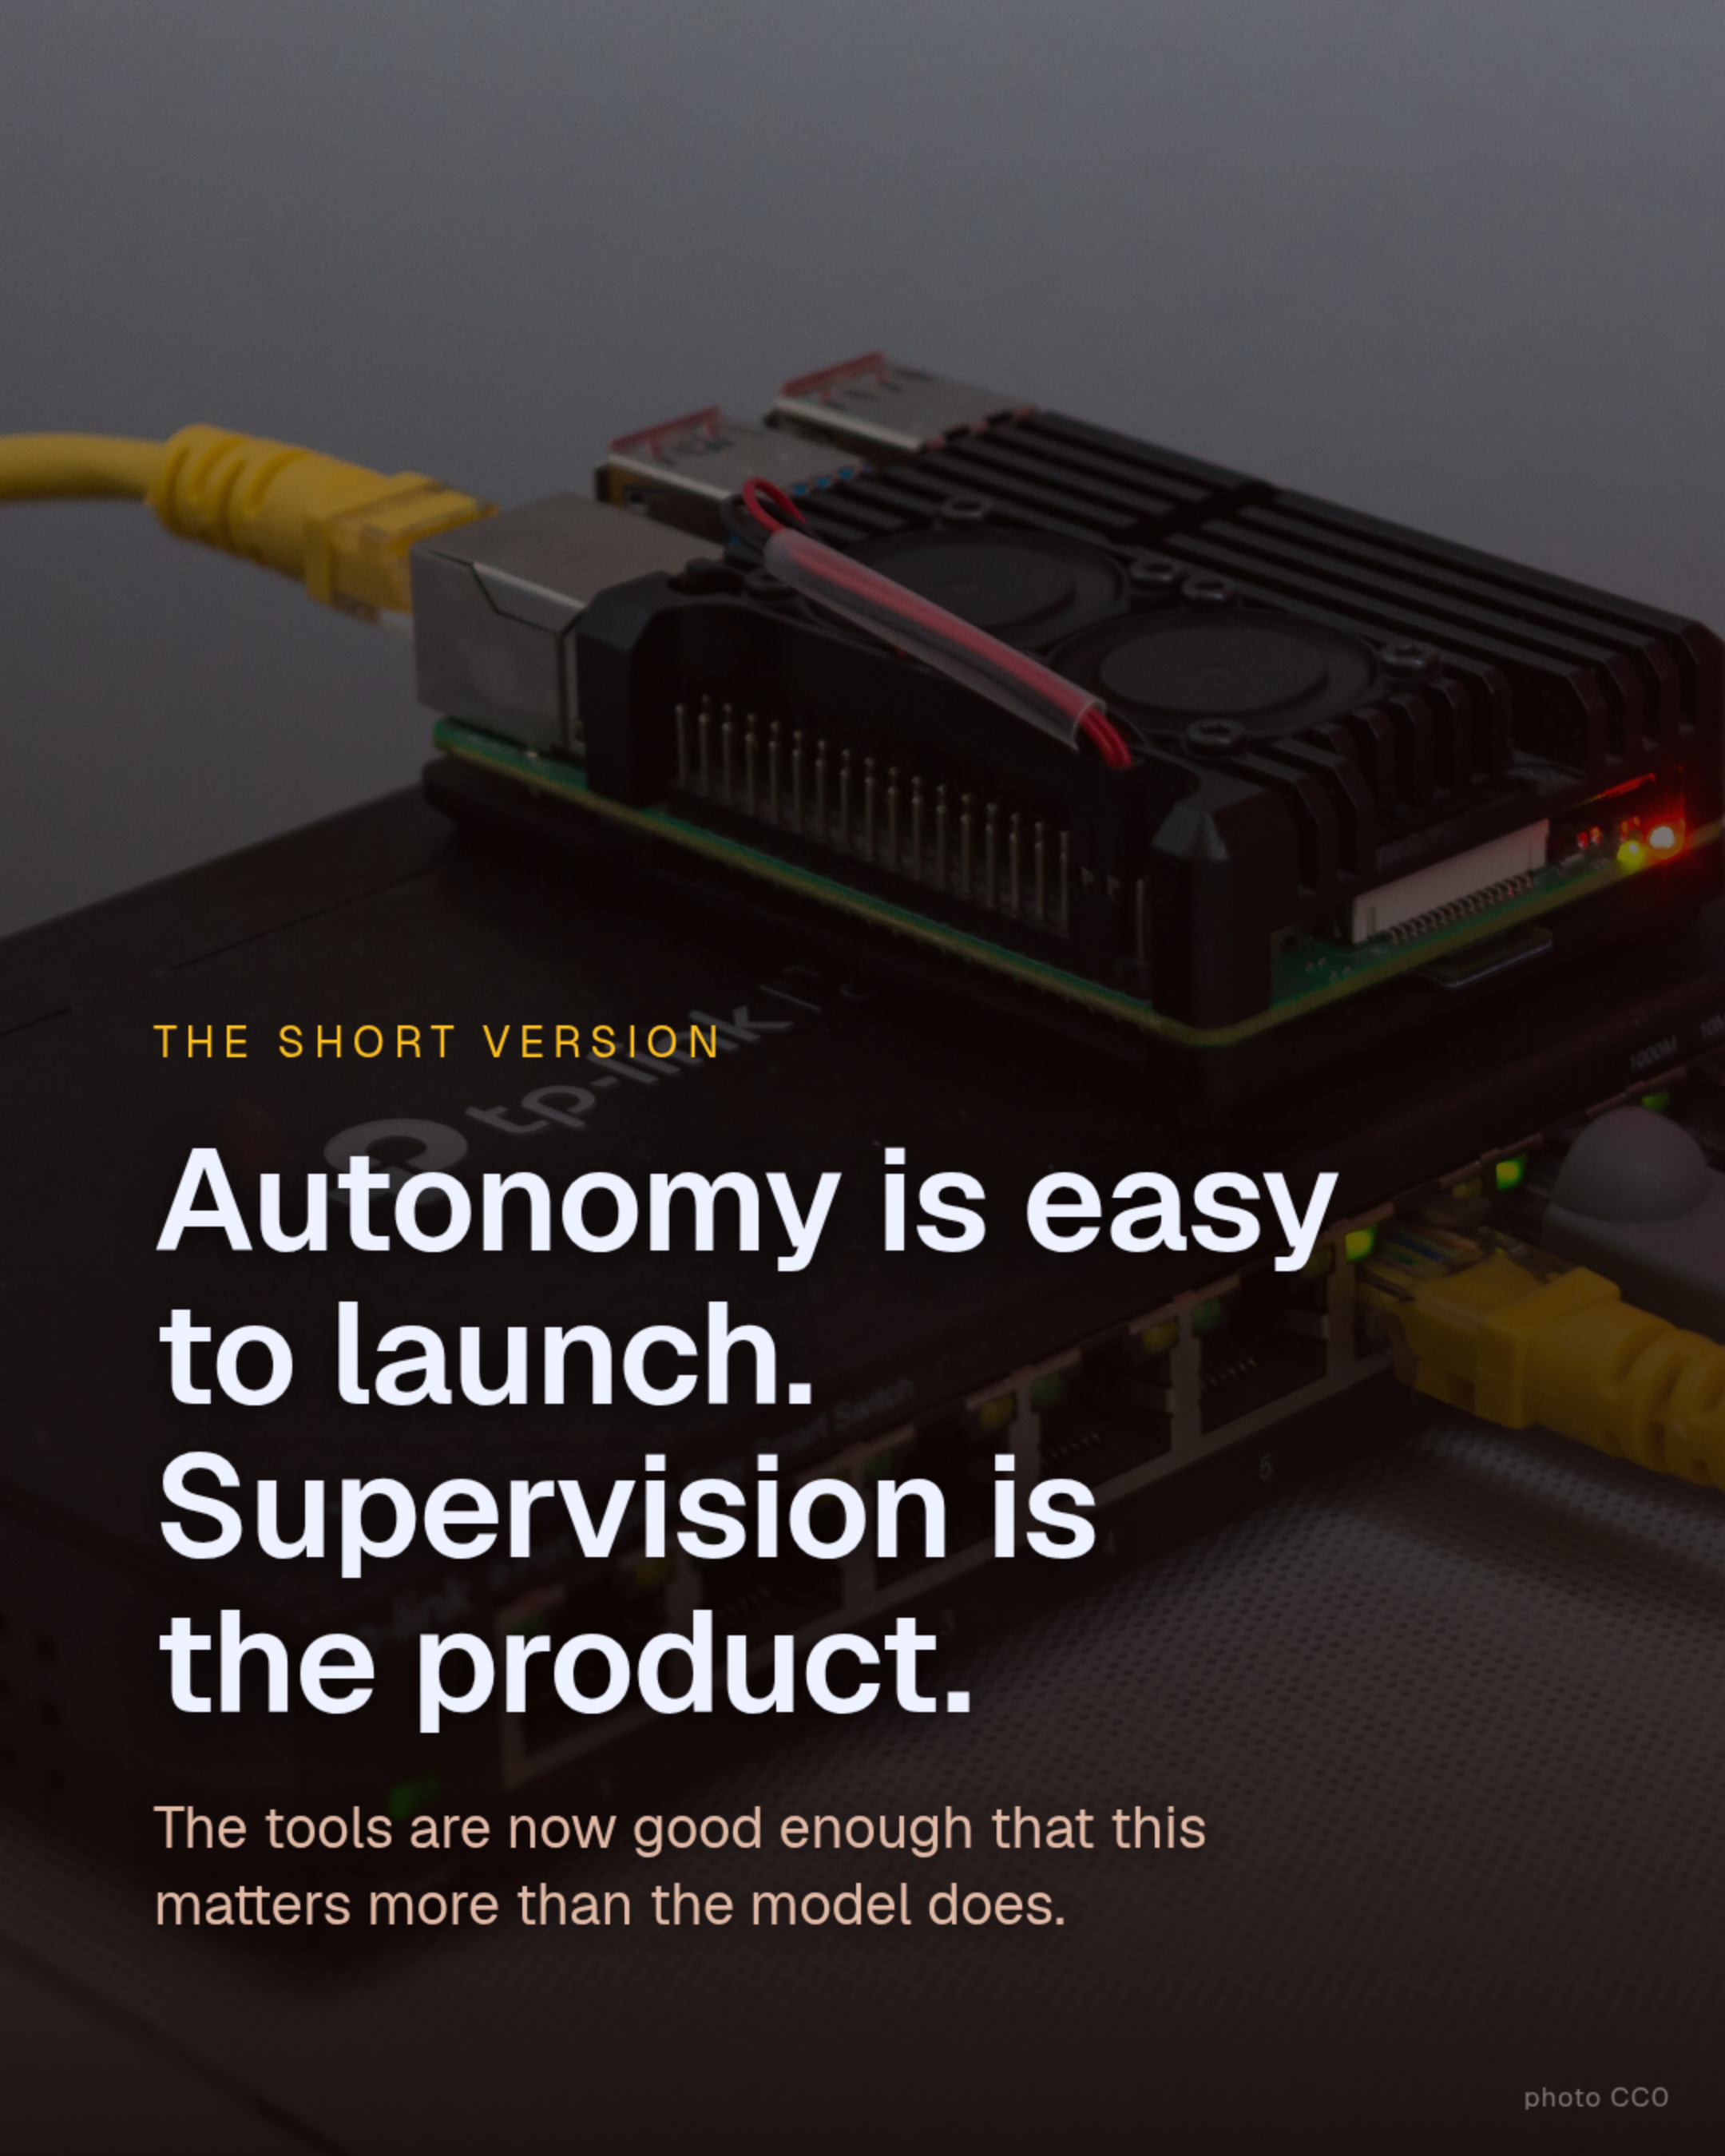

THE SHORT VERSION

**Autonomy is easy
to launch.
Supervision is
the product.**

The tools are now good enough that this matters more than the model does.