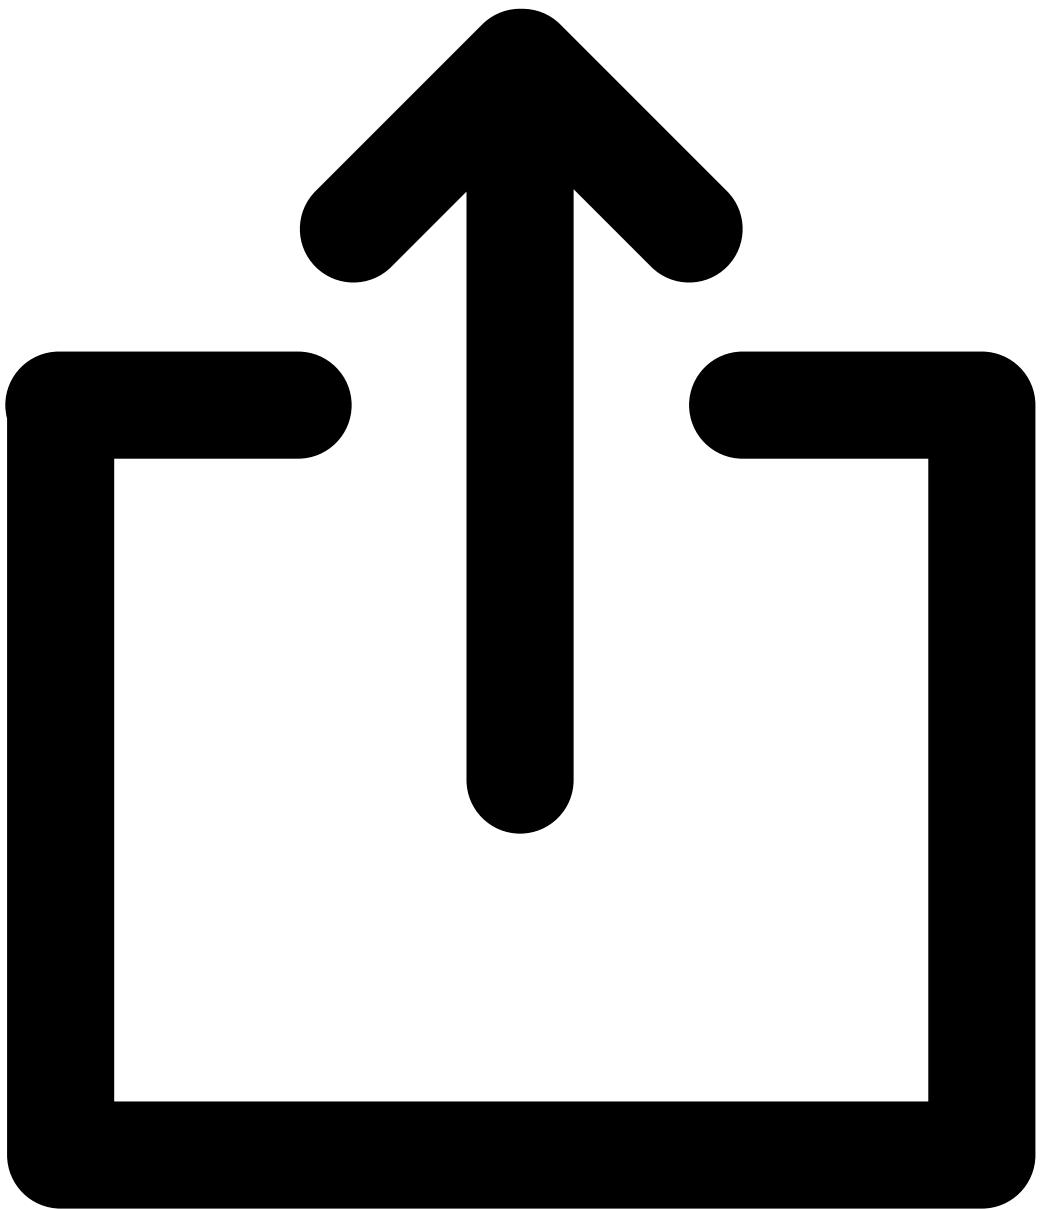


Arrow

Arrow component for sliders and navigation. It's Vue 2 functional component. To see css vars used in component please switch to canvas and CSS Custom Properties tab.



Show code

Name	Description	Default	Control
			<input type="checkbox"/>
Attributes			
disabled	Disable click event. It is passed like any other attribute in Vue functional component. boolean	-	<input type="checkbox"/> FalseTrue
ariaLabel	Aria-label name. It is passed like any other attribute in Vue functional component. string	"Arrow label"	<input type="text"/> Arrow label
			
Slots			
default	Use this slot to replace arrow icon	-	<input type="button"/> Set object
			
Events			
click	Click event. It is passed via v-on='listeners'	-	-
			
CSS modifiers			

Name	Description	Default	Control
classes	CSS classes to modify component styling -	-	



Stories

Disabled

←

Show code

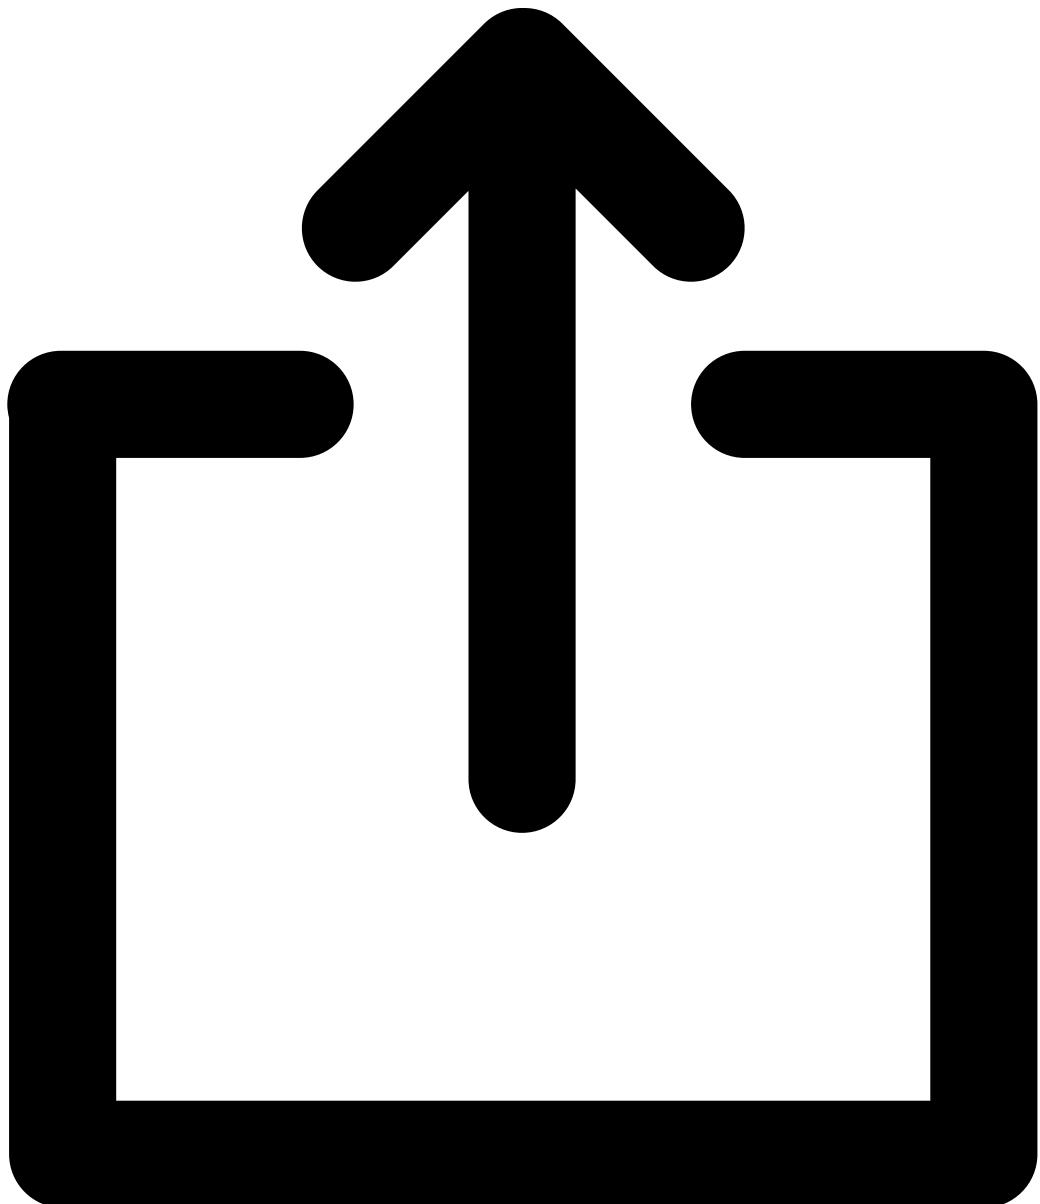
Use Default Slot

→

Show code

Badge

Badge component. Place desired content into its default slot. It's Vue 2 functional component.



Limited

Show code

Name

Description


Default

Control

label

Type here to fill the badge (only for testing in Storybook). For development use default slot, described below, to change the content.

Limited

Name	Description	Default	Control
 Hide CSS modifiers items	 Hide CSS modifiers items		
CSS modifiers			
 classes	CSS classes to modify component styling	-	
 Hide Slots items	 Hide Slots items		
Slots			
default	Use this slot to place content inside the badge	-	
 Stories			
 As Number			
90			
 Show code			
 Secondary			
90			
 Show code			
 Warning			
90			
 Show code			
 Danger			
90			
 Show code			

Info

90

[Show code](#)

Success

90

[Show code](#)

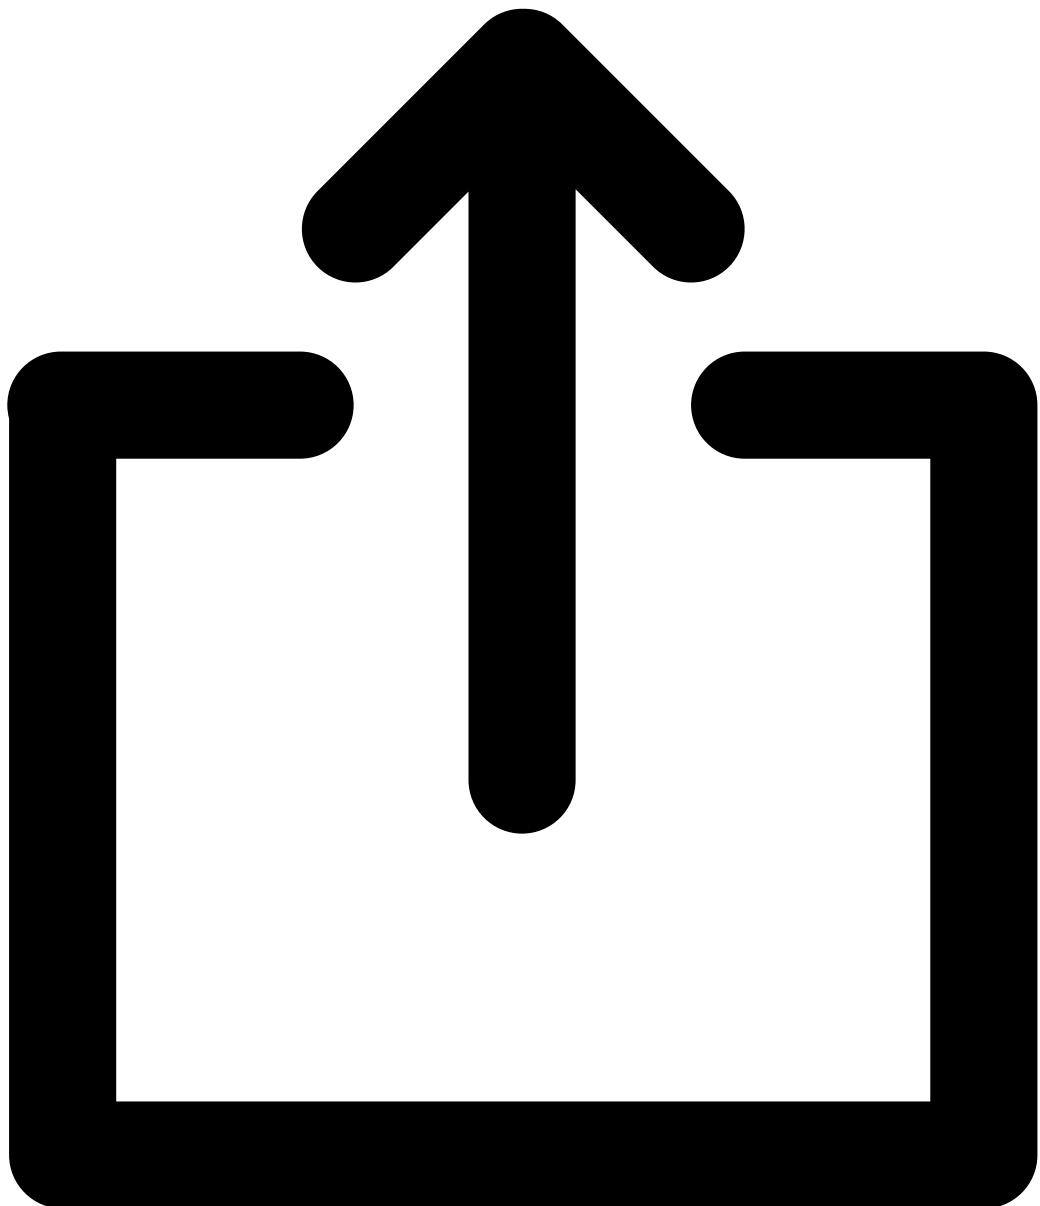
With Default Slot

Hello

[Show code](#)

Breadcrumbs

The component which renders a breadcrumb with router links for indicating the level of navigation the user is currently in. It's Vue 2 functional component.



Home | Category | Pants
[Show code](#)

Name	Description	Default	Control
Hide Props items			<input type="checkbox"/>



[Hide Props items](#)


Props

breadcrumbs


List of breadcrumbs (array of nested objects: [{ text, route }]) []
array




[breadcrumbs : \[](#)




[0 : {...} 2 keys](#)




[1 : {...} 2 keys](#)



[2 : {...} 2 keys](#)



Name	Description	Default	Control
ariaLabel	Attribute for 'aria-label' tag. string	"breadcrumb" <input type="text" value="breadcrumbs"/>	

[Hide Slots items](#)



[Hide Slots items](#)

Slots		
link	Custom markup for previous pages (binds breadcrumb object) -	Set object
current	Custom markup for current page (binds breadcrumb object) -	Set object

Stories

With Link Slot


```
'home' | 'category' | Pants
Show code
```

With Current Slot

```
Home | Category | "PANTS"
Show code
```

Bullets

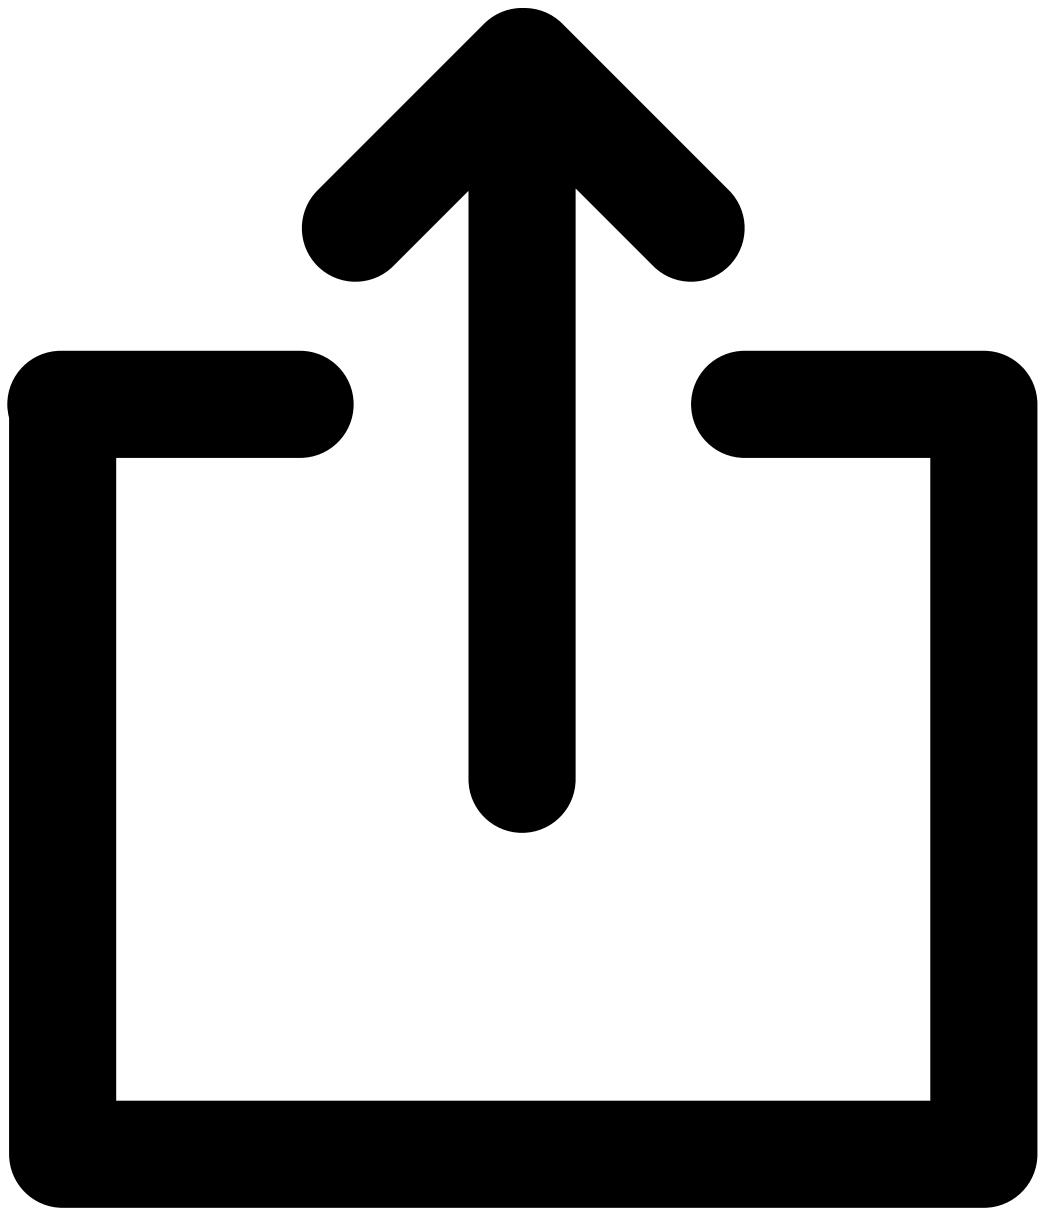Bullet-style indicator for paginated view containers. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
total	Number of bullets in total (active + inactive)	0	<input type="text" value="3"/>
current	Index of the currently active bullet (0-indexed)	0	<input type="text" value="1"/>
Hide Events items			
	Hide Events items		
Events			
click	Click event. Emits when inactive bullet button component is clicked.	-	-
Hide Slots items			
	Hide Slots items		
Slots			
active	Use this slot to replace active bullet	-	-
inactive	Use this slot to replace inactive bullet	-	-

Stories

With Active Slot

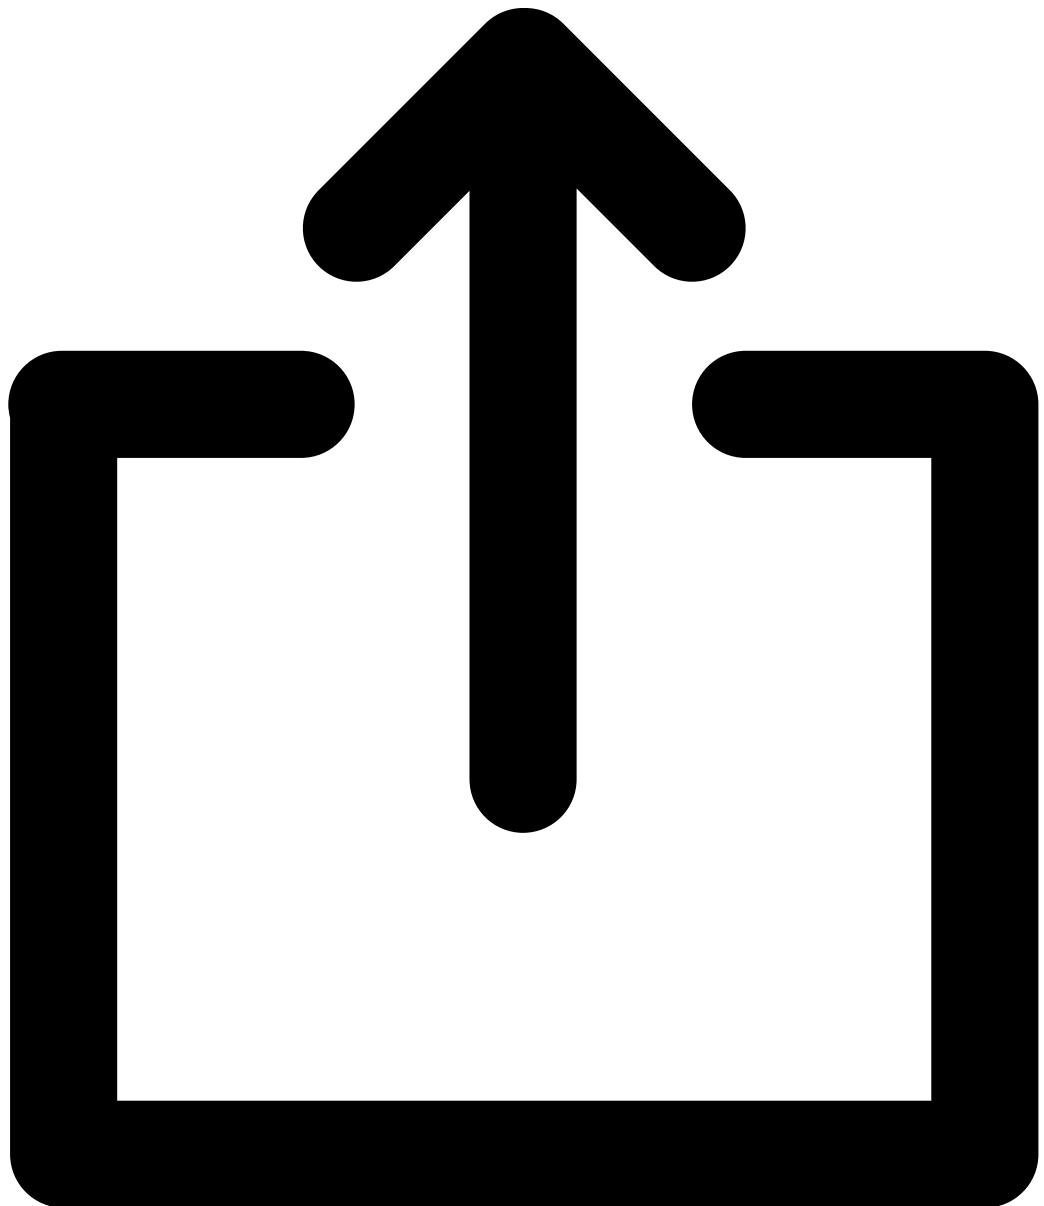
[Show code](#)

With Inactive Slot

[Show code](#)


Button

The base button component. It's Vue 2 functional component.



SHOP NOW

Show code

Name	Description	Default	Control
content	Type here to fill the button (only for testing in Storybook). For development use default slot, described below, to change the content.	-	<input type="text" value="Shop now"/>
Hide CSS modifiers items			
			
CSS modifiers			
classes	CSS classes to modify component styling	-	
Hide Props items			
			
Props			
link	Link for 'a' tag. stringobject	null	<input type="button" value="Set string"/>
disabled	Equivalent of native button disabled attribute, allows focus for better accessibility boolean	false	<input type="checkbox"/> False <input checked="" type="checkbox"/> True
type	Type of button, which controls the behaviour when it is activated. string: button, submit, reset	"button"	
ariaLabel	Attribute for 'aria-label' tag. string	<input type="text" value="button"/>	<input type="text" value="button"/>

Name	Description	Default	Control
	Hide Slots items		
Slots			
default	Use this slot to place content inside the button	-	Set object
	Hide Events items		
Events			
click	Click event. It is passed via v-on='listeners'.	-	-

Stories

Disabled

SHOP NOW

[Show code](#)

Submit

SUBMIT

[Show code](#)

Aria Label

SHOP NOW

[Show code](#)

As Link

SHOP NOW

[Show code](#)

Secondary

SHOP NOW

[Show code](#)

Light

SHOP NOW

[Show code](#)

Warning

SHOP NOW

[Show code](#)

In Danger

SHOP NOW

[Show code](#)

Info

SHOP NOW

[Show code](#)

Success

SHOP NOW

[Show code](#)

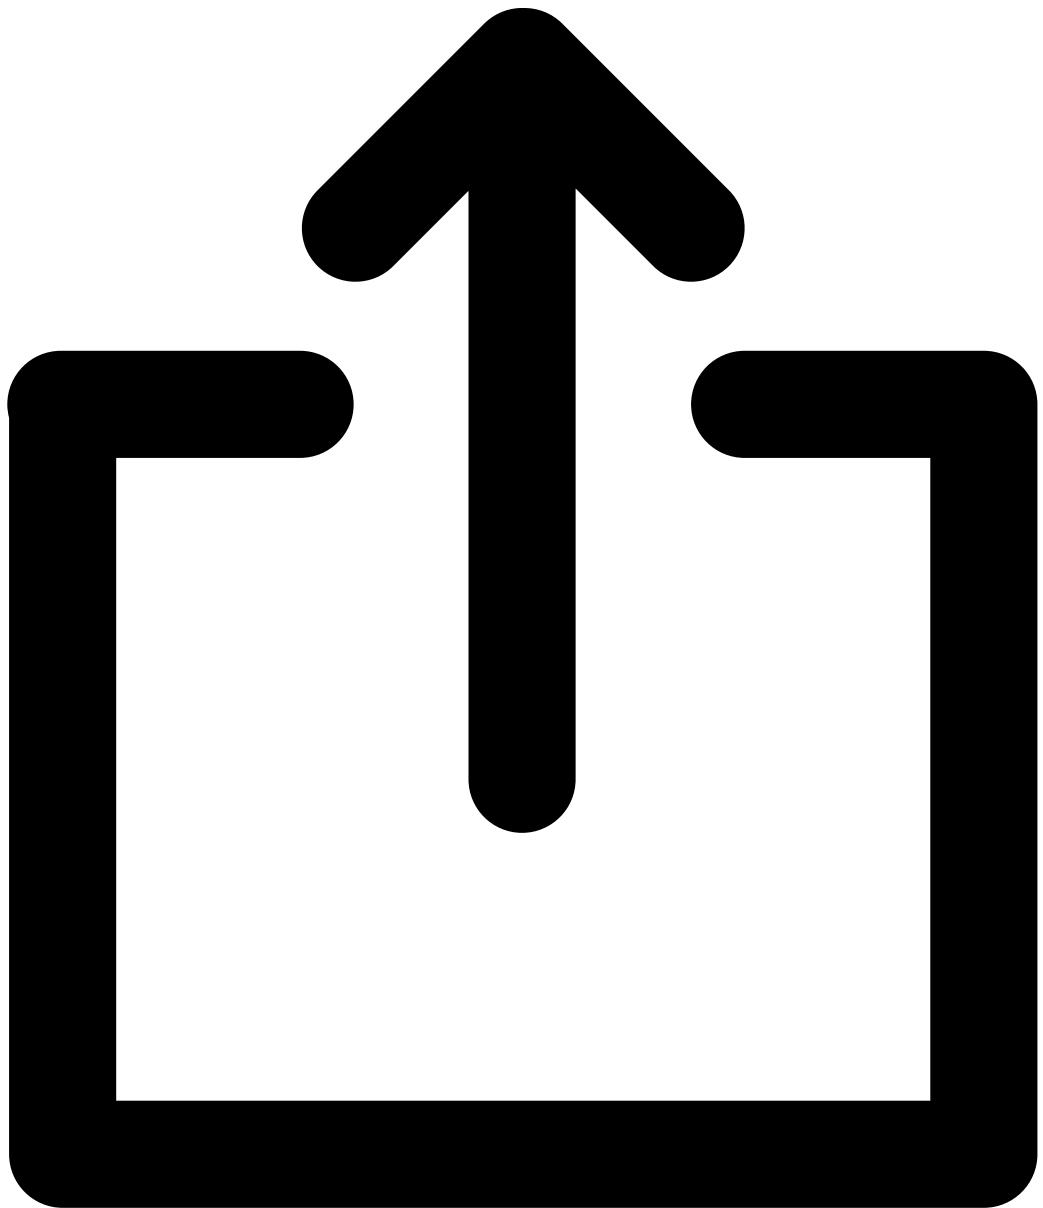
With Default Slot

:ARIA-LABEL="ARIALABEL" CUSTOM SLOT

[Show code](#)


Chevron

The chevron component. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Slots items			

[Hide Slots items](#)

Slots
default

[Hide CSS Modifiers items](#)

Use this slot to place custom chevron markup -

[Set object](#)[Hide CSS Modifiers items](#)

CSS Modifiers

classes

CSS classes to modify component styling

[▼](#)

Stories

[Top](#)

[Show code](#)

[Right](#)

[Show code](#)

[Left](#)

[Show code](#)

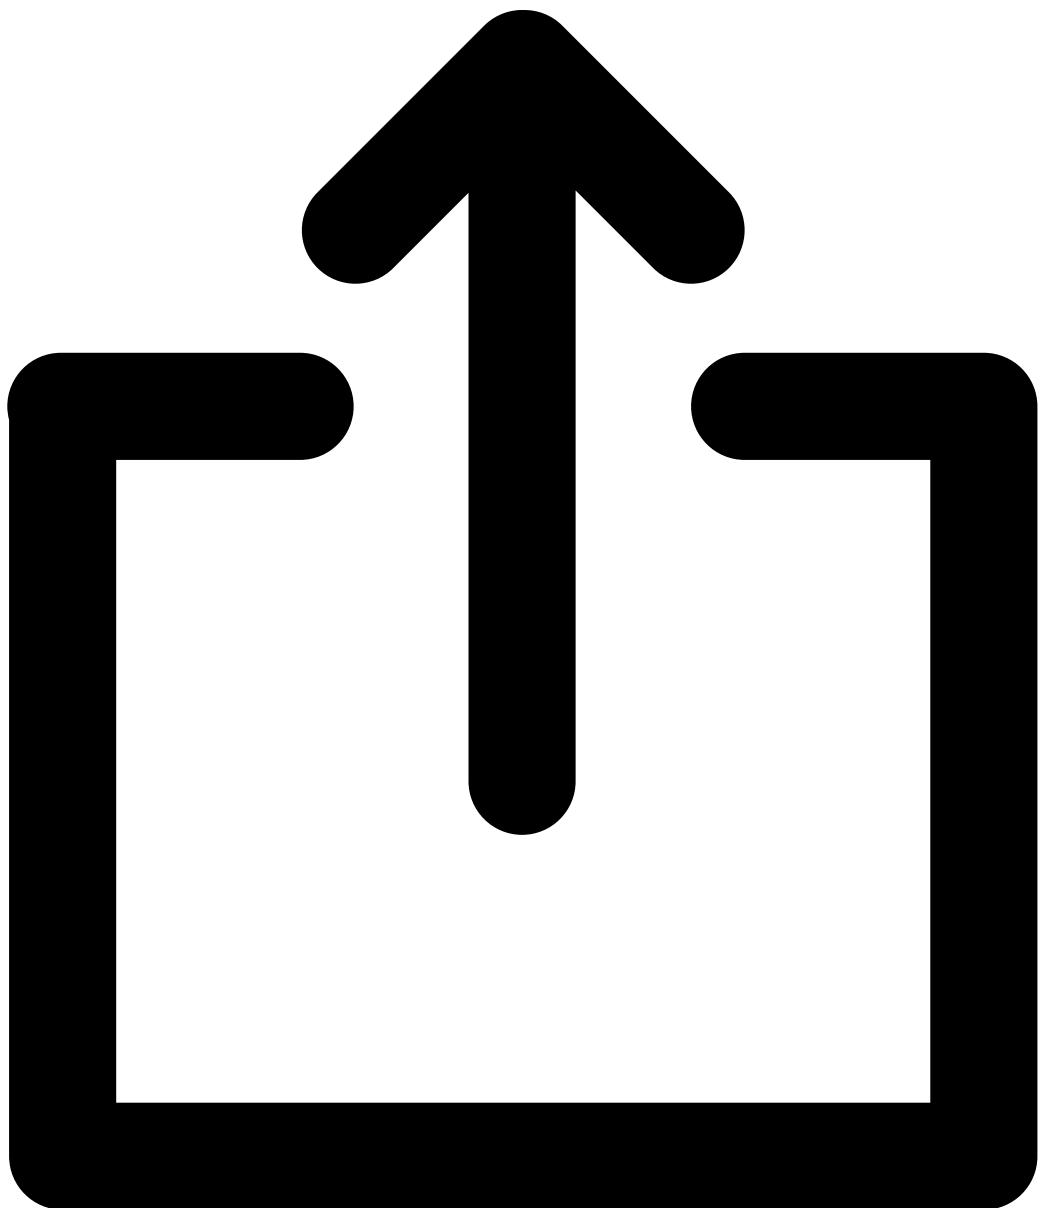
[With Default Slot](#)

←

Show code

CircleIcon

The Round hover-animated component with an icon, e.g. usable for major navigation/action items. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

icon	Icon SVG path(s) It can be single SVG path (string) or array of SVG paths or icon name from our icons list (such as 'added_to_cart') stringarray	"home"	
------	---	--------	--

disabled	Disables button and sets proper styling. boolean	false	<input type="checkbox"/> FalseTrue
----------	---	-------	------------------------------------

iconSize	Custom size of the icon. It can be one of our standard sizes: xxs, xs, sm, md, lg, xl, xxl, xl3, xl4, or e.g. '12px' or '1.2rem' or nothing. string	""	
----------	--	----	--

[Hide props items](#)



[Hide props items](#)

props

ariaLabel	string	"button-icon"	<input type="button" value="Set string"/>
-----------	--------	---------------	---

[Hide Slots items](#)



[Hide Slots items](#)

Slots

default	Custom content that will replace default icon. Can be used for inlined SVG's	-	<input type="button" value="Set object"/>
---------	--	---	---

Name	Description	Default	Control
<code>Hide CSS Modifiers items</code>			



`Hide CSS Modifiers items`

CSS Modifiers

classes

CSS classes to modify component styling



`-`

`Hide Events items`



`Hide Events items`

Events

click

Click event. It is passed via `v-on='listeners'`



Stories

Disabled

`Show code`

Secondary

`Show code`

Light

`Show code`

Warning

`Show code`

In Danger

[Show code](#)

Info

[Show code](#)

Success

[Show code](#)

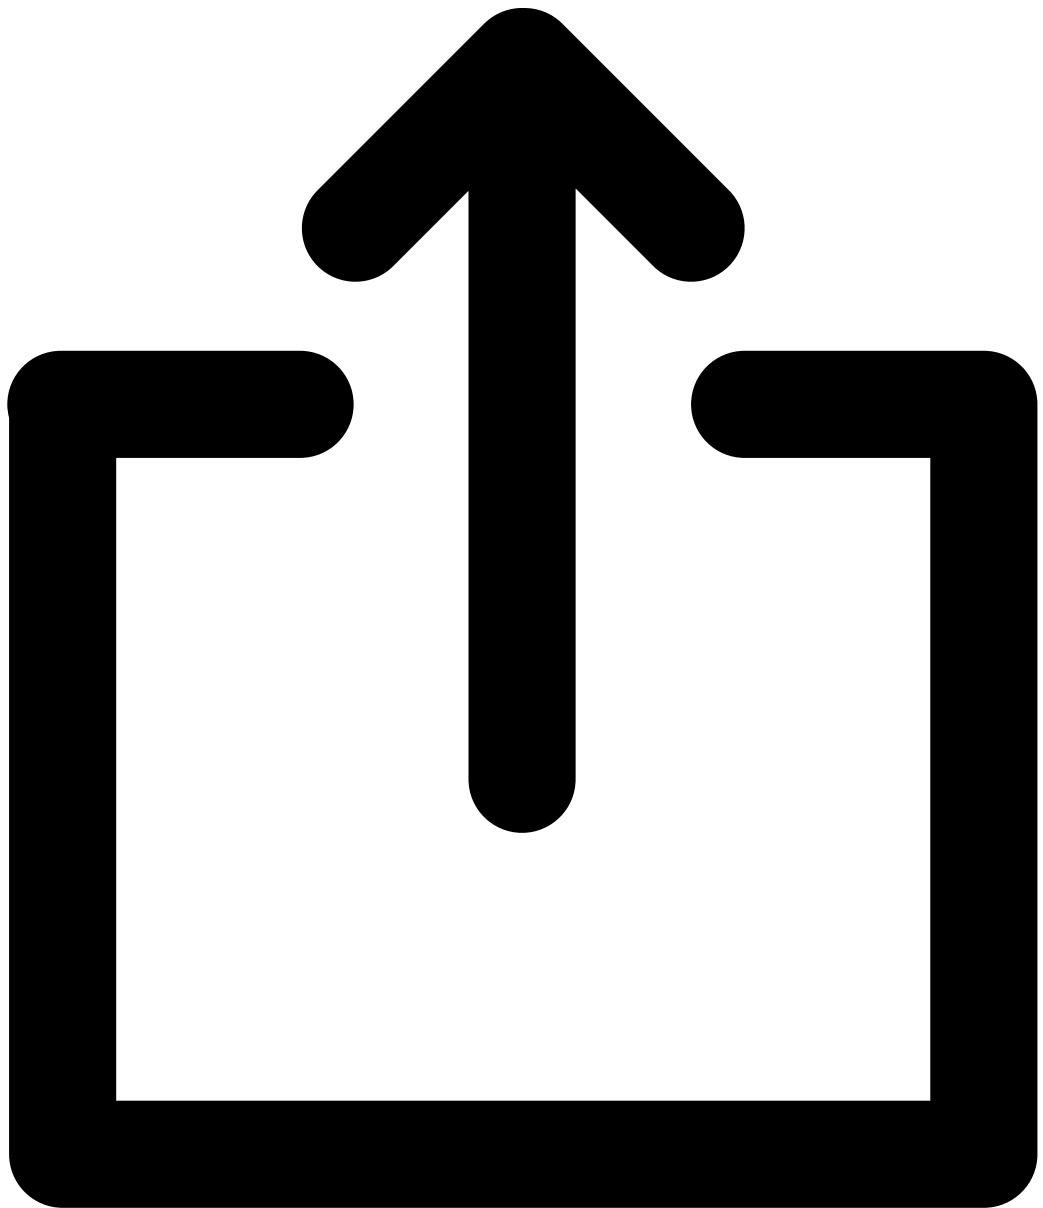
With Default Slot

HOME

[Show code](#)

Color

The color picker component button. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Props items			


[Hide Props items](#)

Props

color

Sets picker color
string

...



selected

Sets select value
boolean

false

 FalseTrue

hasBadge

Use badge for selected state on smartphone mode
boolean

true

 FalseTrue[Hide Slots items](#)[Hide Slots items](#)

Slots

badge

Use it to replace badge to custom element

-

[Set object](#)

Name	Description	Default	Control
Hide CSS Modifiers items			




Hide CSS Modifiers items

CSS Modifiers

classes

CSS classes to modify component styling



sf-color--rounded ▾

Hide Events items



Hide Events items

Events

click

Click event. It is passed via v-on='listeners'

- - -

Stories

Selected

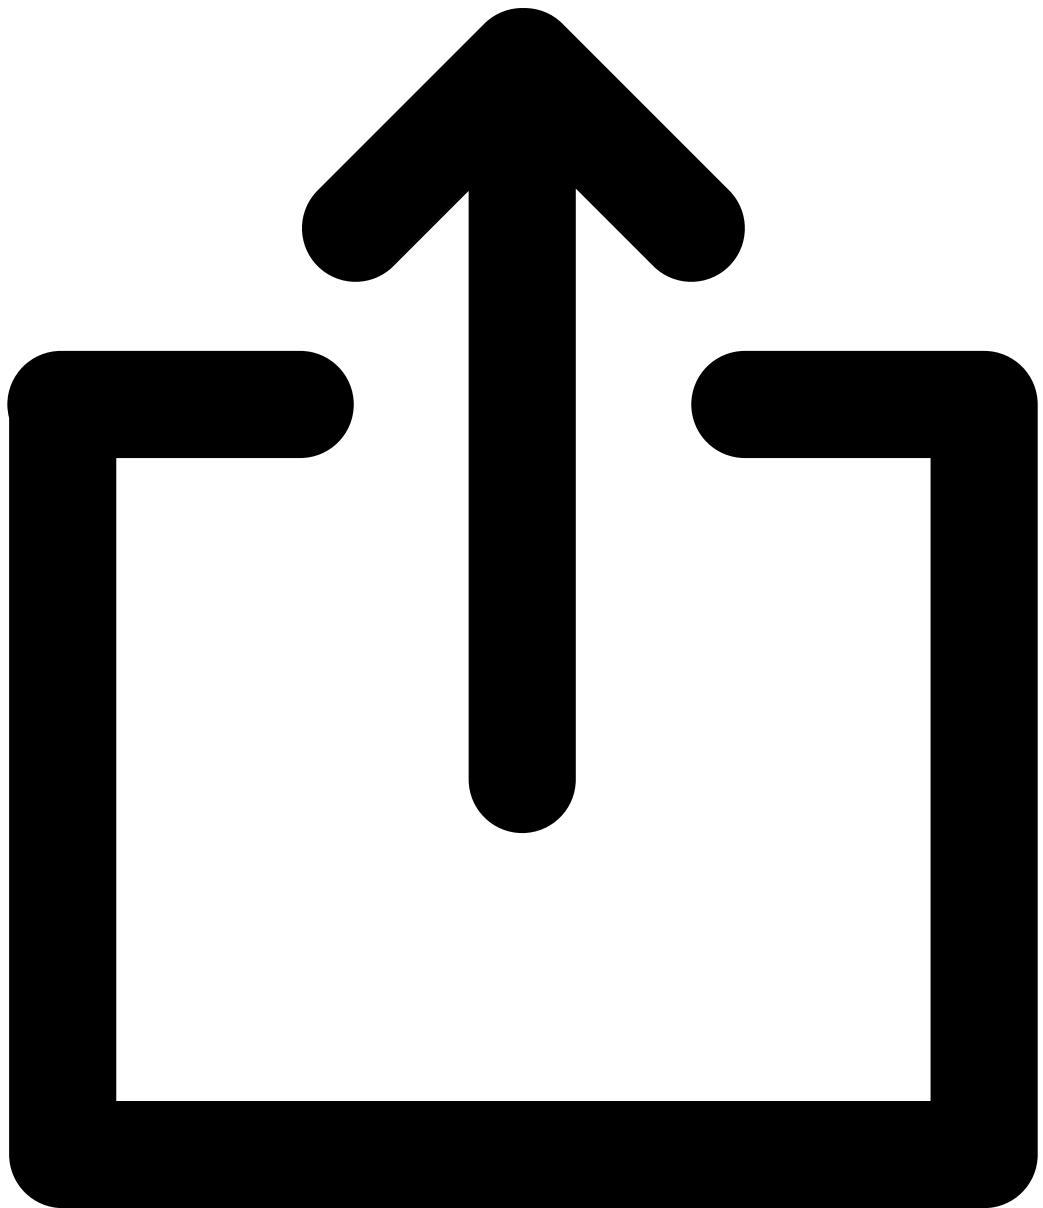
Show code

With Color

Show code


Divider

The divider component. It's Vue 2 functional component.




Show code

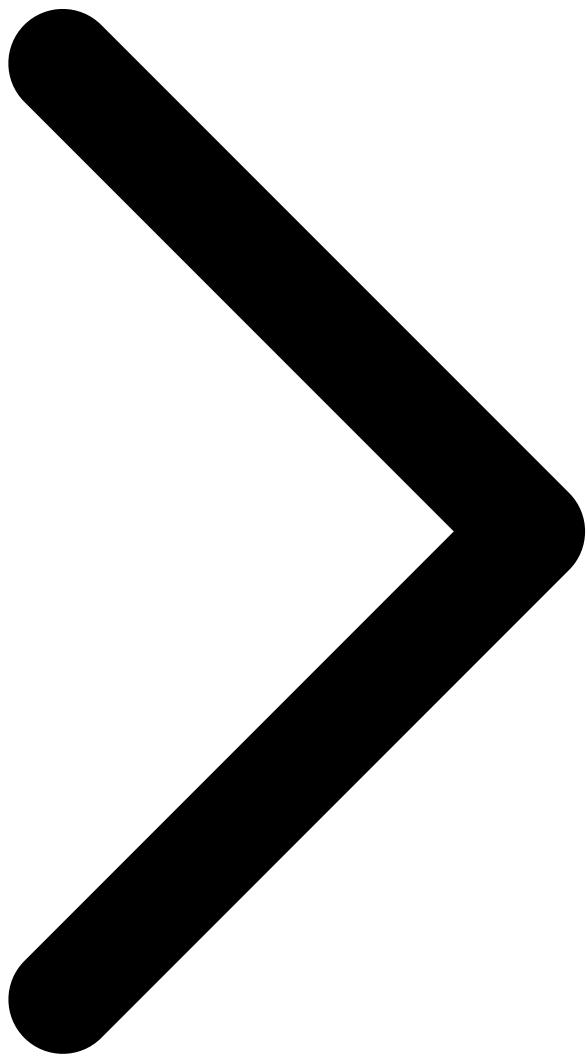No inputs found for this component. [Read the docs](#)



Heading

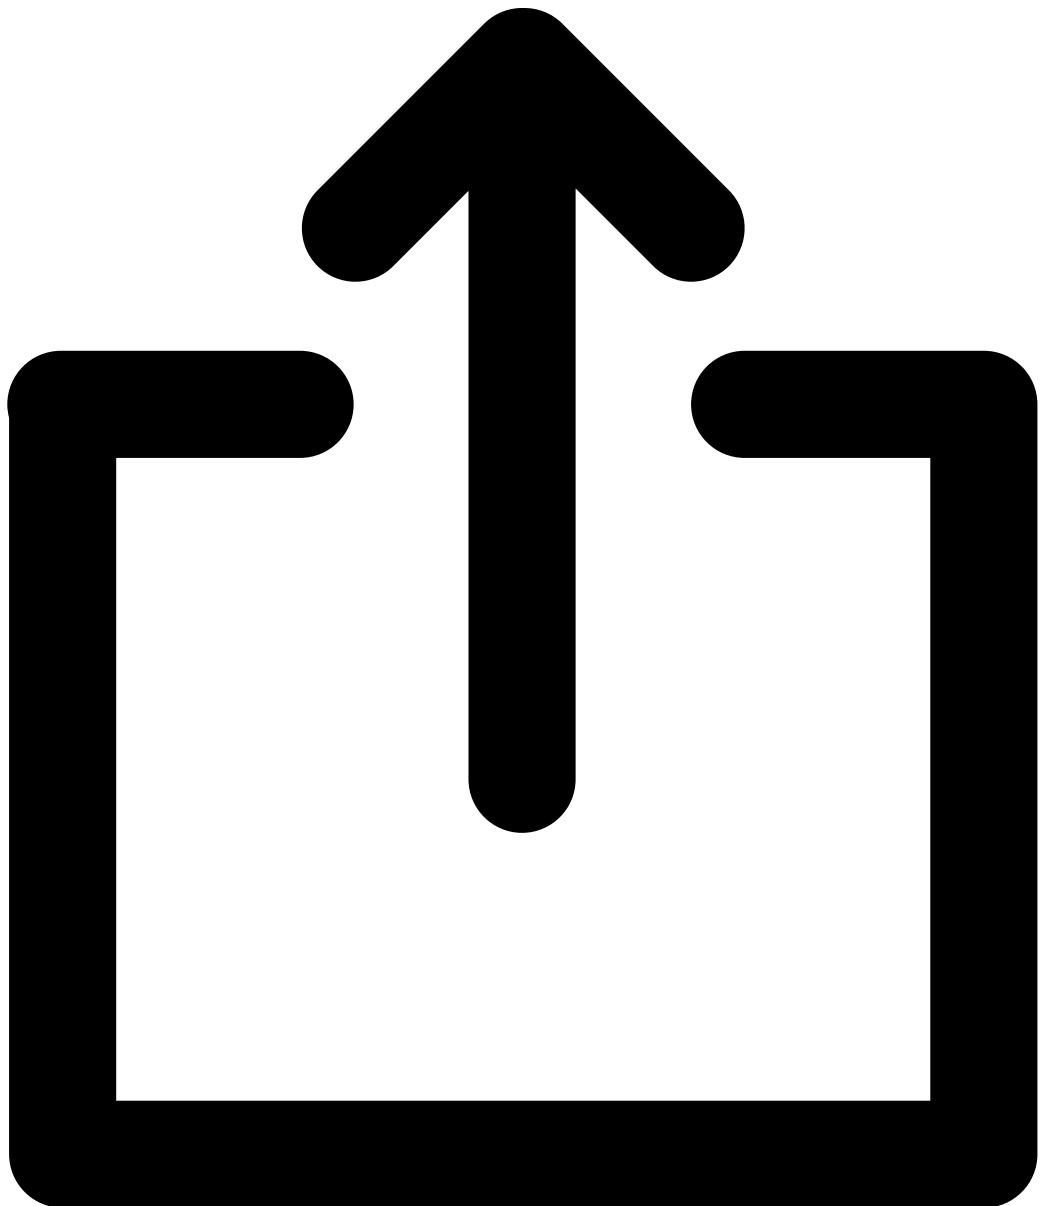The heading component for titles with optional description. It's Vue 2 functional component.



Share your look

#YOURLOOK

Show code

Name	Description	Default	Control
Hide Props items			
			
	Hide Props items		
Props			
title	Heading title string	-	<input type="text" value="Share your look"/>
description	Heading description string	-	<input type="text" value="#YOURLOOK"/>
level	Heading level from 1 to 6 (like in native heading element). number	2	<input type="text" value="2"/>
Hide CSS Modifiers items			

	Hide CSS Modifiers items		
CSS Modifiers			
classes	CSS classes to modify component styling -	-	 <input type="text"/>

Name	Description	Default	Control
Hide Slots items			



[Hide Slots items](#)

Slots			
title	Named slot title. Use this slot to replace title content	-	-
description	Named slot description. Use this slot to replace description content	-	-

Stories

With Label Slot

♡

#YOURLOOK

[Show code](#)

With Description Slot

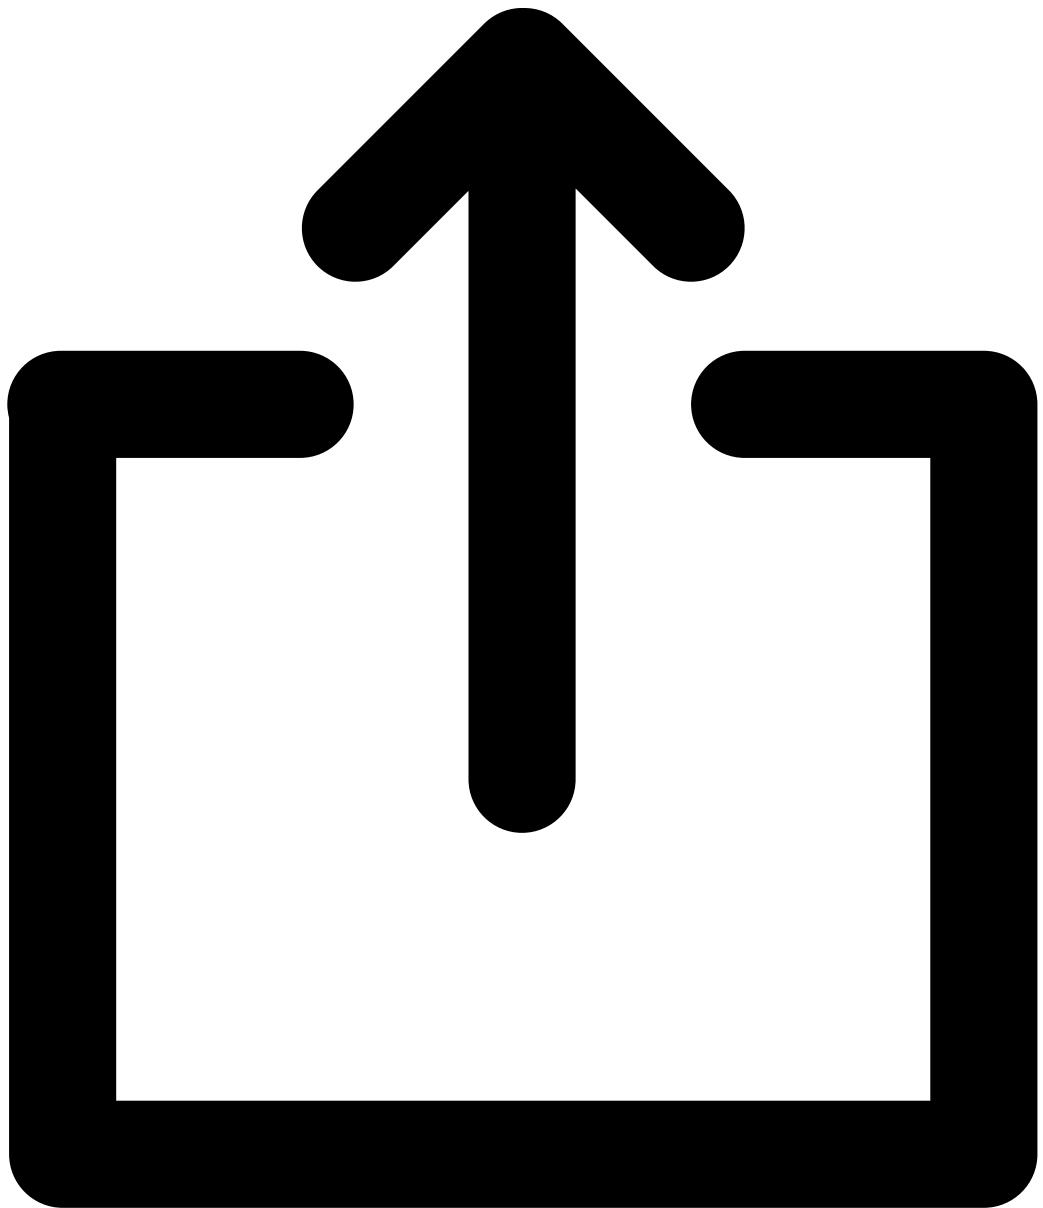
Share your look

⊕


[Show code](#)

Icon

The icon with color and size modifiers.



Show code












Name	Description	Default	Control
	<p>Hide props items</p>		
			
props			
icon	Icon SVG path(s) It can be single SVG path(string) or array of SVG paths or icon name from our icons list(such as 'added_to_cart') stringarray	""	
			
size	Custom size of the icon. It can be our standard sizes, or 12px or 1.2rem or nothing. Standard sizes: xxs, xs, sm, md, lg, xl, xxl, xl3, xl4. string	""	
			
color	Custom color of the icon. It can be according to our standard colors, or legitimate CSS color such as #fff, rgb(255,255,255)), and lightgray or nothing.Standard colors: white, black, green-primary, green-secondary, gray-primary, gray-secondary, light-primary, light-secondary, pink-primary, pink-secondary, yellow-primary, yellow-secondary, blue-primary, blue-secondary, accent. string	""	
			
viewBox	Custom viewBox size of the icon. It should be according to the standard min-x min-y width height. By default it will be 0 0 24 24.If you use our icons, you don't need to pass this prop at all. Recommendations: try to get your SVG designed with our default viewBox value and reduce the number of props passed to the component. string	"0 0 24 24"	
			
			
Props			
coverage	The fraction in which the icon is partially colored with --icon-color value and the rest with --icon-color-negative. To be used in SfRating. stringnumber	1	

Name	Description	Default	Control
	<code>Hide Slots items</code>	-	-
Slots	default Use this slot to replace icon to custom element	-	<code>Set object</code>

Stories

List Of Icons

There are 54 pre-defined icons.

No code available

Icon Sizes

We provide the following standard sizes for customizing icon



No code available

Custom Icon

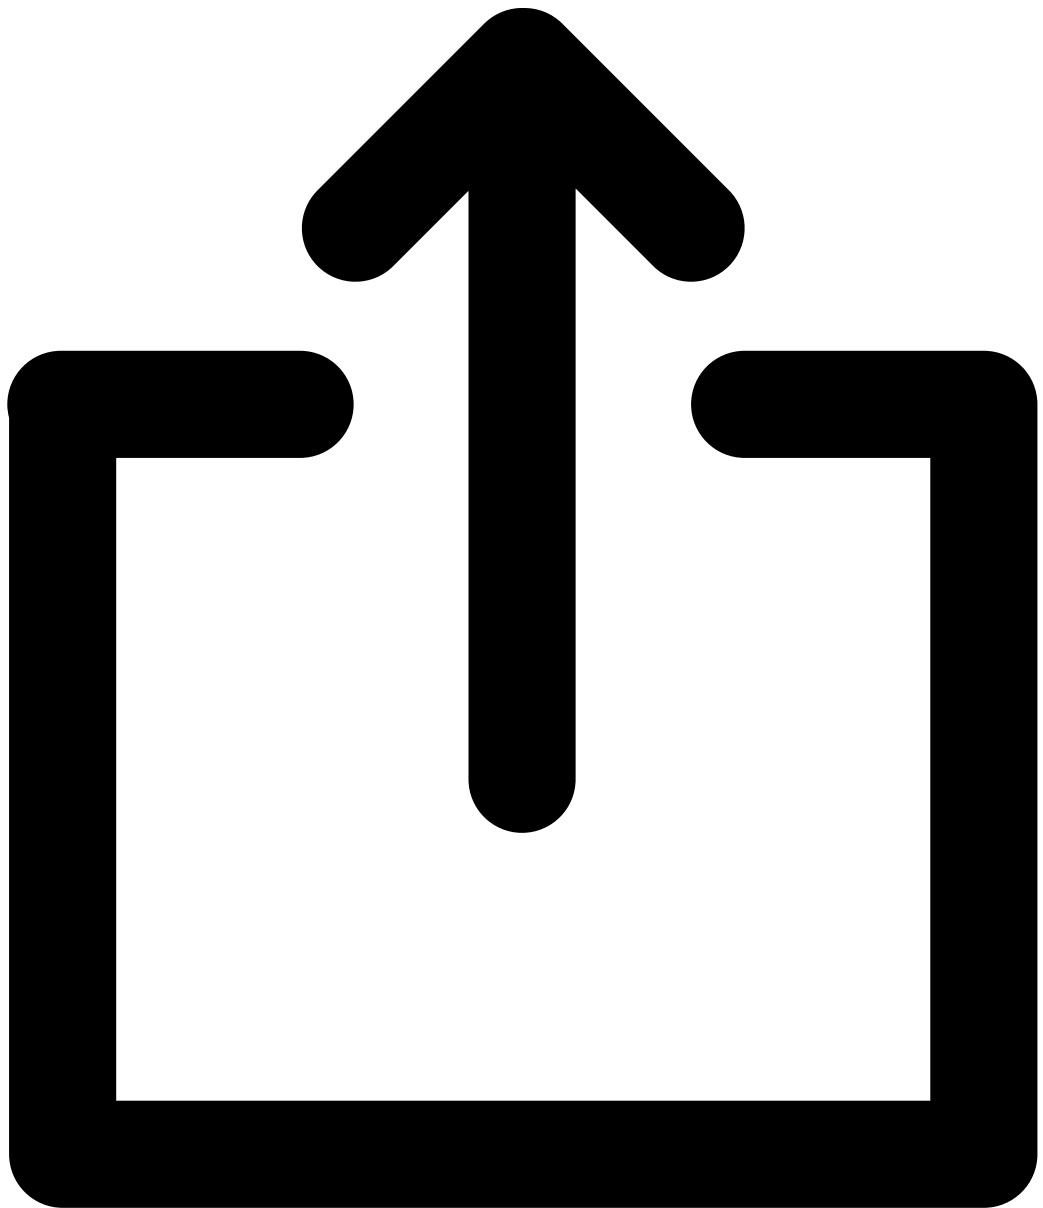


With Default Slot








Image

Image accepting string source and an array of srcsets (with breakpoints(and widths) or resolutions)



 Placeholder
Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
src*	Main source url for the image string	-	/assets/storybook/SflImage/produ ct-216x326.jpg
alt*	Alternative text in case image is not loaded. Use empty string "" for decorative-only image and full text otherwise	""	Vila stripe maxi shirt dress
srcsets	Array of images' source, dimension and breakpoints to generate srcset attribute array	[]	 RAW srcsets : [
			
0 : {...} 3 keys			
			
1 : {...} 3 keys			
			

Name	Description	Default	Control
		2 : {...} 3 keys	
]	
width	Width of the image. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	<input type="text" value="Edit number..."/>	
height	Height of the image. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	<input type="text" value="Edit number..."/>	
placeholder	Url source of the image's placeholder while it is loading. unknown	<input type="text" value="Edit string..."/>	
loading	Native loading attribute supported, either 'eager', 'lazy' or none. string: lazy, eager	"lazy"	
<input type="button" value="▼"/>			
<input type="button" value="Hide props items"/>			
			
<input type="button" value="Hide props items"/>			
props			
imageTag	string: img, nuxt-img, nuxt-picture	"img"	<input type="radio"/> img <input type="radio"/> nuxt-img <input type="radio"/> nuxt-picture
nuxtImgConfig	object	""	<input type="button" value="Set object"/>

Name	Description	Default	Control
Hide Slots items			



[Hide Slots items](#)

Slots

default	Use this slot to have custom element on image overlay	-	Set object
placeholder	Use this slot to have custom placeholder	-	-

[Stories](#)

[With Src Only](#)

Placeholder

[Show code](#)

[With Breakpoints](#)

Placeholder

[Show code](#)

[With Resolutions](#)



Show code

⌚With Placeholder



Show code

⌚With Accessibility

Red highlight when no Alt text found.



Show code

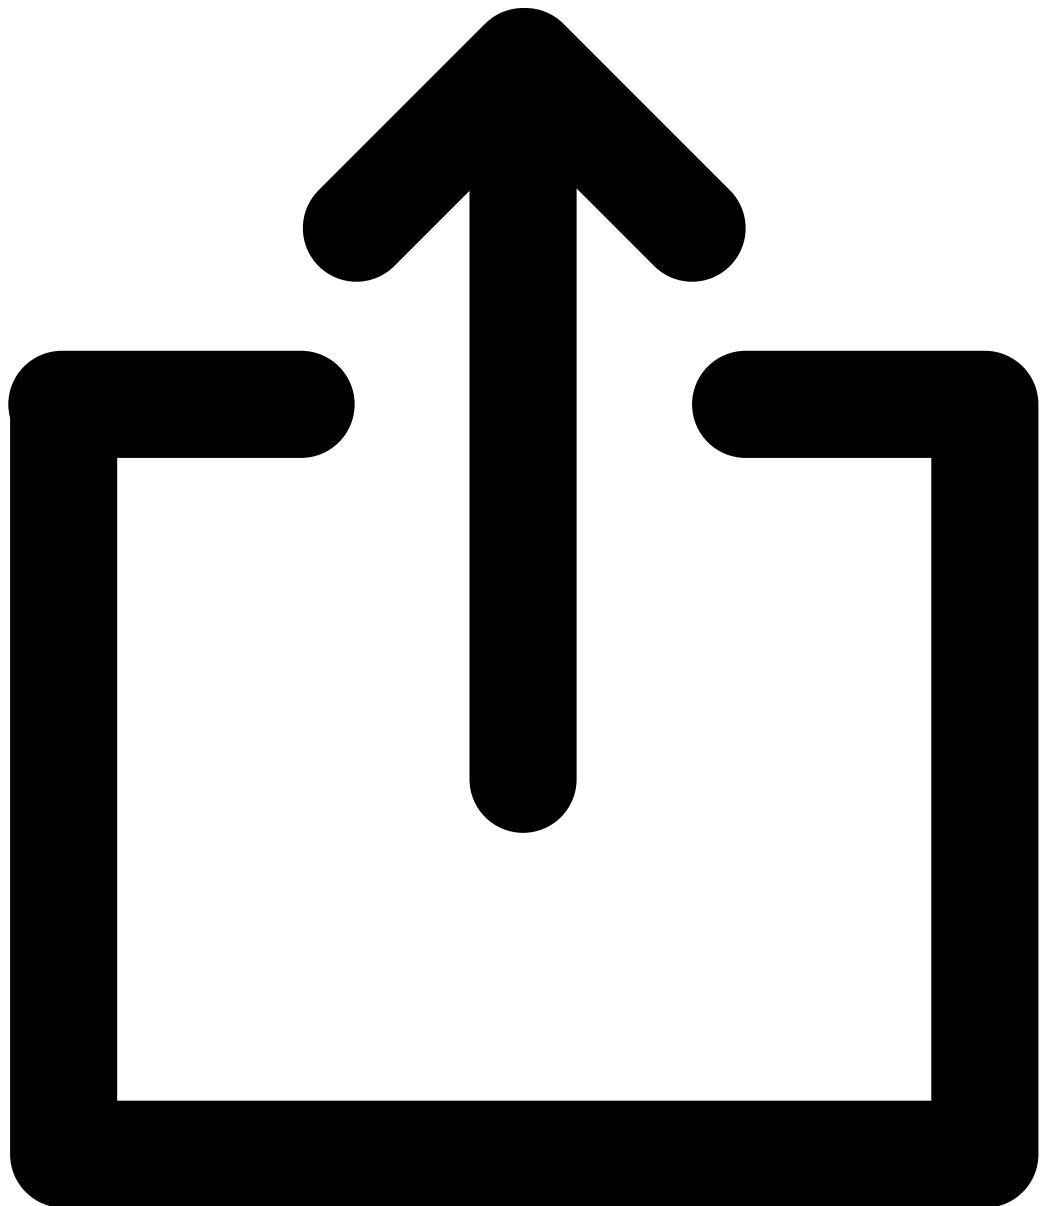
⌚Use Overlay Slot

 Placeholder

[Show code](#)

Input

The input form field with validation and built-in label animation.



First name

Show code


Name	Description	Default	Control
placeholder	Native placeholder, can be added, but it's not default component prop.	""	<input type="text" value="Edit string..."/>




[Hide Props items](#)

Props


type	Form input type string	"text"	<input type="text" value="text"/>
label	Form input label string	""	<input type="text" value="First name"/>
name	Form input name string	""	<input type="text" value="name"/>
value	Current input value (v-model) stringnumber	""	<input type="text" value="Edit string..."/>
icon	The icon configuration object which can have props: icon name, size and color as SfIcon specifies. object	 RAW	icon : {



icon : ""



color : ""



Name	Description	Default	Control
		size : ""	
		}	
valid	Validate value of form input boolean	true	<input checked="" type="checkbox"/> FalseTrue
errorMessage	string	""	Error message value of form input. It appears if `valid` is `false`.
required	Native input required attribute boolean	false	<input type="checkbox"/> FalseTrue
disabled	Native input disabled attribute boolean	false	<input type="checkbox"/> FalseTrue
hasShowPassword	Status of show password icon display boolean	false	<input type="checkbox"/> FalseTrue
Hide events items			



[Hide events items](#)

events

click:icon

unknown

-




[Set object](#)

[Hide Events items](#)



[Hide Events items](#)

Events

Name	Description	Default	Control
input	Input event emits when input value changes. It is passed via v-on='listeners'	-	 RAW input : {  } 
change	Change event emits when input value changes and loses focus. It is passed via v-on='listeners'	-	-
Slots			
error-message	Custom error message for form input	-	
show-password	Custom show password button	-	-
label	Named slot label. Use this slot to replace label content	-	-
			
CSS Modifiers			
			

Name	Description	Default	Control
classes	CSS classes to modify component styling -	-	

⌚ Stories

⌚ With Error

First name

Required

Show code

⌚ Invalid

First name

Required

Show code

⌚ As Required

First name *

Show code

⌚ Disabled

First name

Show code

⌚ Show Password

Password



Show code

⌚ With Placeholder

First name

I'm a placeholder

Show code

⌚ Filled

[Show code](#)

⌚ With Label Slot

♥ First name

[Show code](#)

⌚ With Error Slot

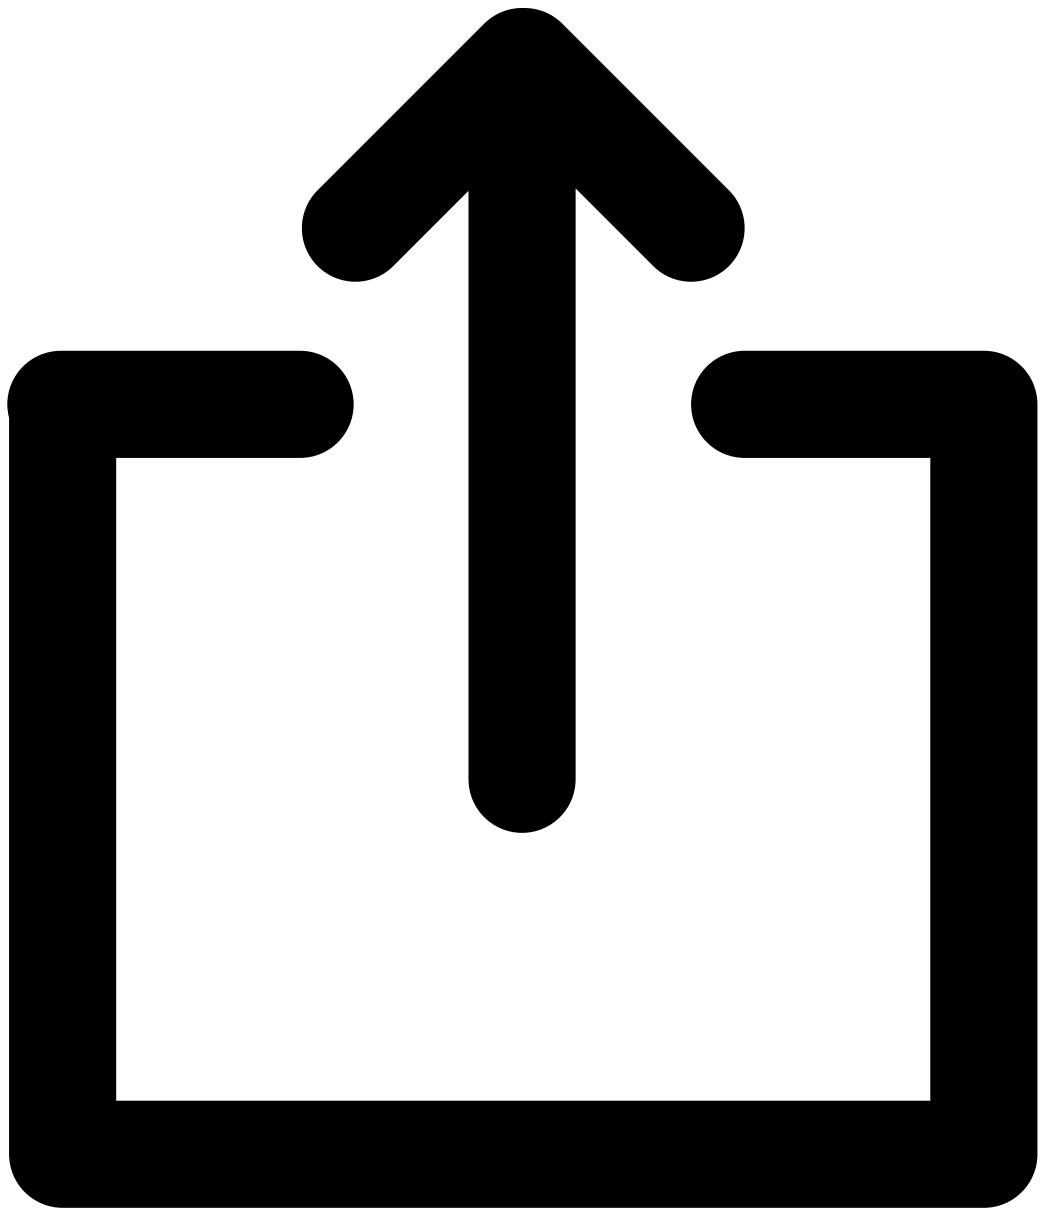
First name

⌚ CUSTOM ERROR MESSAGE

[Show code](#)

Link

Creates a NuxtLink, a native (`a href`) link, or a router link depending on the link property. A slot can be used to pass content.



[Check this out!](#)

[Show code](#)

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

link*

Page route
stringobject

-

<https://www.storefrontui.io/>

[Hide Slots items](#)



[Hide Slots items](#)

Slots

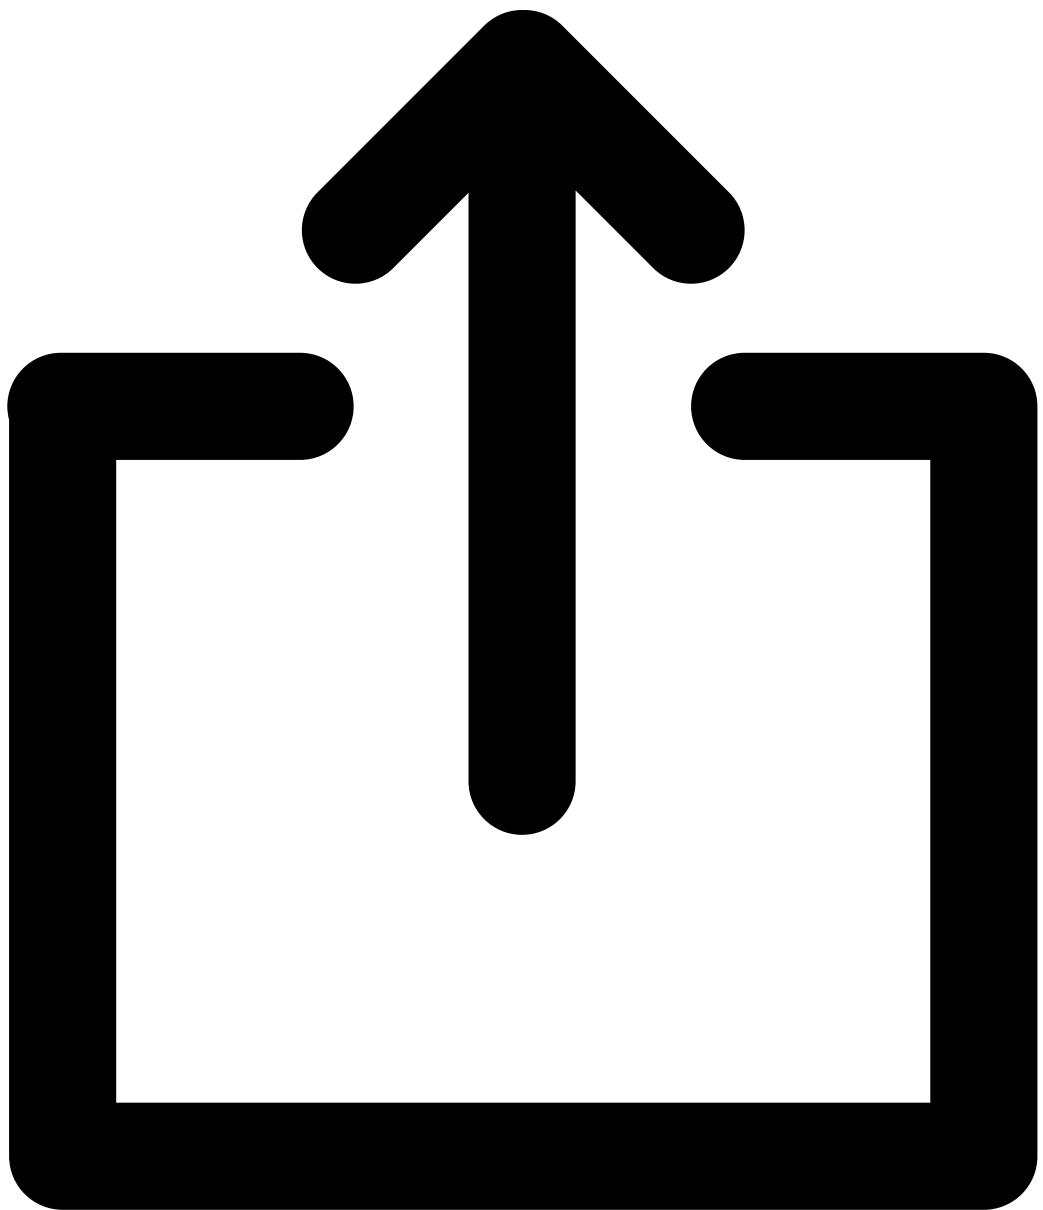
default

Use this slot to place content for link -

[Set object](#)

Loader

The Overlay loading spinner, wrapped around elements for indicating long running tasks like image loading. It's Vue 2 functional component.



Show code



Name	Description	Default Control
Hide Props items		



[Hide Props items](#)

Props

loading	Shows the loader on top of the existing content	true	<input checked="" type="checkbox"/> FalseTrue
---------	---	------	---

[Hide Slots items](#)



[Hide Slots items](#)

Slots

default	Slot for the actual content being loaded	-	Set object
loader	Use this slot to replace the loader	-	Set object

Stories

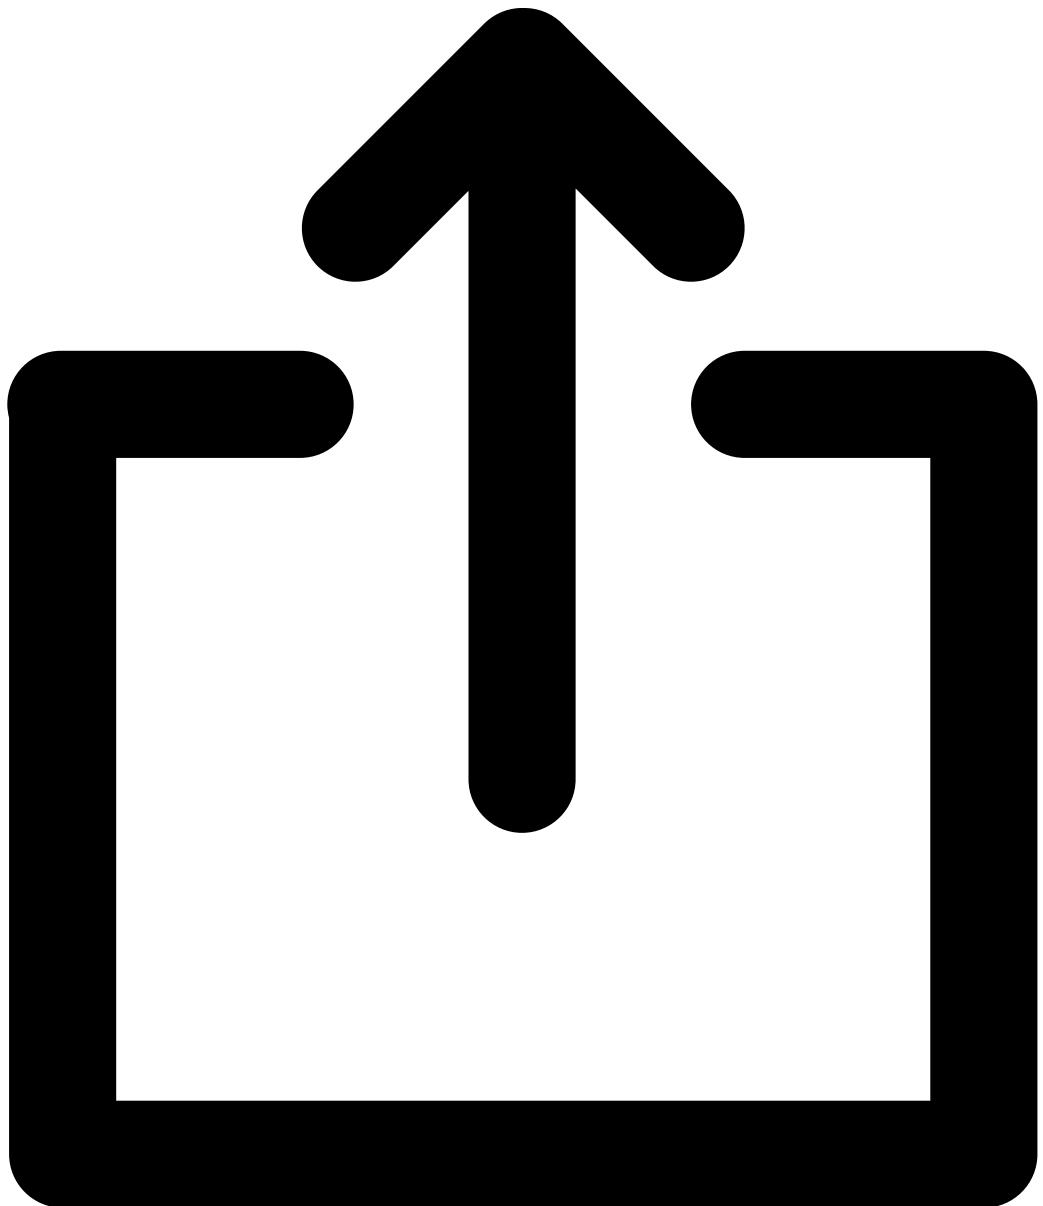
With Loader Slot

[Show code](#)

loading...

Overlay

The fullscreen overlay, emitting click events. It's Vue 2 functional component.



Show code

Name

Hide Props items

Description

Default

Control



Hide Props items

Props

visible

Visibility state
boolean

false

FalseTrue

transition

Transition effect to apply when overlay visibility is changed. Could be one of [the default ones](#).
string

"sf-fade"



sf-collapse-bottom ▾

Hide Events items



Hide Events items

Events

click

Event emits when clicked on overlay.

- -

Stories

With Fade Transition


No code available

 **Visible**

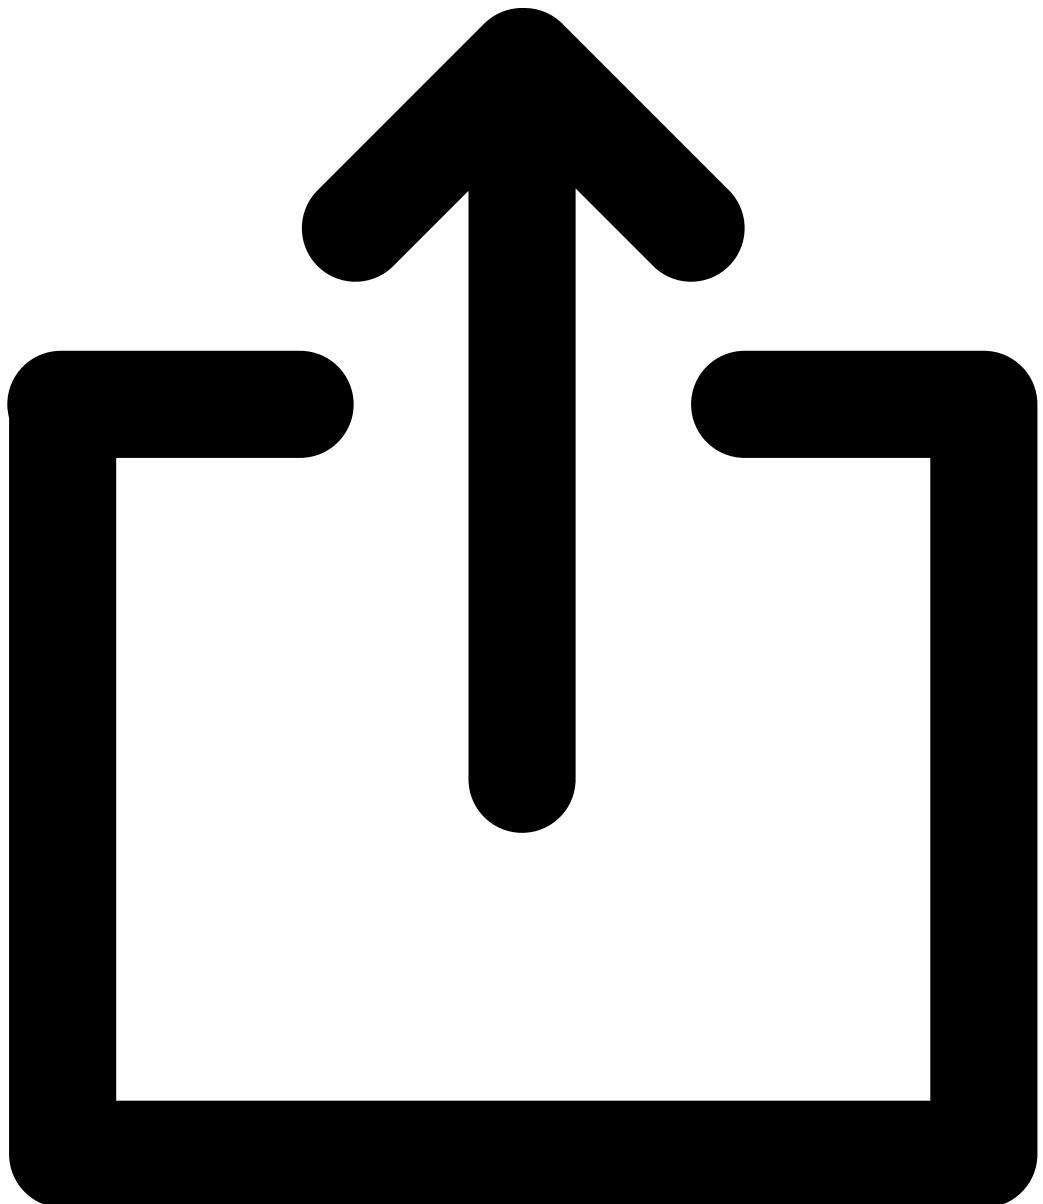No code available

Price

The price information component with optional display of previous price. It's Vue 2 functional component.



\$200.00

Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

regular	Regular/old price value. Crossed out if special is provided string,number	null	\$200.00
special	Special price value string,number	null	<input type="text" value="Edit string..."/>

[Hide Slots items](#)



[Hide Slots items](#)

Slots

old	Use this slot to replace old price content	-	Set object
regular	Named slot regular. Use this slot to replace regular price content	-	-
special	Named slot special. Use this slot to replace special price content	-	-

Stories

Only Regular

\$200.00

[Show code](#)

Has Special

~~\$200.00~~ \$100.00

[Show code](#)

With Special Slot

~~\$200.00~~ \$100.00

[Show code](#)

With Old Slot

\$200.00 \$100.00

[Show code](#)

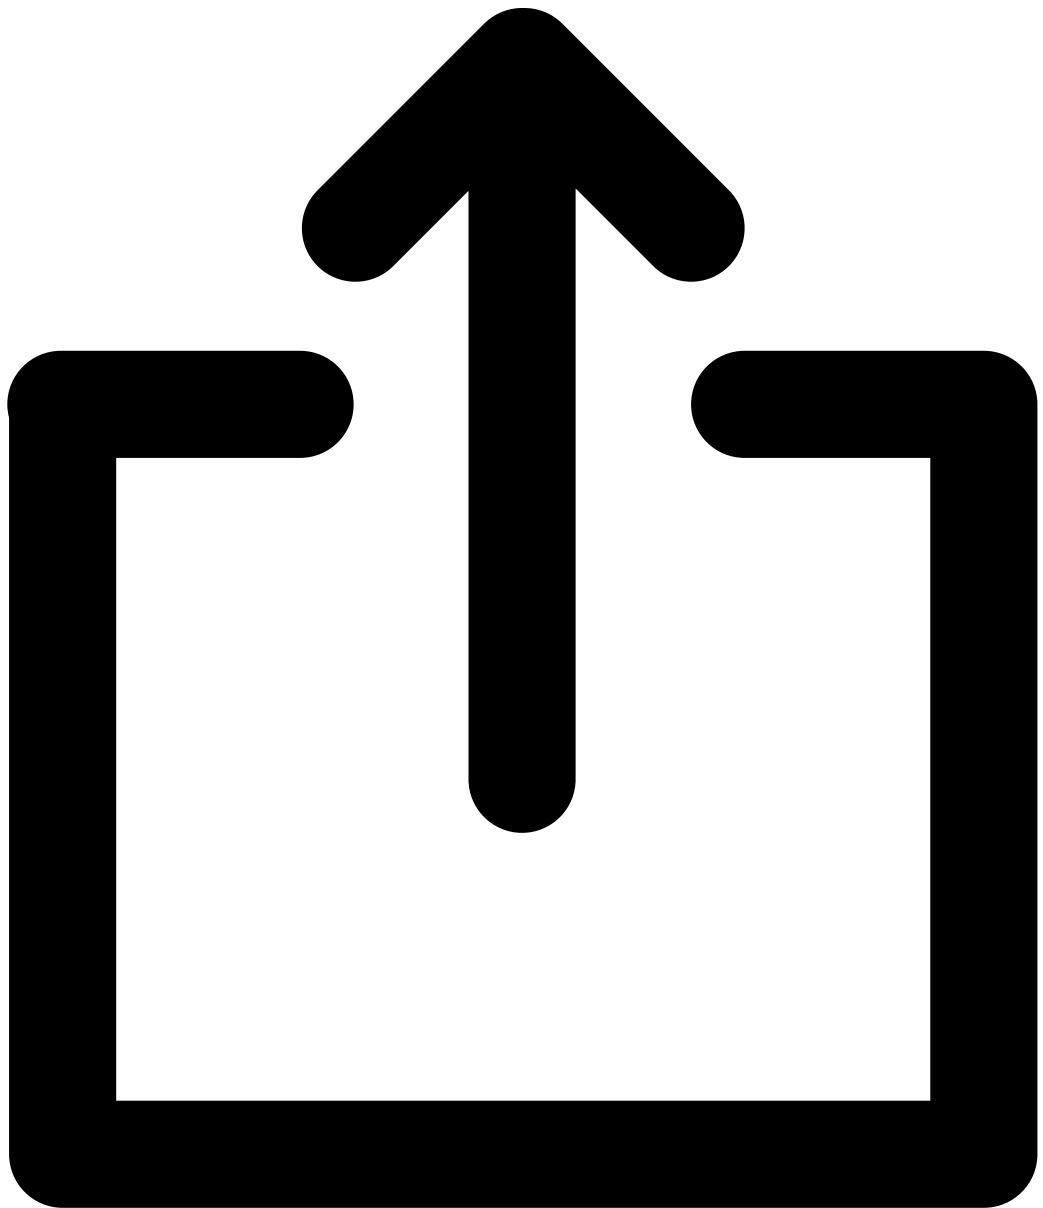
With Regular Slot

\$200.00

[Show code](#)

Property

The component for listing properties of a product. It's Vue 2 functional component.



Material: Cotton

Show code

Name	Description	Default	Control
<button>Hide Props items</button>			



Hide Props items

Props

name	Sets property name string	...	<input type="text" value="Material"/>
value	Sets property value string	...	<input type="text" value="Cotton"/>

Hide CSS Modifiers items



Hide CSS Modifiers items

CSS Modifiers

classes	CSS classes to modify component styling		<input type="text"/>
<button>Hide Slots items</button>			



Hide Slots items

Slots

Name	Description	Default	Control
name	Named slot name. Use this slot to replace property name	-	-
value	Named slot value. Use this slot to replace property value	-	-

⌚Stories

⌚Full Width

Material: Cotton

⌚Value In Middle

Material: Cotton

⌚Large

Material: Cotton

⌚Without Suffix

Material Cotton

⌚With Name Slot

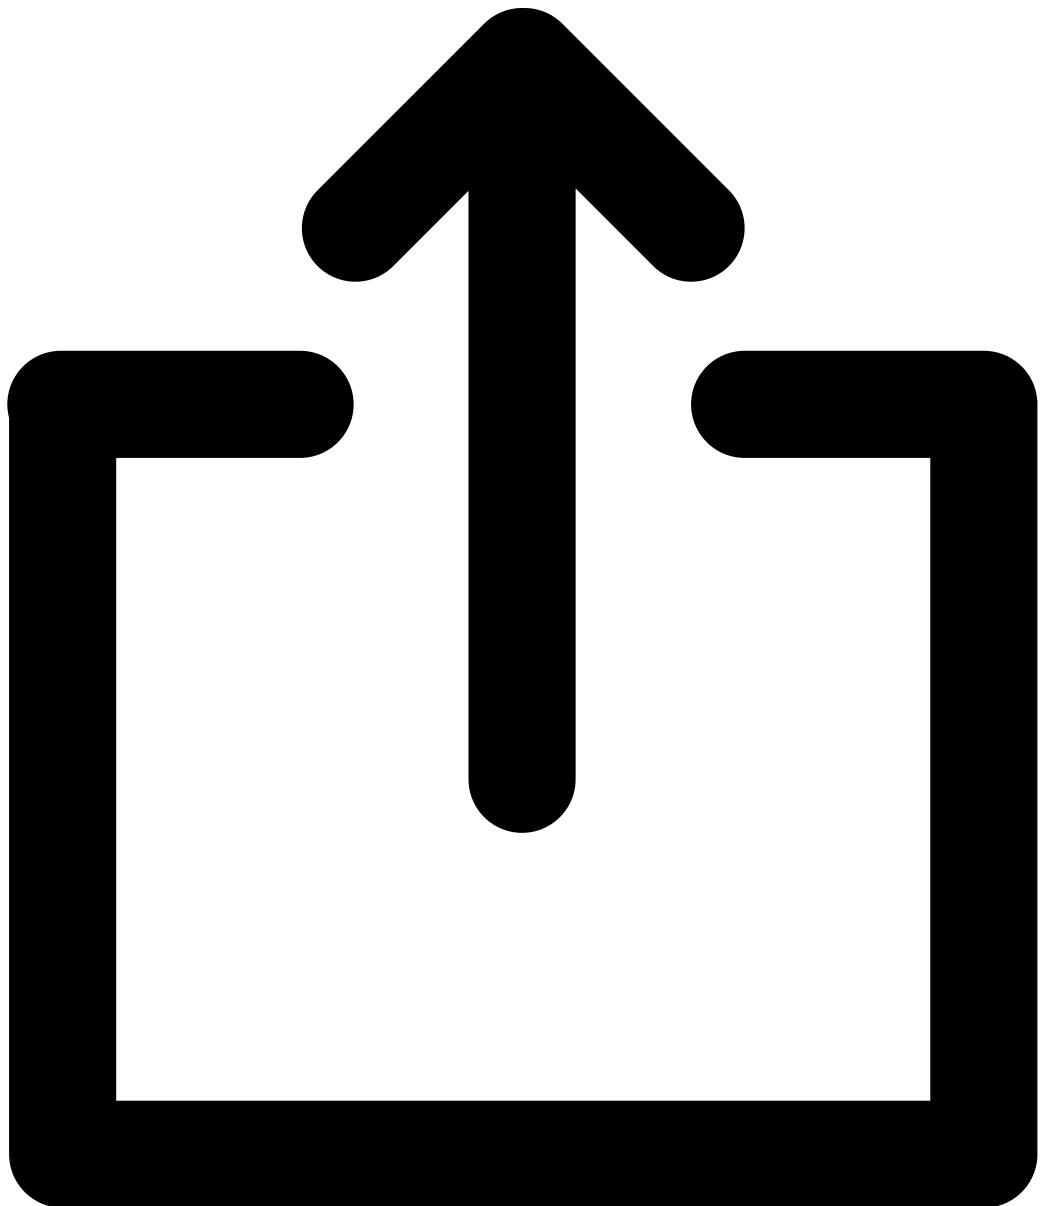
Material:Cotton

⌚With Value Slot

Material: Cotton


QuantitySelector

The Component with input to choose numeric values and describe quantity. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

ariaLabel	Attribute for 'aria-label' tag. string	"Quantity"	<input type="text" value="Quantity"/>
disabled	Sets component state to disabled boolean	false	<input type="checkbox"/> FalseTrue
min	Minimum allowed quantity. number	null	<input type="text" value="Edit number..."/>
qty	Sets quantity value number	1	<input type="text" value="1"/>
max	Maximum allowed quantity. number	null	<input type="text" value="Edit number..."/>

[Hide v-model items](#)



[Hide v-model items](#)

v-model

v-model	v-model accepts qty prop and emits native events number	1	<input type="text" value="1"/>
---------	--	---	--------------------------------

[Hide CSS Modifiers items](#)




[Hide CSS Modifiers items](#)

CSS Modifiers

Name	Description	Default	Control
classes	CSS classes to modify component styling	-	
			<input type="text"/>
			
			<input type="button" value="Hide Events items"/>
			
			<input type="button" value="Hide Events items"/>
Events			
blur	Emits when input field loses focus	-	

Rating

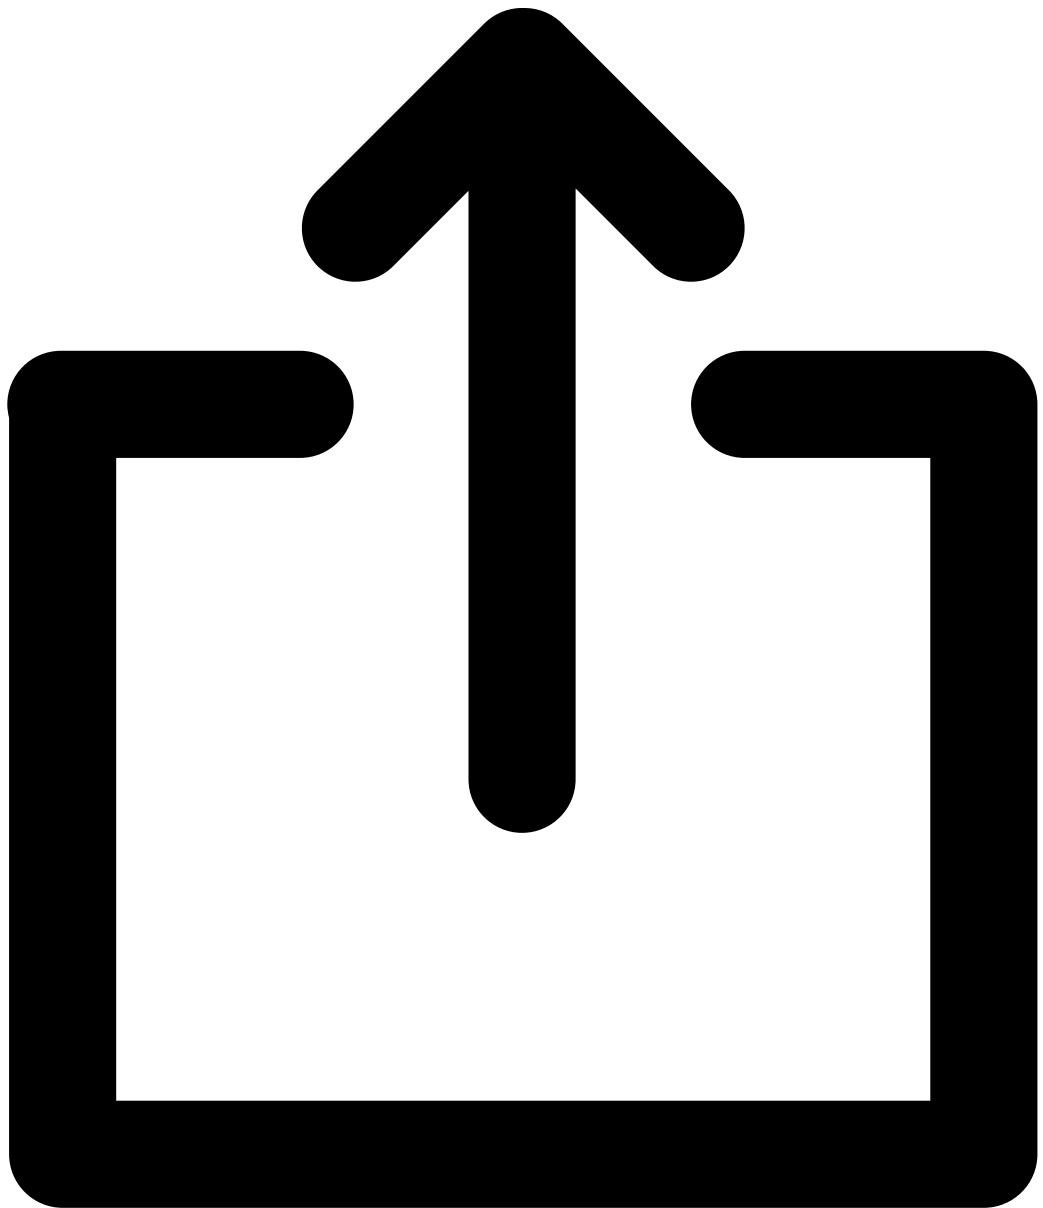The component for displaying score-based user ratings. It's Vue 2 functional component.



Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
score	Score (obviously must be less than maximum) number	1	<input type="text" value="3"/>
max	Maximum score number	5	<input type="text" value="5"/>

icon It can be single SVG path (string) or array of SVG paths or icon name from our icons list(such as 'star') string



[Hide Slots items](#)

[add_to_cart](#) ▾

Slots		
icon-positive	Custom icons that starts from the left side. Provide single icon that will be automatically repeated	- Set object
icon-negative	Custom icons that are on the right side. Provide single icon that will be automatically repeated	- Set object

Stories

With Max



[Show code](#)

With Icon



[Show code](#)

Changed Colors



[Show code](#)

With Icon Positive Slot



[Show code](#)

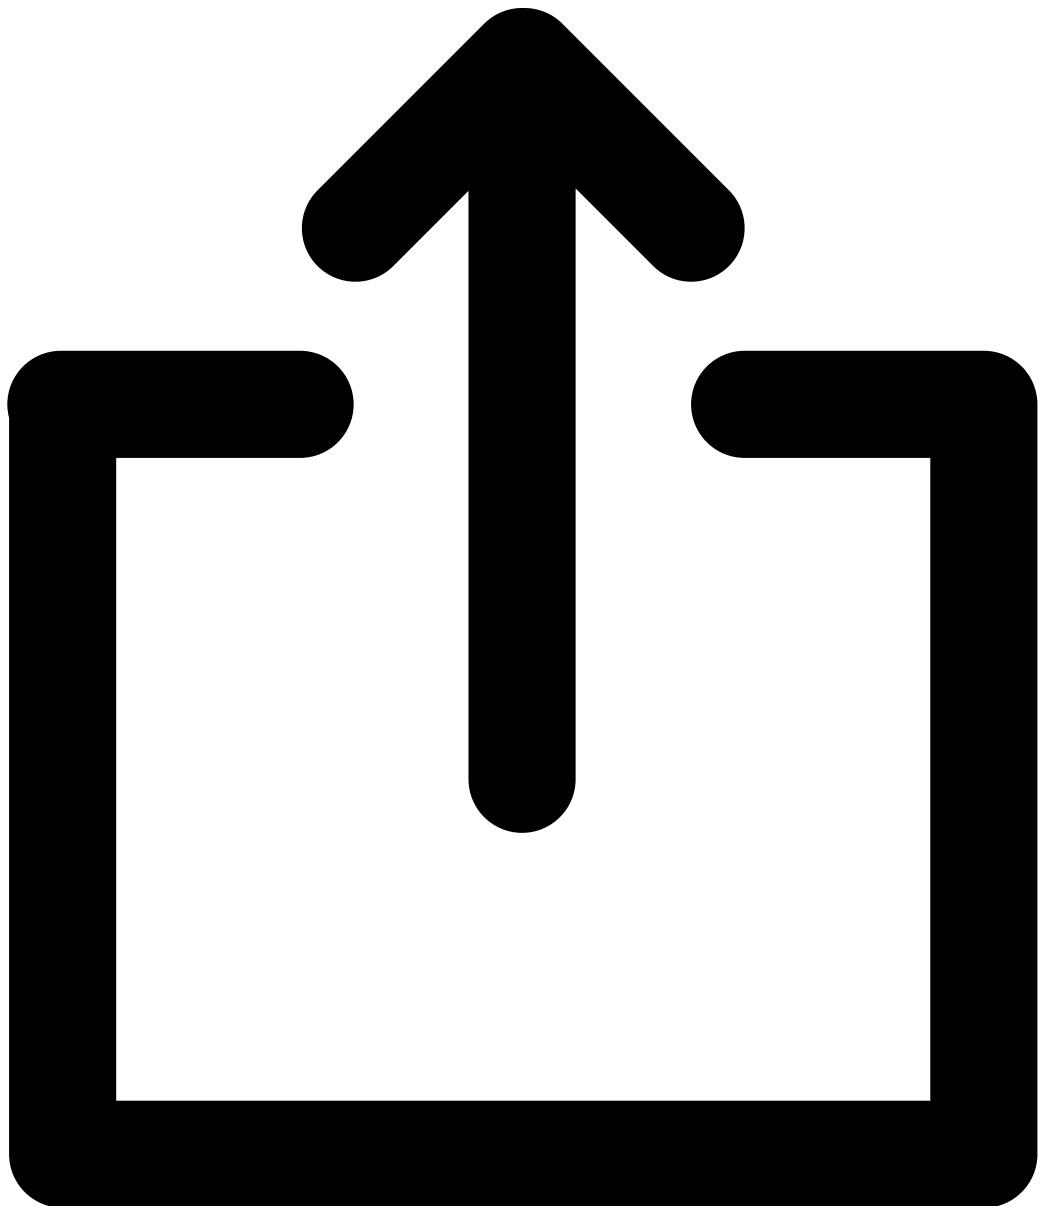
With Icon Negative Slot







Show code

Skeleton

The skeleton of the component to show instead of target component during loading.



[Show code](#)

Name	Description	Default	Control
 Hide Props items	 Hide Props items		
Props			
type	Defines shape for SfSkeleton. Available values: 'paragraph', 'image', 'button', 'input', 'avatar' string	"paragraph"	 paragraph 
 Hide Slots items	 Hide Slots items		
Slots			
default	Use this slot to replace default skeleton	-	
 Hide CSS modifiers items	 Hide CSS modifiers items		
CSS modifiers			
classes	Classes to define component animation. Also animation can be disabled by sf-skeleton--no-animation class. -		

Stories

Image

[Show code](#)

Paragraph Input And Button

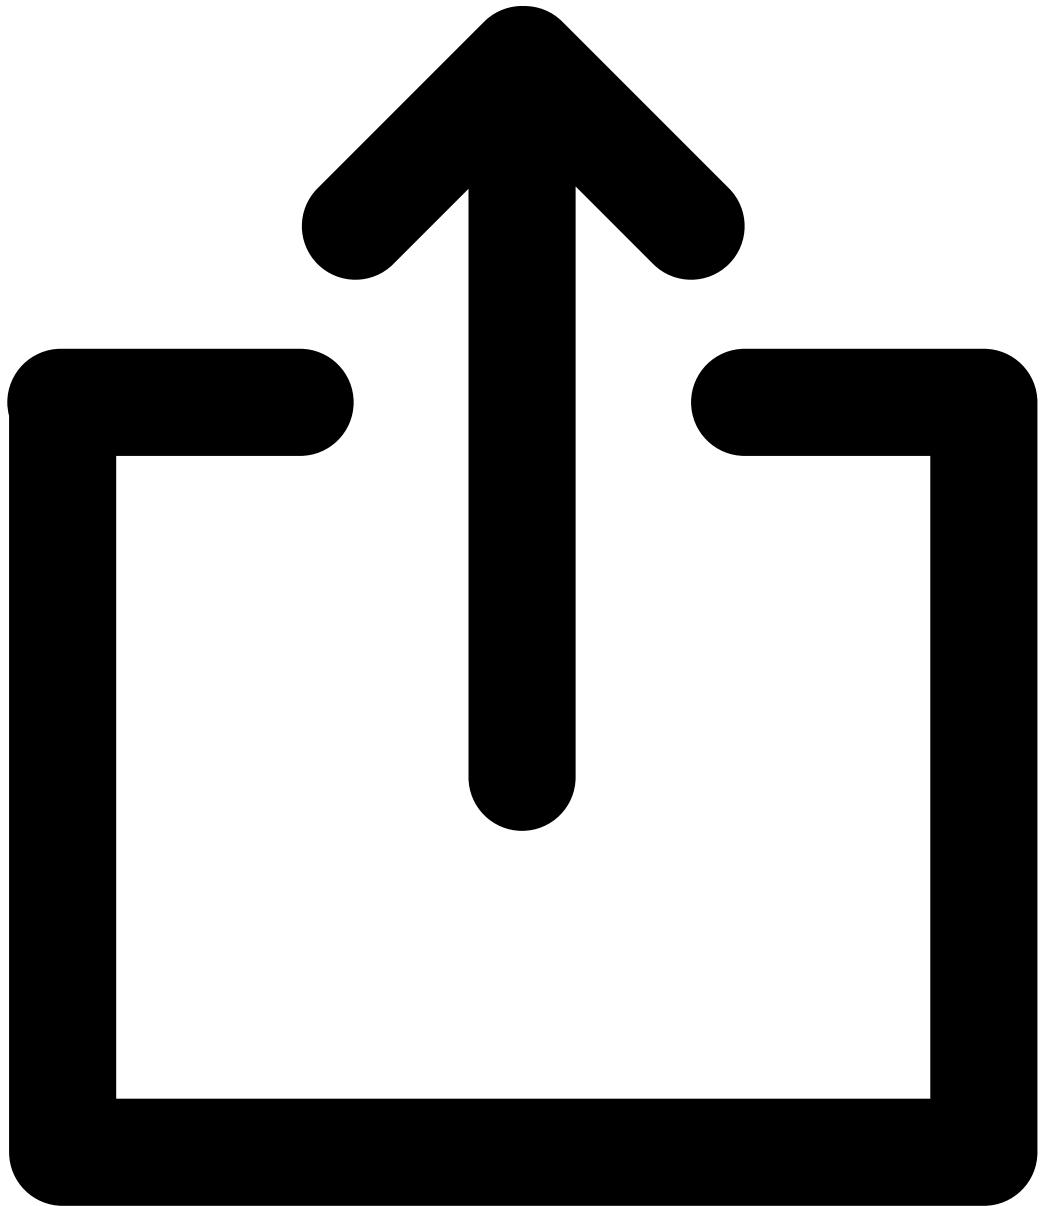
[Show code](#)

Avatar And Paragraphs

[Show code](#)

Textarea

The multi-line text input control. It's Vue 2 functional component.



First name

Show code

Name

[Hide Props items](#)

Description

Default

Control



[Hide Props items](#)

Props

label	Textarea label. string	-	<input type="text" value="First name"/>
name	Textarea name. string	""	<input type="text" value="first-name"/>
cols	The visible width of the text control. It must be a positive integer. If it is not specified, the default value is 20. stringnumber	"20"	<input type="text" value="40"/>
rows	The number of visible text lines for the control. stringnumber	""	<input type="text" value="10"/>
wrap	Indicates how the control wraps text. Possible values are soft, hard, off. Default value is soft. string	"soft"	<input type="text" value="soft"/>
errorMessage	Error message for textarea. It appears if valid is false. string	""	<input type="text" value="Required"/>
value	Current textarea value (v-model). stringnumber	""	<input type="text" value="Edit string..."/>
valid	Validate value of textarea. boolean	true	<input checked="" type="checkbox"/> FalseTrue
placeholder	Placeholder for textarea. string	""	<input type="text" value="Edit string..."/>
disabled	Native textarea disabled attribute. boolean	false	<input type="checkbox"/> FalseTrue
required	Native textarea required attribute. boolean	false	<input type="checkbox"/> FalseTrue
maxlength	The maximum number of characters that the user can enter. If this value isn't specified, the user can enter an unlimited number of characters. stringnumber	null	<input type="text" value="Set string"/>
minlength	The minimum number of characters required that the user should enter. stringnumber	null	<input type="text" value="Set string"/>
readonly	With default false value the textarea is editable. boolean	false	<input type="checkbox"/> FalseTrue

Name	Description	Default	Control
Hide Slots items			



Hide Slots items

Slots

error-message	Custom error message	-	Set object
label	Named slot label. Use this slot to replace label content	-	-

Hide Events items




Hide Events items

Events

change	Emits when textarea value changes and loses focus.	-	-
--------	--	---	---

AddressPicker

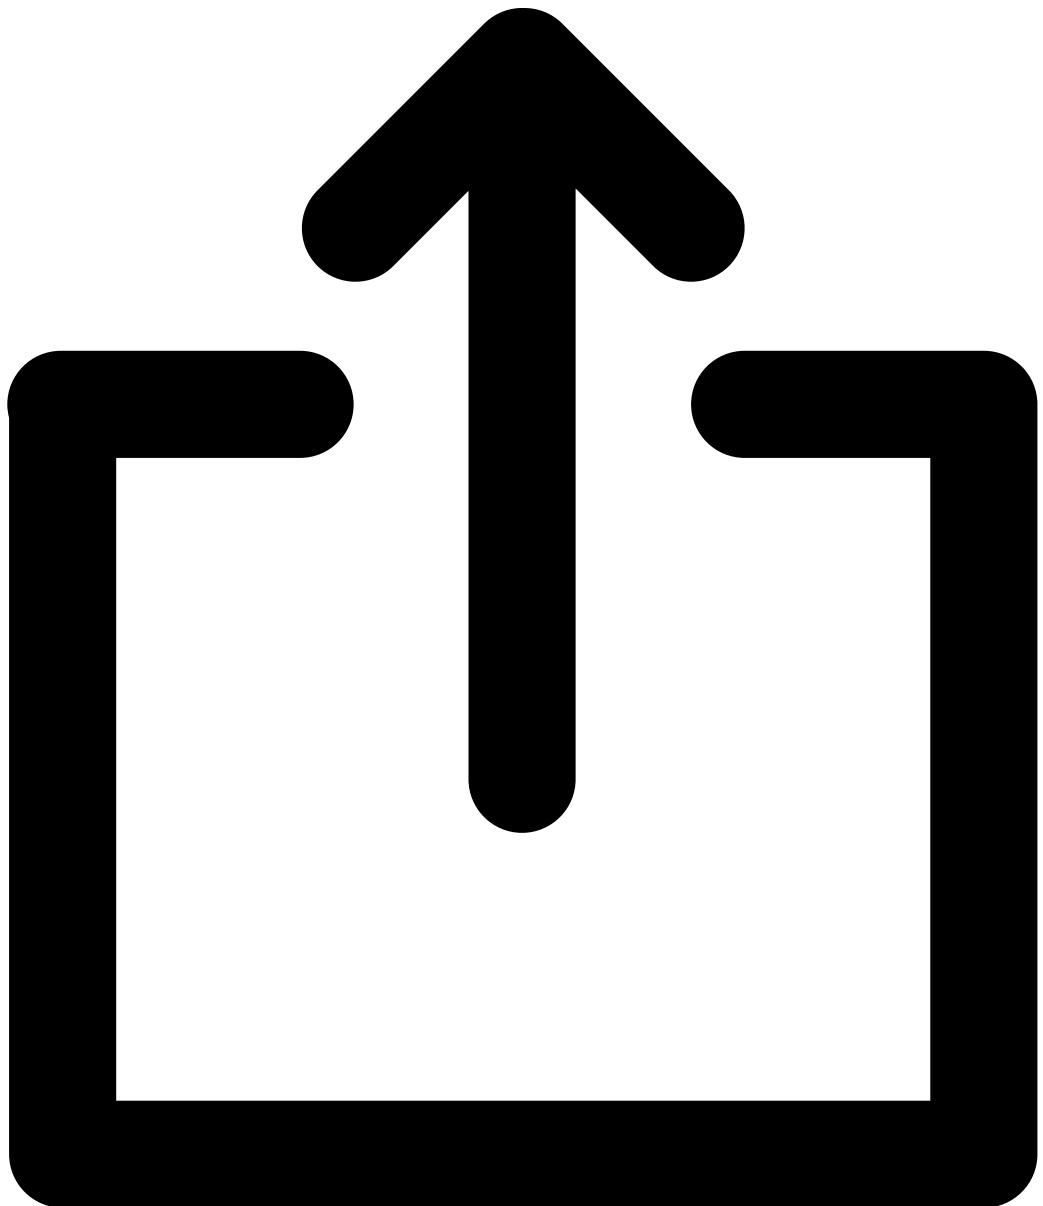The component for choosing addresses. Built from main component - SfAddressPicker and internal components - SfAddress.



Jack Smith
Mazowiecka 34
02-020
Warszawa, Mazowieckie

Poland
+48 777 777 777

Show code

Name	Description	Default	Control
title	Title (only for testing purposes). For development use default slot in SfAddress component, to change the content.	Jack Smith	<input type="text"/>
street	Street (only for testing purposes). For development use default slot in SfAddress component, to change the content.	Mazowiecka 34	<input type="text"/>
postCode	PostCode (only for testing purposes). For development use default slot in SfAddress component, to change the content.	02-020	<input type="text"/>
city	City (only for testing purposes). For development use default slot in SfAddress component, to change the content.	Warszawa, Mazowieckie	<input type="text"/>
country	Country (only for testing purposes). For development use default slot in SfAddress component, to change the content.	Poland	<input type="text"/>
phone	Phone (only for testing purposes). For development use default slot in SfAddress component, to change the content.	+48 777 777 777	<input type="text"/>

[Hide Props for SfAddress component items](#)



[Hide Props for SfAddress component items](#)

Props for SfAddress component

name

Name for address. Each address should have different name.
For example 'first', 'second', 'default'.
string

""

first

[Hide Slots items](#)



[Hide Slots items](#)

Slots

default

Default slot for SfAddress component. Here you should pass address details

-

[Set object](#)

icon

Use this slot to have custom checkmark


-

[Set object](#)

default

Default slot for SfAddressPicker component. Use this slot to pass addresses in SfAddress components

-

Name	Description	Default	Control
<code>Hide Props for main component items</code>			
	<code>Hide Props for main component items</code>		
Props for main component			
selected	Sets address as chosen by its name	---	<input type="text" value="Edit string..."/>
<code>Hide Events items</code>			
	<code>Hide Events items</code>		
Events			
change	Emits change event with the name of picked address component	---	---
<code>Hide v-model items</code>			
	<code>Hide v-model items</code>		
v-model			
v-model	v-model accepts selected prop and emits change event text	---	<input type="text" value="Edit string..."/>

Stories

Selected


Jack Smith

Mazowiecka 34
02-020
Warszawa, Mazowieckie
Poland
+48 777 777 777

Show code

AddToCart

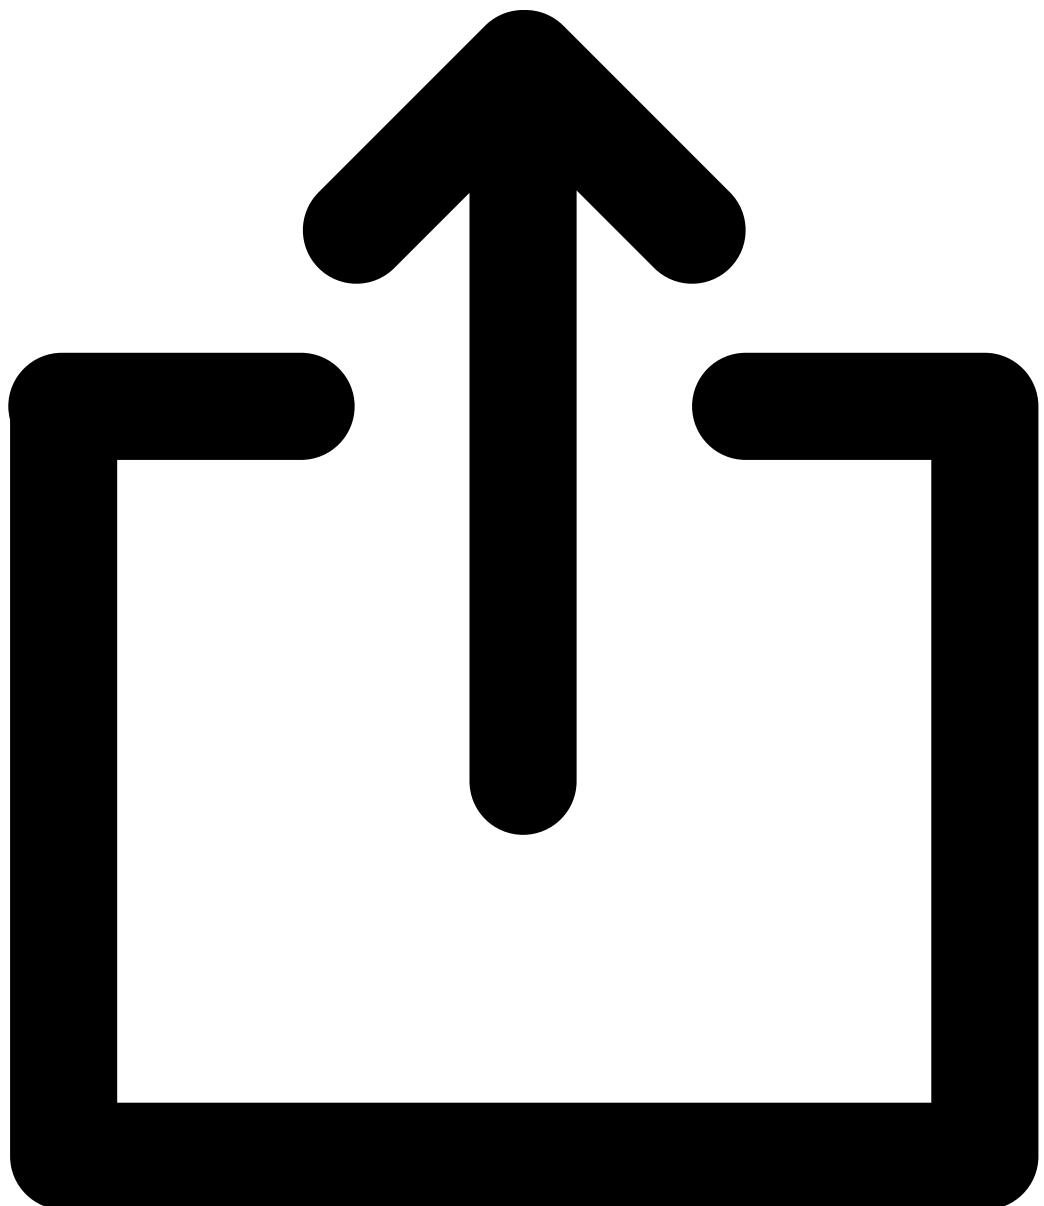
The Add-to-cart button and quantity input field with maximum stock validation.



- + ADD TO CART

Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
disabled	Boolean to indicate whether product can be added to cart boolean	false	<input type="checkbox"/> FalseTrue
qty	Selected quantity string,number	1	<input type="text" value="1"/>
Hide v-model items			
	Hide v-model items		
v-model			
v-model	v-model accepts qty prop and emits native events number	1	<input type="text" value="1"/>
Hide Events items			
	Hide Events items		
Events			
input	Emits input event when input value is changed	-	 <input type="text" value="input:{"/> <div style="border: 2px solid black; border-radius: 50%; width: 100px; height: 100px; margin-left: 10px; display: flex; align-items: center; justify-content: center;"> + </div>

Name	Description	Default	Control
click	Emits click event when add to cart button is clicked	-	-
	Hide Slots items		



[Hide Slots items](#)

Slots		
quantity-select-input	Custom content that will replace default quantity selector	-
add-to-cart-btn	Custom content that will replace default Add to cart button design	-

Stories

Disabled

- + ADD TO CART

[Show code](#)

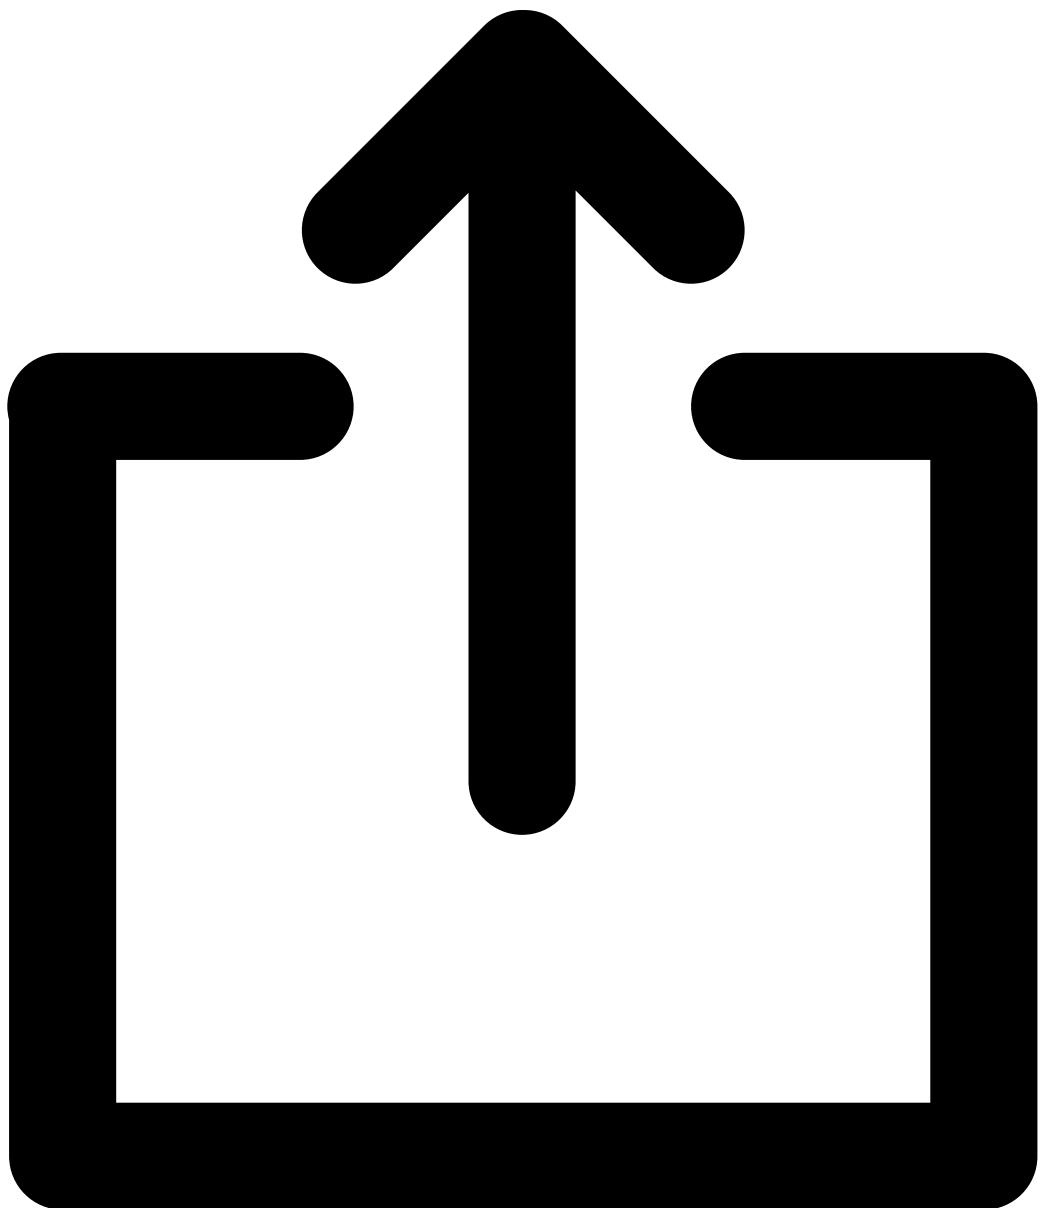
With Add To Cart Slot

 ADD TO CART

[Show code](#)

Alert

The component for displaying brief information of varying importance to the user, enriched with an icon.



Low in stock

[Show code](#)

Name	Description	Default	Control
 Hide Props items	 Hide Props items		

Props

message Message that will be displayed in Alert.
string

Props

message  Low in stock

 Hide Slots items	 Hide Slots items	
Slots		

Slots

icon This slot content will replace default icon

message This slot content will replace default message tag

Stories

Secondary

 Low in stock

Show code

Info

 Low in stock

Show code

Success

 Low in stock

Show code

Warning

 Low in stock

Show code

Danger

 Low in stock

Show code

With Message Slot

CUSTOM MESSAGE

Show code

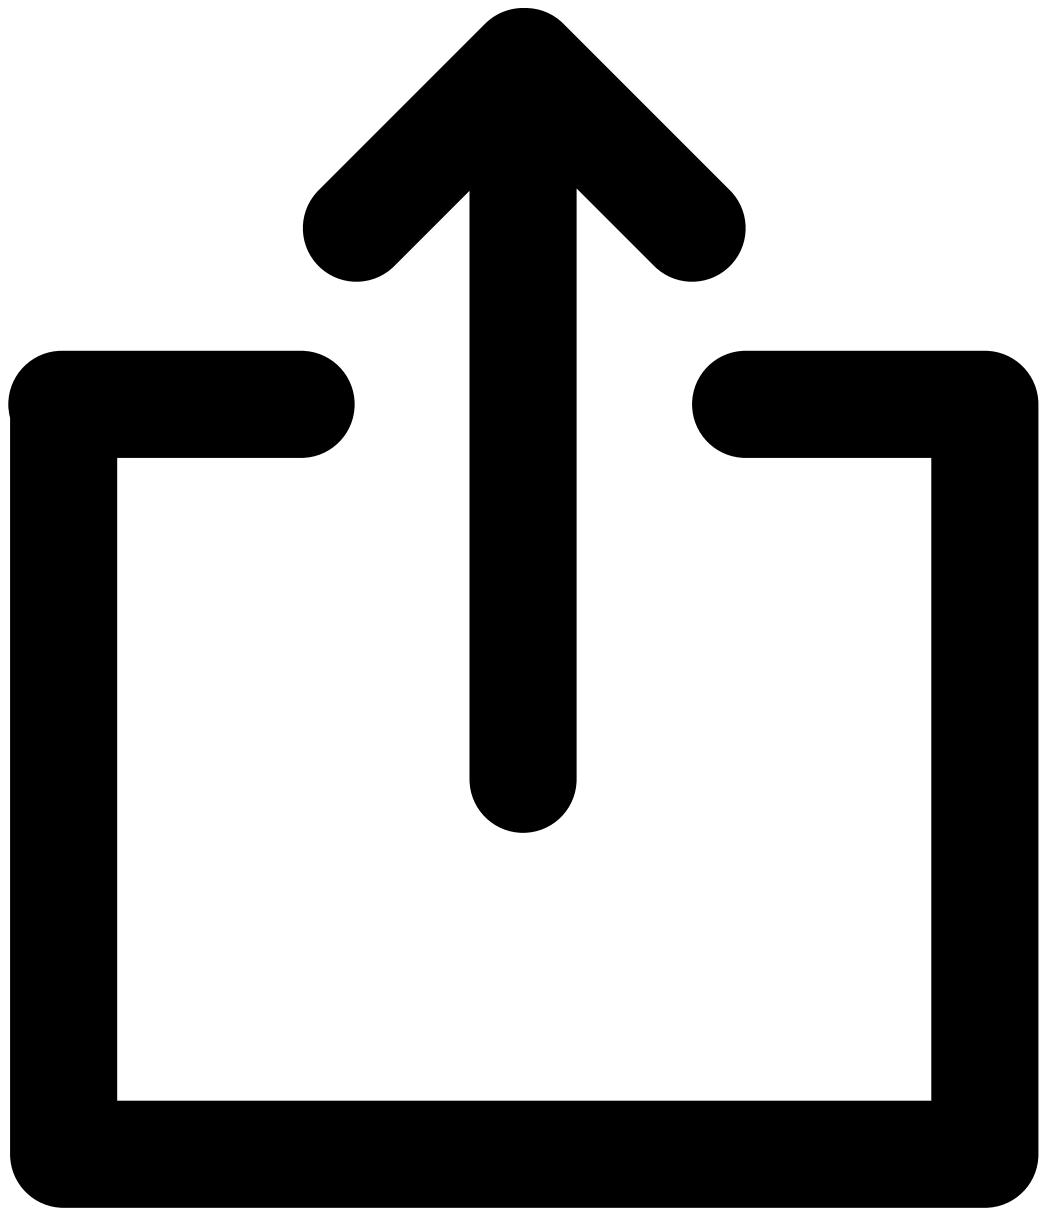
With Icon Slot

 Low in stock

Show code

Banner

The banner component which features various text levels, a background and a button.



SUMMER SHOES

ECO SANDALS

Show code

Name

Description

Default


Control

[Hide Props items](#)



[Hide Props items](#)

Props

image	Background image. Influenced by \$banner-background-size, \$banner-background-position CSS props. stringobject	...	
title	Banner title string	...	Eco Sandals
subtitle	Banner subtitle (at the top) string	...	Summer shoes
description	Text content string	...	The collection features formal and casual comfort shoes with a Danish design focus. Made from premium leathers and comfort.
buttonText	Text that will be displayed inside the button. You can replace the button with 'call- to - action' slot string	...	Shop Now
link	Link to be used in call to action button if necessary string	null	Set string
background	Background color in HEX (eg #FFFFFF) string	...	Choose color...

[Hide props items](#)



[Hide props items](#)

props

imageTag	string	-	Set string
nuxtImgConfig	object	---	Set object

Name	Description	Default	Control
Hide Slots items			
	Hide Slots items		
Slots			
call-to-action	Use this slot to replace call-to-action content	-	Set object
img-tag	Slot dedicated to img tags or other components with this tag (e.g. SfImage, SfCimage) that can be used as images for background. If you want to use this slot, make sure that background and image props are NOT provided.	-	Set object
title	Use this slot to replace title content	-	-
subtitle	Use this slot to replace subtitle content	-	-
description	Use this slot to replace description content	-	-
Hide CSS Modifiers items			

CSS Modifiers

classes	CSS classes to modify component styling
	-



[Hide Events items](#)

	Hide Events items
Events	

click	Emits click event when button is clicked
	-

Stories

Only Title

ECO SANDALS

Show code

Only Description

Show code

Only Subtitle

SUMMER SHOES

Show code

Only Call To Action

[Show code](#)

With Background

SUMMER SHOES

ECO SANDALS

[Show code](#)

On The Right

SUMMER SHOES

ECO SANDALS

[Show code](#)

With Title Slot

SUMMER SHOES
CUSTOM TITLE

Show code

With Subtitle Slot

CUSTOM SUBTITLE
ECO SANDALS

Show code

With Description Slot

SUMMER SHOES
ECO SANDALS
CUSTOM DESCRIPTION

Show code

With Call To Action Slot

SUMMER SHOES
ECO SANDALS

Show code


 **With Img Tag Slot**

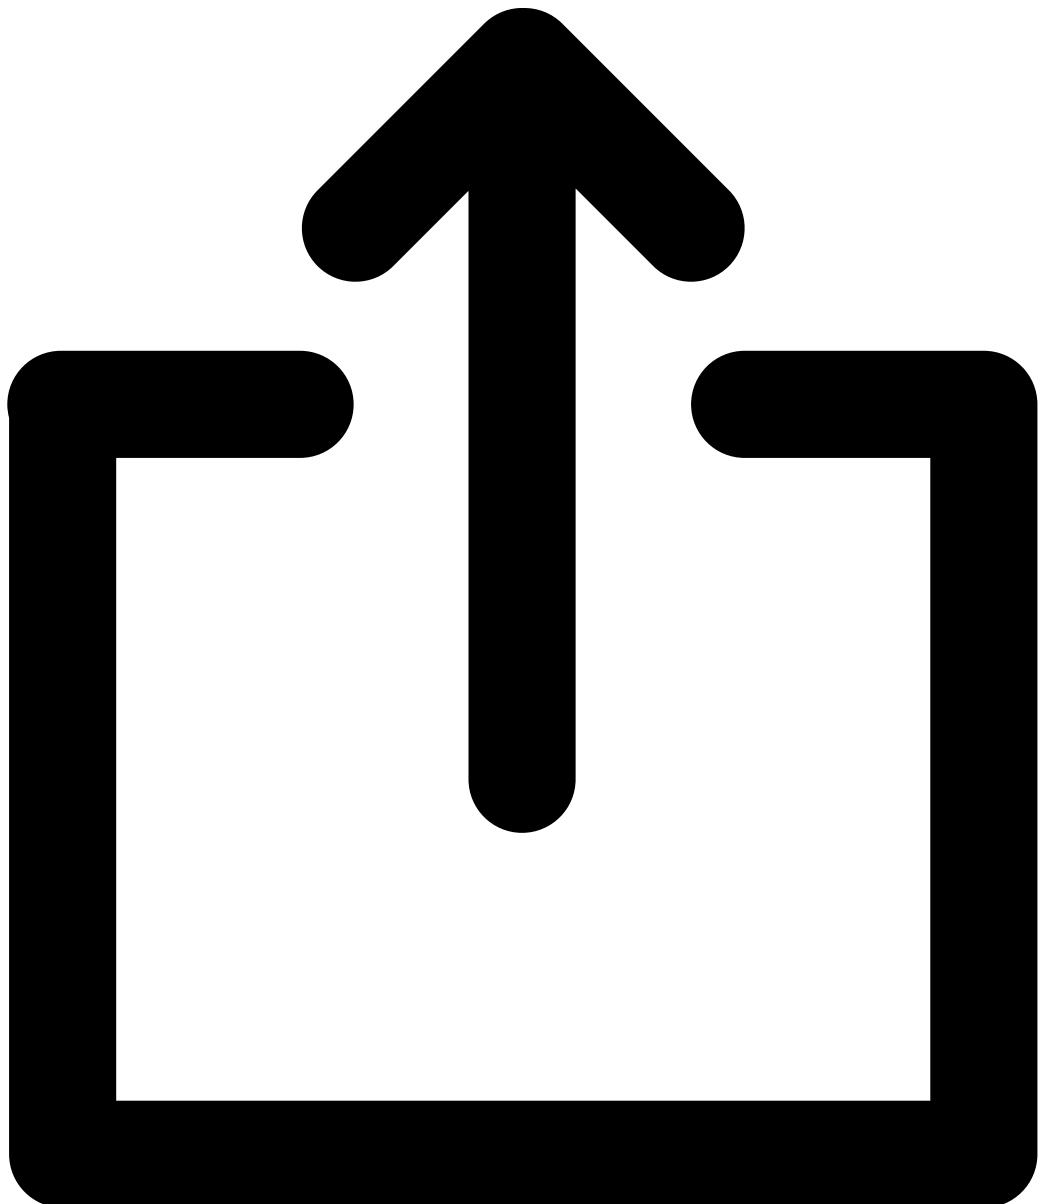SUMMER SHOES
ECO SANDALS

Show code

Bar

The bar component for mobile components.



Dresses

Show code

Props

Name

Description

Default

Control

[Hide Props items](#)



[Hide Props items](#)

Props

title

Title text
string

""

Dresses

back

Sets visibility of back button
boolean

false

FalseTrue

close

Sets visibility of close button
boolean

false

FalseTrue

[Hide Events items](#)



[Hide Events items](#)



Events

click:back

Emits click:back event when back button is clicked -




click:back :{



click:close

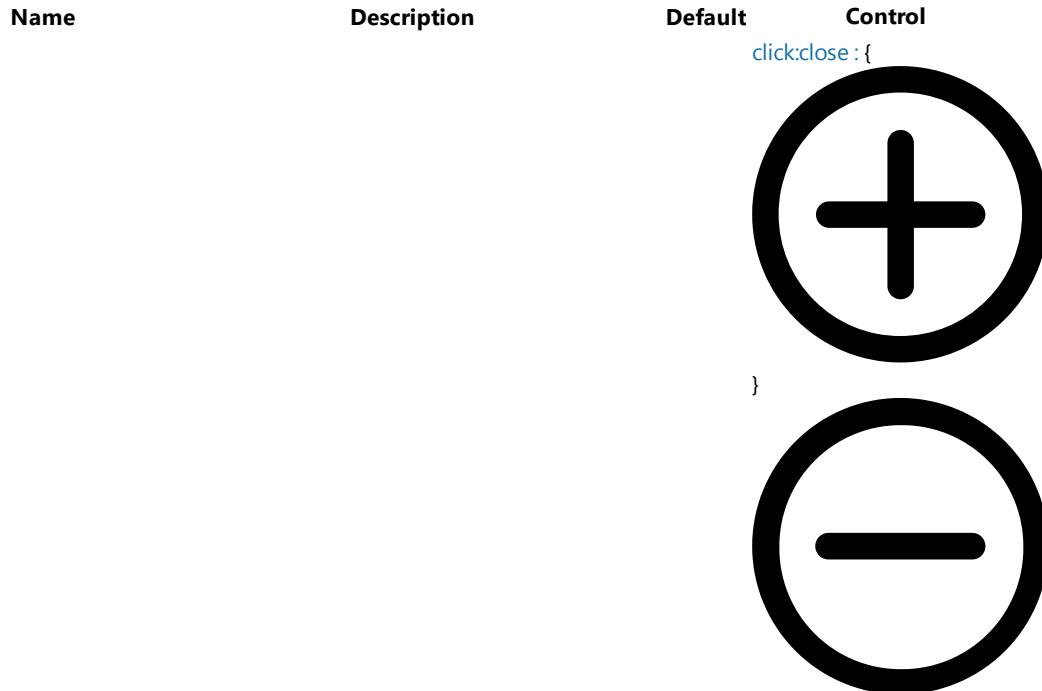Emits click:close event when close button is clicked -



[Hide Slots items](#)



[Hide Slots items](#)

Slots

back	Use this slot to replace back button	-	-
title	Use this slot to replace title content	-	-
close	Use this slot to replace close button	-	-

Stories

With Back Btn

<

Dresses

[Show code](#)

With Close Btn

×

Dresses

[Show code](#)

Use Title Slot

<

CUSTOM TITLE

[Show code](#)

Use Back Slot

CUSTOM BACK

Dresses

X

Show code

 **Use Close Slot**

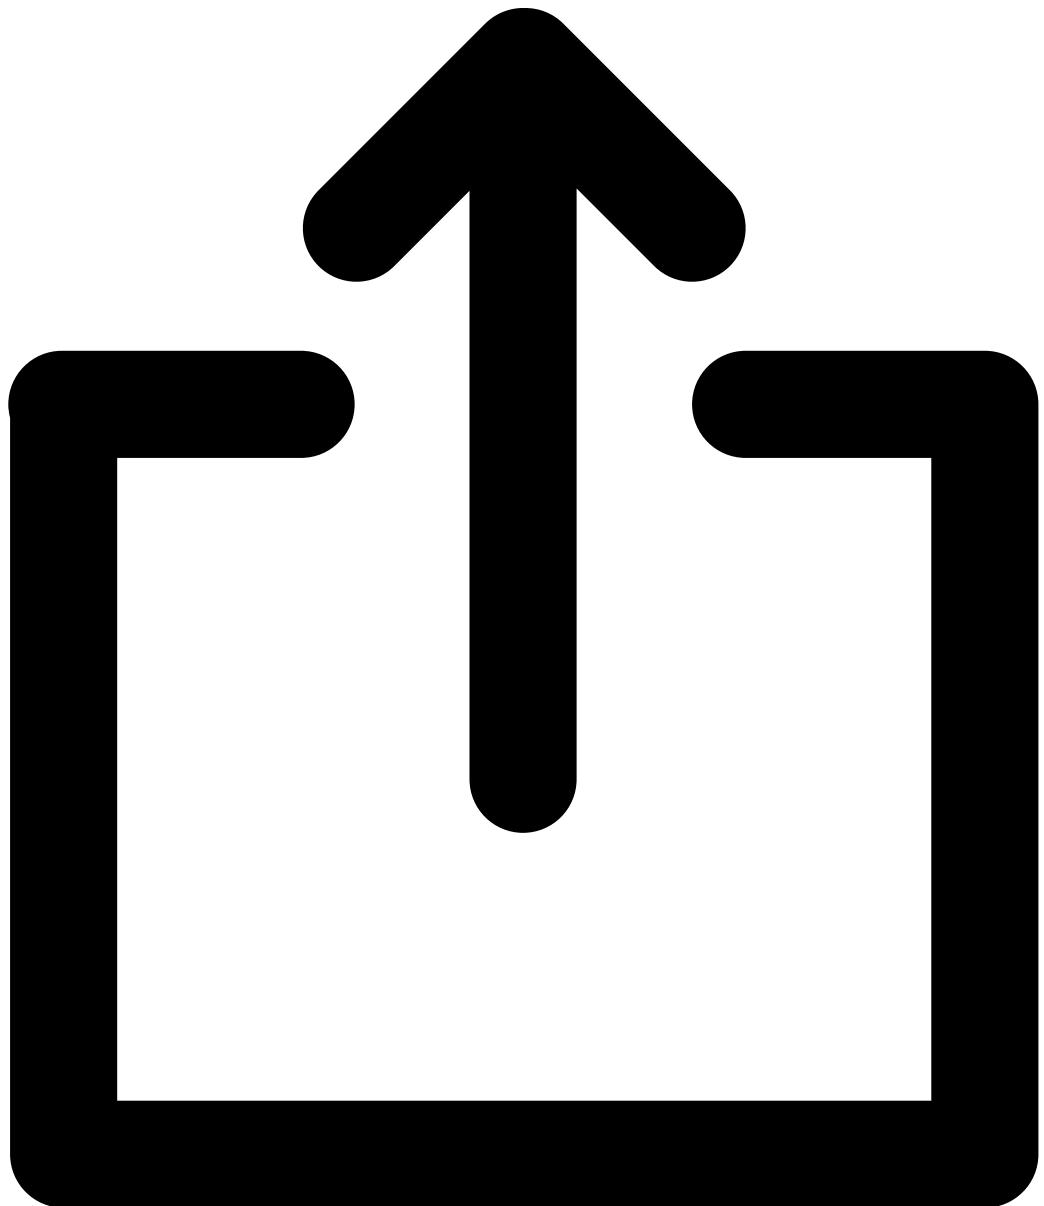
Dresses

CUSTOM CLOSE

Show code

BottomModal

The modal component displaying at the bottom of the page.



Show code

Name

content

Description

Fill to see the content (for testing purposes). For development use default slot, described below, to change the content.

Default

-

Control



Your content

[Hide Props items](#)



[Hide Props items](#)

Props

isOpen

Bottom Modal is open
boolean

false

FalseTrue

title

Bottom Modal title
unknown

""

Title

transition

Transition effect on opening modal. Could be one of [the default ones](#).
stringboolean

""

sf-fade

[Hide Events items](#)



[Hide Events items](#)


Events

click:close

Emits click:close event when close button is clicked

-


RAW
click:close : {




Name

Description

Default

Control

}



[Hide Slots items](#)



[Hide Slots items](#)

Slots

close-desktop	Use this slot to replace close button for desktop
default	Use this slot to replace content
close-mobile	Use this slot to replace close button for mobile
title	Use this slot to replace title button

-

[Set object](#)

-

[Set object](#)

-

[Set object](#)

-

-

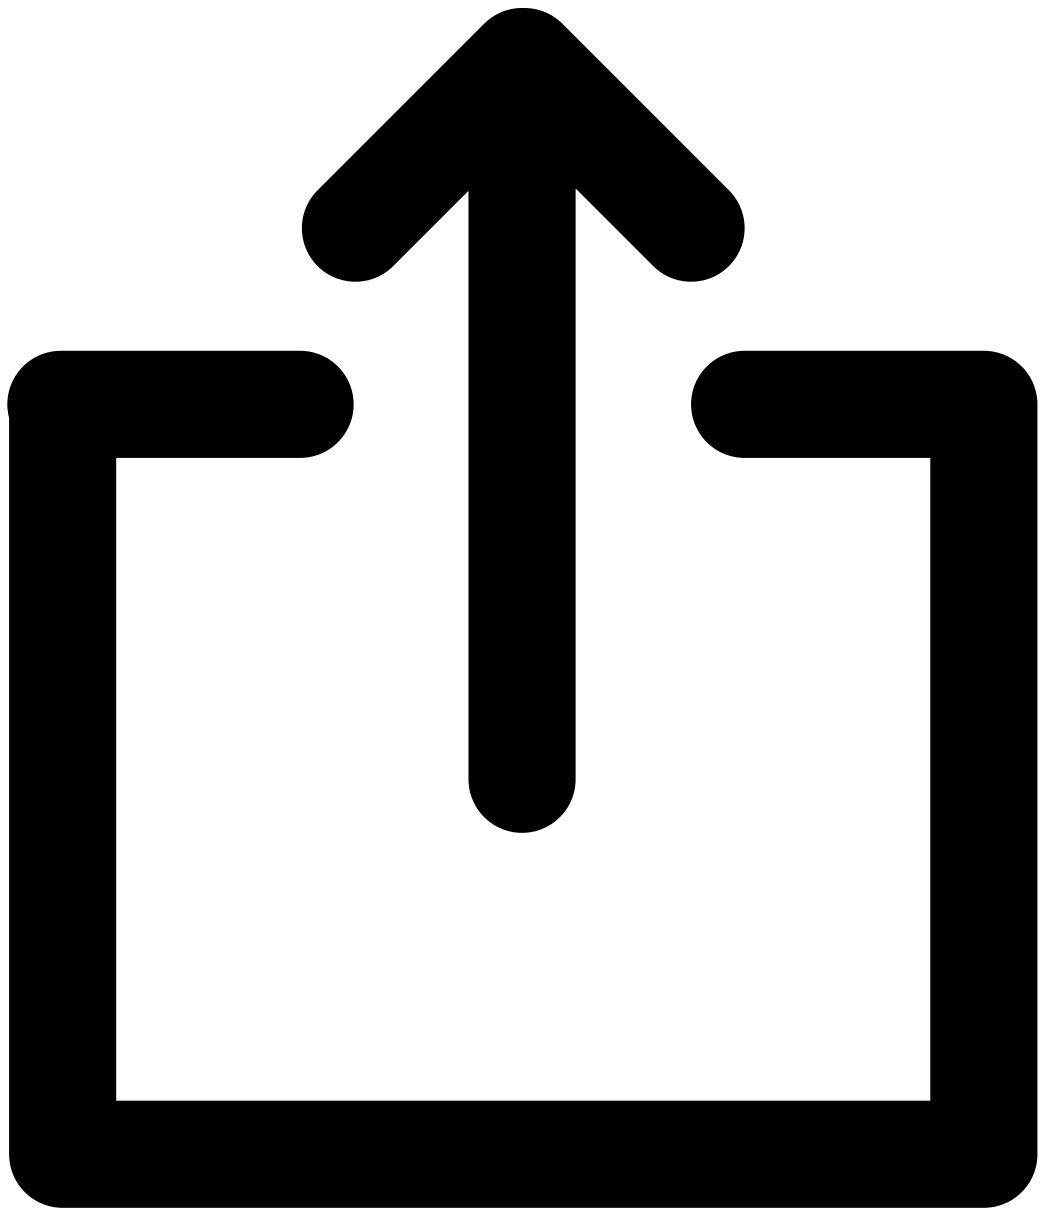
Stories

Example

[No code available](#)

CallToAction

The call to action component with button and text



Subscribe to Newsletters

Be aware of upcoming sales and events. Receive gifts and special offers!

SUBSCRIBE

Show code

Name

Hide Props items

Description

Default


Control



Hide Props items

Props

title	CallToAction title. string	...	Subscribe to Newsletters
description	CallToAction description. string	...	Be aware of upcoming sales and events. Receive gifts and special offers!
buttonText	Text that will be displayed inside the button. string	...	Subscribe
image	Background image. stringobject	...	Edit string... <code>#e1e3e2</code>



background	Background color. string	...
------------	-----------------------------	-----

link	CallToAction link. If it's filled in, changes button tag on a tag.	null
------	--	------

Set string

Hide Events items





Hide Events items

Events

click	Emits change event with name of picked address component -
-------	--



Name	Description	Default	Control
		click : { }	 } 

[Hide Slots items](#)



[Hide Slots items](#)

Slots

button	Use this slot to replace bottom button	-	Set object
title	Use this slot to replace title button	-	-
description	Use this slot to replace description button	-	-

Stories

With Image

Subscribe to Newsletters

Be aware of upcoming sales and events. Receive gifts and special offers!

SUBSCRIBE

[Show code](#)

With Link

Subscribe to Newsletters

Be aware of upcoming sales and events. Receive gifts and special offers!

SUBSCRIBE

Show code

☞ Use Title Slot

CUSTOM TITLE

Be aware of upcoming sales and events. Receive gifts and special offers!

SUBSCRIBE

Show code

☞ Use Description Slot

Subscribe to Newsletters

CUSTOM DESCRIPTION

SUBSCRIBE

Show code

☞ Use Button Slot

Subscribe to Newsletters

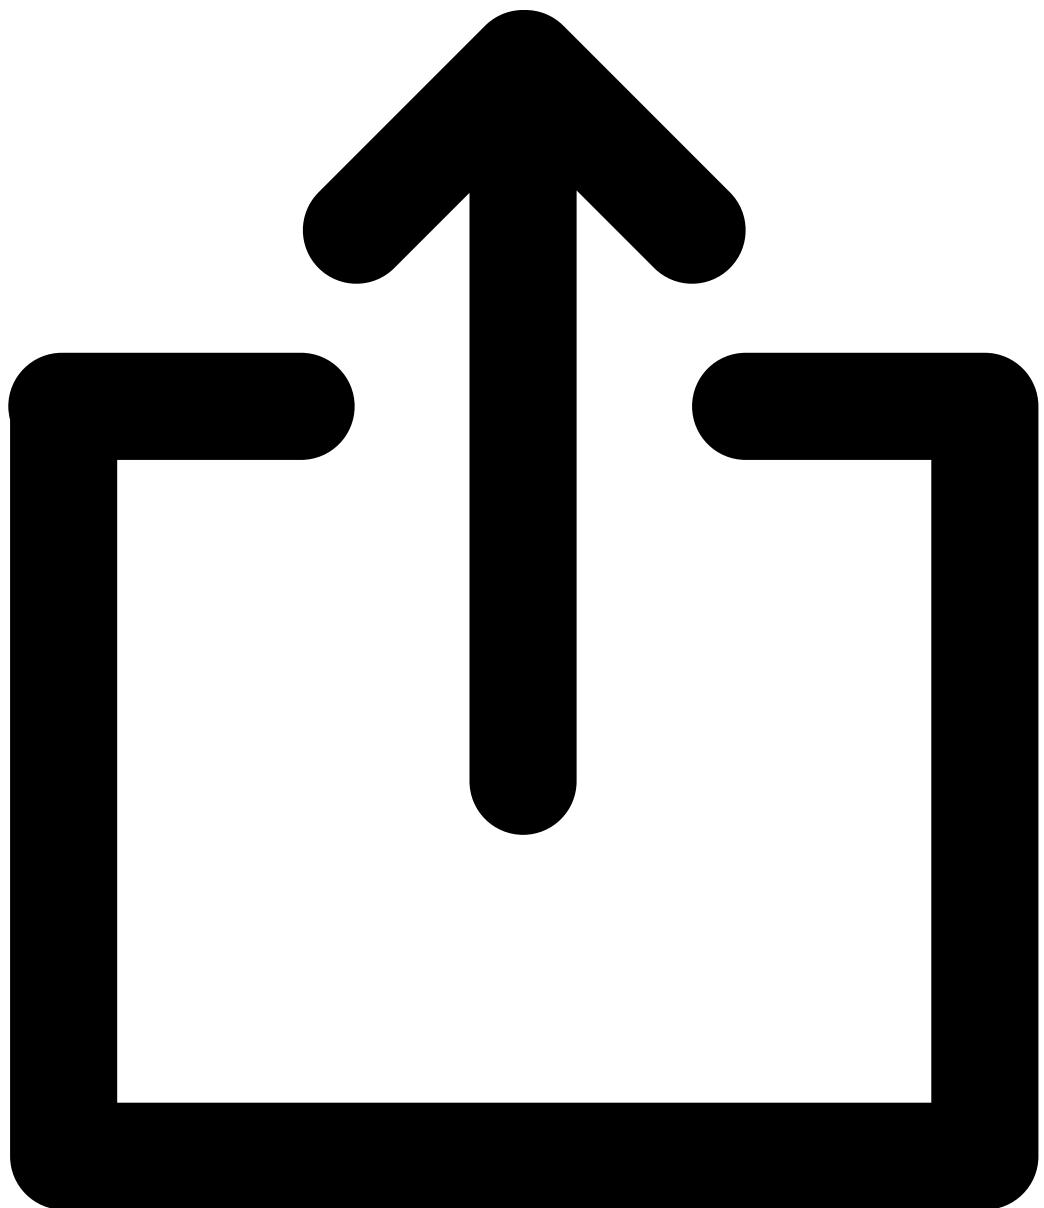
Be aware of upcoming sales and events. Receive gifts and special offers!


CUSTOM BUTTON

Show code

Card

The component for displaying information with title, image and action button





Baby Care

Read how to take care of your baby, see our products available, clothes and suggestions how stay healthy.

Show code

LEARN MORE

Name

Description

Default

Control

Hide Props items



Hide Props items

Props

image	Card image string	...	static/media/card.a58afe1b.jpg
title	Card title string	...	Baby Care
titleLevel	Card title level of heading (form 1 as h1 tag to 6 as h6 tag) number	3	3
description	Card description string	...	Read how to take care of your baby, see our products available, clothes and suggestions how stay healthy.
link	Card link string	null	Edit string...
buttonText	Text displayed on button string	...	Learn more
imageWidth*	Product image width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	288	
imageHeight*	Product image height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	189	

Hide Slots items



Hide Slots items

Slots

details	Custom content for heading and description	-	Set object
action	Slot content will replace button	-	Set object

Stories

With Details Slot



[Show code](#)

[LEARN MORE](#)

CUSTOM DETAILS

With Action Slot



Baby Care

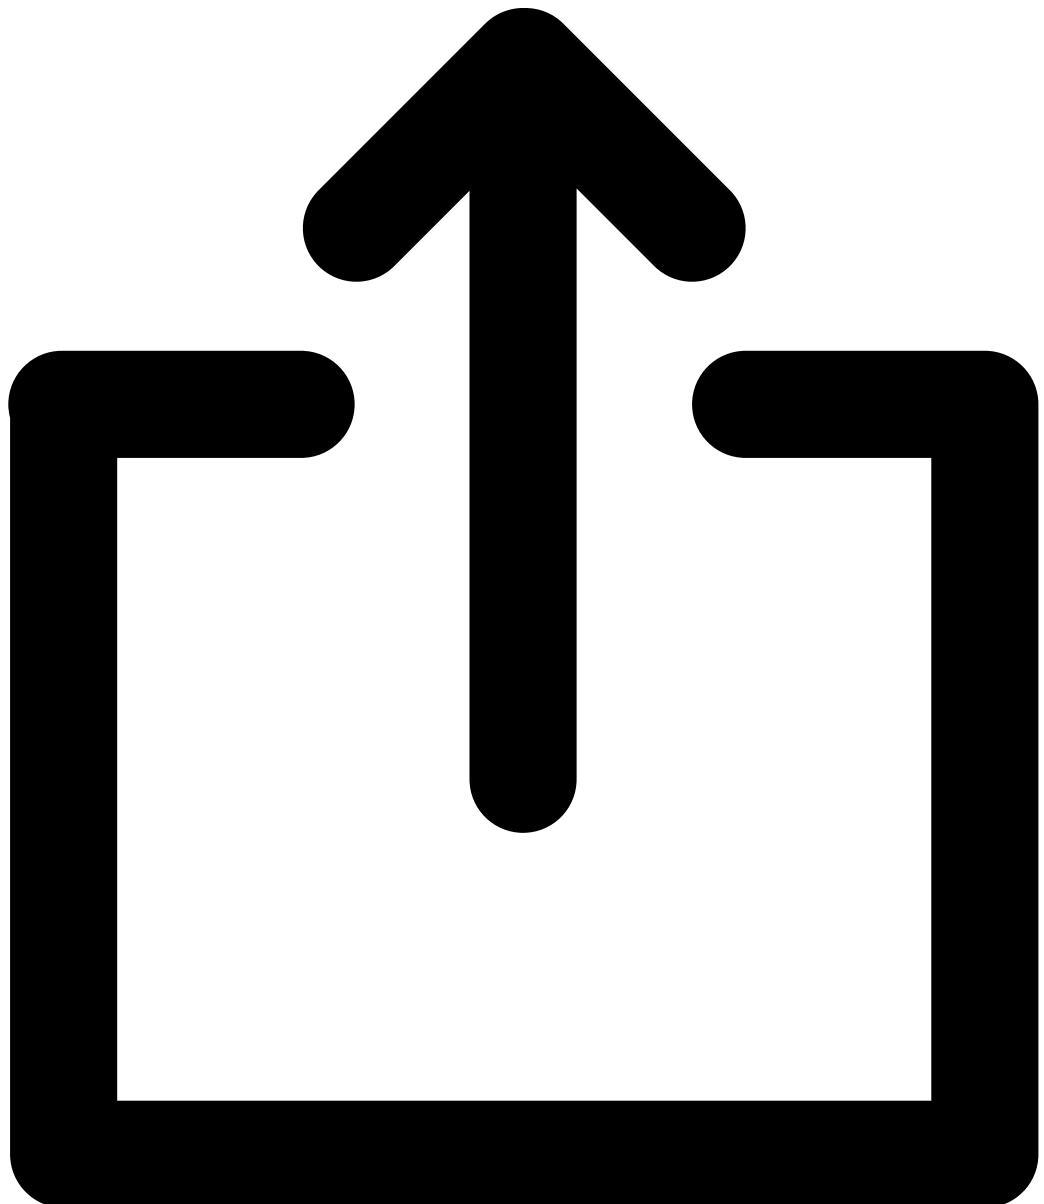
Read how to take care of your baby, see our products available, clothes and suggestions how stay healthy.

CUSTOM ACTION

[Show code](#)

CategoryCard

The component for displaying information about categories.



Show code

Name	Description	Default	Control
Hide Props items			



Hide Props items

Props

label	Label for card string	...	<input type="text" value="Personal Care"/>
count	Count for card stringnumber	...	<input type="text" value="32"/>
link	Link for category stringobject	...	<input type="text" value="#"/>
background	Defines background of card. Can be a string or object with strings to display images for desktop and mobile stringobject	...	 <code>background : {</code>


Personal Care

32


#




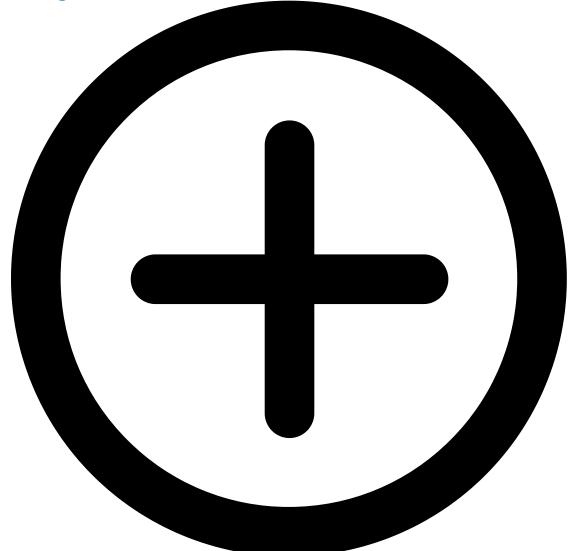
`background : {`


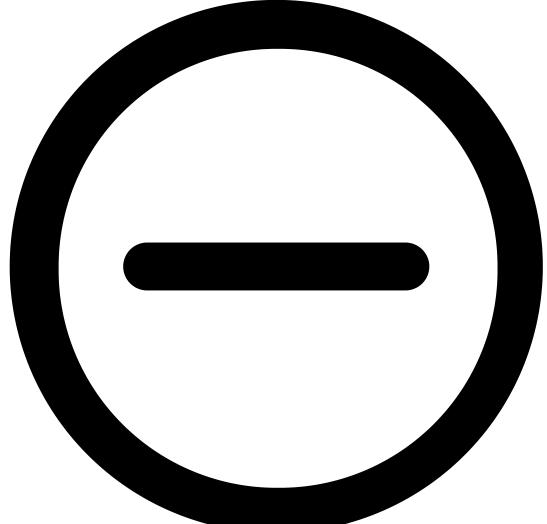
`mobile : "assets/storybook/SfCategoryCard/category-cardM.jpg"`


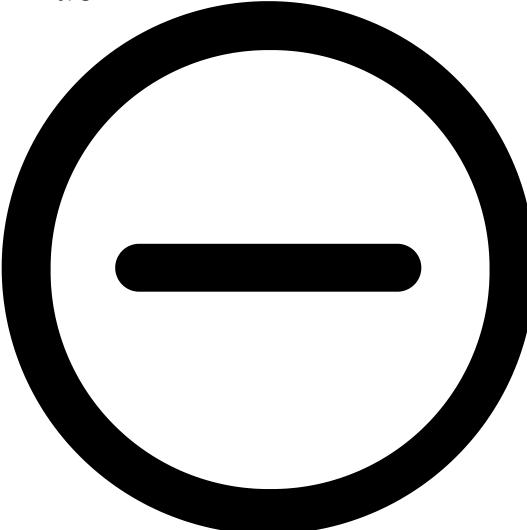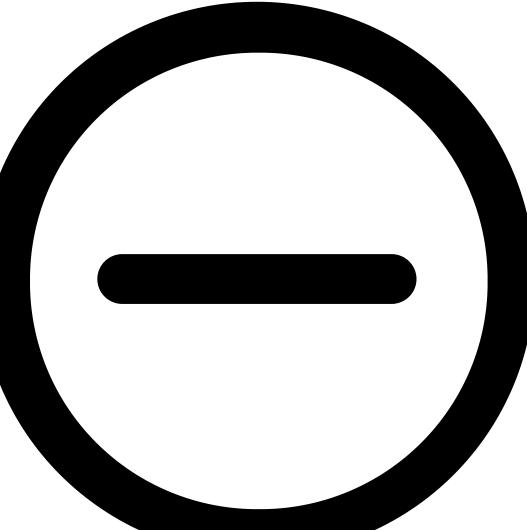
`desktop :`
`"assets/storybook/SfCategoryCard/category-`

Name	Description	Default	Control
cardD.jpg"			
}			

Hide Slots items



Hide Slots items

Slots

default

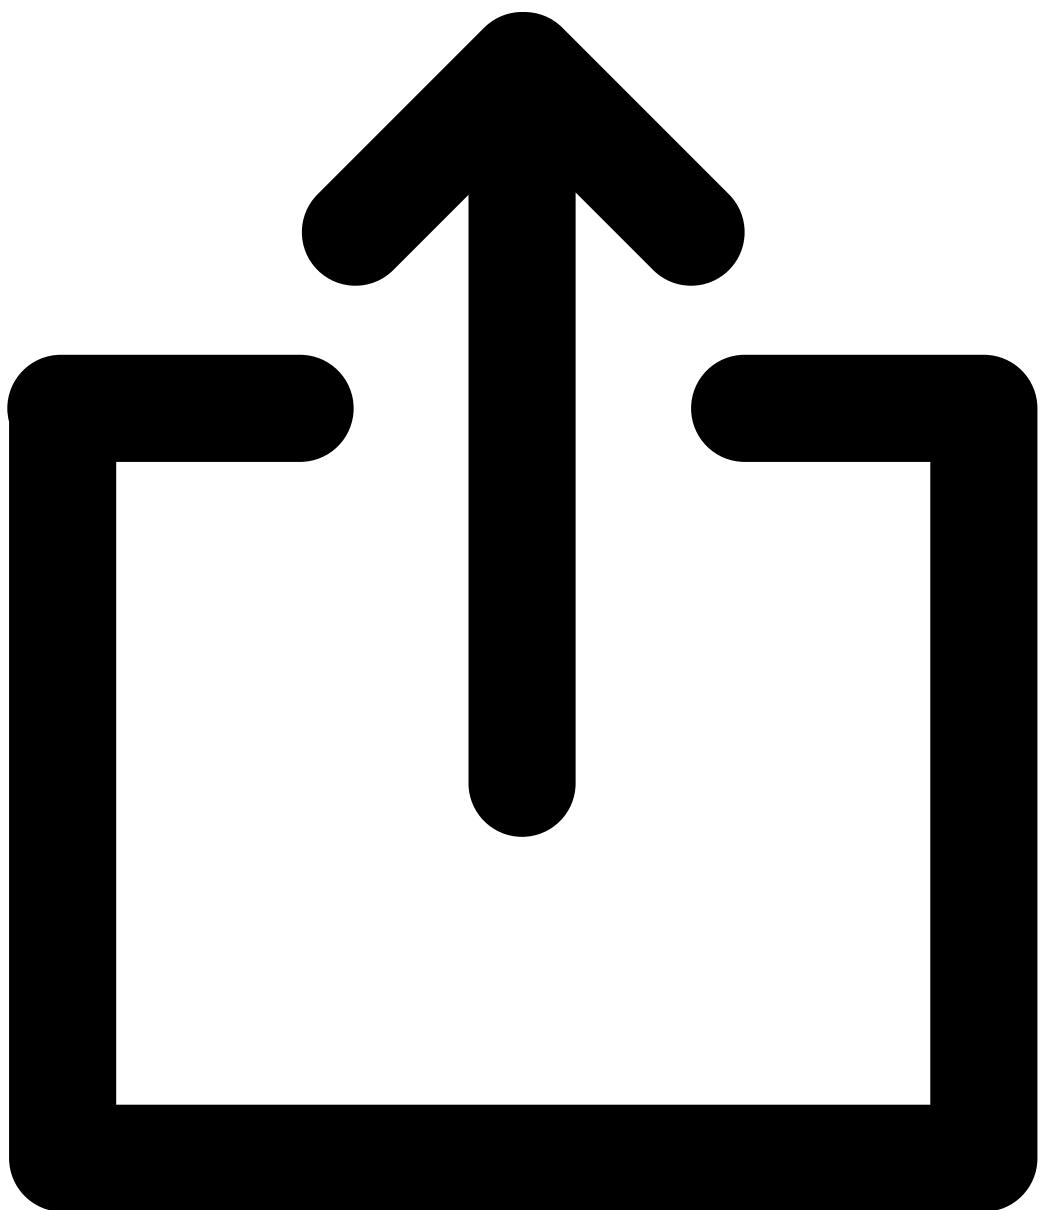
Here you can pass content of your category card

-

Set object

Characteristic

The component with icon and text used for describing product characteristics.



Safety

It carefully packaged with a personal touch

Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
description	Characteristic description string	...	<input type="text" value="It carefully packaged with a personal touch"/>
title	Characteristic title string	...	<input type="text" value="Safety"/>
Hide Slots items			
	Hide Slots items		
Slots			
text	Characteristic text. Slot content will replace default title and description text -		<input type="button" value="Set object"/>

Name	Description	Default	Control
title	Use this slot to replace title button	-	-
description	Use this slot to replace description button	-	-
icon	Use this slot to replace icon	-	-

↳ Stories

↳ With Icon

 Safety
It carefully packaged with a personal touch
[Show code](#)

↳ Use Icon Slot

 Safety
It carefully packaged with a personal touch
[Show code](#)

↳ Use Text Slot

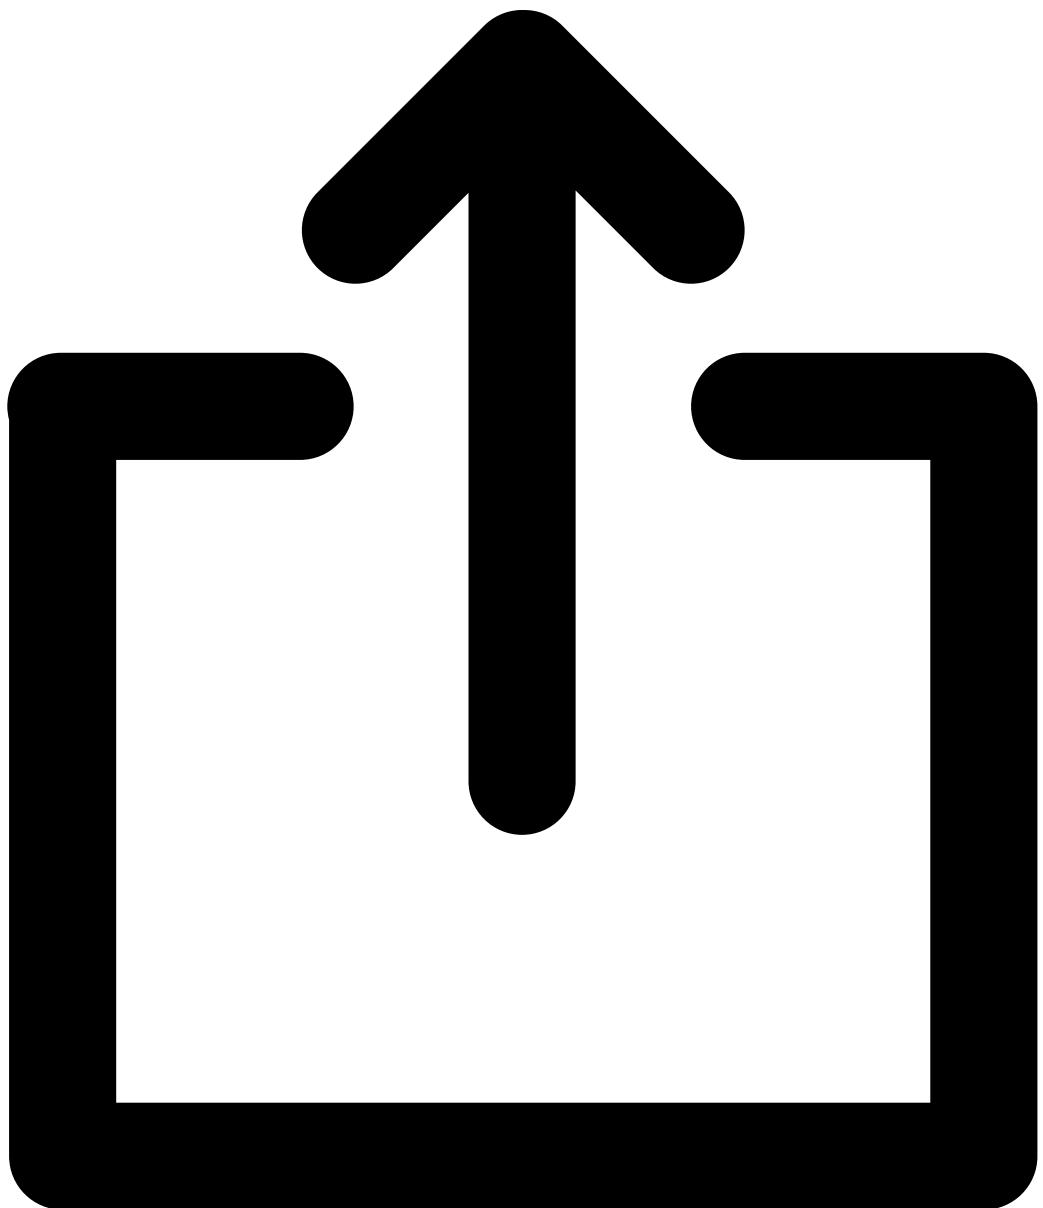
 CUSTOM TEXT
[Show code](#)

↳ Use Description Slot

 Safety
CUSTOM DESCRIPTION
[Show code](#)

Checkbox



The checkbox component consisting of input field, label and error message field



I want to create an account

Show code

Name	Description	Default	Control
Hide Props items			
			
Hide Props items			
Props			
name	Checkbox name string	...	<input type="text" value="shipping"/>
label	Label text string	...	<input type="text" value="I want to create an account"/>
hintMessage	Hint/Required message text. string	"Required."	<input type="text" value="Required."/>
value	Value of checkbox input stringboolean	...	<input type="text" value="Edit string..."/>
required	Sets the required value of checkbox. boolean	false	<input type="checkbox"/> FalseTrue
infoMessage	Info/success message text. string	...	<input type="text" value="Edit string..."/>
errorMessage	Error message value of select. It appears if valid is false. string	"This field is not correct."	<input type="text" value="Edit string..."/>
valid	Indicates if the checkbox is properly filled. boolean	true	<input checked="" type="checkbox"/> FalseTrue
disabled	Sets the checkbox state to disabled. boolean	false	<input type="checkbox"/> FalseTrue
selected	Indicates which checkbox is selected. array,boolean	false	<input type="checkbox"/> FalseTrue
Hide v-model items			
			
Hide v-model items			
v-model			
v-model	v-model accepts selected prop and emits change event text	...	<input type="text" value="Edit string..."/>
Hide Events items			
			
Hide Events items			
Events			

Name	Description	Default	Control
change	Emits change event when checkbox is clicked	-	 RAW change : {  } 

[Hide Slots items](#)



[Hide Slots items](#)

Slots

checkmark	Custom checkmark markup	-	Set object
show-error-message	Custom error message	-	-
show-info-message	Custom info message	-	-
show-hint-message	Custom hint message	-	-
label	Use this slot to replace label	-	-

[Hide slots items](#)



[Hide slots items](#)

slots

default	unknown	-	Set object
---------	---------	---	----------------------------

Stories

Selected

I want to create an account

[Show code](#)

⌚ Required

I want to create an account

Required.

[Show code](#)

⌚ With Info

I want to create an account

This is an info message

[Show code](#)

⌚ With Custom Error

I want to create an account

Something is wrong

[Show code](#)

⌚ Invalid

I want to create an account

[Show code](#)

⌚ Disabled

I want to create an account

[Show code](#)

⌚ Use Checkmark Slot

 I want to create an account

[Show code](#)

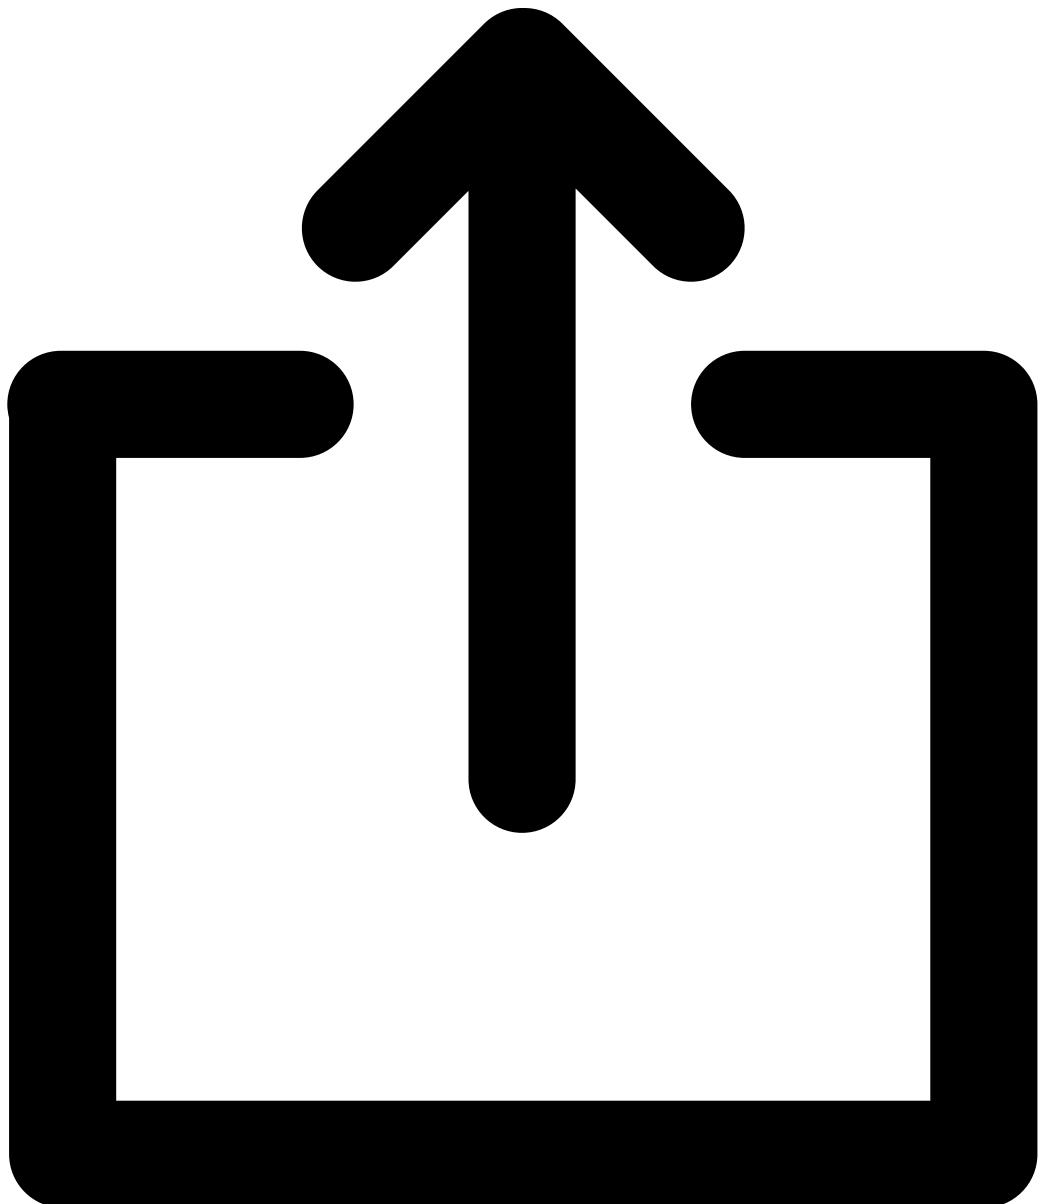
⌚ Use Error Message Slot

I want to create an account

[Show code](#)

ColorPicker

ColorPicker component utilizing [SfButton](#) with slot for [SfColor](#) component



Choose color

[Show code](#)**Name**

colors

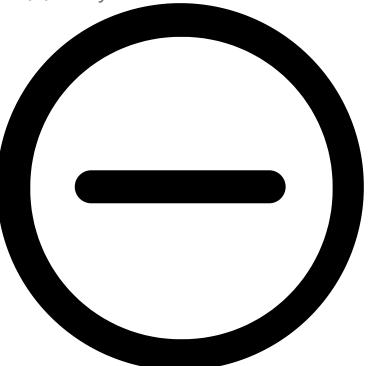
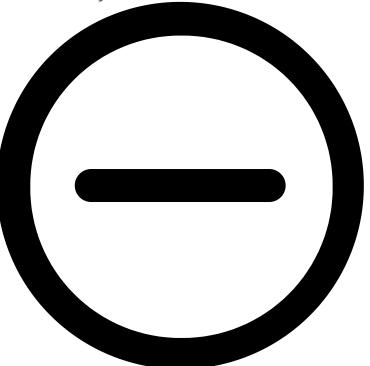
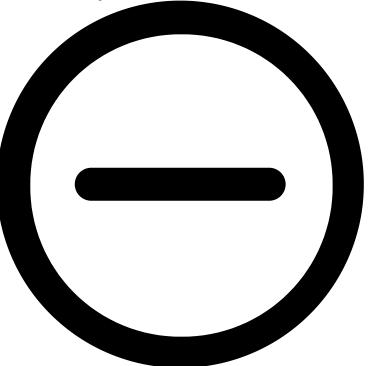
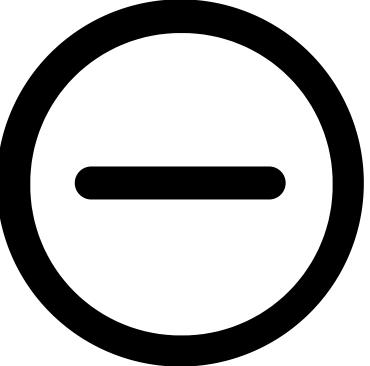
Description

Changing colors (for testing purposes). For development, you can use default slot to place custom color element.

-

Default**Control**

colors : [

Name	Description	Default	Control
		2 : {...} 4 keys	
		3 : {...} 4 keys	
		4 : {...} 4 keys	
		5 : {...} 4 keys	

]



[Hide Props items](#)



[Hide Props items](#)

Props

isOpen	ColorPicker is open boolean	false	<input checked="" type="checkbox"/> FalseTrue
label	Label for ColorPicker string	""	<input type="text"/> Choose color
hasClose	Close button state whether show it or not boolean	false	<input type="checkbox"/> FalseTrue

[Hide Events items](#)






[Hide Events items](#)

Events

click:toggle	Emits click:toggle when open/close button is clicked in mobile mode	-	
--------------	---	---	--

RAW

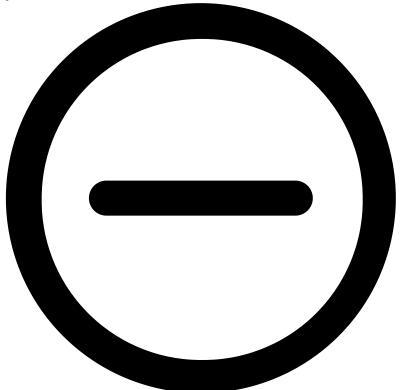click:toggle : {

Name	Description	Default	Control
		}	
 Hide Slots items			
Slots			
open	Use this slot to replace open button	-	
default	Use this slot to place content inside the color picker	-	
close	Use this slot to replace close button	-	
label	Use this slot to replace label	-	-
 Hide CSS Modifiers items			
CSS Modifiers			
classes	CSS classes to modify component styling	-	
			

Stories

Is Open

Choose color

Show code

⌚With Close Btn

Choose color

Show code

⌚Vertical Display

Switch to smaller viewport mode to view better

Choose color

Show code

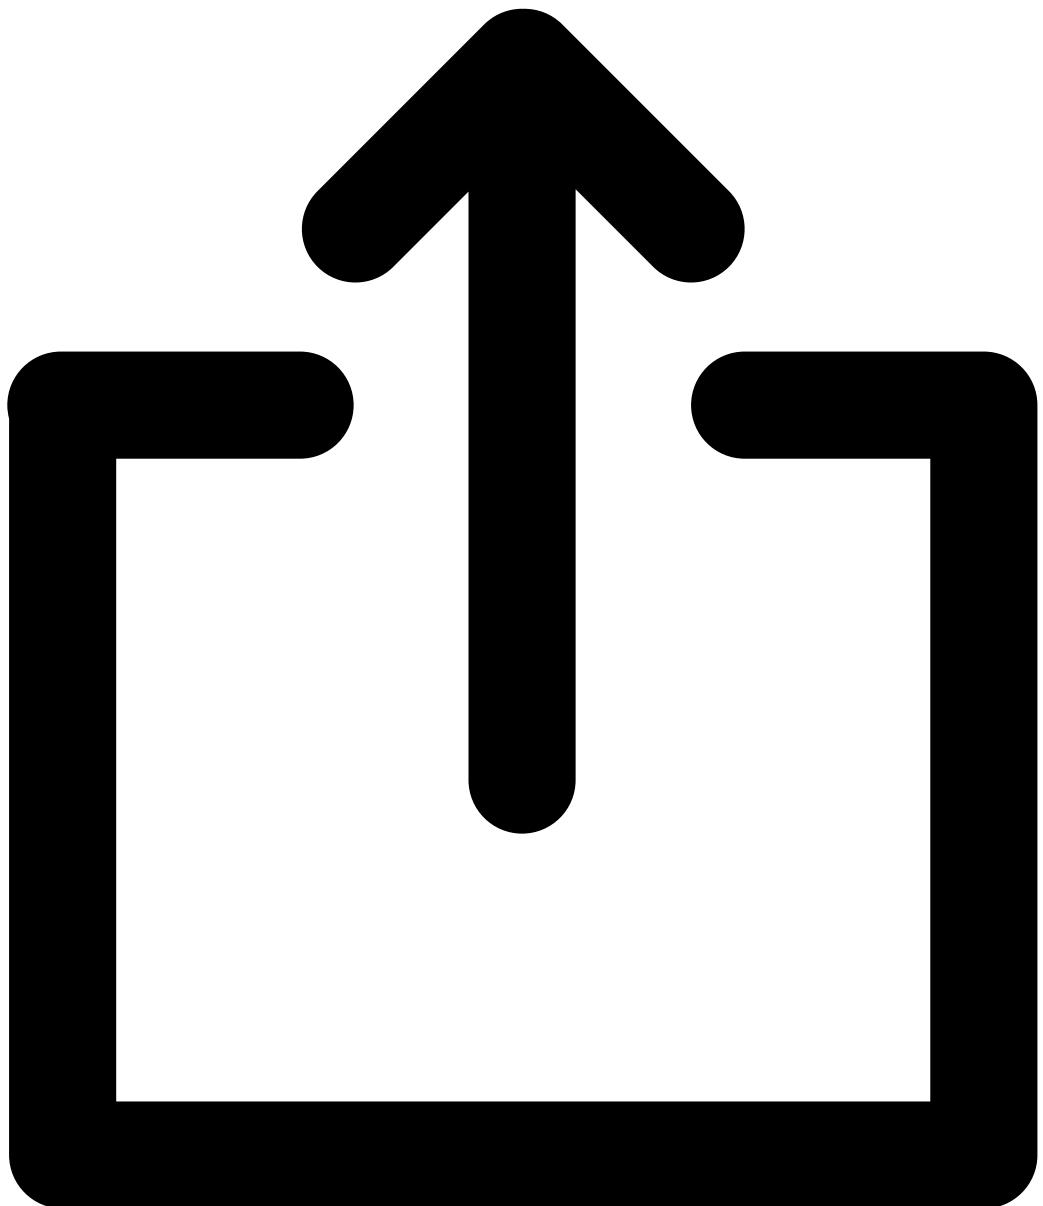
⌚Vertical Left Display

Switch to smaller viewport mode to view better

Choose color





ComponentSelect




On click input select field with dropdown. Built from main component - SfComponentSelect and internal components - SfComponentSelectOption.




Color

Show code

Name	Description	Default	Control
options	Options values (for testing purposes). For development, you can use default slot to place custom options.	-	 RAW options : []
		0 : {...} 3 keys	
		1 : {...} 3 keys	
		2 : {...} 3 keys	

Name	Description	Default	Control
		3 : {...} 3 keys	
		4 : {...} 3 keys	
]	

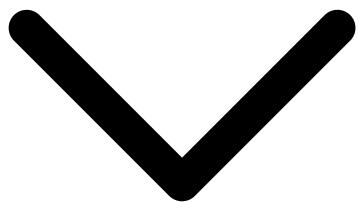[Hide Props for main component items](#)




[Hide Props for main component items](#)

Props for main component

label	Label text string	""	<input type="text" value="Color"/>
size	Dropdown items quantity number	5	<input type="text" value="5"/>
required	Required attribute boolean	false	<input type="checkbox"/> FalseTrue
valid	Validate value of form select boolean	true	<input checked="" type="checkbox"/> FalseTrue

Name	Description	Default	Control
disabled	Disabled status of form select boolean	false	<input type="checkbox"/> FalseTrue
errorMessage	Error message value of form select. It appears if valid is false. string	"This field is not correct."	<input type="text" value="This field is not correct."/>
persistent	If true clicking outside will not dismiss the select boolean	false	<input type="checkbox"/> FalseTrue
cancelLabel	Cancel label text string	Cancel	<input type="text" value="Edit string..."/>
selected	Selected item value string	...	<input type="text" value="Edit string..."/>

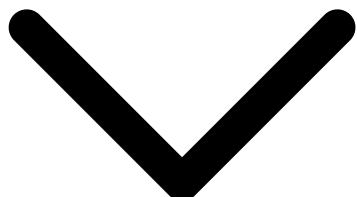[Hide v-model items](#)



[Hide v-model items](#)

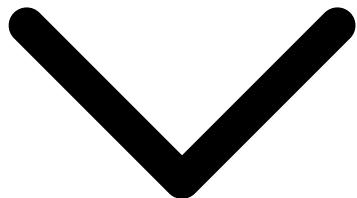
v-model

v-model

v-model accepts selected prop and emits change event
text

...

[Hide Events items](#)



[Hide Events items](#)

Events

change

Emits change event when option is chosen

-



RAW


Name

Description



Default

Control

change : {



}

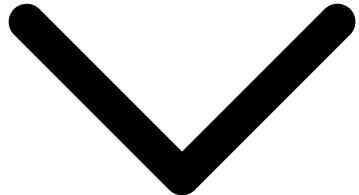

events


click:close



Slots

Name	Description	Default	Control
icon	Use this slot to place custom icon	-	<button>Set object</button>
default	Use this slot to place content inside select component	-	<button>Set object</button>
cancel	Use this slot to place custom cancel button	-	<button>Set object</button>
error-message	Use this slot to place custom error message element	-	<button>Set object</button>
label	Use this slot to replace label	-	-
default	Default slot for SfComponentSelectOption. Use this slot to place options in SfComponentSelect component	-	-

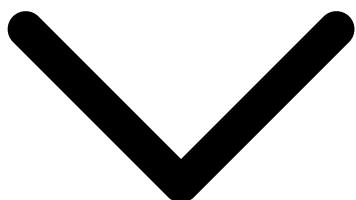Hide CSS modifiers items



Hide CSS modifiers items

CSS modifiers

classes

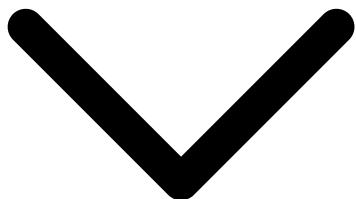
CSS classes to modify component styling

-



Hide Props for SfComponentSelectOption component items

Hide Props for SfComponentSelectOption component items



Name	Description	Default	Control
Props for SfComponentSelectOption component			
value	The content of the option string,number,object	...	<input type="text" value="Edit string..."/>

Stories

Required

Color *

[Show code](#)

Invalid

Color
Amaranth

This field is not correct.

[Show code](#)

Persistent

Color

[Show code](#)

Selected

Color
Amaranth

[Show code](#)

With Underlined

Color

[Show code](#)

No Chevron

Color

[Show code](#)

With Label On Right

Color

[Show code](#)

Long Options List

Color

[Show code](#)

[Use Label Slot](#)

CUSTOM LABEL

[Show code](#)

[Use Error Message Slot](#)

Color

[Show code](#)

[Use Cancel Slot](#)

Color

[Show code](#)

Choose size

ADD TO CART

ADD TO COMPARE

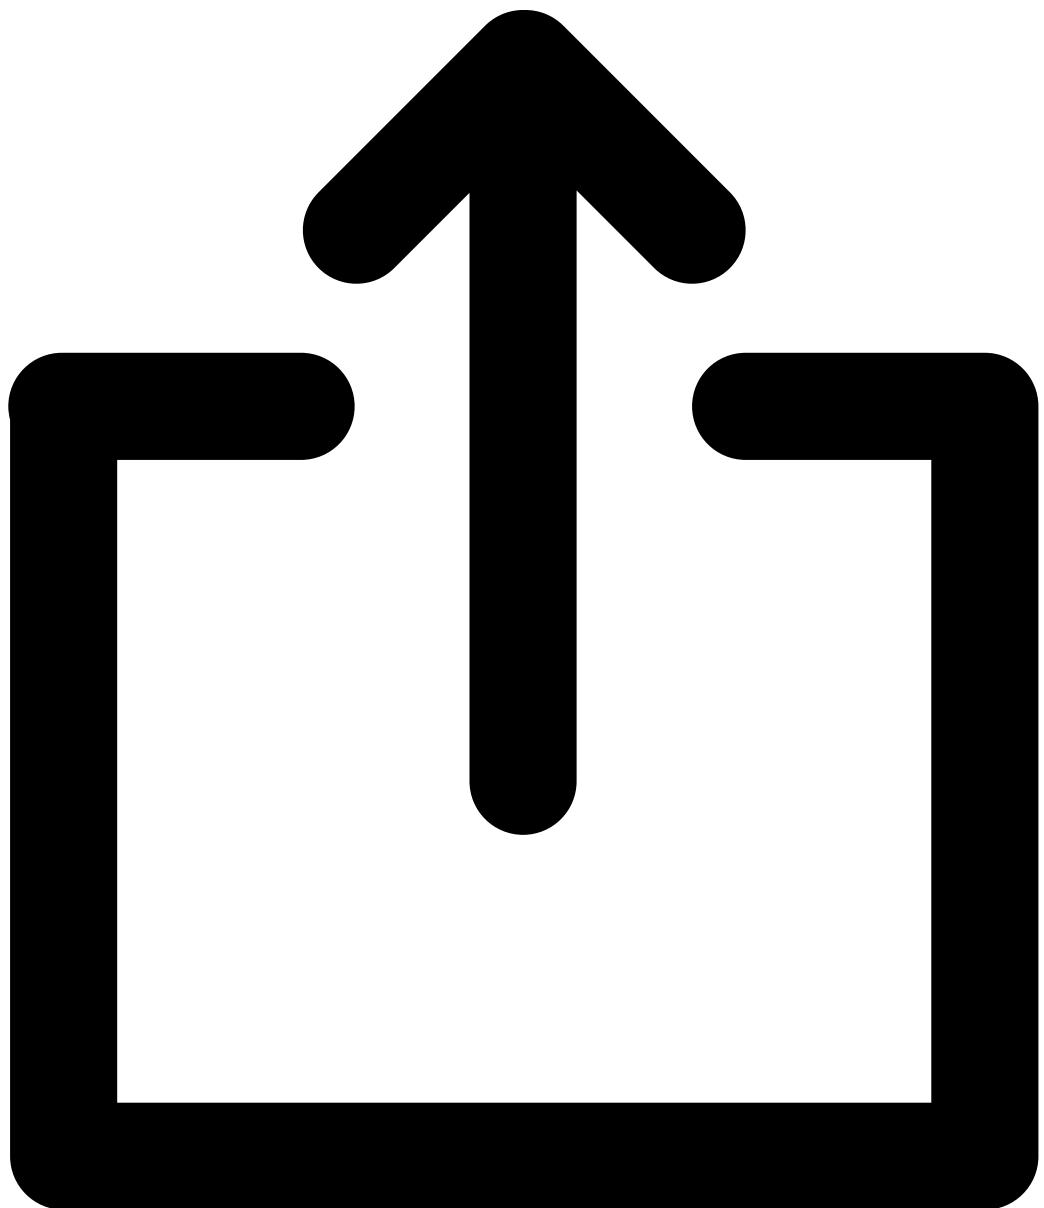
ADD TO WISHLIST

SHARE

CANCEL

Filter

Filter component with color, name and counter of items.



Red

30

Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

label	Label text. string	...	<input type="text" value="Red"/>
count	The quantity. string,number	...	<input type="text" value="30"/>
selected	Sets selected state boolean	false	<input type="checkbox"/> FalseTrue
color	Sets filter color. string	...	<input type="button" value="Choose color..."/>

[Hide Events items](#)





[Hide Events items](#)

Events



change : {



change

Emits change event when component is clicked -

}

Name	Description	Default	Control
Hide Slots items			



[Hide Slots items](#)

Slots			
label	Slot for replacing label element	-	-
count	Slot for replacing count element	-	-
color	Slot for replacing color element	-	-

Stories

Selected

Red	30	<input type="radio"/>
Show code		

As Color Filter

Red	30	
Show code		

Use Label Slot


CUSTOM LABEL	30	
Show code		

Use Count Slot

RedCUSTOM COUNT	30	
Show code		

Gallery

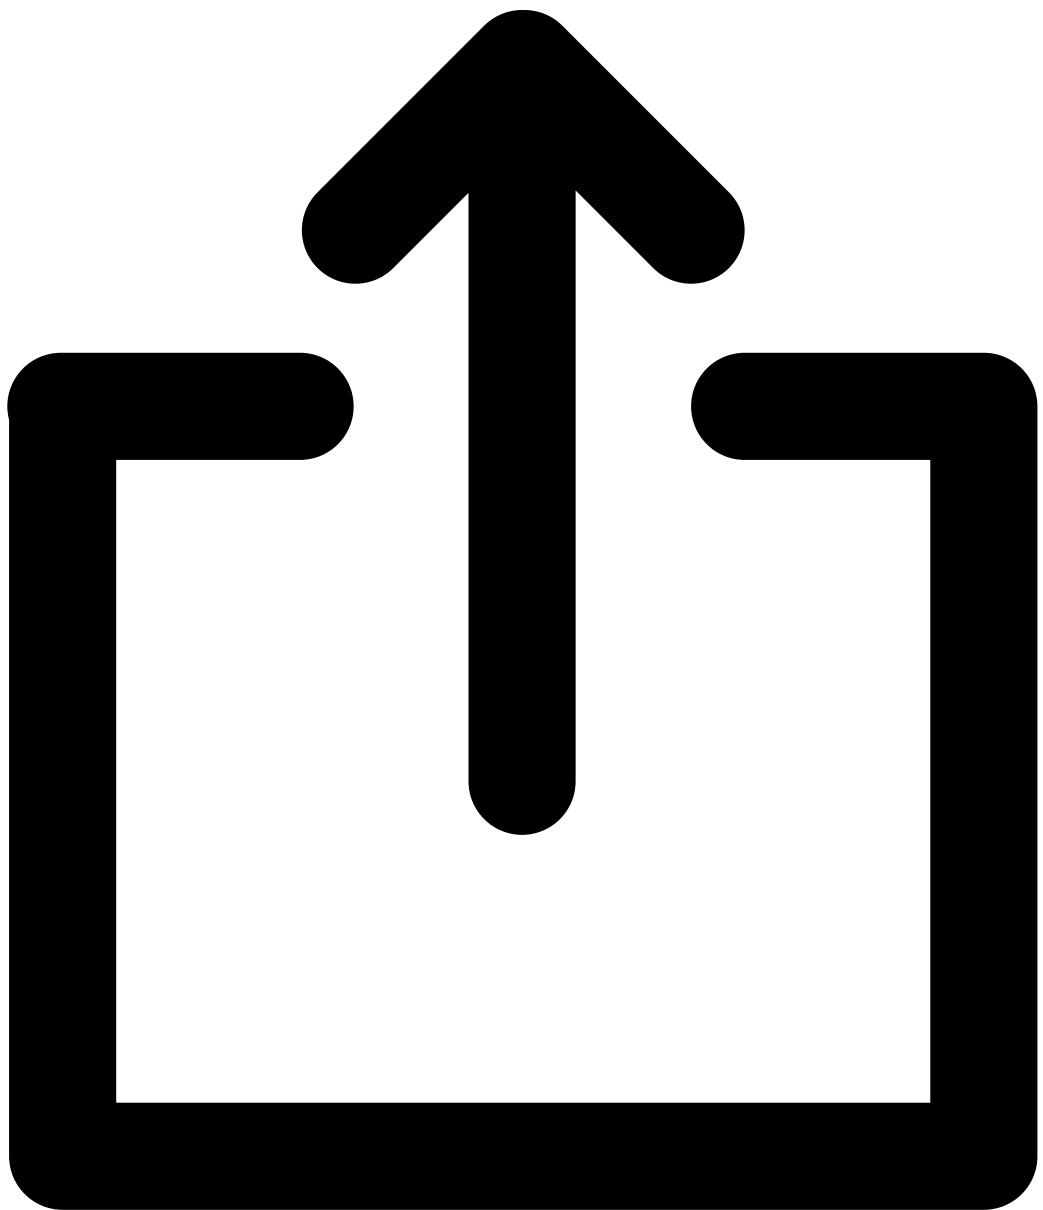Gallery with one main and few side pictures that user can browse through.





Product A



Product B



Product A



Product B

Show code

Name

Hide Props items

Description

Default

Control



Hide Props items


Props
images






Images list
array

[]




images : [




Name	Description	Default	Control
			0 : {...} 5 keys 
			1 : {...} 5 keys 
			2 : {...} 5 keys 
			3 : {...} 5 keys 
] 
current	Initial image number (starting from 1) number	1	<input type="text" value="1"/>
imageWidth	Images width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not		<input type="text" value="422"/>


Name	Description	Default	Control
imageHeight	allowed. numberstring Images height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	664	
thumbWidth	Thumb width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	160	
thumbHeight	Thumb height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	160	
sliderOptions	Glide slider options (https://glidejs.com/docs/options/) object	{ type: "slider", autoplay: false, rewind: false, gap: 0, }	 RAW sliderOptions : {






`type : "slider"`



`autoplay : false`



Name	Description	Default	Control
			rewind : false
			
			gap : 0
			
			}
			
outsideZoom	Image zoom inside or overlap the stage boolean	false	<input type="checkbox"/> FalseTrue
enableZoom	Toogle for image zoom or overlap the stage boolean	false	<input type="checkbox"/> FalseTrue
Hide props items			



[Hide props items](#)

props

imageTag	string
nuxtImgConfig	object
thumbImageTag	string
thumbNuxtImgConfig	object

"img"

""

"img"




""

[Set string](#)

[Set object](#)

[Set string](#)

[Set object](#)

Name	Description	Default	Control
	<input type="button" value="Hide Events items"/>		
Events			
 RAW			
<code>click:stage : {</code>			
		-	
			}
			
 RAW			
<code>click : {</code>			
			



[Hide Slots items](#)



[Hide Slots items](#)

Slots

big-image	Use this slot to replace main image element	-	Set object
outside-zoom	Use this slot to replace outside zoom image	-	Set object
thumbs	Use this slot to replace gallery thumbs buttons	-	Set object

Stories

With Zoom

Product A



[Show code](#)

With Outside Zoom



[Show code](#)

Auto Slide



Product A



Product B



Product A

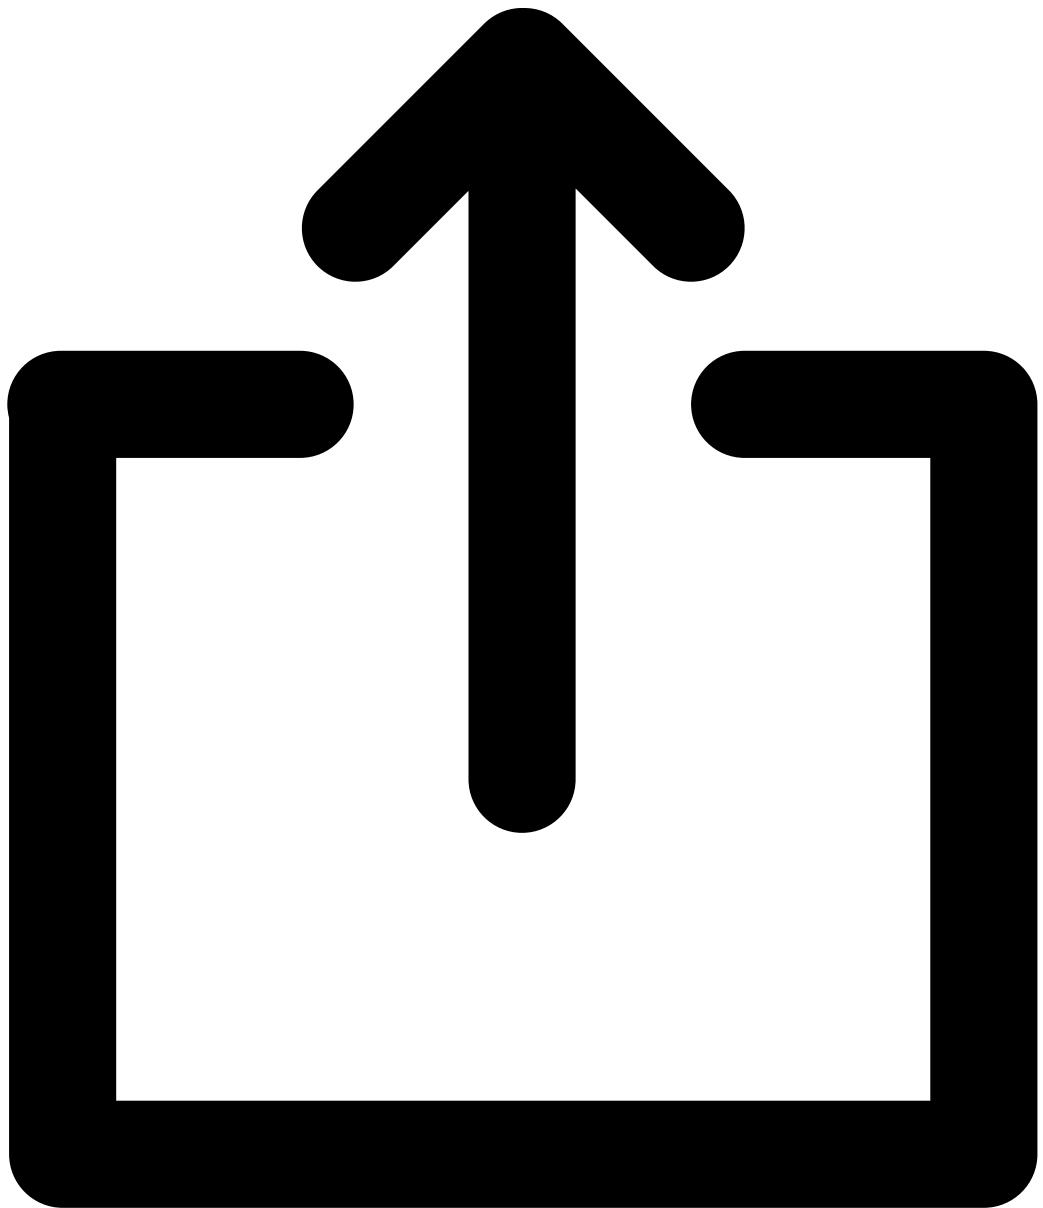


Product B

Show code

MenuItem

Component with text and counter, usable for menus and listing.



Red

30 >

Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

label	Menu-item label string	...	<input type="text" value="Red"/>
count	Menu - item count of items string,number	...	<input type="text" value="30"/>



icon	Menu-item icon (visible on mobile) string	...	
------	--	-----	--

link	Menu-item link (if is empty then SfMenuItem is SfButton) string,object	null	<input type="text" value="add_to_cart"/> Set string
------	---	------	---

[Hide Slots items](#)



[Hide Slots items](#)

Slots

mobile-nav-icon	Use this slot to replace icon on mobile devices	-	Set object
icon	Slot for replacing menu item icon	-	-
label	Slot for replacing menu item label	-	-
count	Slot for replacing items count	-	-

Stories

As Link

Red 30 >
[Show code](#)

Use Icon Slot

♥ Red 30 >
[Show code](#)

Use Mobile Nav Icon Slot

Red 30 →

[Show code](#)

⌚Use Label Slot

CUSTOM LABEL 30 >

[Show code](#)

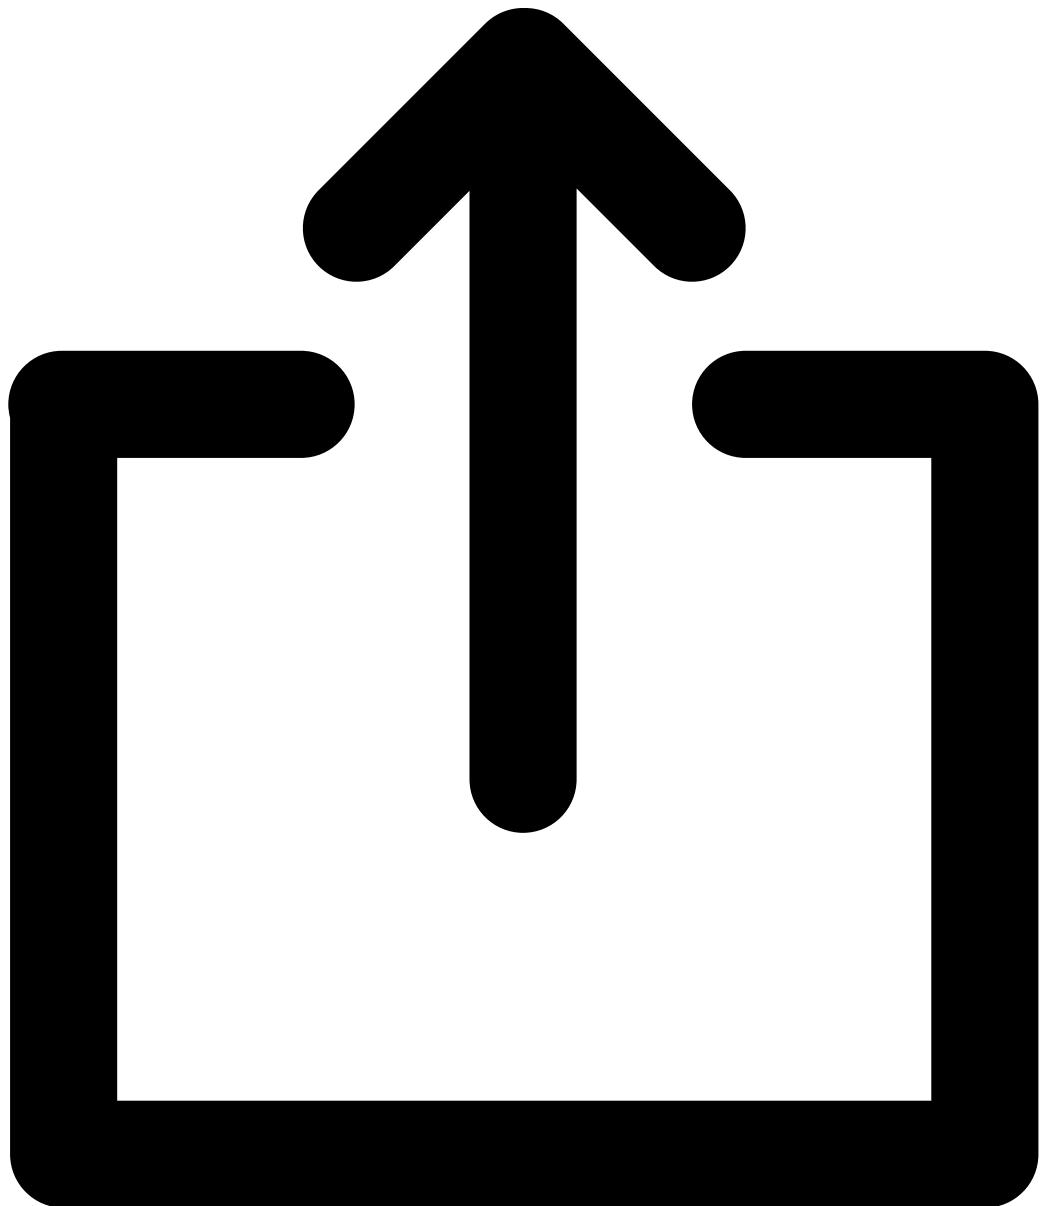
⌚Use Count Slot

RedCUSTOM COUNT >

[Show code](#)

Modal

Modal component with overlay. Example usage can involve many cases like informative or decision dialogue.



Show code

Name

Description

Default

Control



Props

title	Heading title of the modal string	""	<input type="text" value="My title"/>
cross	Cross closing modal button boolean	true	<input checked="" type="checkbox"/> FalseTrue
overlay	Whether to show the overlay boolean	true	<input checked="" type="checkbox"/> FalseTrue
persistent	If true clicking outside will not dismiss the modal boolean	false	<input type="checkbox"/> FalseTrue
transitionOverlay	Overlay transition effect. Could be one of the default ones. string	"sf-fade"	<input type="text" value="sf-fade"/>
transitionModal	Modal transition effect. Could be one of the default ones. string	"sf-fade"	<input type="text" value="sf-fade"/>
visible	Visibility of the modal boolean	false	<input type="button" value="Set boolean"/>



v-model

v-model	v-model accepts visible prop and emits close event boolean	false	<input type="checkbox"/> FalseTrue
---------	---	-------	------------------------------------

Name	Description	Default	Control
Hide Events items			



[Hide Events items](#)

Events



`close : {`

}

`close`

Emits close event when clicked on close button or outside modal -

[Hide Slots items](#)



[Hide Slots items](#)

Slots

`modal-bar`

Use this slot to place content inside the modal bar

-

[Set object](#)

`default`

Use this slot to place content inside the modal

-

[Set object](#)

`close`

Use this slot to place content inside the close button

-

-

Stories

Without Overlay

No code available

 **Persistent**

No code available

 **Cross**


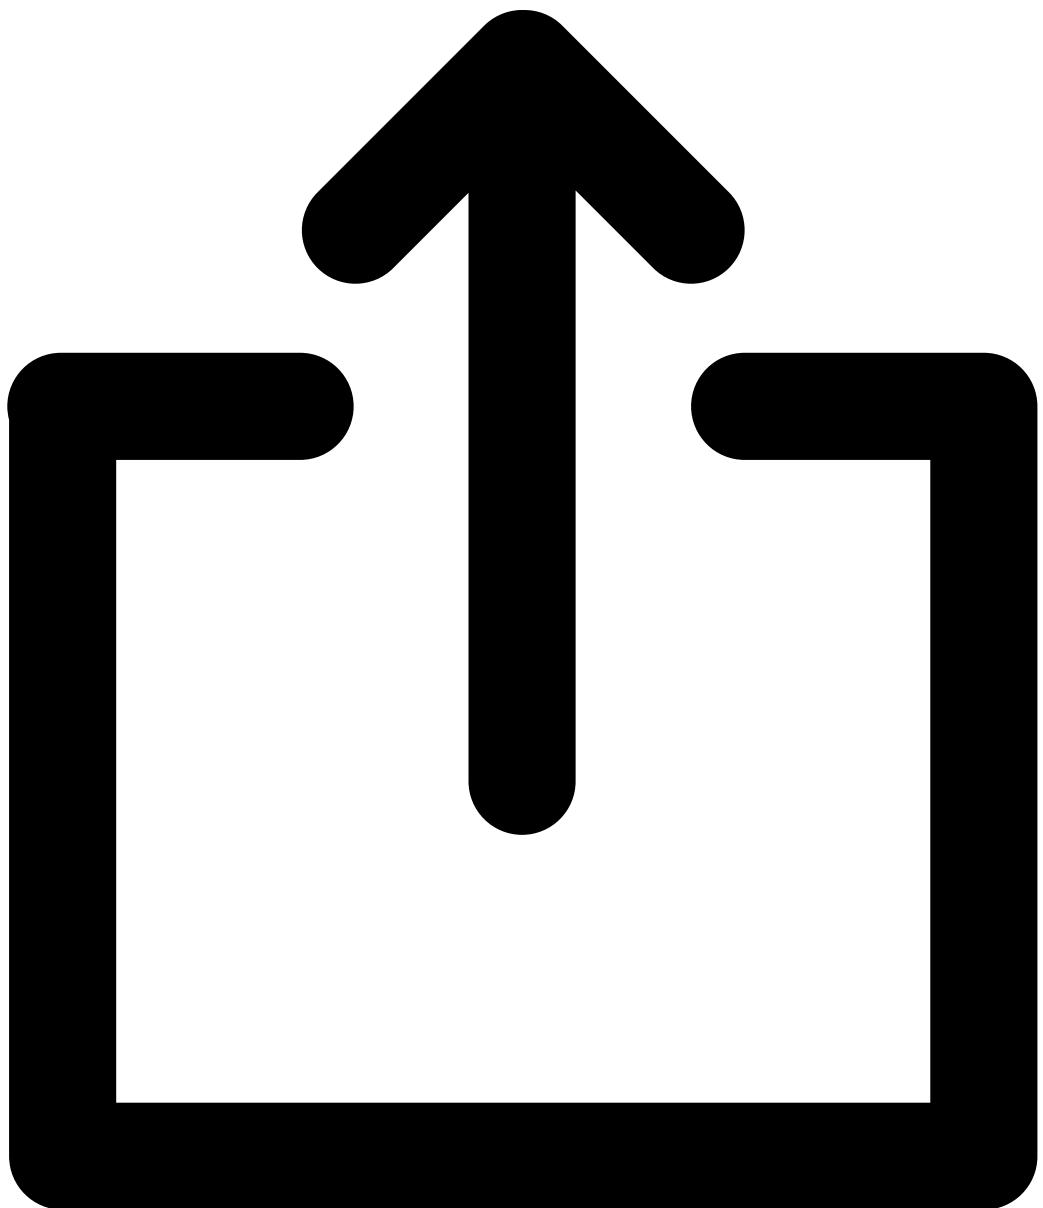
No code available

 **Use Close Slot**

No code available


Notification




Component used for informative function e.g. products added to cart or successful login.



This is an information message

Show code

Name	Description	Default	Control
Hide Props items			
	Hide Props items		
Props			
message	Message displayed in component. string	""	<input type="text" value="This is an information message"/>
visible	Visibility of the Notification. Default value is false. boolean	false	<input checked="" type="checkbox"/> FalseTrue
persistent	Persistence of the Notification. Default value is false. boolean	false	<input type="checkbox"/> FalseTrue
title	Title text visible only on mobile. string	""	<input type="text" value="Edit string..."/>
action	Action text button displayed in component. string	""	<input type="text" value="Edit string..."/>
type	Notification type ('secondary', 'info', 'success', 'warning', 'danger'). Check 'Knobs' section to see how they look like. string: secondary, info, success, warning, danger	"secondary"	 <input type="button" value="▼"/>
Hide Events items			
	Hide Events items		
Events			
click:action	Emits click:action event when action slot is clicked	-	 RAW click:action :{ 

Name	Description	Default	Control
click:close	Emits click:close event when close button is clicked	-	
			 click:close :{ 
			

Slots

icon

close

title

message

action Custom action. Slot content will replace default action.

-

Set object

-

Set object

-

-

-

-

-

-

Stories

With Title

Added to Cart

This is an information message

[Show code](#)

⌚Secondary

This is an information message

[Show code](#)

⌚Info

This is an information message

[Show code](#)

⌚Success

This is an information message

[Show code](#)

⌚Warning

This is an information message

[Show code](#)

⌚Danger

This is an information message

[Show code](#)

⌚With Action

This is an information message

[Show code](#)

⌚Persistent

This is an information message

[Show code](#)

⌚Use Icon Slot

Added to Cart

This is an information message

[Show code](#)

⌚Use Message Slot

Added to Cart
CUSTOM MESSAGE

Show code

☞ Use Title Slot

CUSTOM TITLE
This is an information message

Show code

☞ Use Action Slot

Added to Cart
This is an information message
CUSTOM ACTION

Show code

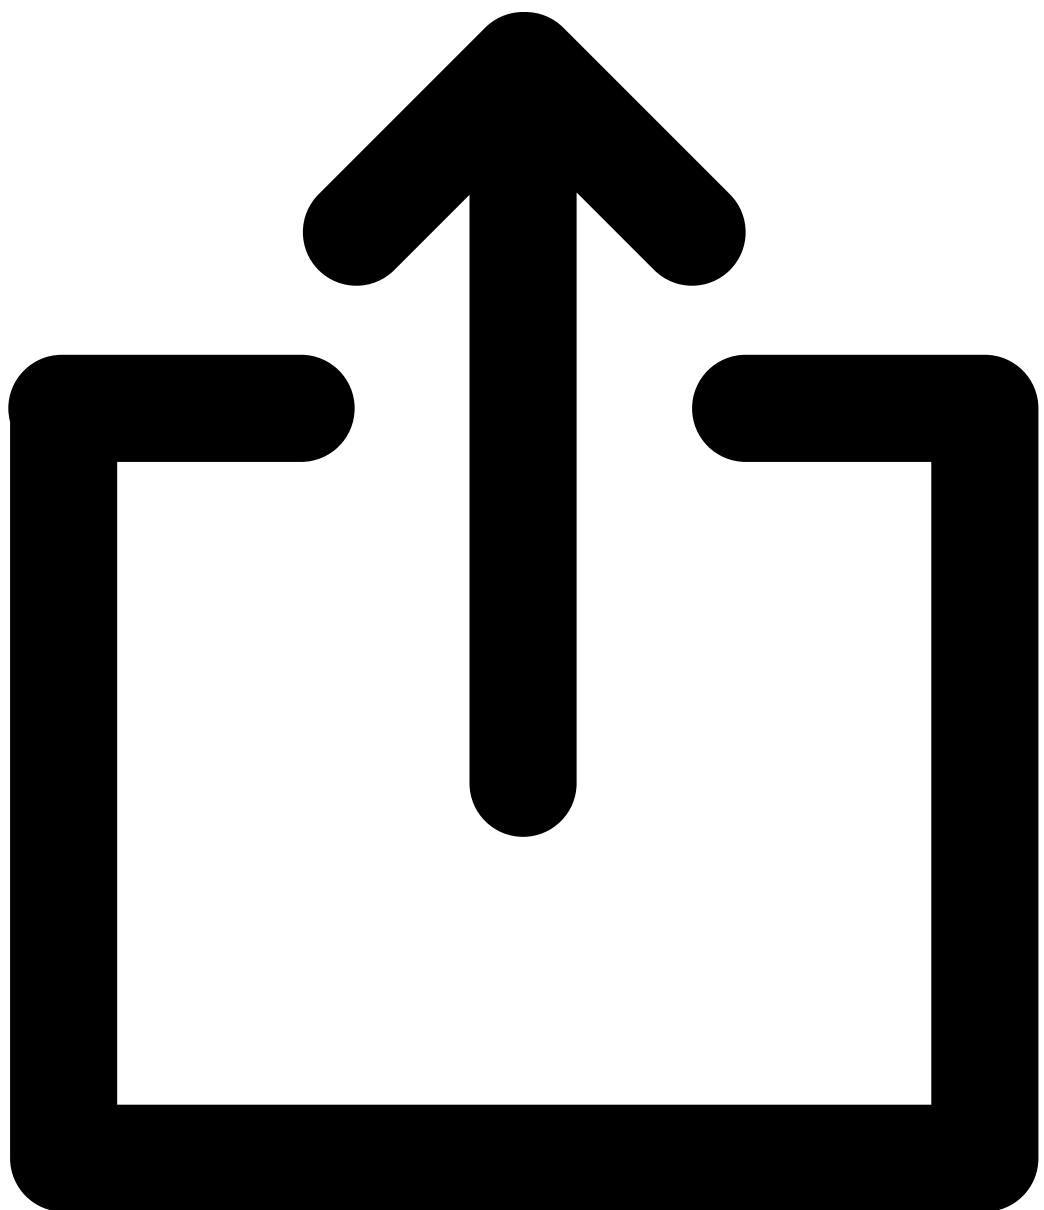
☞ Use Close Slot

Added to Cart close
This is an information message

Show code

Pagination

Pagination component with indicators.



← 1 2 3 4 5 →

Show code



Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

total	Total number of pages number	0	<input type="text" value="5"/>
visible	Maximum visible pagination items number	5	<input type="text" value="5"/>
hasArrows	Status of arrows display boolean	true	<input checked="" type="checkbox"/> FalseTrue
current	Current page number, for non router number	1	<input type="text" value="1"/>
pageParamName	Name of page query param for router string	"page"	<input type="text" value="page"/>

[Hide Events items](#)




[Hide Events items](#)

Events




click : {



click

Emits click event with page value when page number is clicked -

}



Name	Description	Default	Control
Hide Slots items			



Hide Slots items

Slots

prev	Custom markup for previous page button	-	Set object
number	Custom markup for number	-	Set object
points	Custom markup for points between visible numbers	-	Set object
next	Custom markup for next page button	-	Set object

Stories

Without Arrows

1 2 3 4 5

Show code

Use Points Slot

← 1 2 3 4 5 →

Show code

Use Prev Slot

prev 1 2 3 4 5 →

Show code

Use Next Slot

← 1 2 3 4 5 next

Show code

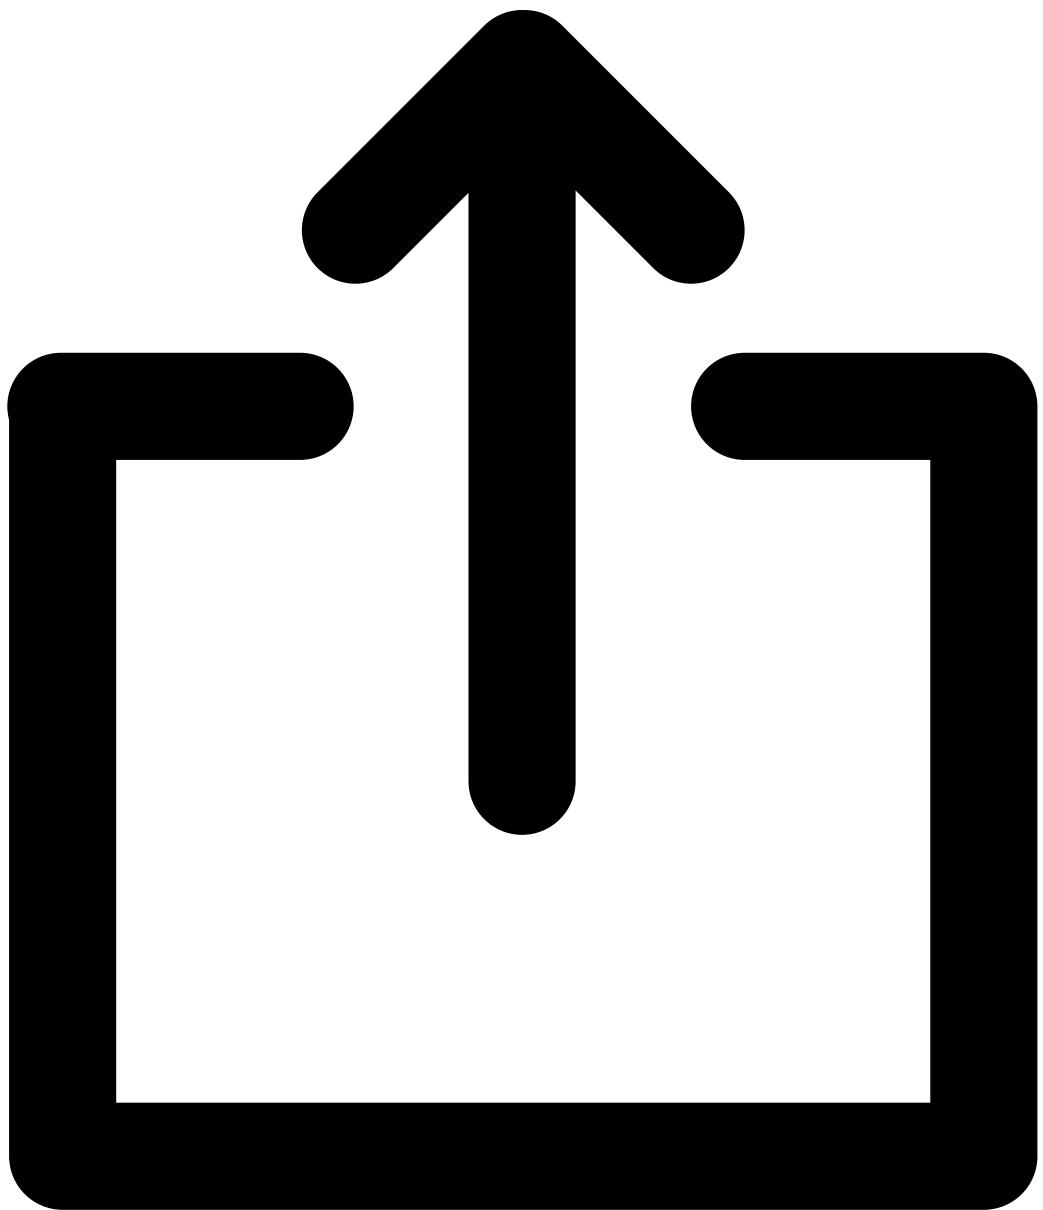
Use Number Slot

← 1 2 3 4 5 →

Show code

ProductOption

Component with label used as part of product description.



Red

Show code

Name	Description	Default	Control
Hide Props items			




[Hide Props items](#)

Props

color

Product color, can be any CSS available property ...
string



label

Label to assign to the product
string

...

[Hide Slots items](#)



[Hide Slots items](#)

Slots

label

Use this slot to replace label element

-

-

color

Use this slot replace color element

-

-

Stories

Use Color Slot

Red

[Show code](#)

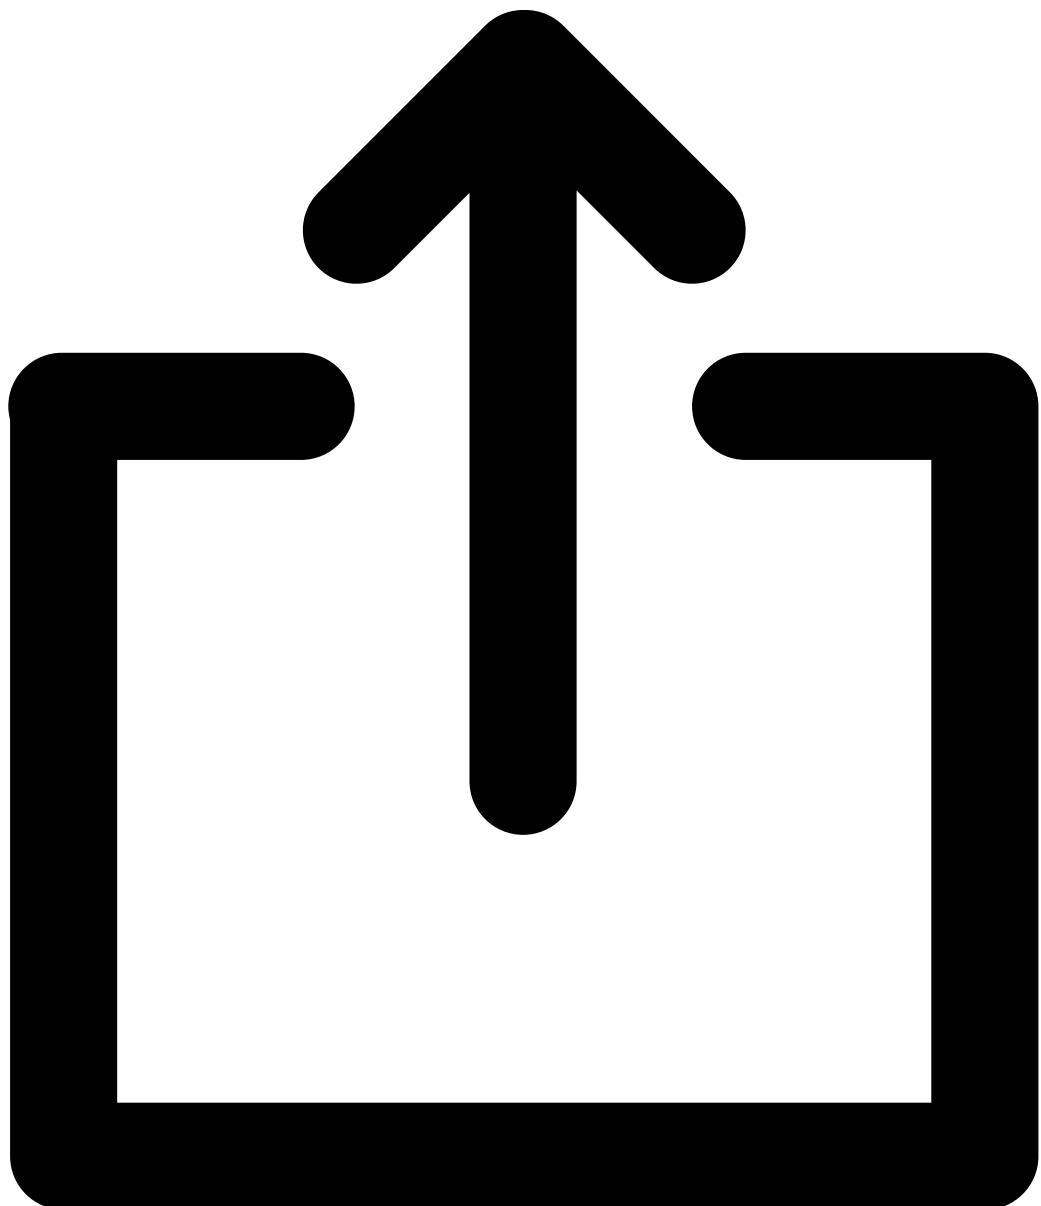
Use Label Slot

CUSTOM LABEL

[Show code](#)

Radio

Radio button component with label and description.



- Pickup in the store

Delivery from 4-6 business days

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

Show code

Name

Description

Default

Control



Props

label

Label for option
string

...

Pickup in the store



details

Option details
string

...

Delivery from 4-6 business days



description

Additional description to the radio option to display
string

...

Novelty! From now on you have
the option of picking up an order
in the selected InPack parceler. Just
remember that in the case of
orders paid on delivery, only the
card payment will be accepted.



name

Name of the option
string

...

Shipping



value

Value of the option
string

...

store



disabled

Indicate if this option is disabled
boolean

false

FalseTrue

selected

Value of the selected option
string

...



v-model

v-model

v-model accepts selected prop and emits change event
text



Name	Description	Default	Control
Hide Events items			




Hide Events items


Events



change:{



}



change


Emits change event when option is clicked


input

Emits input event when option is clicked



input:{



Name	Description	Default	Control
		}	

[Hide Slots items](#)



[Hide Slots items](#)

Slots

checkmark	Custom checkmark markup	-	Set object
label	Use this slot to have custom label	-	-
details	Use this slot to have custom details	-	-
description	Use this slot to have custom description	-	-

[Hide CSS Modifiers items](#)



[Hide CSS Modifiers items](#)

CSS Modifiers

classes

CSS classes to modify component styling

-



[sf-radio--transparent ▾](#)

 **Stories**

Transparent Selected

Pickup in the store

Delivery from 4-6 business days

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

[Show code](#)

Disabled

Pickup in the store

Delivery from 4-6 business days

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

[Show code](#)

Use Checkmark Slot

Pickup in the store

Delivery from 4-6 business days

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

[Show code](#)

Use Label Slot

CUSTOM LABEL

Delivery from 4-6 business days

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

[Show code](#)

Use Details Slot

Pickup in the store

CUSTOM DETAILS

Novelty! From now on you have the option of picking up an order in the selected InPack parceler. Just remember that in the case of orders paid on delivery, only the card payment will be accepted.

[Show code](#)

Use Description Slot

Pickup in the store

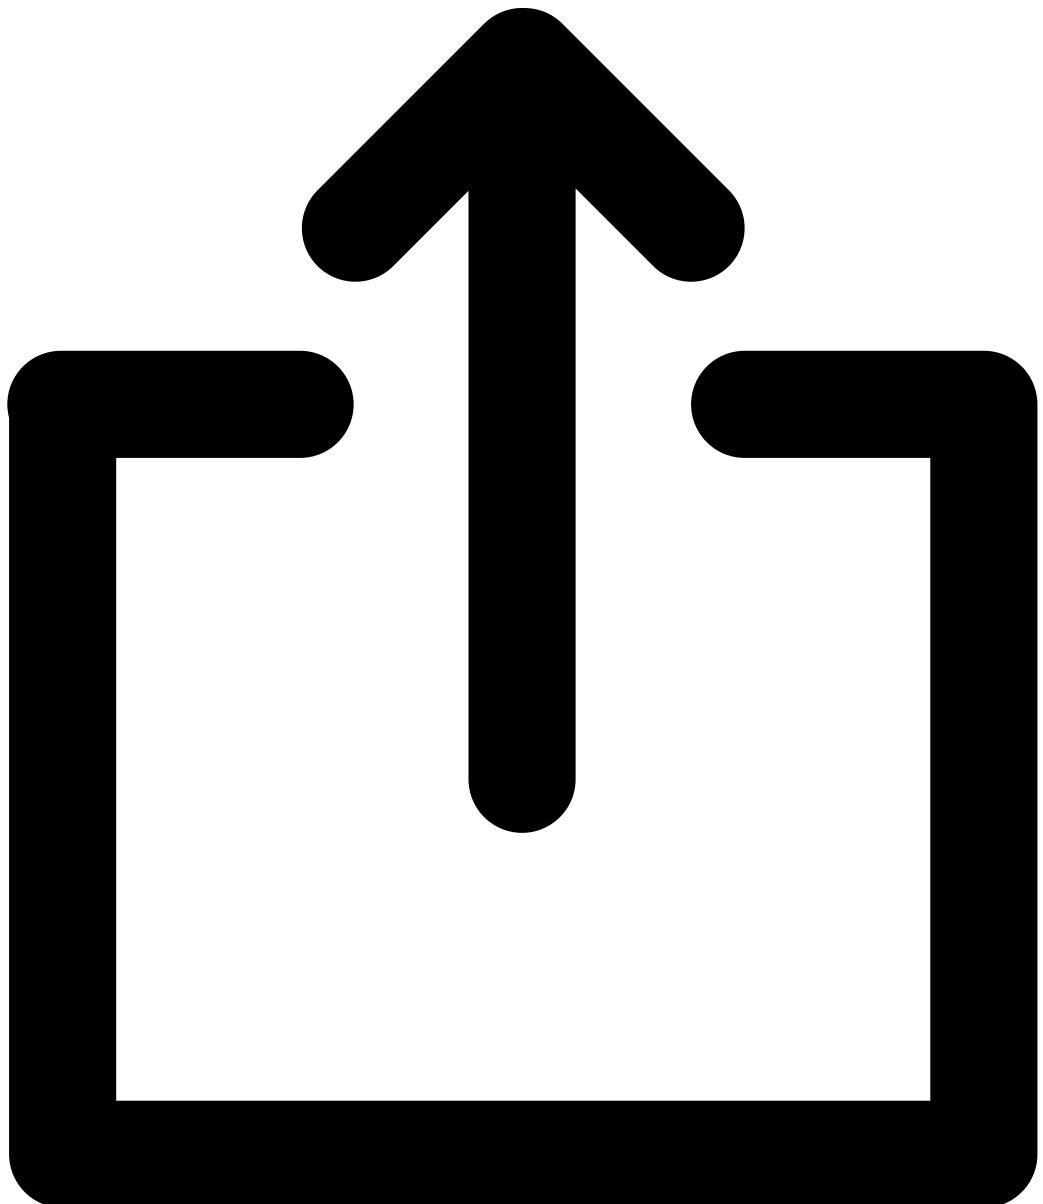
Delivery from 4-6 business days

CUSTOM DESCRIPTION

[Show code](#)

Range

Range component based on [nouislider library](#).



Name	Description	Default	Control
		1 : 1	
config.range	Property in config prop object (only for testing purposes). See config prop below.	-	 RAW

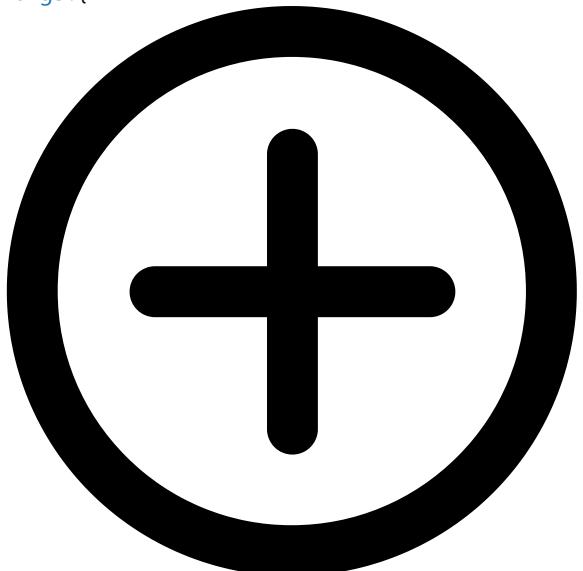
Name

Description


Default

Control


range : {







min : 0

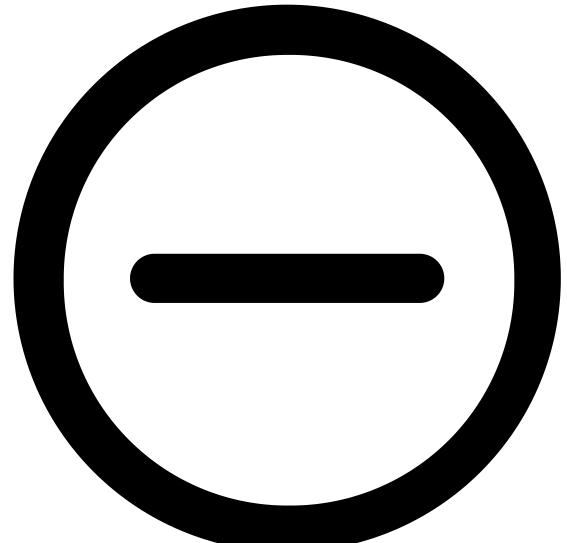

max : 10

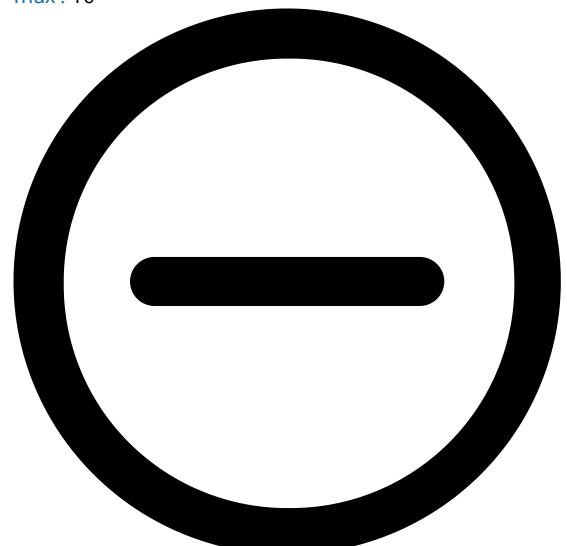

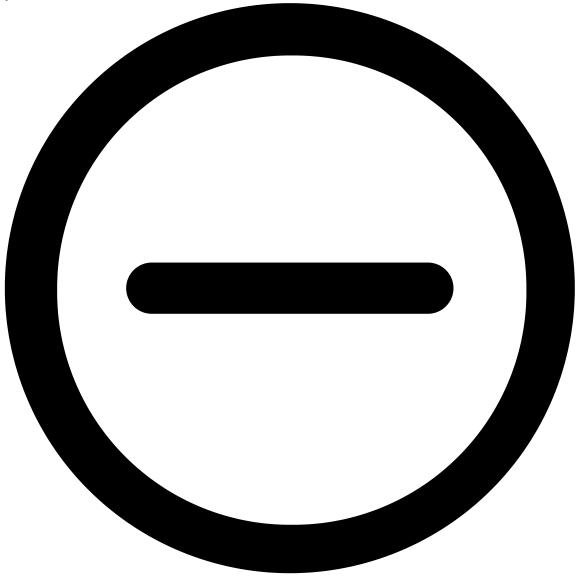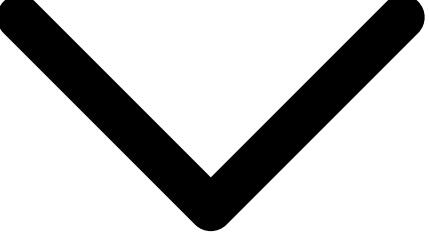Name	Description	Default	Control
		}	
config.step	Property in config prop object (only for testing purposes). See config prop below. -	<input type="text" value="1"/>	
config.connect	Property in config prop object (only for testing purposes). See config prop below. -	<input checked="" type="checkbox"/> FalseTrue	
config.direction	Property in config prop object (only for testing purposes). See config prop below. -	<input checked="" type="radio"/> ltr <input type="radio"/> rtl	
config.orientation	Property in config prop object (only for testing purposes). -	<input checked="" type="radio"/> horizontal <input type="radio"/> vertical	
config.behaviour	Property in config prop object (only for testing purposes). For detailed description please see: https://refreshless.com/nouislider/behaviour-option/ . See config prop below. -		
config.tooltips	Property in config prop object (only for testing purposes). See config prop below. -	<input style="width: 100px; height: 20px; border: 1px solid #ccc; margin-bottom: 5px;" type="text" value="drag"/> <input checked="" type="checkbox"/> FalseTrue	
config.keyboardSupport	Property in config prop object (only for testing purposes). See config prop below. -	<input checked="" type="checkbox"/> FalseTrue	

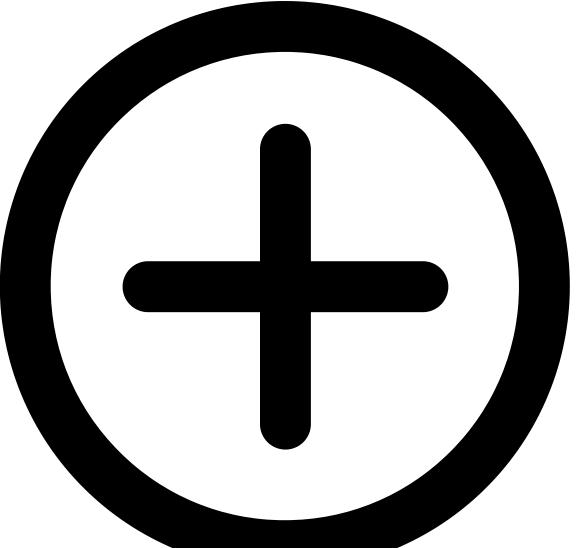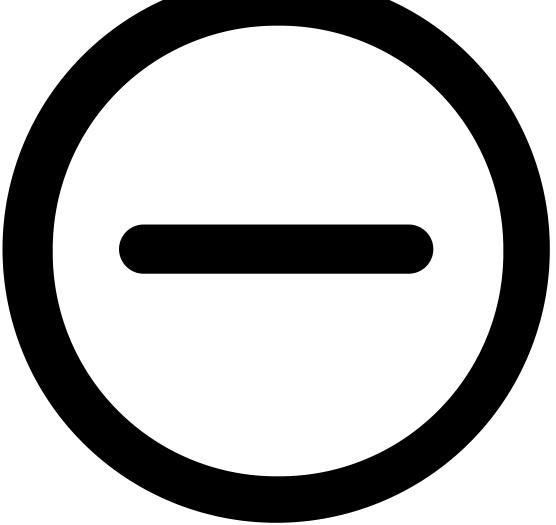Name	Description	Default	Control
config.format	<p>Property in config prop object (only for testing purposes). For details of tooltips number formatting please see: https://refreshless.com/nouislider/number-formatting. See config prop below.</p> <p>-</p>	 format : {	
		<p>to : function(value){return new Intl.NumberFormat("de-DE",{style:"currency",currency:"EUR"}).format(value)}</p>	
		<p>from : function(value){return new Intl.NumberFormat("de-DE",{style:"currency",currency:"EUR"}).formatToParts(value)}</p>	

Name	Description	Default	Control
		[0].value}	
		}	

[Hide Props items](#)



[Hide Props items](#)

Props

disabled	Sets the state of range to disabled boolean	false	<input type="checkbox"/> FalseTrue
value	Sets the starting values for slider(s), if only one number is given than only one slider appears array	[0, 1]	

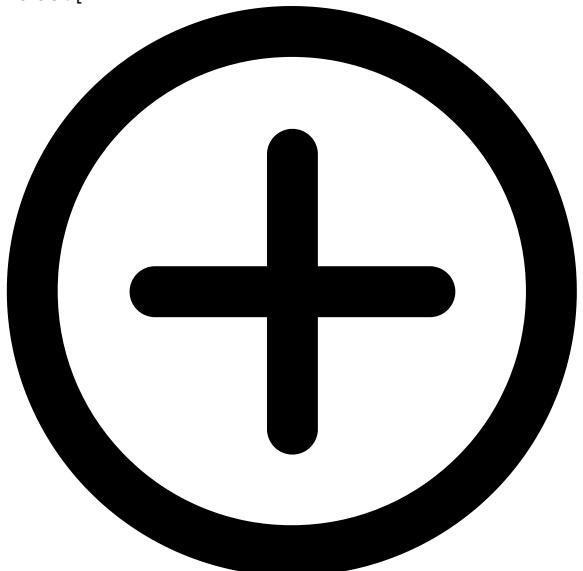
Name

Description


Default

value : [


Control




0 : 0

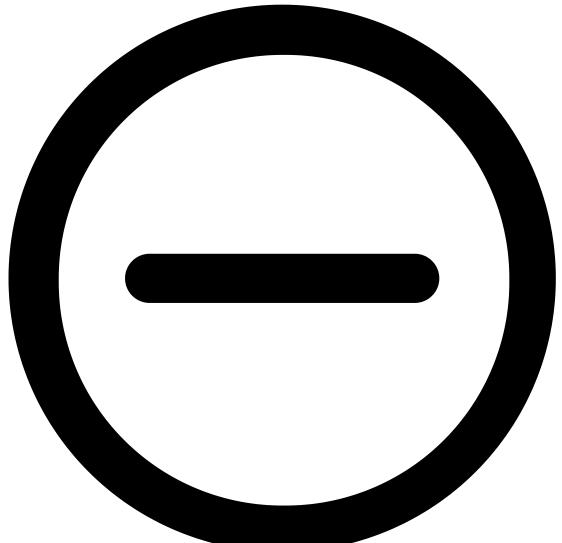

1 : 1

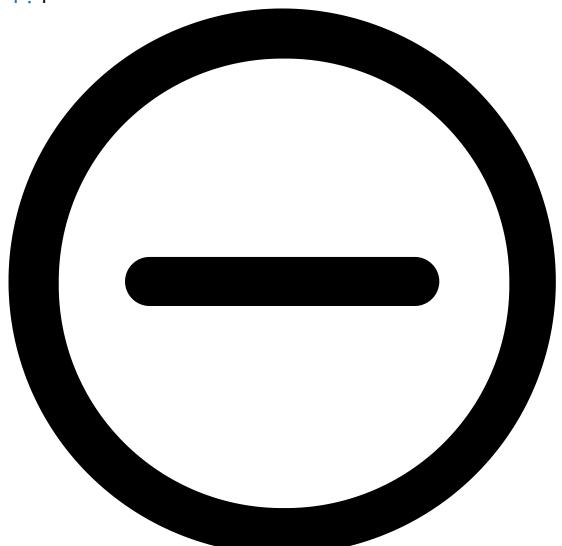

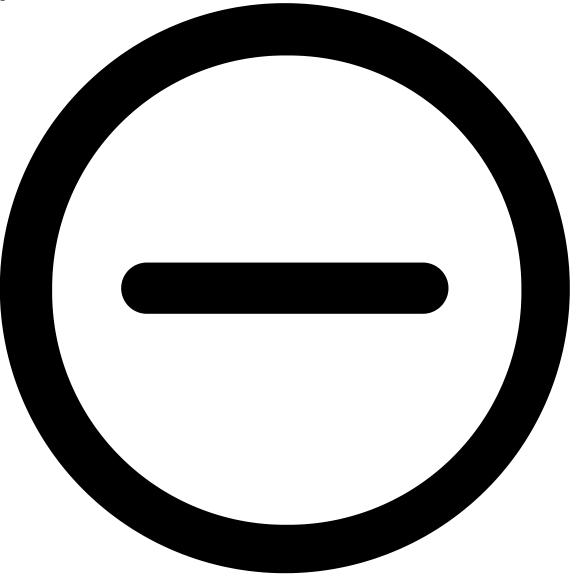Name	Description	Default	Control
]	

config

Sets the configuration of range component according to [nouislider library](#). Default config object consists only from basic properties, but can be widen by properties mentioned in above section.

```
{ start:  
  [0, 1],  
  range: {  
    min: 0,  
    max: 10,  
    step: 1,  
  }  
}
```



RAW

config : {

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

}

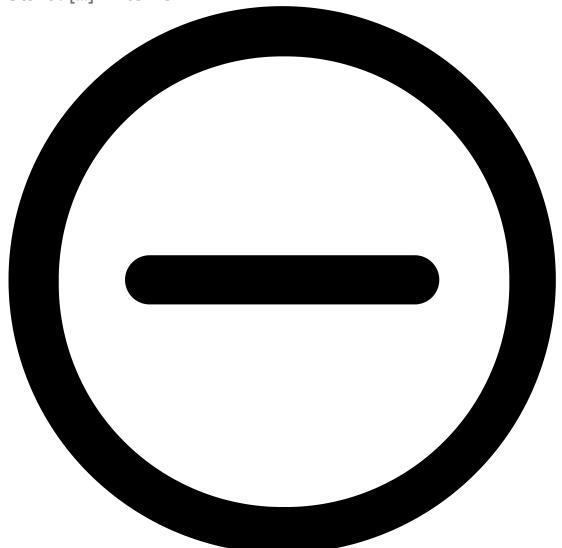
Name

Description


Default

Control


start : [...] 2 items




range : {...} 2 keys

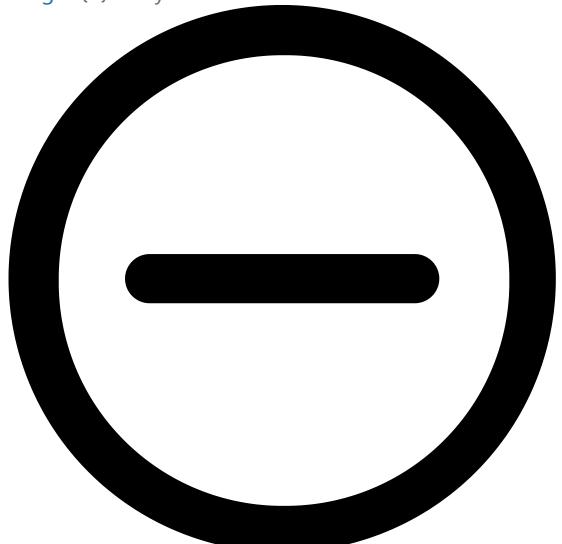

step : 1

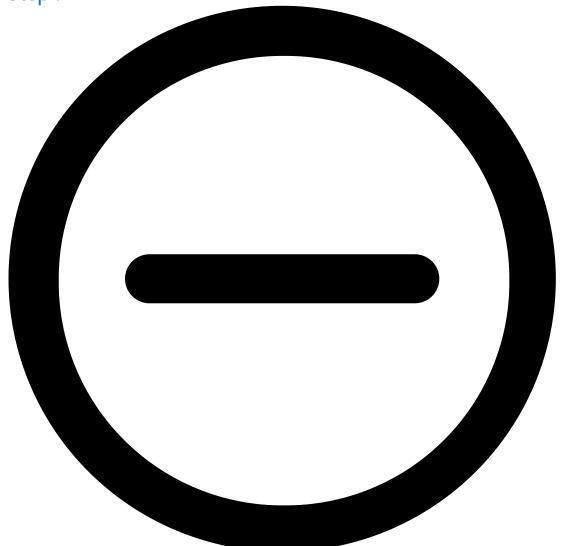

}

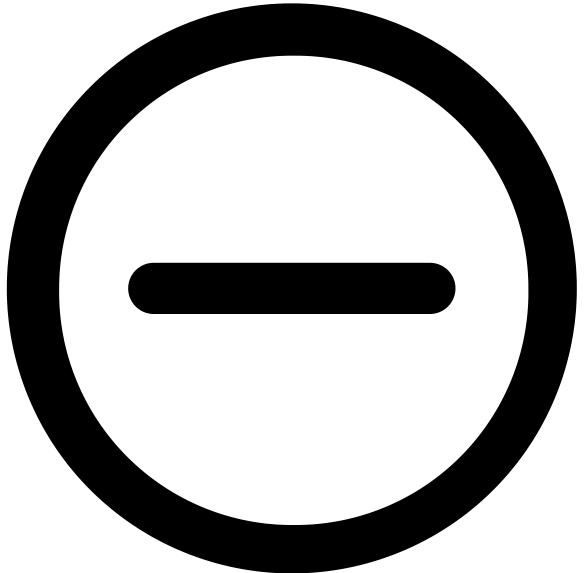Name**Description****Default****Control**

[Hide Events items](#)



[Hide Events items](#)

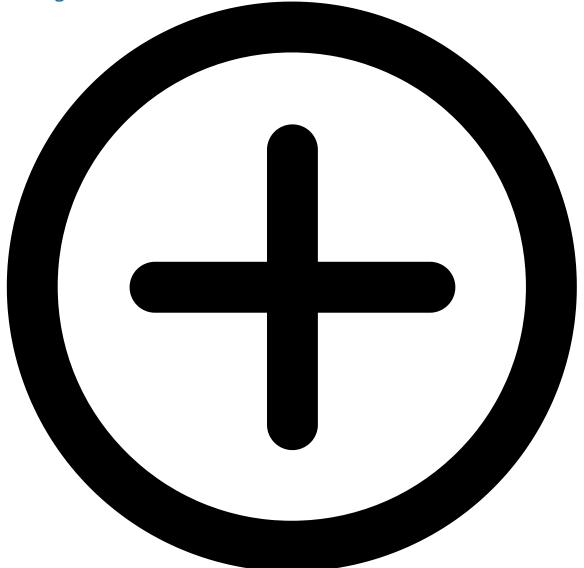
Events
change

Emits change event when value is changed

-



change :{




Name

Description

Default

Control

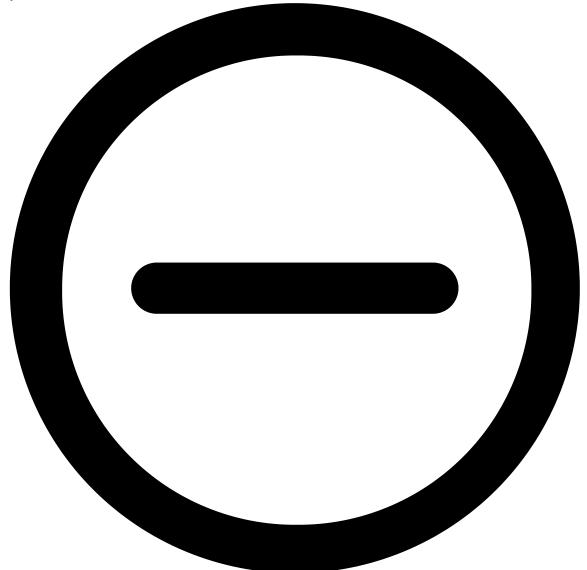}



[Hide Slots items](#)



[Hide Slots items](#)

Slots

default

Slot to replace default range component

-

[Set object](#)

Stories

One Slider

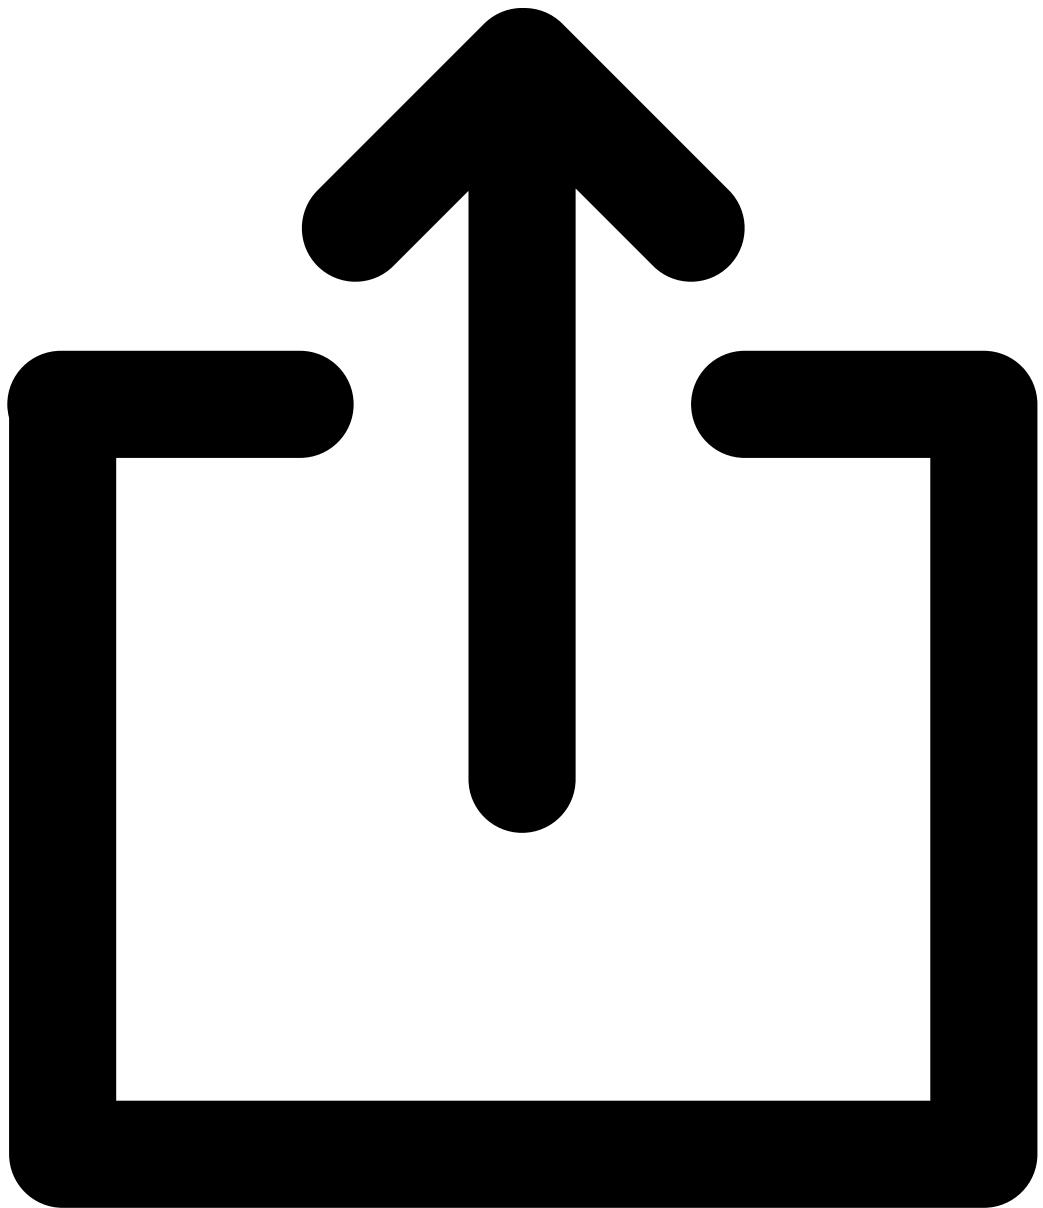


0,00 €

[Show code](#)

Review

Customer review component with author, rating, date and review text.



 Jane D.Smith

★★★★★

4 April 2019

I was looking for a bright light for the kitchen but wanted some item more modern than a strip light. this one is perfect, very bright and looks great. I can comment on interlation as I had an electriton instal it. Would recommend.

Show code

Name

Description

Default

Control

[Hide Props items](#)



[Hide Props items](#)

Props

author	Author of the review string	...	<input type="text" value="Jane D.Smith"/>
date	Date of the review string	...	<input type="text" value="4 April 2019"/>
message	Message from the reviewer string	...	<input type="text" value="I was looking for a bright light for the kitchen but wanted some item more modern than a strip light. this one is perfect, very bright and looks great. I can comment on interlation as I had an electriton instal it. Would recommend."/>
rating	Rating from the reviewer numberstringboolean	false	<input type="text" value="4"/>
maxRating	Max rating for the review numberstring	5	<input type="text" value="5"/>
charLimit	Char limit for the review numberstring	250	<input type="text" value="250"/>
readMoreText	Read more text for the review string	Read more	<input type="text" value="Edit string..."/>
hideFullText	Hide full text message for the review string	Read less	<input type="text" value="Edit string..."/>

[Hide Slots items](#)



[Hide Slots items](#)

Slots

icon	Review icon. Slot content can be replaced by custom icon	-	<input type="button" value="Set object"/>
info	Review information. Slot content will replace default <div> tag and its inner <div> tags	-	<input type="button" value="Set object"/>
author	Review author. Slot content will replace default <div> tag	-	-
message	Slot content will replace default <div> tag and its inner and <a> tags.	-	-

Stories

Use Icon Slot

 Jane D.Smith

★★★★★

4 April 2019

I was looking for a bright light for the kitchen but wanted some item more modern than a strip light. this one is perfect, very bright and looks great. I can comment on interlation as I had an electriton instal it. Would recommend.

[Show code](#)

Use Author Slot

CUSTOM AUTHOR

★★★★★

4 April 2019

I was looking for a bright light for the kitchen but wanted some item more modern than a strip light. this one is perfect, very bright and looks great. I can comment on interlation as I had an electriton instal it. Would recommend.

[Show code](#)

Use Info Slot

 Jane D.Smith

CUSTOM INFO

I was looking for a bright light for the kitchen but wanted some item more modern than a strip light. this one is perfect, very bright and looks great. I can comment on interlation as I had an electriton instal it. Would recommend.

[Show code](#)

Use Message Slot

 Jane D.Smith

★★★★★

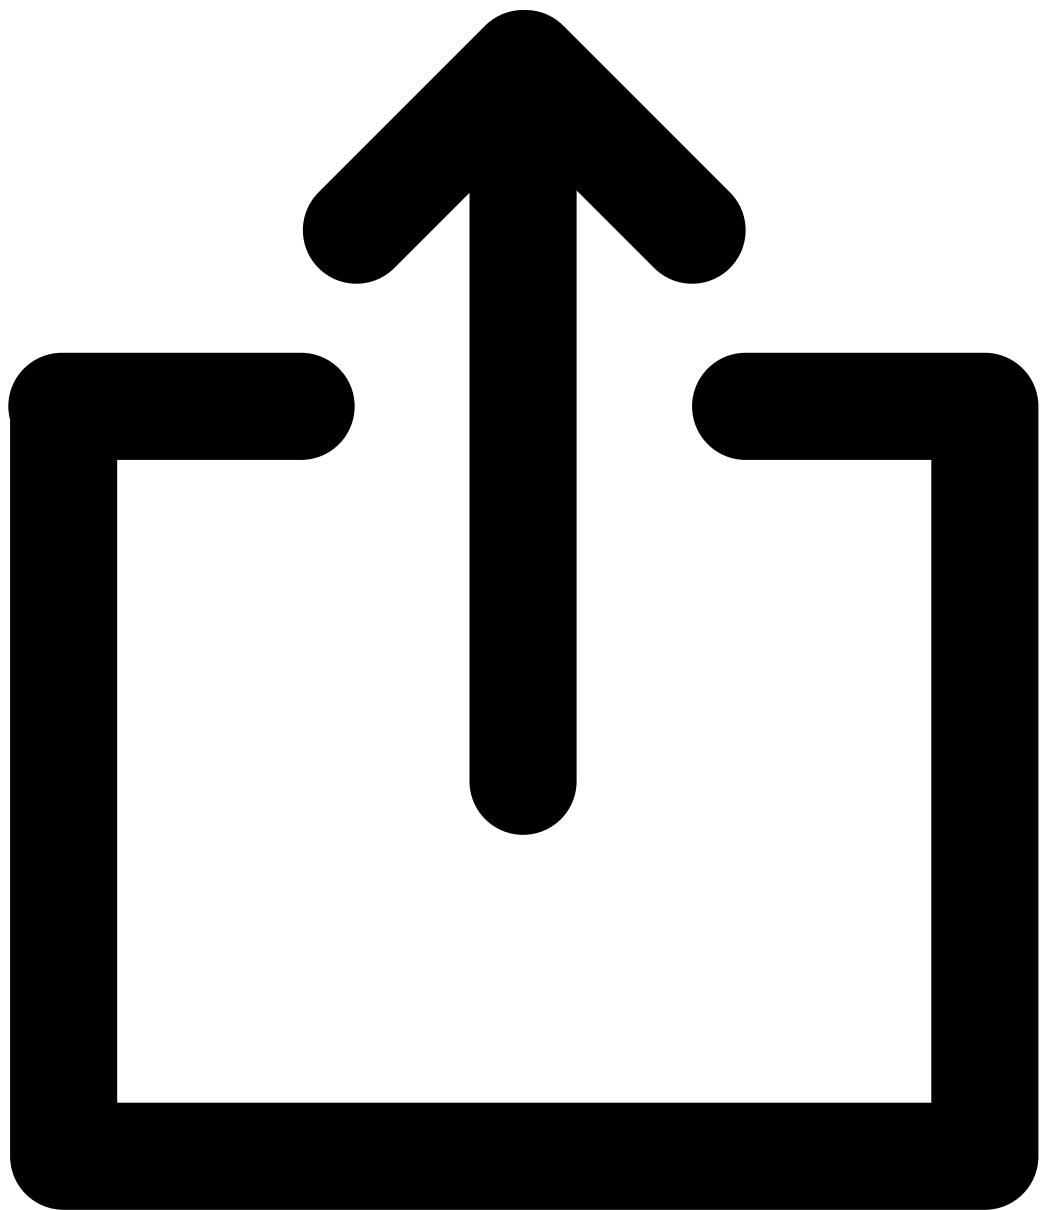
4 April 2019

CUSTOM MESSAGE

[Show code](#)

Scrollable

Scollable wrapper with styled bar and toggle button.



Red

Blue

Green

Black

[View all colors](#)

Show code	Name	Description	Default	Control 
Hide Props items				



[Hide Props items](#)

Props

showText	Text for button showing content string	Show	View all colors
hideText	Text for button hiding content string	Hide	Hide colors
maxContentHeight	Maximum height of visible content string	...	6.875rem

[Hide Slots items](#)



[Hide Slots items](#)

Slots

default	Slot to place default content	-	Set object
view-all	Slot to replace buttons showing/hiding content	-	Set object

Stories

With CSS Height

Red

Blue

Green

[View all colors](#)

[Show code](#)

Use Button Slot

Red

Blue

Green

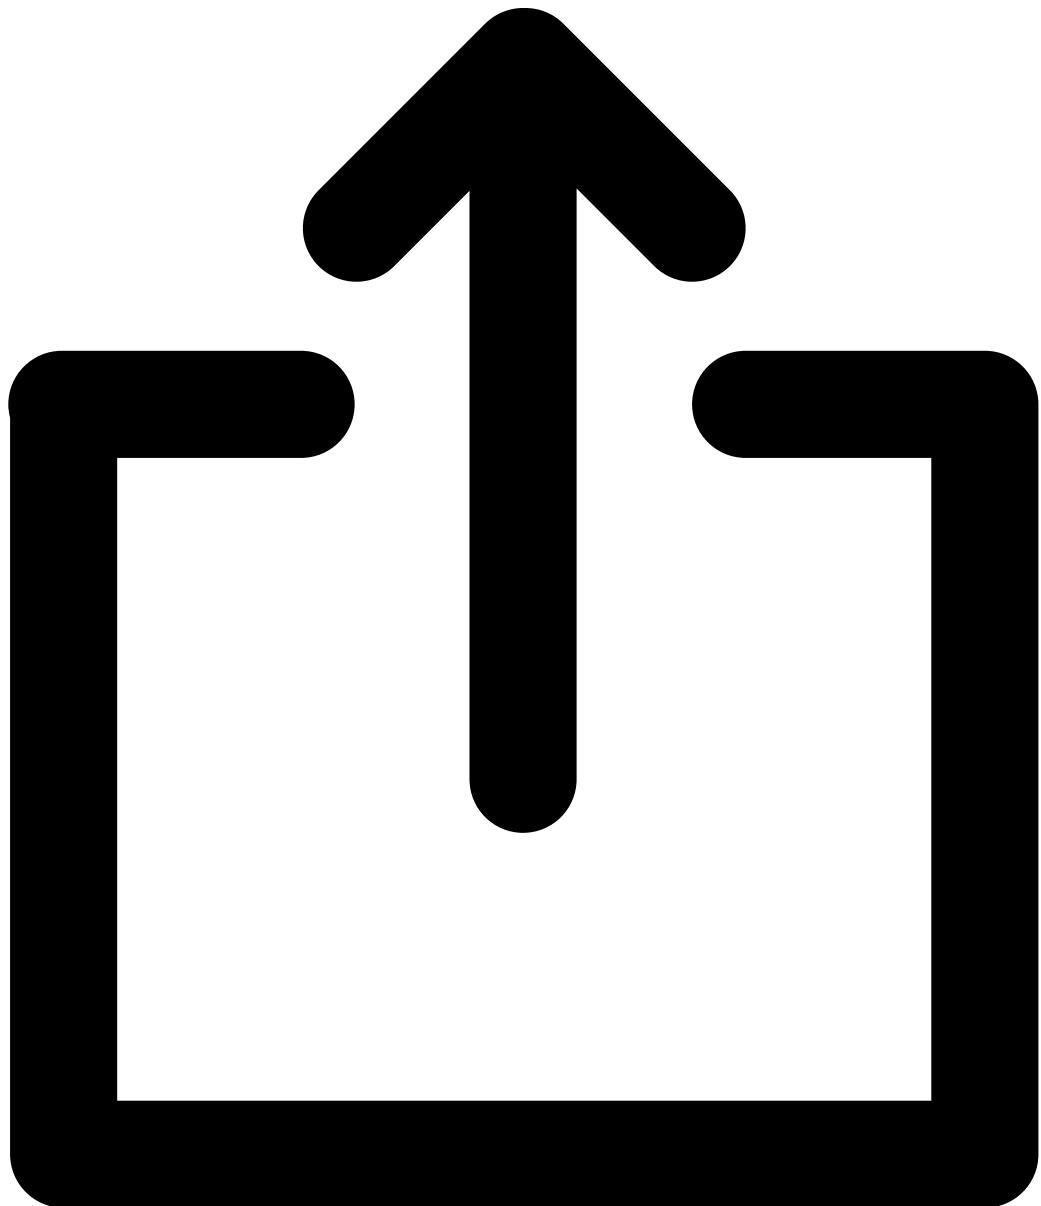
[Black](#)

[View all colors](#)

[Show code](#)

SearchBar

Search bar component with placeholder text and icon.



Search for items




Show code




Name	Description	Default	Control
icon.size	Define size of the search icon. Property in icon object prop (for testing purposes).Custom size of the icon. It can be our standard sizes, or 12px or 1.2rem or		<input type="text" value="Edit string..."/>

Name	Description	Default	Control
	nothing. Standard sizes: xxs, xs, sm, md, lg, xl, xxl, xl3, xl4. See icon prop below.	-	
icon.color	Define color of the search icon. Property in icon object prop (for testing purposes). Custom color of the icon. It can be according to our standard colors, or legitimate CSS color such as #ffff, rgb(255,255,255), and lightgray or nothing. Standard colors: white, black, green-primary, green-secondary, gray-primary, gray-secondary, light-primary, light-secondary, pink-primary, pink-secondary, yellow-primary, yellow-secondary, blue-primary, blue-secondary, accent. See icon prop below.	-	<input type="text" value="Choose color..."/>



Props

placeholder	Text for placeholder string	""	<input type="text" value="Search for items"/>
value	Value that will be displayed in search bar numberstring	null	<input type="text" value="Edit string..."/>
icon	Define the type, size and color of the search icon unknown	RAW	icon : {  icon : ""  size : "" 

Name	Description	Default	Control
		blur : {	
		}	
click:icon	Emits click:icon event when search icon is clicked	 RAW	clickicon : {  }
focus	Emits focus event when search field gains focus. It is passed via v-on='listeners'	-	-
Hide CSS Modifiers items		Hide CSS Modifiers items	
		Hide CSS Modifiers items	
CSS Modifiers			

Name	Description	Default	Control
classes	CSS classes to modify component styling -	-	
Slots icon	Use this slot to replace the icon	-	 Hide Slots items

Stories

With Icon

Search for items



Show code

With Value

Search for items



Show code

Hide Icon CSS

Search for items



Show code

Centered

Search for items



Show code

Use Icon Slot

Search for items

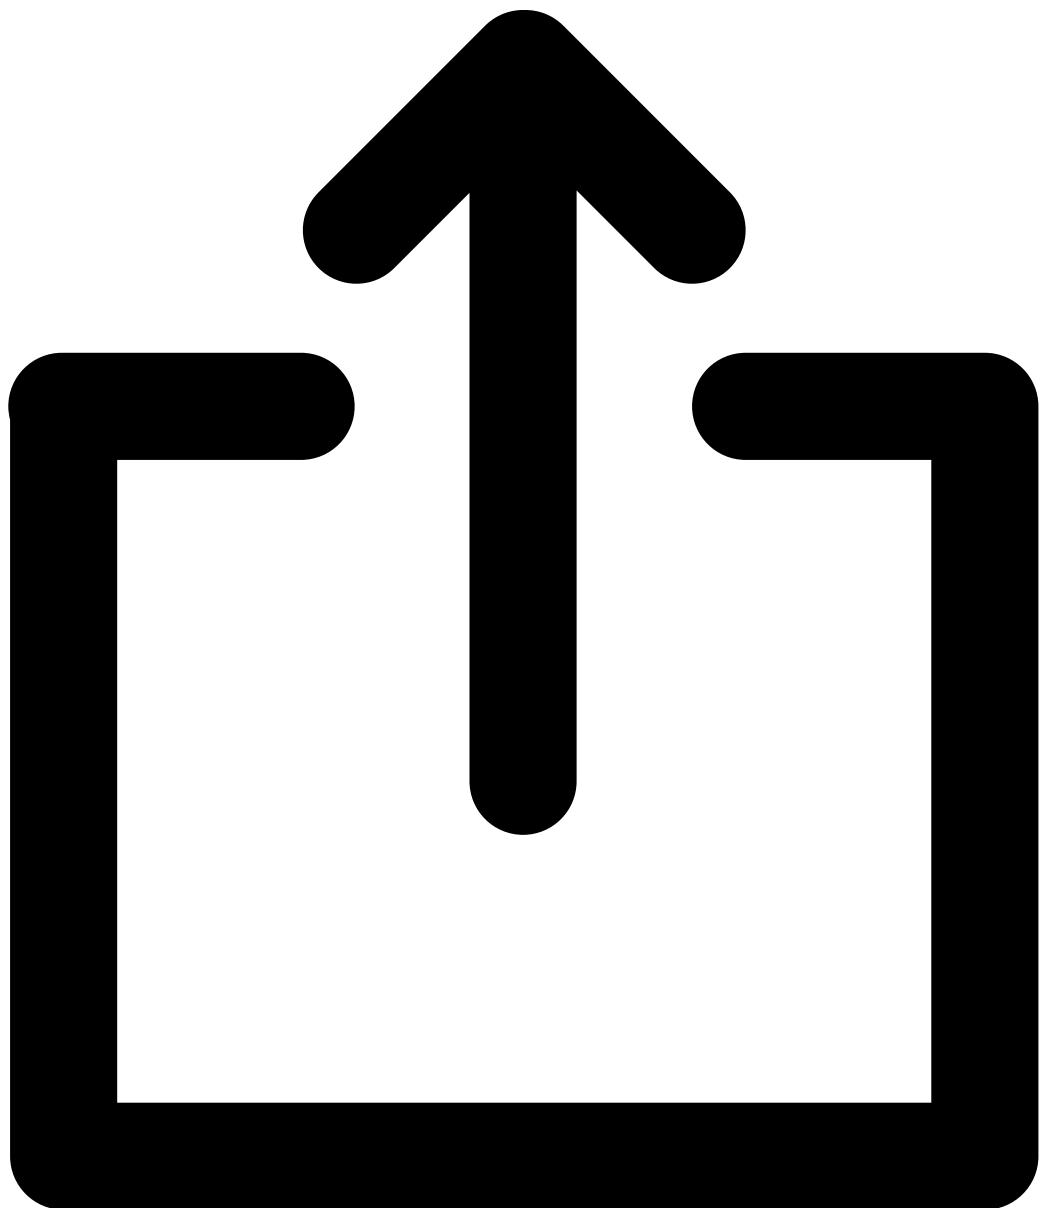


Show code



Section

Full-width section for content.



Share your look

#YOURLOOK

[#default slot content]

Show code

Name

Description

Default

Control

Hide Props items



Hide Props items

Props

titleHeading

Heading title
string

Share your look



subtitleHeading

Heading subtitle
string

#YOURLOOK



levelHeading

Heading tag level
number

2

2

Hide Slots items



Hide Slots items

Slots

heading

Slot for section heading, replacing default SfHeading component -

Set object

default

Slot to replace section content

-

Set object

Stories

Use Heading Slot

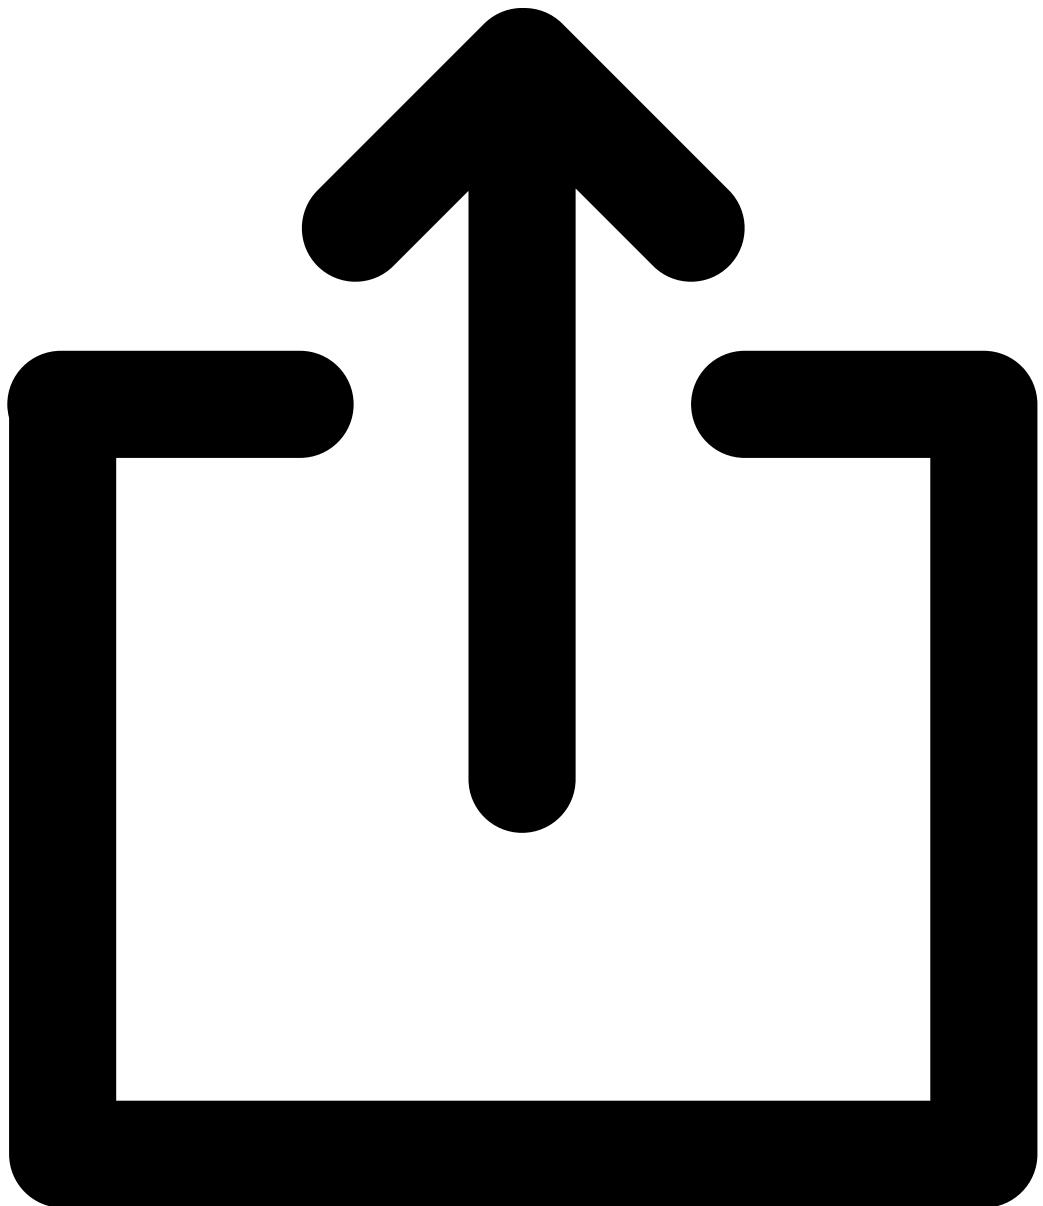
CUSTOM HEADING

[#default slot content]

Show code

Select

Native select component. Built from main component - SfSelect and internal component - SfSelectOption.




Color
Andean



Show code

Name	Description	Default	Control
Hide Props for main component items			




Hide Props for main component items

Props for main component

label	Select field label string	...	Color
required	Required field? boolean	false	<input type="checkbox"/> FalseTrue
valid	Validate value of form select boolean	true	<input checked="" type="checkbox"/> FalseTrue
disabled	Disabled status of form select boolean	false	<input type="checkbox"/> FalseTrue
errorMessage	Error message value of form select. It appears if valid is false. string	This field is not correct.	This field is not correct.
placeholder	Placeholder string	...	Edit string...

Hide Props for SfSelectOption component items




Hide Props for SfSelectOption component items

Props for SfSelectOption component

value	Content of the option. string,number,objetc	...	Edit string...
-------	--	-----	----------------

Name	Description	Default	Control
------	-------------	---------	---------

[Hide Events items](#)




[Hide Events items](#)


Events



input:{



}



input

Emits input event when option is chosen

[Hide Slots items](#)



[Hide Slots items](#)


Slots
default

Slot to place select options

[Set object](#)

Name	Description	Default	Control
default	Default slot for SfSelectOption component. Use this slot to place options in SfSelect component	-	-
label	Use this slot to customize the label	-	-
placeholder	Use this slot to customize the placeholder	-	-
errorMessage	Use this slot to customize the errorMessage	-	-

[Hide CSS Modifiers items](#)



[Hide CSS Modifiers items](#)

CSS Modifiers

classes

CSS classes to modify component styling

...



[sf-select--underlined ▾](#)

Stories

Invalid

Anilanth

This field is not correct.

[Show code](#)

Required

Anilanth

[Show code](#)

Disabled

Anilanth

[Show code](#)

With Placeholder

Color

Amaranth



[Show code](#)

Underlined

Amaranth



[Show code](#)

Has Selected Value

Amaranth



[Show code](#)

Use Label Slot

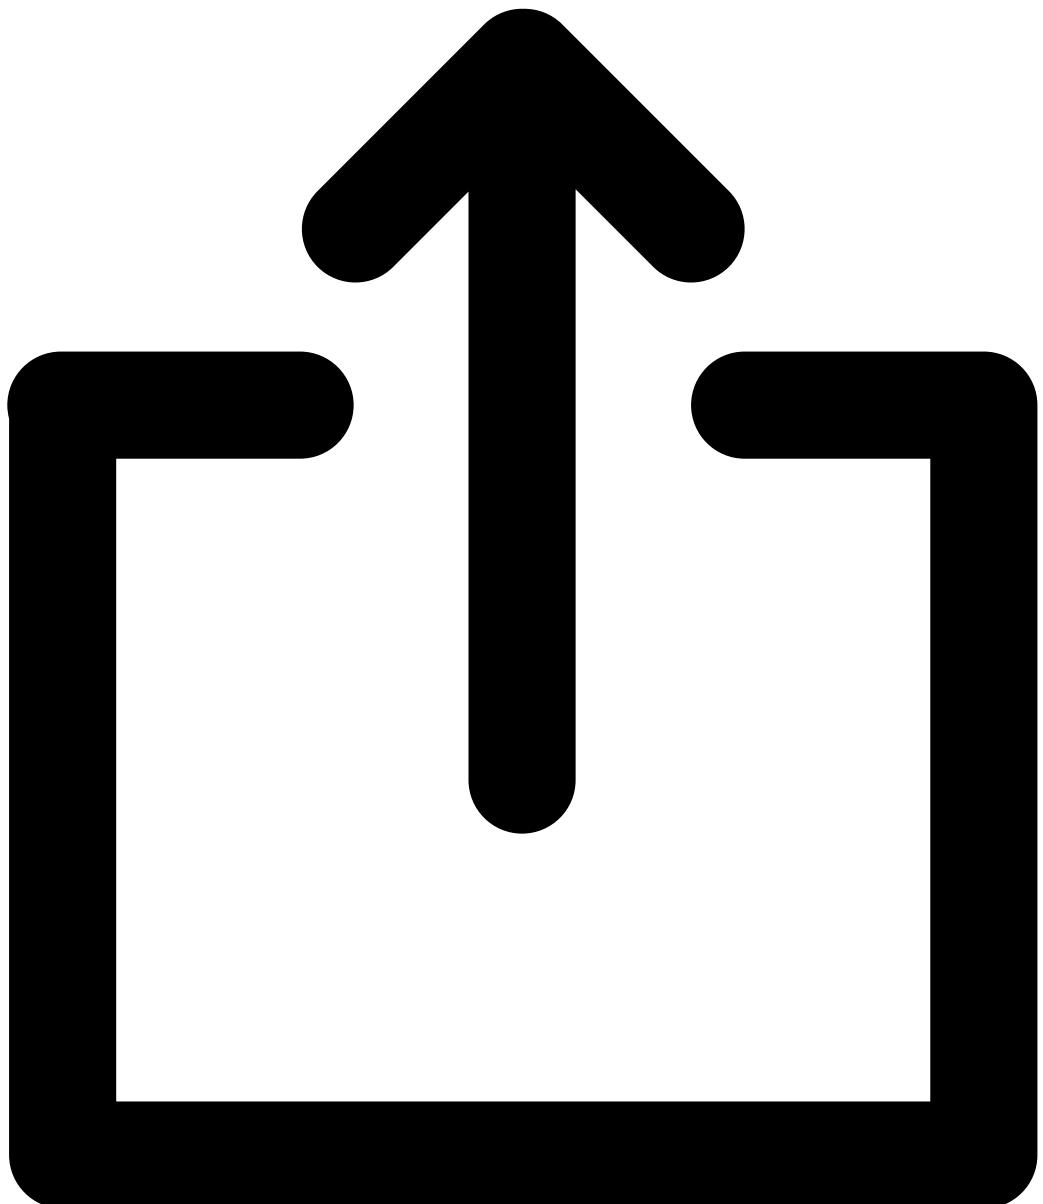
CUSTOM LABEL



[Show code](#)

Steps

Stepper component increasing dynamically on click. Used to guide user through defined path.Built from main component - SfSteps and internal component - SfStep.



Details

Shipping

Payment

Review

[#default slot content] Details

Show code

Name

Description

Default


Control




Props for main component
steps





Steps to display (only for testing purposes). Add steps using SfStep component.
array



RAW
steps : [



0 : "Details"



Name	Description	Default	Control
		1 : "Shipping"	
		2 : "Payment"	
		3 : "Review"	
]	
canGoBack	Disable clicking on a past step boolean	true	<input checked="" type="checkbox"/> FalseTrue
active	Current active step number	0	<input type="text"/> 0

Name	Description	Default	Control
<code>Hide v-model items</code>			
	<code>Hide v-model items</code>		
<code>v-model</code>			
<code>v-model</code>	v-model accepts active prop and emits change event number	0	<input type="text" value="0"/>
<code>Hide Events items</code>			
	<code>Hide Events items</code>		
<code>Events</code>			
<code>change</code>	Emits change event with step value when step is clicked -		 RAW <code>change : {</code> 



[Hide Slots items](#)



[Hide Slots items](#)

Slots

default

Default slot for SfSteps component. Slot to replace steps content

-

[Set object](#)

steps

Use this slot to customize the steps

-

-


default

Default slot for SfStep component. Use this slot to customize step in SfStep component

-

-

[Hide Props for SfStep component items](#)



[Hide Props for SfStep component items](#)

Props for SfStep component

name

Name of the step.

[Set string](#)

Stories

No Go Back

Details

Shipping

Payment

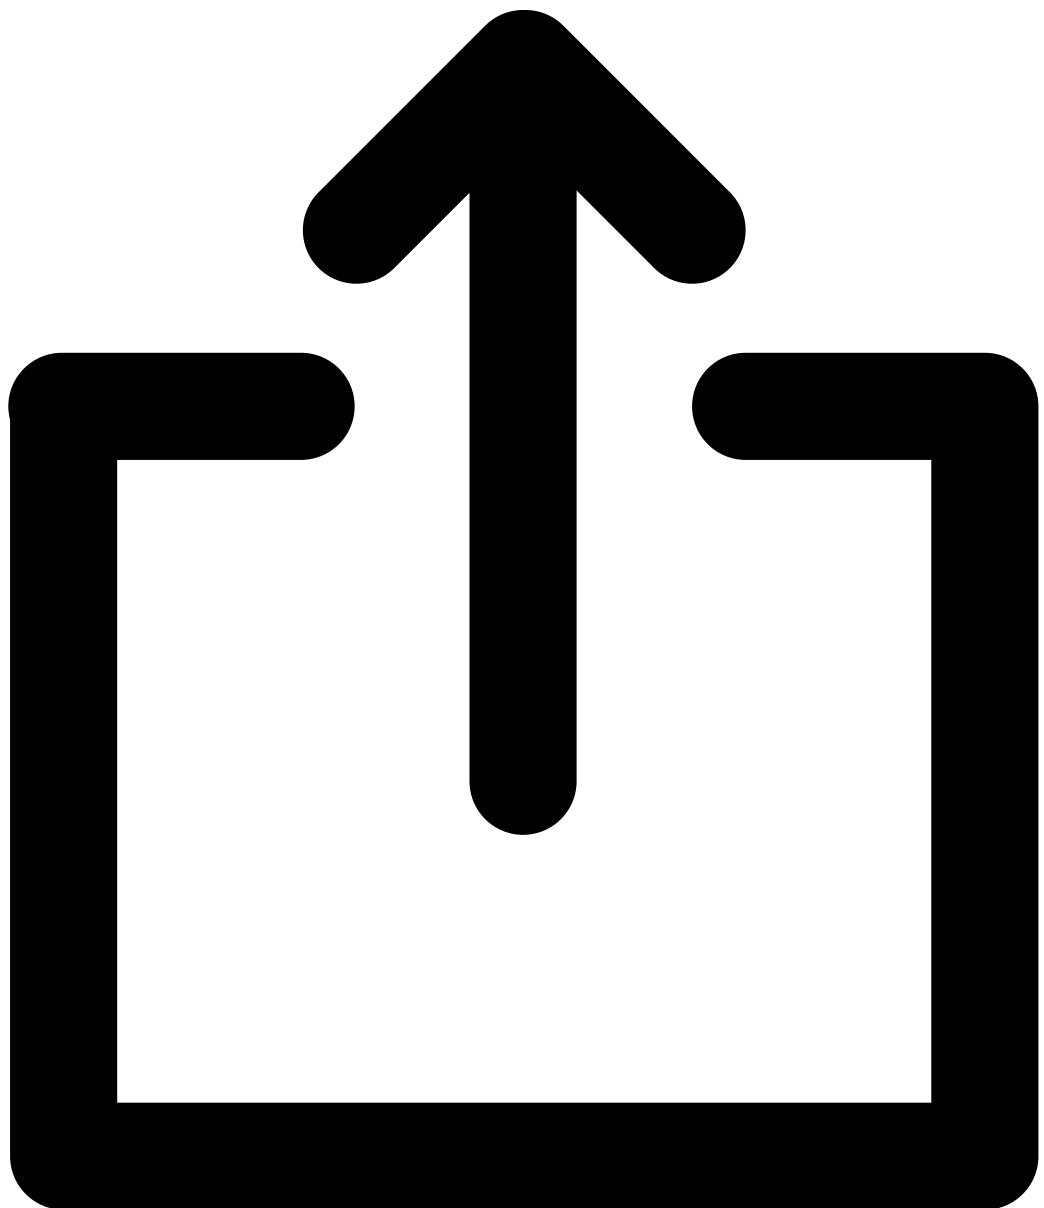
Review

[#default slot content] Shipping


Show code

Sticky

Applies sticky property to the component.



[#default slot content]



Show code

Name

Description

Default Control

Hide Slots items



Hide Slots items

Slots

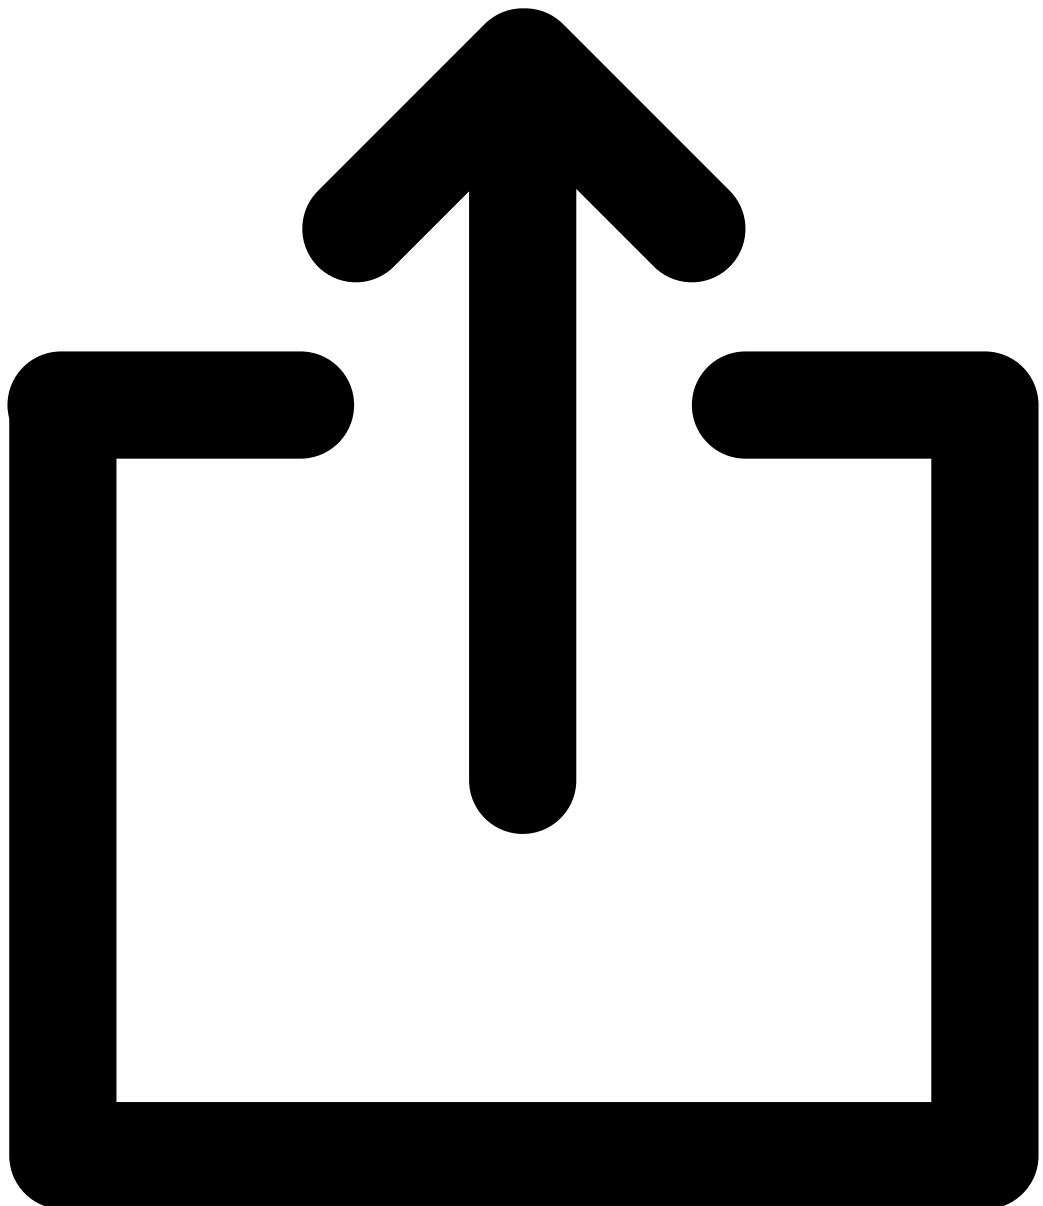
default

Place here all content that sticky property applies to -

Set object

Tile

Tile component with text and background-image



BAGS

Show code


Name	Description	Default	Control
Hide Props items			




Hide Props items


Props

title	Tile title string	""	<input type="text" value="Bags"/>
background	Tile background image stringobject	""	 <code>background : {</code>

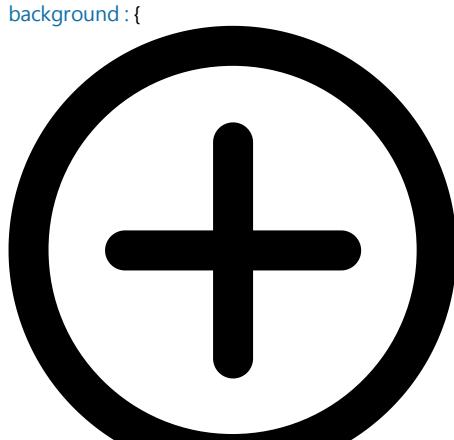

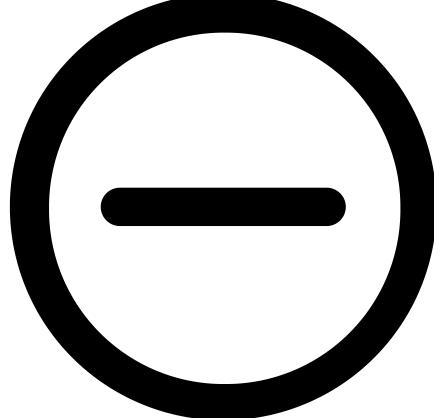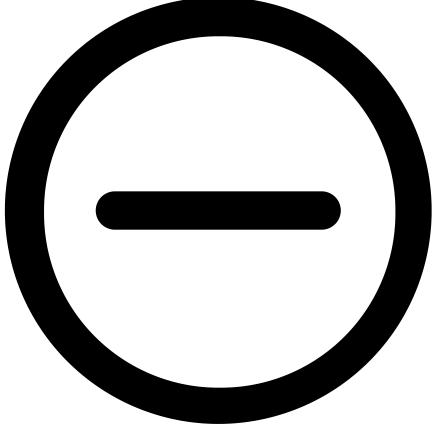
`mobile : "/assets/storybook/SfTile/tileB-m.jpg"`



Name	Description	Default	Control
		desktop : "/assets/storybook/SfTile/tileB.jpg"	

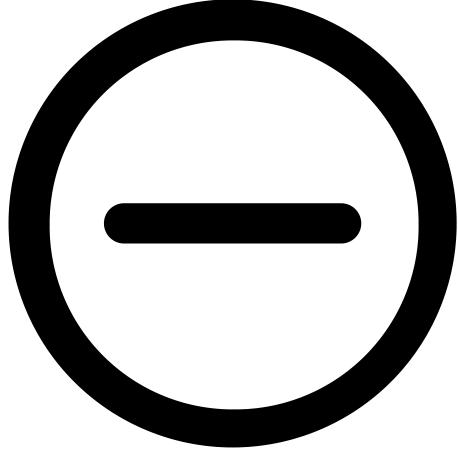}



link

Tile link
string

<https://www.storefrontui.io/>

[Hide Slots items](#)



[Hide Slots items](#)

Slots

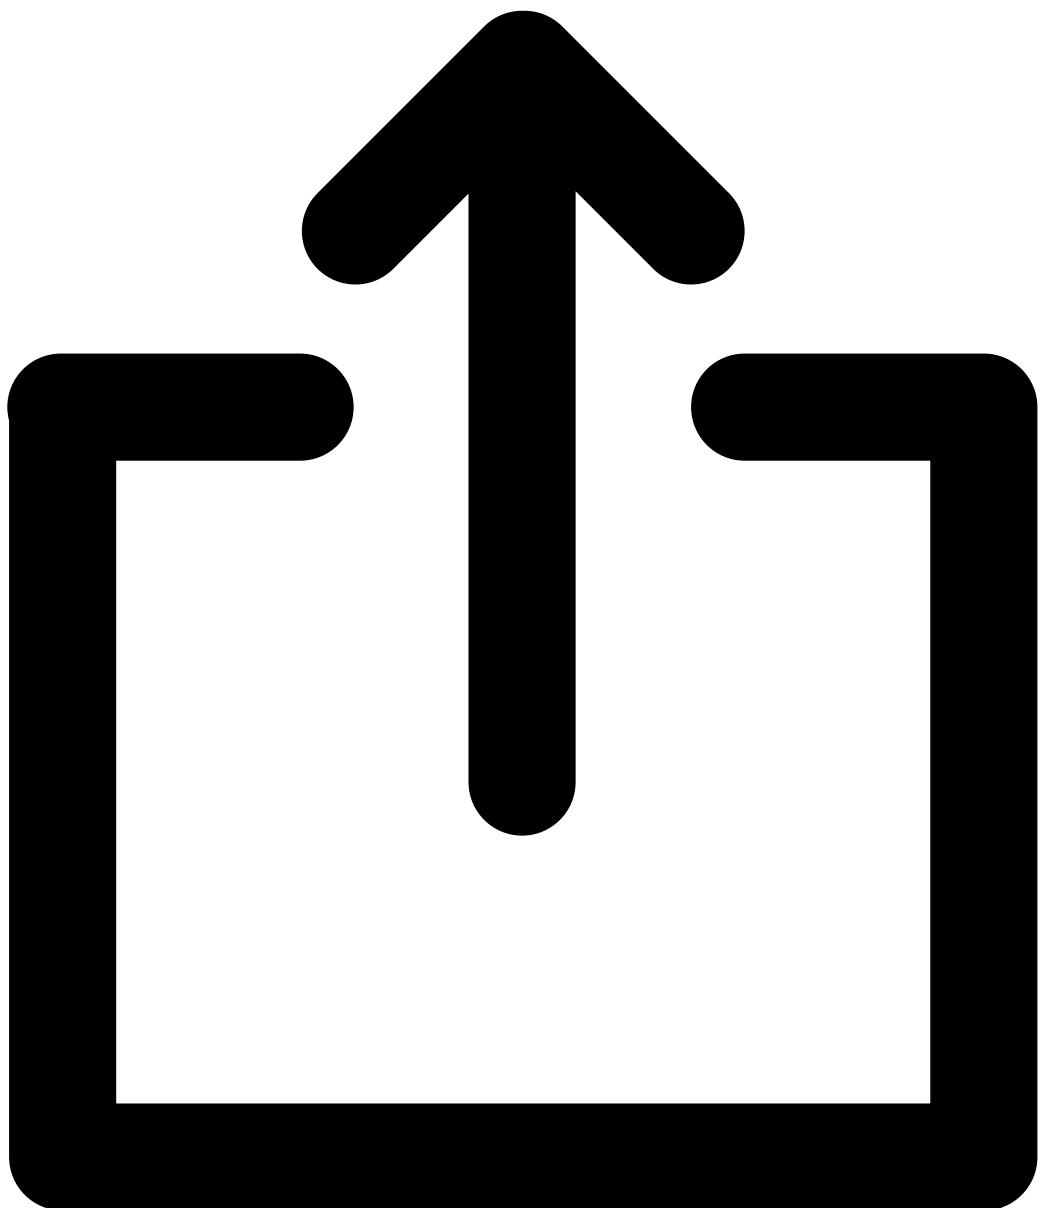
default

Use this slot to replace title content -

-

Accordion

Accordion component. Can be set as one or multiple opened, with or without icon. Constructed from main component - SfAccordion and internal components - SfAccordionItem.



Clothing

Accessories

Shoes

Show code

Name

Description

Default

Control



Slots

header	Use this slot to replace accordion item header	-	<input type="button" value="Set object"/>
additional-info	Use this slot for additional information about this item	-	<input type="button" value="Set object"/>
default	Default slot for SfAccordion component. Use this slot to place SfAccordionItem elements	-	<input type="button" value="Set object"/>
default	Default slot for SfAccordionItem component. Use this slot to place item's content	-	-



Props

open	Opens an accordion item based on title. If 'all' string is passed then all items will be open by default. string	""	<input type="button" value="Edit string..."/>
multiple	Allows to open multiple accordion items if set to true string	false	<input type="checkbox"/> FalseTrue
transition	Overlay transition effect. Could be one of the default ones . string	""	<input type="button" value="Edit string..."/>
showChevron	Show chevron icon string	true	<input checked="" type="checkbox"/> FalseTrue



Events

click:open	Emits open event with header name when header is opened.	-	-
------------	--	---	---

Stories

Open One

Clothing

Accessories

All	80	>
Belts	101	>
Bag	2	>

Shoes

[Show code](#)

⌚Open Multiple

Clothing

All	280	>
Skirts	11	>
Dresses	32	>

Accessories

Shoes

All	2	>
Trainers	22	>
Sandals	55	>

[Show code](#)

⌚All Open

Clothing

All	280	>
Skirts	11	>
Dresses	32	>

Accessories

All	80	>
Belts	101	>
Bag	2	>

Shoes

All	2	>
Trainers	22	>
Sandals	55	>

[Show code](#)

Hide Chevron

Clothing

Accessories

Shoes

[Show code](#)

Control With Buttons

[OPEN CLOTHING](#)

[OPEN ACCESSORIES](#)

[OPEN SHOES](#)

Clothing

Accessories

Shoes

All
Trainers
Sandals

2 >
22 >
55 >

[Show code](#)

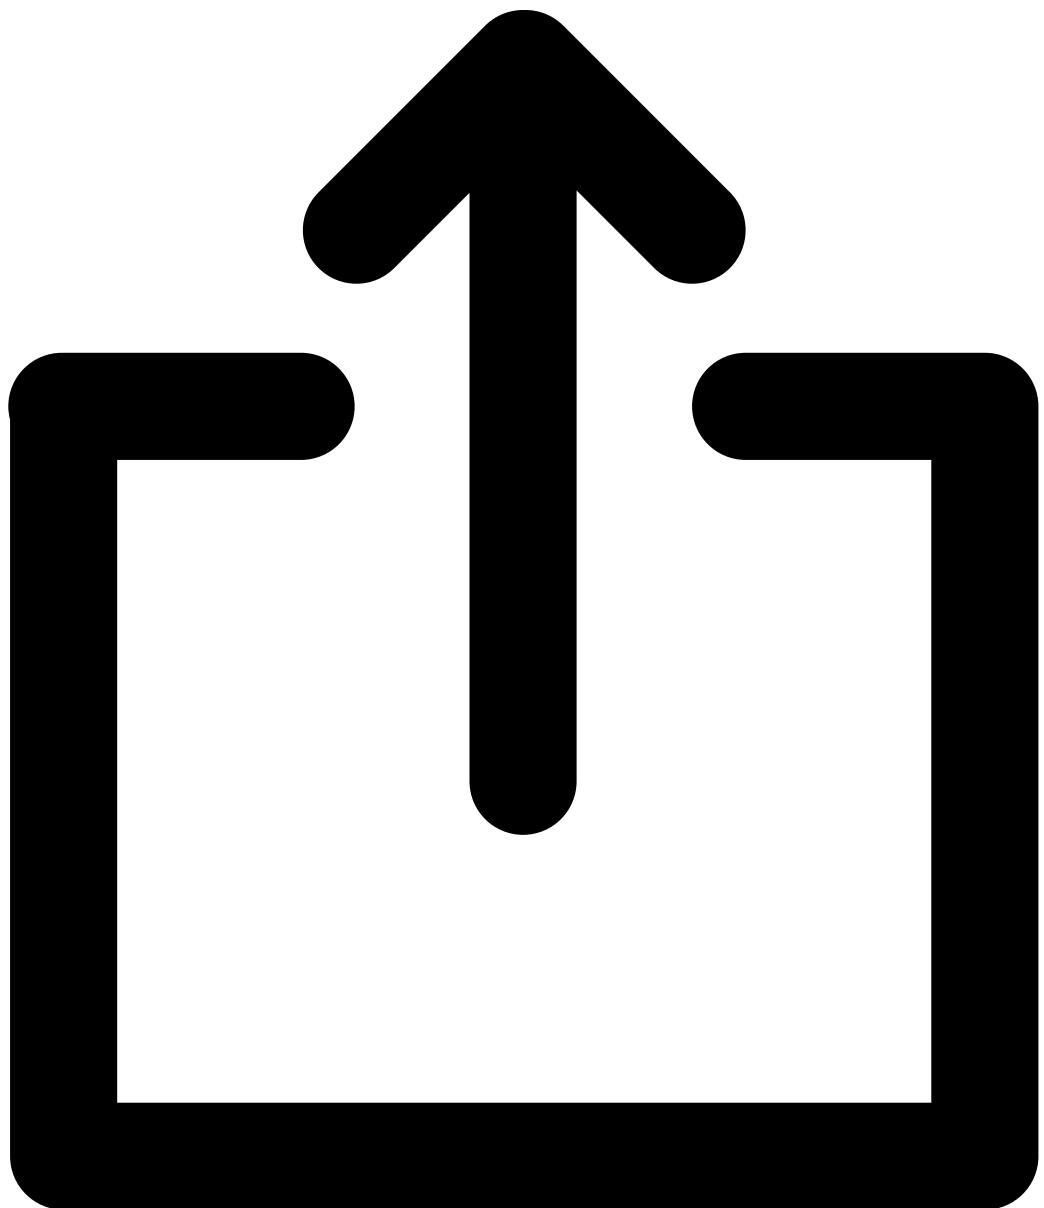
Use Header Slot

CUSTOM HEADER
CUSTOM HEADER
CUSTOM HEADER

[Show code](#)

BannerGrid

Full width grid made with banners.



DRESSES

COCKTAIL & PARTY

DRESSES

LINEN DRESSES

T-SHIRTS

THE OFFICE LIFE

SUMMER SANDALS

ECO SANDALS

Show code

Name

Description

Default

Control



Props

bannerGrid

Number of grid for banners.
number



Slots

banner-A

Slot for banner image

-

banner-B

Slot for banner image

-

banner-C

Slot for banner image

-

banner-D

Slot for banner image

-

Stories

With Cimage

DRESSES

COCKTAIL & PARTY

DRESSES

LINEN DRESSES

T-SHIRTS

THE OFFICE LIFE

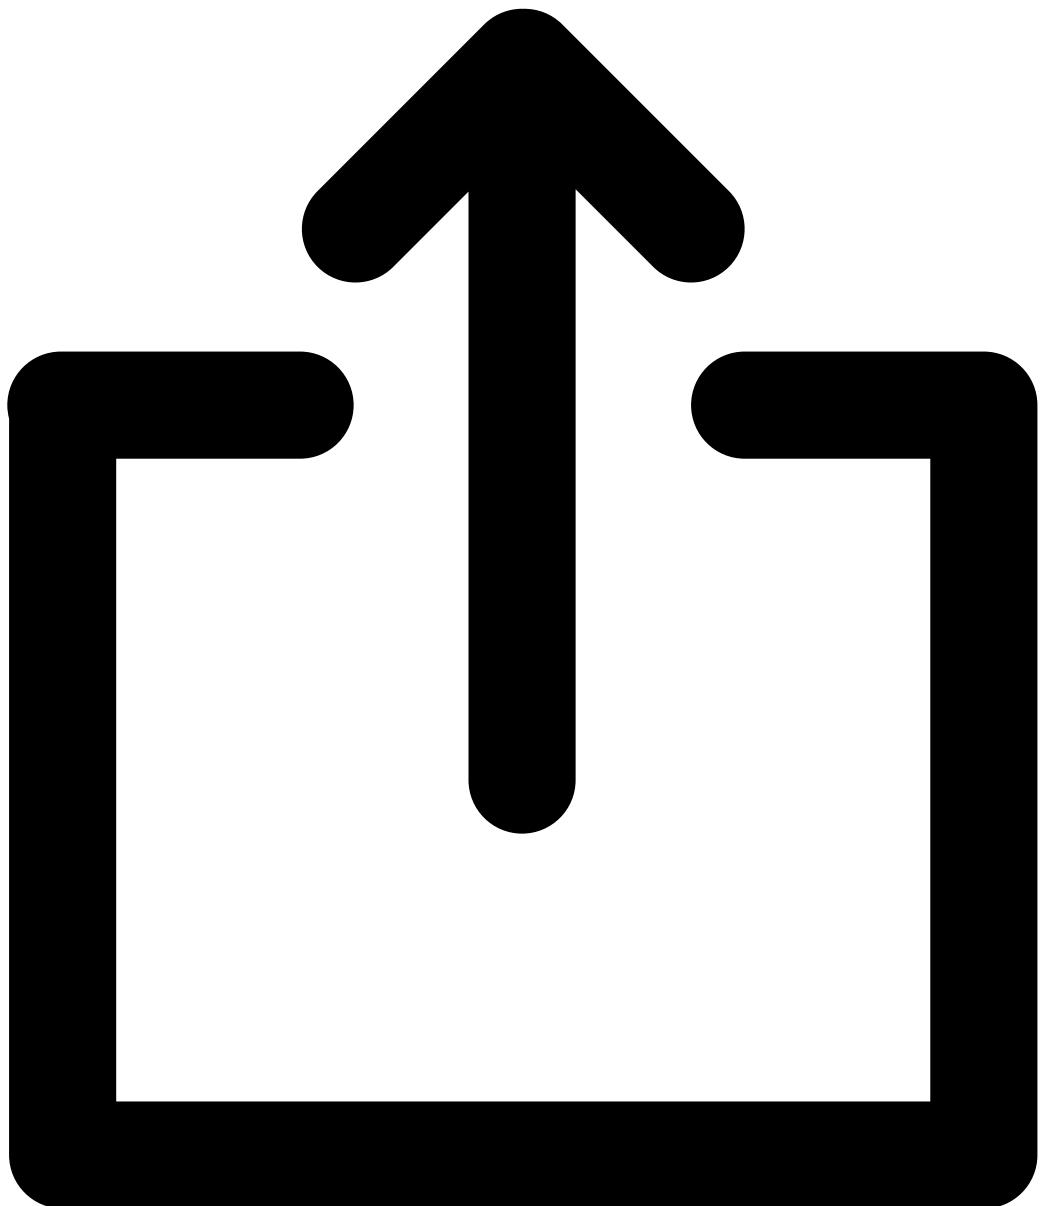
SUMMER SANDALS

ECO SANDALS

Show code

BottomNavigation

Full-width fixed bottom navigation component with items and circle icon. Constructed from main component - SfBottomNavigation and internal components - SfBottomNavigationItem.



Show code

Name	Description	Default	Control
Hide Props for internal component items			



Hide Props for internal component items

Props for internal component

icon

Sets icon type. Icon SVG path(s). It can be single SVG path(string) or array of SVG paths or icon name from our icons list(such as 'added_to_cart')
string,array



isActive

Sets icon to active
boolean

false

FalseTrue

iconActive

The name of the default active icon
string

...

Edit string...

label

Label text
string

...

Edit string...

iconSize

Icons size
string

20px

20px

isFloating

Changes icon styling
boolean

false

FalseTrue

Name	Description	Default	Control
Hide Slots items			



[Hide Slots items](#)

Slots

default

Default slot for SfBottomNavigation component. Use this slot to place SfBottomNavigationItem elements

- -

label

Named slot for SfBottomNavigationItem component. Use this slot to replace label element

- -

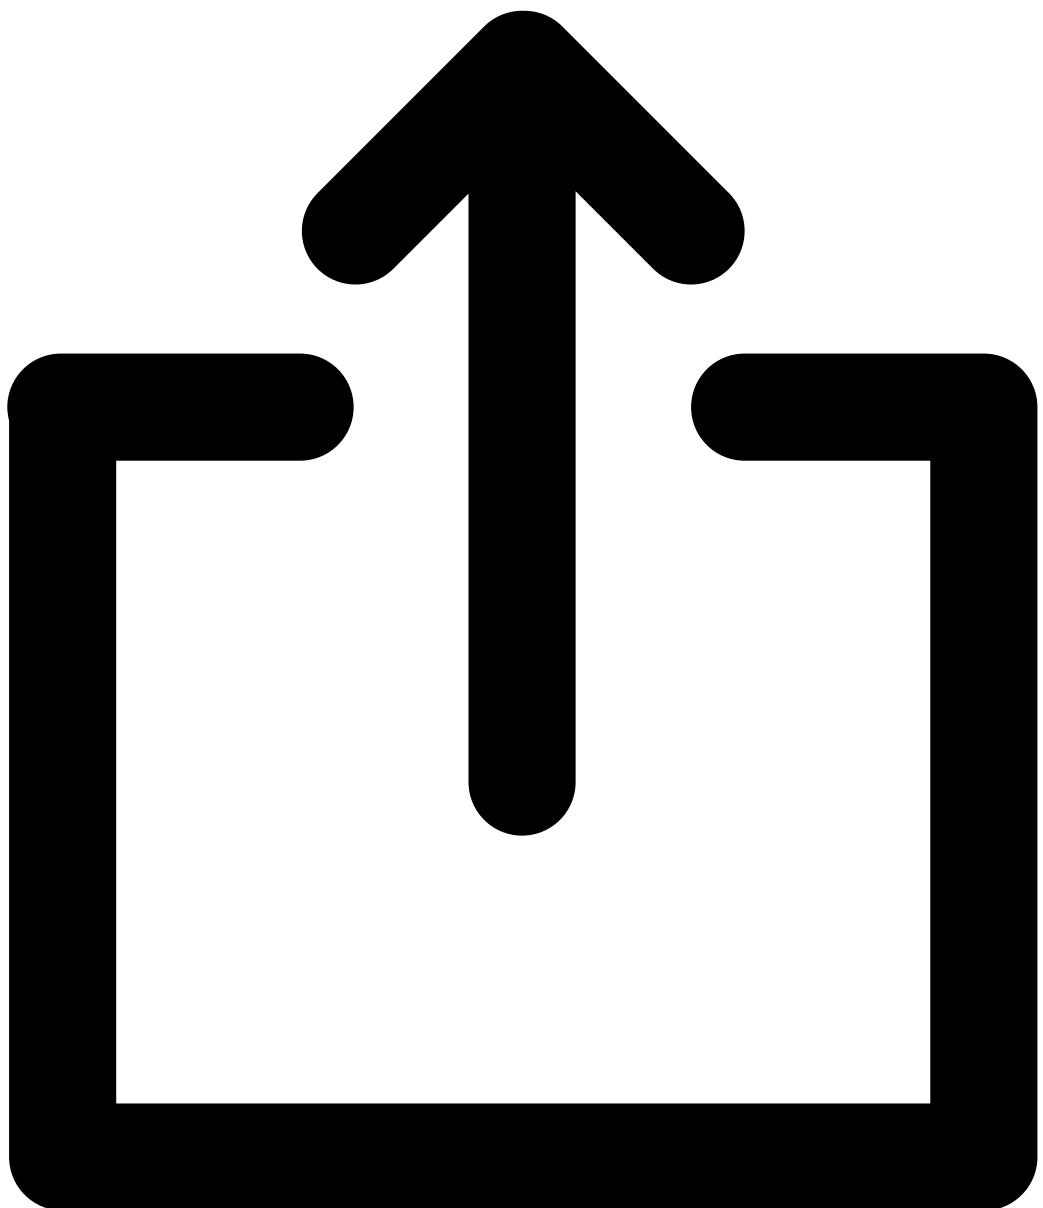
icon

Named slot for SfBottomNavigationItem component. Use this slot to replace icon element

- -

Carousel

Carousel component with swipe and arrow navigation. Constructed from main component - SfCarousel and internal components - SfCarouselItem.



1

2

3

4

5

6

Name**Description****Default****Control**

Props

settings

Carousel options after glide.js
[\(https://glidejs.com/docs/\)](https://glidejs.com/docs/)
 object


```
{ type: "carousel", rewind: true, perView: 4, slidePerPage:  

  true, gap: 0, breakpoints: { 1023: { perView: 2, peek: { before:  

  0, after: 50, }, }, }, }
```




settings : {





type : "carousel"



rewind : true



perView : 4

slidePerPage :
true

Name	Description	Default	Control
			gap : 0
			
			breakpoints : {...} 1 key  }
			

Hide Slots
items



Hide Slots items

Slots

prev	Named slot for SfCarousel component. Slot for icon moving to the previous item	-	<button>Set object</button>
next	Named slot for SfCarousel component. Slot for icon moving to the next item	-	<button>Set object</button>
default	Default slot for SfCarousel component. Use this slot to place SfCarouselItem elements	-	<button>Set object</button>
default	Default slot for SfCarouselItem component. Use this slot to place item's content	-	-

Stories

Use Next Slot

1

2

3

4

5

6

Show code

 **Use Prev Slot**

1

2

3

4

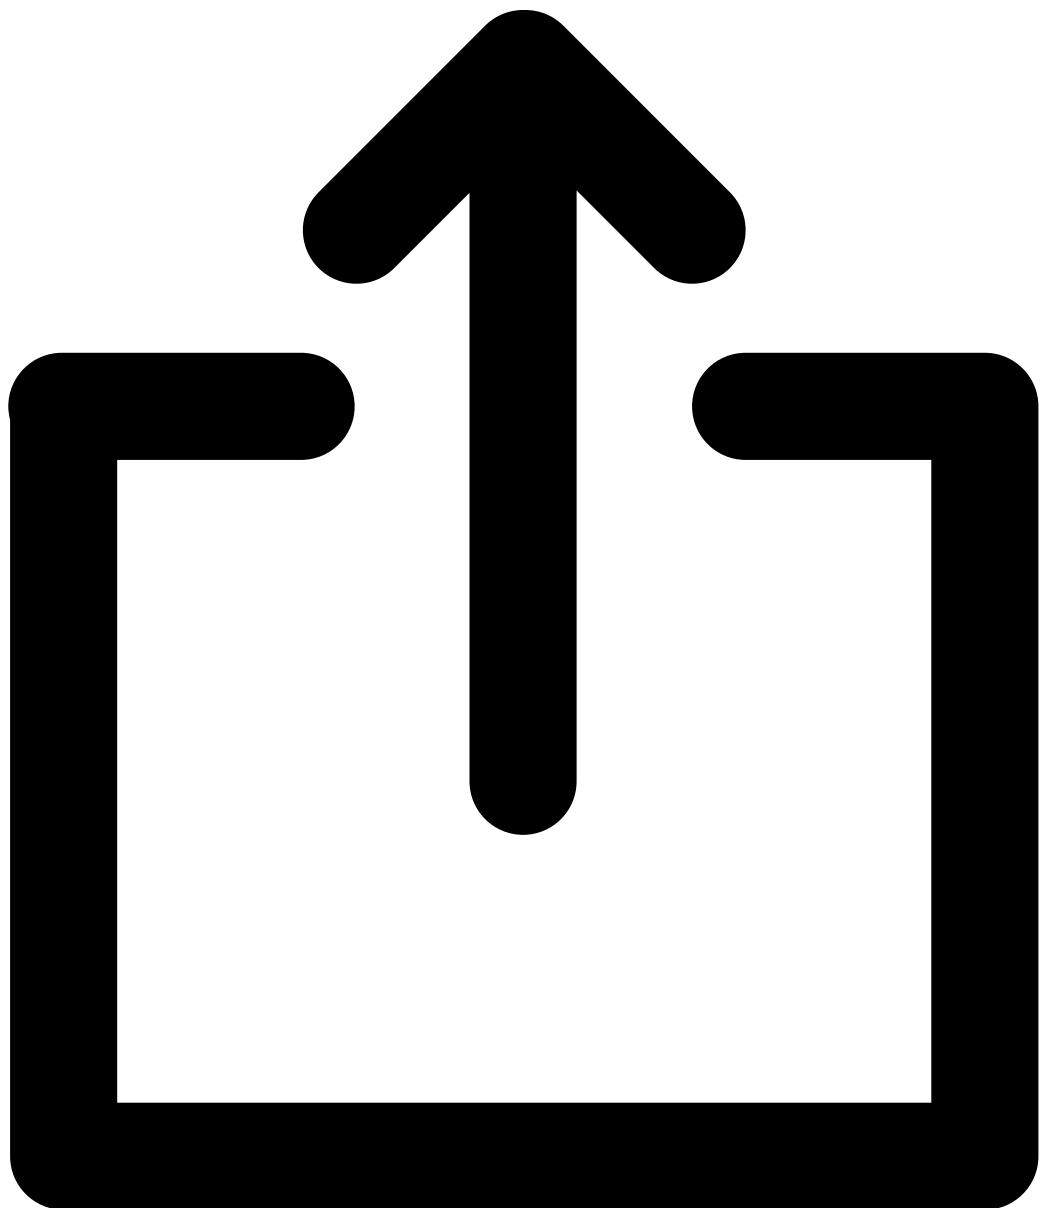
5


6

Show code

CollectedProduct

Tile component with image, descriptions and actions for collected product.





Cotton Sweater Modern Style

⋮

\$10.99

Size : XS


Color : white




-

+

[Remove](#)[Show code](#)**Name****Description****Default****Control** [Hide Props items](#)[Hide Props items](#)**Props**

image	The url of the product image. string	""	/assets/storybook/Home/productB.jpg
title	Product title string	""	Cotton Sweater Modern Style
regularPrice	Product regular price string,number	null	<input type="button" value="Edit number..."/>
imageWidth	Product image width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	140	<input type="text" value="140"/>
imageHeight	Product image height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	200	<input type="text" value="200"/>
specialPrice	Product special price string,number	null	<input type="button" value="Edit number..."/>
minQty	Minimum quantity value number	null	<input type="button" value="Edit number..."/>
maxQty	Maximum quantity value number	null	<input type="button" value="Edit number..."/>
link	Link to product stringobject	null	<input type="button" value="Set string"/>
hasRemove	Remove button visibility boolean	true	<input type="button" value="Set boolean"/>
hasMoreActions	More actions button visibility boolean	true	<input type="button" value="Set boolean"/>
qty	Selected quantity string,number	1	<input type="text" value="1"/>

Name	Description	Default	Control
 Hide v-model items			
v-model			
v-model	v-model accepts qty prop and emits native events number	1	<input type="text" value="1"/>
 Hide Slots items			
Slots			
input	Use this slot to pass custom input element	-	<button>Set object</button>
price	Use this slot to pass custom price element	-	<button>Set object</button>
configuration	Use this slot to pass custom configuration	-	<button>Set object</button>
actions	Use this slot to pass custom actions	-	<button>Set object</button>
remove	Use this slot to pass custom remove button	-	<button>Set object</button>
more-actions	Use this slot to pass other custom actions	-	<button>Set object</button>
title	Use this slot to replace title element	-	-
image	Use this slot to replace image element	-	-
 Hide Events items			
Events			
click:remove	Emits click:remove event when close button is clicked	-	 RAW <code>click:remove :{</code> 

Name	Description	Default	Control
		}	
click:actions	Emits input event when actions button in mobile mode is clicked	-	 RAW click:actions :{ 
		}	

[Hide CSS Modifiers items](#)



[Hide CSS Modifiers items](#)


CSS Modifiers

Name	Description	Default	Control
classes	CSS classes to modify component styling -	-	

[sf-collected-product--detailed ▾](#)

⌚ Stories

⌚ With Special Price


 Cotton Sweater Modern Style ⋮

~~\$10.99~~ \$0.99
 Size: XS
 Color: white

- +
[Remove](#)

[Show code](#)

⌚ With Link

 Cotton Sweater Modern Style ⋮

[\\$10.99](#)
 Size: XS
 Color: white

- +
[Remove](#)

[Show code](#)

⌚ Use Actions Slot

 Cotton Sweater Modern Style ⋮

[\\$10.99](#)
 Size: XS
 Color: white
 CUSTOM ACTIONS

- +
[Remove](#)

[Show code](#)

⌚ Use Configuration Slot

 **CUSTOM IMAGE** Cotton Sweater Modern Style ⋮

\$10.99
CUSTOM CONFIGURATION

- + [Remove](#)

[Show code](#)

⌚ Use Image Slot

CUSTOM IMAGE Cotton Sweater Modern Style ⋮

\$10.99
Size: XS
Color: white

- + [Remove](#)

[Show code](#)

⌚ Use Input Slot

 Cotton Sweater Modern Style ⋮

\$10.99
Size: XS
Color: white

CUSTOM INPUT [Remove](#)

[Show code](#)

⌚ Use Title Slot


 CUSTOM TITLE ⋮

\$10.99
Size: XS
Color: white

- + [Remove](#)

[Show code](#)

⌚ Use Price Slot



Cotton Sweater Modern Style



CUSTOM PRICE

Size: **XS**

Color: **white**

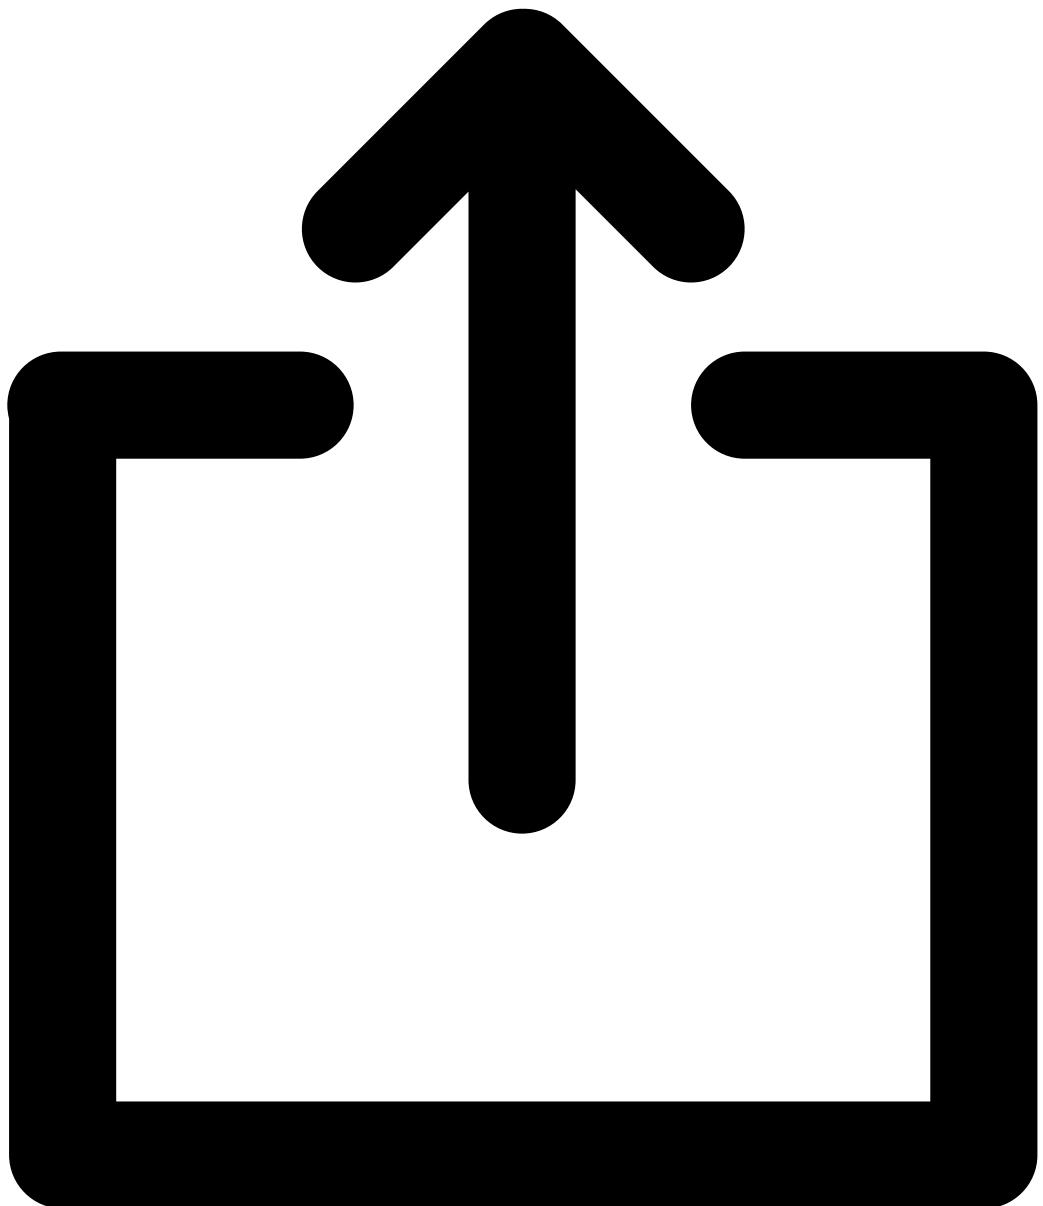
- +

[Remove](#)

[Show code](#)

ContentPages

The content pages for static content. Built from main component - SfContentPages and internal components - SfContentCategory and SfContentPage.




Help





About us >

Customer service >

Store locator >

Show code

Name	Description	Default	Control
pages	Pages data (only for testing purposes).	 RAW pages : []	<input type="checkbox"/>

Name	Description	Default	Control
0 :{...} 2 keys			
1 :{...} 2 keys			
2 :{...} 2 keys			
]			

Hide Props for SfContentCategory component items




Hide Props for SfContentCategory component items

Props for SfContentCategory component

Name	Description	Default	Control
title	Sets category title. string	""	Help

`Hide Props for main component items`



`Hide Props for main component items`

Props for main component


active

Active page.
string

""

Edit string...

`Hide Events items`



`Hide Events items`


Events


click:change

Emits click:change event with menu item title when it is clicked


-

 RAW
click:change : {



Name	Description	Default	Control
		}	

[Hide Slots items](#)



[Hide Slots items](#)

Slots


menu-item	Named slot for SfContentPages component. Use this slot to replace menu item element	-	Set object
default	Default slot for SfContentPages component. Use this slot to place content pages items	-	Set object
default	Default slot for SfContentCategory component. Use this slot to place categories content	-	-
default	Default slot for SfContentPage component. Use this slot to place page content	-	-

[Hide Props for SfContentPage component items](#)



[Hide Props for SfContentPage component items](#)

Props for SfContentPage component

Name	Description	Default	Control
icon	Sets icon type. Icon SVG path(s). It can be single SVG path(string) or array of SVG paths or icon name from our icons list(such as 'added_to_cart') string,array	...	

`add_to_cart` ▾

Stories

Has Active



About us

[Show code](#)

⌚With Categories

[Help](#)

About us >

Customer service >

Store locator >

[Show code](#)

⌚With Category Icon

[Help](#)

⌚ About us >

♡ Customer service >

Show code

 **Use Menu Item Slot**

Help

About us

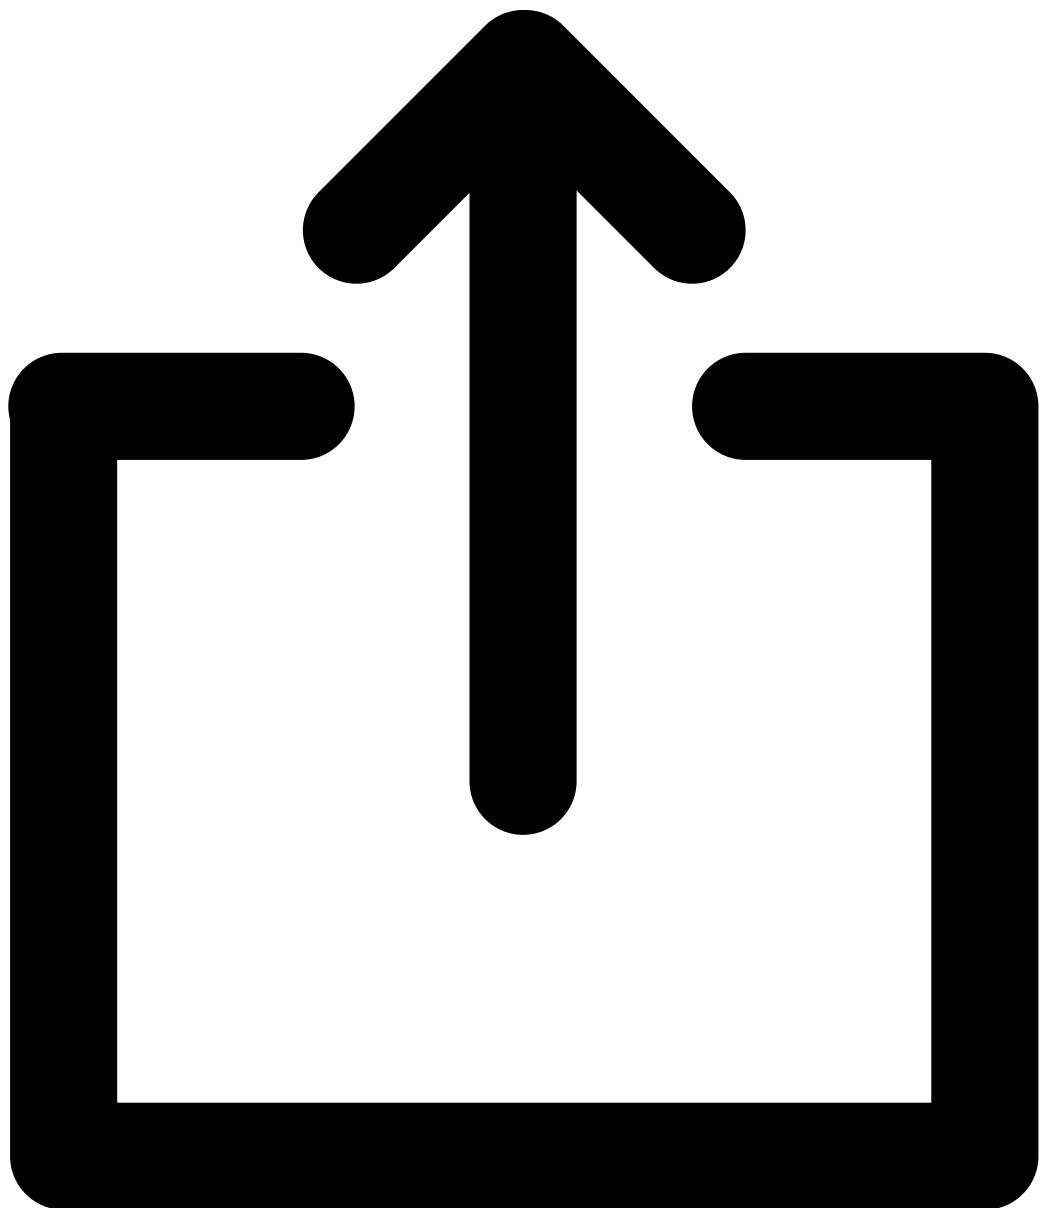
Customer service

Store locator

Show code

Footer

Footer component. Built from main component - SfFooter and internal components -SfFooterColumn.



ABOUT US

Who we are



Quality in the details >

Customer Reviews >

DEPARTMENTS

HELP

Customer service >

Size guide >

Contact us >

PAYMENT & DELIVERY

SOCIAL



Type your email address

SUBSCRIBE



Show code

Name

logo

Description

Logo url to show on mobile (only for testing purposes).

Default

-

/assets/logo.svg

Control



Hide Props for main component items



Hide Props for main component items





Props for main component

open


Opens footer columns on mobile.
stringarray



RAW

Name	Description	Default	Control
		open : [
		0 : "About us"	
		1 : "Help"	
]	
column	Number of columns in footer number	4	<input type="text" value="4"/>
multiple	Multiple footer columns open at the same time on mobile boolean	true	<input checked="" type="checkbox"/> FalseTrue

Name	Description	Default	Control
Hide Props for SfFooterColumn component items			



Hide Props for SfFooterColumn component items

Props for SfFooterColumn component

title

Title of the column in SfFooterColumn component.
string

...

Storefront UI

[Hide Events items](#)



[Hide Events items](#)


Events


change

Emits click event when column title is clicked on mobile mode. It is emitted with the array of opened columns

-


 RAW
change : {



Name	Description	Default	Control
			}
			
Slots			
default	Default slot for SfFooter component. Use this slot to place footer content	-	<button>Set object</button>
default	Default slot for SfFooterColumn component. Use this slot to footer column content	-	-


[Hide Slots items](#)

[Hide Slots items](#)



GroupedProduct

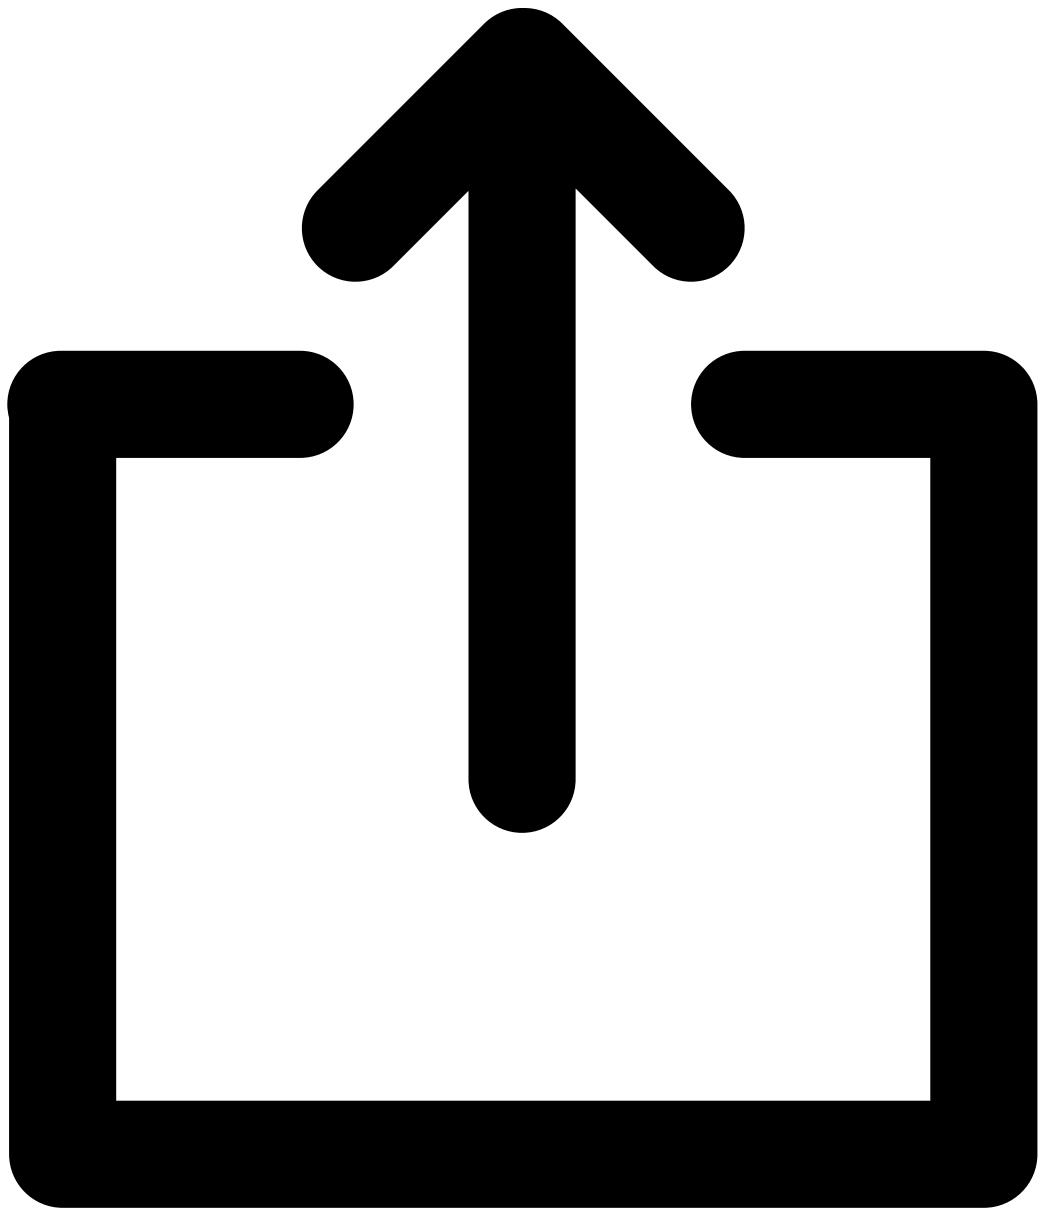Grouped Product component. Built from main component - SfGroupedProduct and internal component - SfGroupedProductItem.



Placeholder

Leave white brooch

MSD23-345-324

Color : **White**

\$10.99

- +

Show code

Name

Description

Default

Control

Hide Props for main component items



Hide Props for main component items

Props for main component



settings : {


settings

Settings for carousel following [glide.js documentation](#)
object

{ type: "slider", rewind: true,
gap: 0, slidePerPage: true,
breakpoints: { 1023: { perView:
2, peek: { before: 0, after: 50, }
}, }, }

type : "slider"

}



Name	Description	Default	Control
hasCarousel	Indicates if the carousel of products is on boolean	true	<input checked="" type="checkbox"/> FalseTrue

Hide Props for SfGroupedProductItem component items



Hide Props for SfGroupedProductItem component items

Props for SfGroupedProductItem component

image	Image url string	...	/assets/storybook/SfGroupedProduct/white.png
imageWidth	Product image width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	328	Edit string...
imageHeight	Product image height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	448	Edit string...
title	Product title string		Leave white brooch
priceRegular	Product regular price string,number	...	\$10.99
imagePictureBreakpoint	Product image picture breakpoint number	576	576
priceSpecial	Product special price string,number	...	Edit string...
link	Link to product string,object		Edit string...
imagePlaceholder	Product image placeholder -		Edit string...
qty	Product quantity string,number		1

Hide v-model items



Hide v-model items

v-model

Name	Description	Default	Control
------	-------------	---------	---------

v-model

v-model in SfGroupedProductItem
accepts qty prop and emits native events
number

Default

Control

1

[Hide Events items](#)



[Hide Events items](#)

Events



input:{



input

Emits input event when quantity selector
value is changed

}



[Hide Slots items](#)



[Hide Slots items](#)

Slots

details

Named slot for SfGroupedProductItem
component. Use this slot to pass custom
details

Set object

Name	Description	Default	Control
configuration	Named slot for SfGroupedProductItem component. Use this slot to pass custom configuration	-	<button>Set object</button>
price	Named slot for SfGroupedProductItem component. Use this slot to pass custom price element	-	<button>Set object</button>
default	Default slot for SfGroupedProduct component. Use this slot to place grouped product items	-	-
title	Named slot title for SfGroupedProductItem component. Use this slot to replace title element	-	-
image	Named slot image for SfGroupedProductItem component. Use this slot to replace image element	-	-
input	Named slot for SfGroupedProductItem component. Use this slot to replace quantity selector	-	-

Stories

Use Configuration Slot



Leave white brooch

CUSTOM CONFIGURATION

\$10.99

- +

Show code

Use Image Slot

CUSTOM IMAGE


Leave white brooch

\$10.99

- +

Show code

Use Input Slot



Leave white brooch

\$10.99

CUSTOM INPUT

Show code

⌚Use Title Slot



CUSTOM TITLE

\$10.99

- +

Show code

⌚Use Price Slot



Leave white brooch

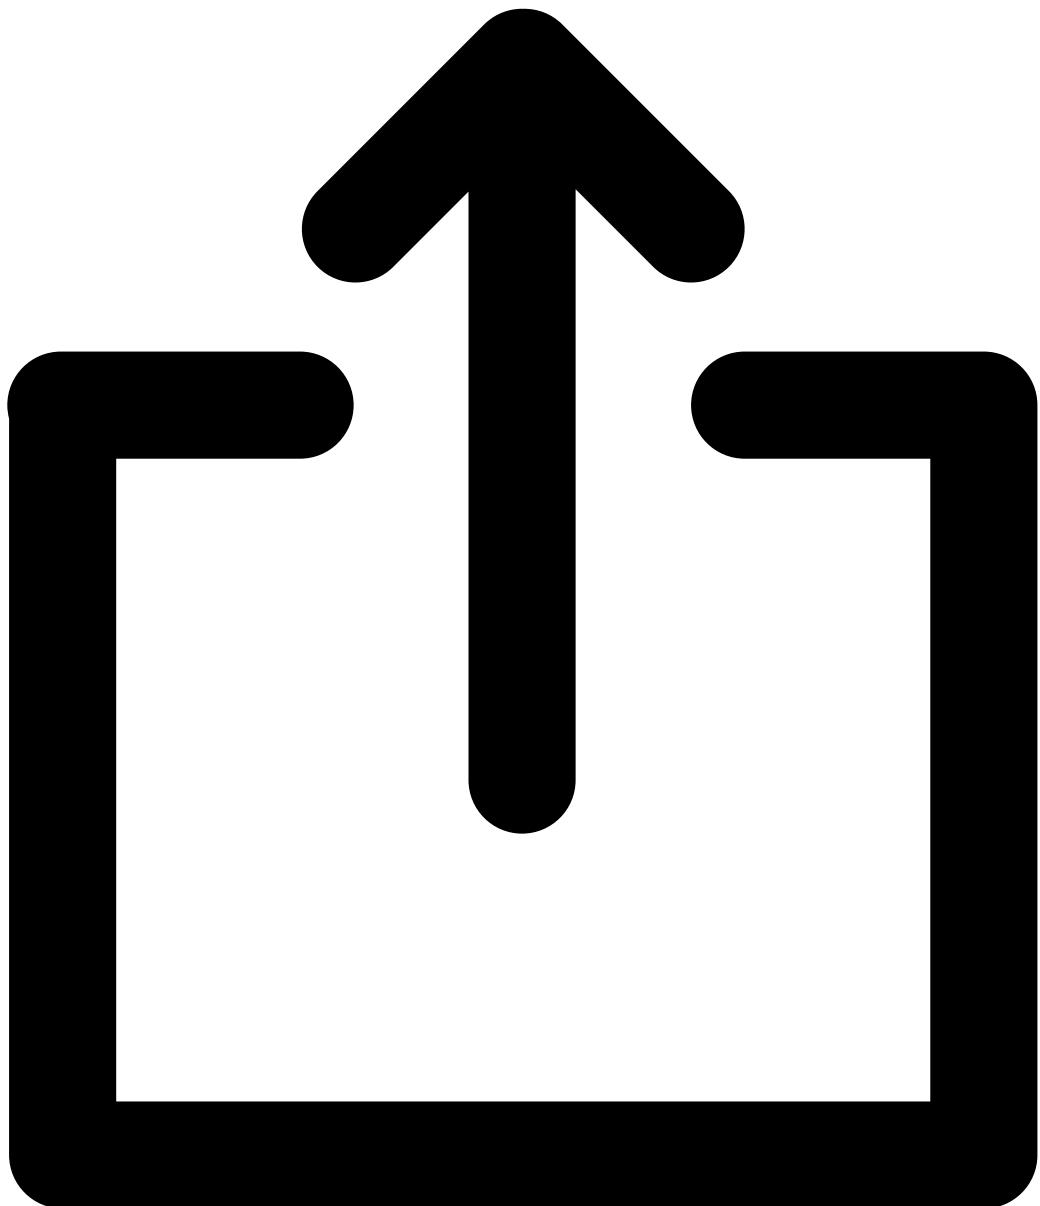
CUSTOM PRICE

- +


Show code




Header





Grouped Product component. Built from main component - SfHeader and internal components - SfHeaderNavigation and SfHeaderNavigationItem.






Show code


Name	Description	Default	Control
<input type="button" value="Hide Props for main component items"/>			
			
<input type="button" value="Hide Props for main component items"/>			
Props for main component			
title	Header title string	...	<input type="text" value="Storefront UI"/>
logo	Header logo string,object	...	<input type="text" value="/assets/logo.svg"/>
searchValue	Header search phrase string	...	<input type="text" value="Edit string..."/>
logoHeight	Header logo height. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	35	<input type="text" value="35"/>
logoWidth	Header logo width. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	34	<input type="text" value="34"/>
cartIcon	Header cartIcon (accepts same value as SfIcon) stringbooleanarray	empty_cart	<input type="text" value="empty_cart"/>
wishlistIcon	Header wishlistIcon (accepts same value as SfIcon) stringbooleanarray	heart	<input type="text" value="heart"/>
accountIcon	Header accountIcon (accepts same value as SfIcon) stringbooleanarray	profile	<input type="text" value="profile"/>
activeIcon	Header activeIcon (accepts account, wishlist and cart) string: account, wishlist, cart	account	<input type="text" value="account"/>
searchPlaceholder	Header search placeholder string	Search for items	<input type="text" value="Search for items"/>
wishlistItemsQty	*This prop is passed to slot and changing this prop won't be visible in storybook. Header wishlist items quantity stringnumber	0	<input type="text" value="0"/>
cartItemsQty	*This prop is passed to slot and changing this prop won't be visible in storybook. Header cart items quantity. stringnumber	0	<input type="text" value="0"/>
isSticky	Header sticky to top boolean	false	<input type="checkbox"/> FalseTrue
isNavVisible	Is nav slot visible on mobile view boolean	false	<input type="checkbox"/> FalseTrue

Name	Description	Default	Control
<input type="button" value="Hide Events items"/>			
	<input type="button" value="Hide Events items"/>		
Events			
change:search	Emits change:search event when searchbar value is changed	 RAW <code>change:search :{</code>	
enter:search	Emits enter:search event when enter key is pressed	 RAW <code>enter:search :{</code>	

Name	Description	Default	Control
		}	
click:account	Emits click:account event when account button is clicked		 RAW click:account:{ 
click:wishlist	Emits click:wishlist event when wishlist button is clicked		  RAW click:wishlist:{ 

Name	Description	Default	Control
		}	
click:cart	Emits click:cart event when cart button is clicked -		 RAW click:cart : {
		}	
			

[Hide Slots items](#)



[Hide Slots items](#)

Slots

aside

Named slot for SfHeader component. Use this slot to pass aside content for example language or currency selector

[Set object](#)


navigation

Named slot for SfHeader component. Use this slot to pass navigation elements

[Set object](#)

Name	Description	Default	Control
search	Named slot for SfHeader component. Use this slot to pass search element	-	<button>Set object</button>
header-icons	Named slot for SfHeader component. Use this slot to replace default icons	-	<button>Set object</button>
logo	Named slot for SfHeader component. Use this slot to replace logo element	-	-
default	Default slot for SfHeaderNavigation component. Use this slot to place navigation elements	-	-
default	Default slot for SfHeaderNavigationItem component. Use this slot to place navigation items	-	-
desktop-navigation-item	Named slot for SfHeaderNavigationItem component. Use this slot to place desktop navigation	-	-
mobile-navigation-item	Named slot for SfHeaderNavigationItem component. Use this slot to place mobile navigation	-	-

Hide CSS Modifiers items




Hide CSS Modifiers items

CSS Modifiers

classes	CSS classes to modify component styling	-
---------	---	---



Name	Description	Default	Control
Hide Props for SfHeaderNavigationItem component items			




Hide Props for SfHeaderNavigationItem component items

Props for SfHeaderNavigationItem component

label	Label for header navigation item string	...	<input type="text" value="Edit string..."/>
link	link for header navigation item string	...	<input type="text" value="Edit string..."/>

Hero

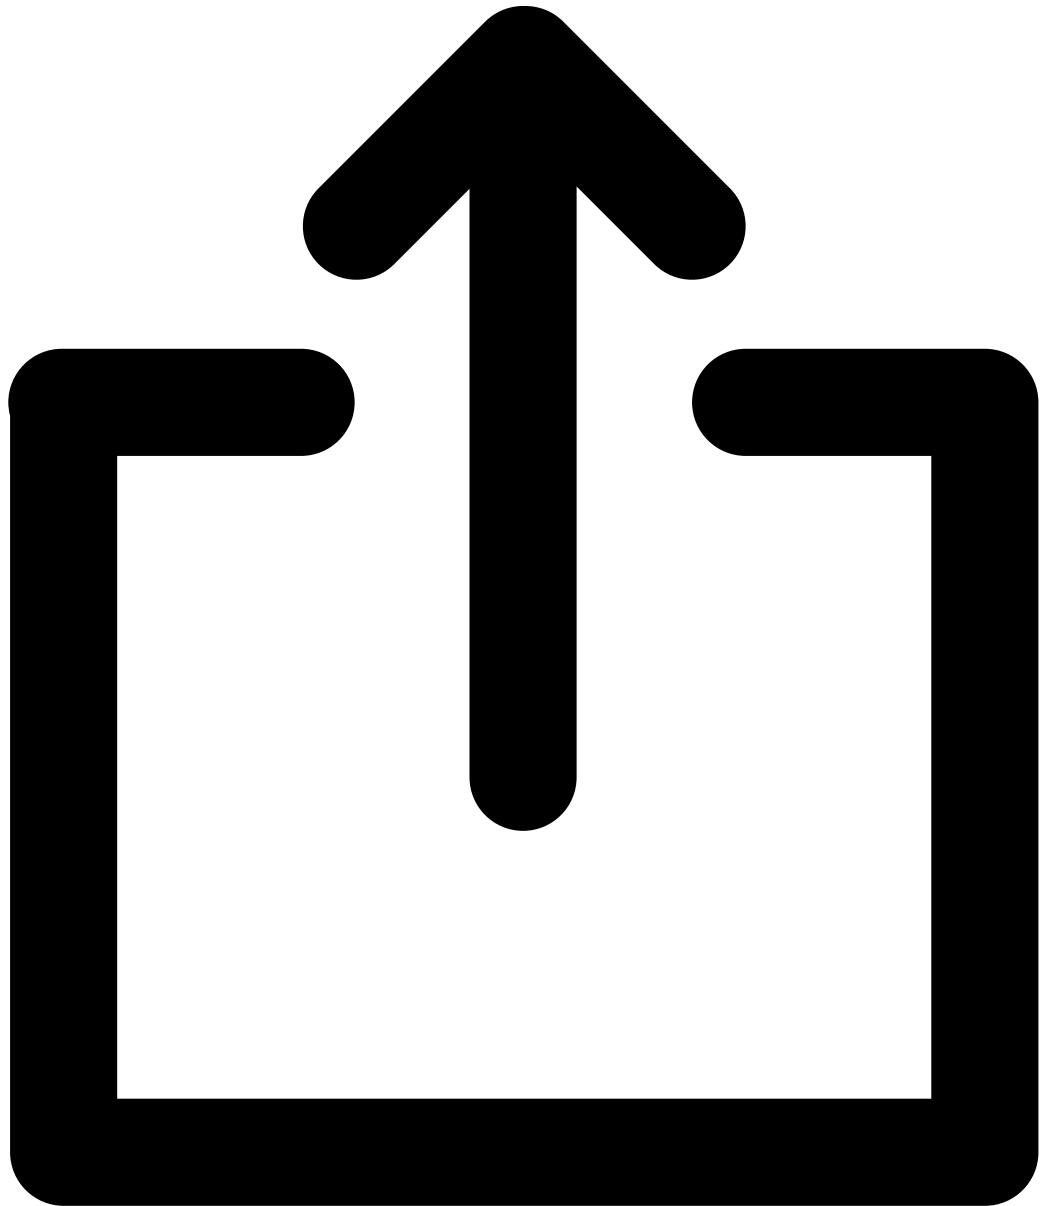Full-width hero component with autoplay and navigation arrows. Built from main component - SfHero and internal component - SfHeroItem.



SUMMER COLLECTION 2019

Colorful summer dresses are already in store

Show code

Name	Description	Default	Control
Hide Props for SfHeroItem component items			<input type="checkbox"/>



Hide Props for SfHeroItem component items

Props for SfHeroItem component

title	Hero item title (for SfHeroItem component) string	...	<input type="text"/> Edit string...
subtitle	Hero item subtitle at the top (for SfHeroItem component) string	...	<input type="text"/> Edit string...
buttonText	Text that will be displayed inside the button. You can replace the button with 'call- to - action' slot (for SfHeroItem component) string	...	<input type="text"/> Edit string...
background	Background color (for SfHeroItem component) string	...	<input type="text"/> Edit string...
image	Background image path(for SfHeroItem component) object/string	...	<input type="text"/> Edit string...
link	Link to be used in button if necessary (for SfHeroItem component) string	null	<input type="text"/> Set string


Hide props items




Hide props items

props

imageTag	string	...	<input type="text"/> Set string
nuxtImgConfig	object	...	<input type="text"/> Set object

Name	Description	Default	Control
 Hide Slots items			
Slots			
call-to-action	Named slot all-to-action for SfHeroItem component. Use this slot to replace default SfButton component.	-	
withImgTag	Named slot withImgTag for SfHeroItem component. Slot dedicated to img tags or other components with this tag (e.g. SfImage, SfCimage) that can be used as images for background. If you want to use this slot, make sure that background and image props are NOT provided (in SfHeroItem component).	-	
default	Default slot for SfHero component. Use this slot to pass SfHeroItems components	-	-
prev	Named slot for SfHero component. Use this slot to pass custom button that moves to the previous item	-	-
next	Named slot for SfHero component. Use this slot to pass custom button that moves to the next item	-	-
bullets	Named slot for SfHero component. Use this slot to pass custom markup for pagination bullets	-	-
title	Named slot for SfHeroItem component. Use this slot to replace title element	-	-
subtitle	Named slot for SfHeroItem component. Use this slot to replace subtitle element	-	-
 Hide CSS Modifiers items			

CSS Modifiers

classes  CSS classes to modify component styling



Name	Description	Default	Control
Hide Props for main component items			



Hide Props for main component items

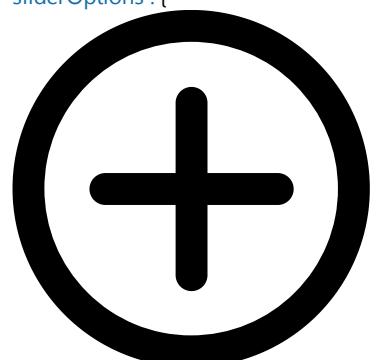
Props for main component
sliderOptions

Slider options from [glide.js documentation](#).


-

```
{ type: "slider",
  rewind: true,
  autoplay: 5000,
  perView: 1, gap:
  0, }
```


RAW
sliderOptions : {







type : "slider"



rewind : true



Name	Description	Default	Control
			autoplay : 5000
			
			perView : 1
			
			gap : 0
			
			}
			

[Stories](#)

[With Cloudinary Image](#)

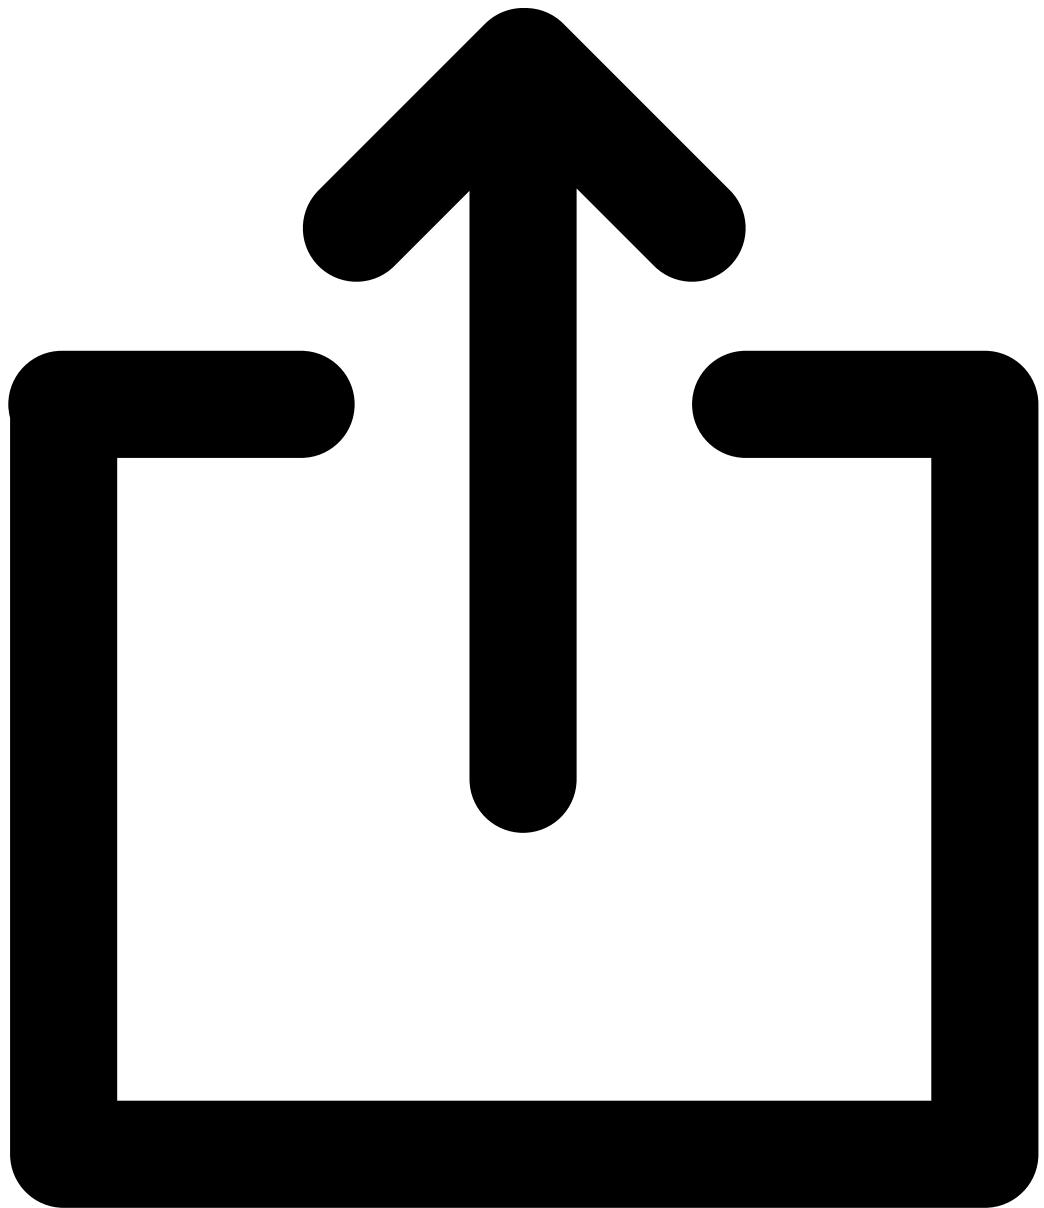
SUMMER COLLECTION 2019

Colorful summer dresses are already in store

Show code

List

Vertical list component. Built from main component - SfList and internal component - SfListItem.



All: 280

Skirts: 11

Dresses: 32

Belts: 101

Bag: 2

Trainers: 22

Sandals: 55

Show code

Name	Description	Default Control
Hide Slots items		



Hide Slots items

Slots

default

Default slot for SfList component. Use this slot to pass list content -

Set object

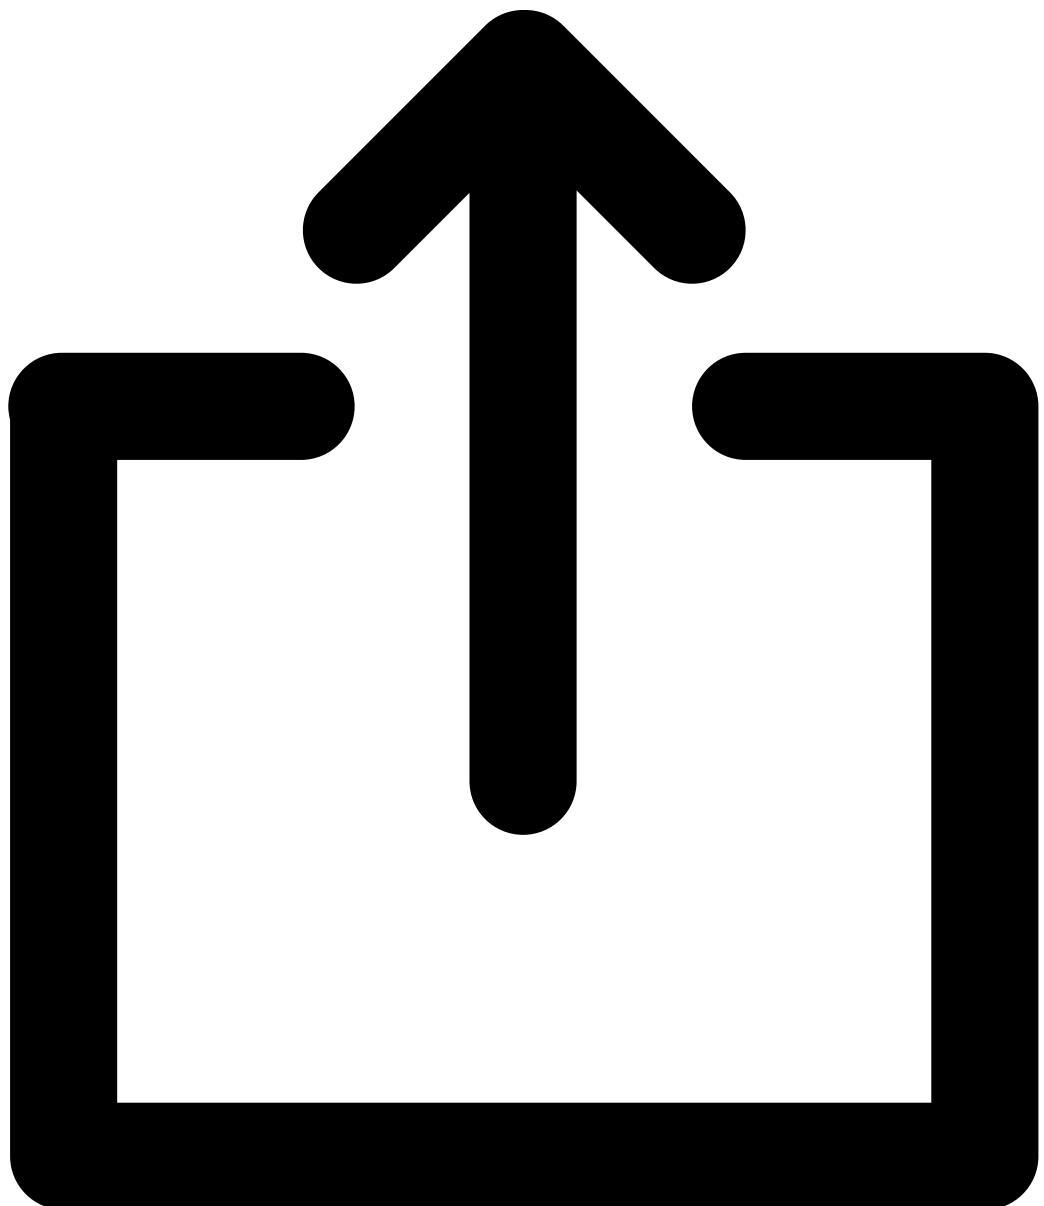
default

Default slot for SfListItem component. Use this slot to place list item content -

-

MegaMenu

MegaMenu component for page navigation. Built from main component - SfMegaMenu and internal component - SfMegaMenuColumn.



Man

CLOTHING



ACCESORIES >

SHOES >

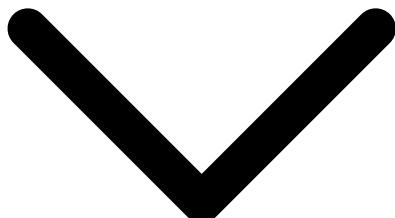
T-SHIRTS

THE OFFICE LIFE

T-SHIRTS

ECO SANDALS

Sh



Props for SfMegaMenuColumn component


title

Title of the column.
string

...

Menu

Name	Description	Default	Control
Hide Props for main component items			

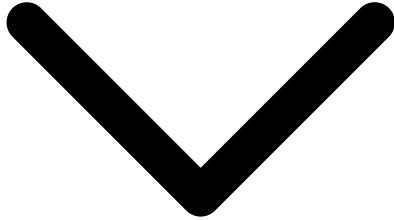


Hide Props for main component items

Props for main component

visible	Sets mega menu state to visible boolean	false	<input type="checkbox"/> FalseTrue
isAbsolute	Sets css position to absolute. boolean	false	<input type="checkbox"/> FalseTrue
transitionName	Sets transition name. Could be one of the default ones . string	sf-fade	<input type="text"/> sf-fade
asideTitle	*Depraceted. Sets title for aside column. string	***	<input type="text"/> Edit string...

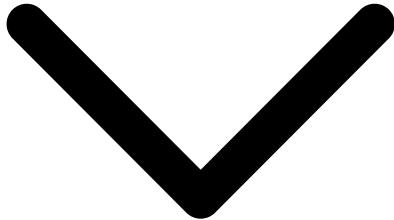Hide Events items







Hide Events items

Events


change

Emits change event when active menu item is changed -



Name	Description	Default	Control
		change : {	
		}	
close	Emits close event when back button is clicked	 RAW	close : { 
		}	

Name	Description	Default	Control
Hide Slots items			

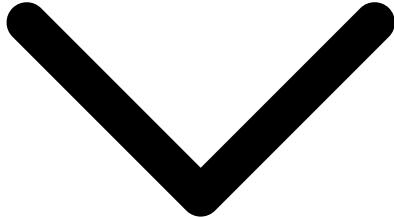

Hide Slots items

Slots

default	Default slot for SfMegaMenu component. Use this slot to pass menu columns	-	Set object
aside	Named slot for SfMegaMenu component. Use this slot to place content in aside element	-	Set object
default	Default slot for SfMegaMenuColumn component. Use this slot to place column's content	-	-
title	Named slot for SfMegaMenuColumn component. Use this slot to replace column's title	-	-

Stories

Use Aside Slot

<	Menu	>
CLOTHING		
ACCESORIES		
SHOES		

T-SHIRTS

THE OFFICE LIFE

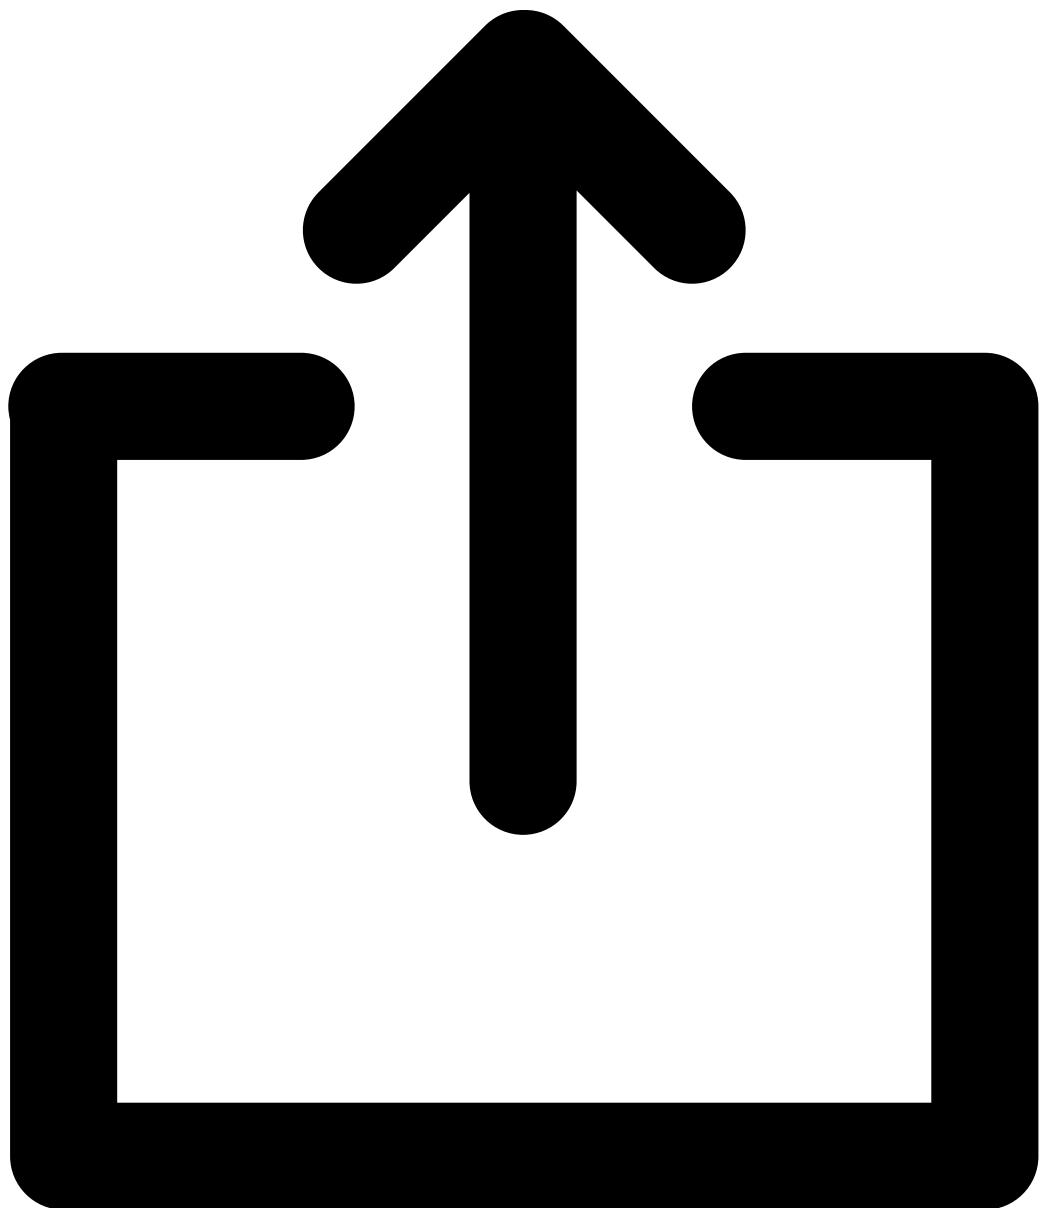
Show code

T-SHIRTS

ECO SANDALS

ProductCard

Product card component with image, description and rating.





Cotton Sweater

★★★★★ (7)

Show code

Name

Description

Default

Control



Hide Props items



Hide Props items

Props

image	Product image. It should be an url of the product string	...	/assets/storybook/Home/productB.jpg
title	Product title string	...	Cotton Sweater
scoreRating	Product rating numberboolean	false	4
maxRating	Maximum product rating numberstring	5	5
reviewsCount	Product reviews count numberboolean	false	7
showAddToCartButton	Status of showing add to cart button. boolean	false	<input checked="" type="checkbox"/> FalseTrue
imageWidth	Product image width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	216	
imageHeight	Product image height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	326	
badgeLabel	Badge label string	...	<input type="button"/> Edit string...
badgeColor	Badge color It can be according to our standard colors, or legitimate CSS color such as #fff, rgb(255,255,255)), and lightgray or nothing. Standard colors: primary, secondary, white, black, accent, green-primary, green-secondary, gray-primary, gray-secondary, light-primary, light-secondary, pink-primary, pink-secondary, yellow-primary, yellow-secondary, blue-primary, blue-secondary. string		<input type="button"/> Choose color...

Name	Description	Default	Control
colors	Product colors It should be an array of objects array	[]	 RAW colors : [ ]
link	Link to product page stringobject	null	<input type="button" value="Set string"/>
linkTag	*deprecated. Link element tag. Use slot to replace content string	---	<input type="button" value="Edit string..."/>
regularPrice	Product regular price numberstring	null	<input type="button" value="Edit number..."/>
specialPrice	Product special price numberstring	null	<input type="button" value="Edit number..."/>
wishlistIcon	Wish list icon This is the default icon for product not yet added to wish list. It can be a icon name from our icons list, or array or string as SVG path(s). "heart" stringarrayboolean		<input type="button" value="heart"/>
isInWishlistIcon	Wish list icon for product which has been added to wish list This is the icon for product added to wish list.Default visible on mobile.Visible only on hover on desktop. It can be a icon name from our icons list, or array or string as SVG path(s).	"heart_fill"	<input type="button" value="heart_fill"/>
isInWishlist	Status of whether product is on wish list or not. boolean	false	<input type="checkbox"/> FalseTrue
isAddedToCart	isAddedToCart status of whether button is showed, product is added or not. boolean	false	<input type="checkbox"/> FalseTrue
addToCartDisabled	addToCartDisabled status of whether button is disabled when out of stock. boolean	false	<input type="checkbox"/> FalseTrue



props

Name		Description	Default	Control
imageTag	string		""	<button>Set string</button>
nuxtImgConfig	object		""	<button>Set object</button>

[Hide Events items](#)




[Hide Events items](#)

Events


click:reviews Emits click:reviews event when reviews count button is clicked



click:reviews :{



-









}

click:wishlist Emits click:wishlist event when add to wishlist button is clicked



click:wishlist :{



Name	Description	Default	Control
		}	
click:colors	Emits click:colors event when color is chosen	-	 RAW click:colors :{
		-	
click:addToCart	Emits click:add-to-cart event when add to cart button is clicked	-	
		-	
			
events			
click:add-to-cart	unknown		
			
Slots			

Name	Description	Default	Control
badge	Use this slot to replace badge element	-	Set object
wishlist-icon	Use this slot to replace wishlist icon	-	Set object
add-to-cart	Use this slot to replace add to cart button	-	Set object
add-to-cart-icon	Use this slot to replace add to cart icon (it's visible before an item will be added to cart)	-	Set object
adding-to-cart-icon	Use this slot to replace add to cart icon (it's visible during adding an item to cart)	-	Set object
price	Use this slot to replace price element	-	Set object
reviews	Use this slot to replace reviews element	-	Set object
image	Use this slot to replace image element	-	-
colors	Use this slot to replace color picker element	-	-
title	Use this slot to replace title element	-	-

⌚ Stories

⌚ With Color Picker



+ Colors

Cotton Sweater

★★★★★ (7)

Show code

⌚ With Link



Cotton Sweater

★★★★★ (7)

Show code

⌚With Badge



-50%



Cotton Sweater

★★★★★ (7)

Show code

⌚Added To Cart



Cotton Sweater

★★★★★ (7)

Show code

⌚Added To Wishlist



Cotton Sweater

★★★★★ (7)

Show code

⌚With Multiple Images



Cotton Sweater

★★★★★ (7)

Show code

⌚With Price Range



Cotton Sweater

\$3.99 - \$19.09

★★★★★ (7)

Show code

Use Image Slot



CUSTOM IMAGE

Cotton Sweater

★★★★★ (7)

Show code

Use Add To Cart



CUSTOM ADD TO
CART

Cotton Sweater

★★★★★ (7)

Show code

Use Colors Slot



CUSTOM COLORS

Cotton Sweater



Show code

[Use Title Slot](#)



Cotton Sweater



Show code

[Use Wishlist Icon Slot](#)



Cotton Sweater

★★★★★ (7)

Show code

☛ Use Price Slot



Cotton Sweater

★★★★★ (7)

Show code

☛ Use Reviews Slot




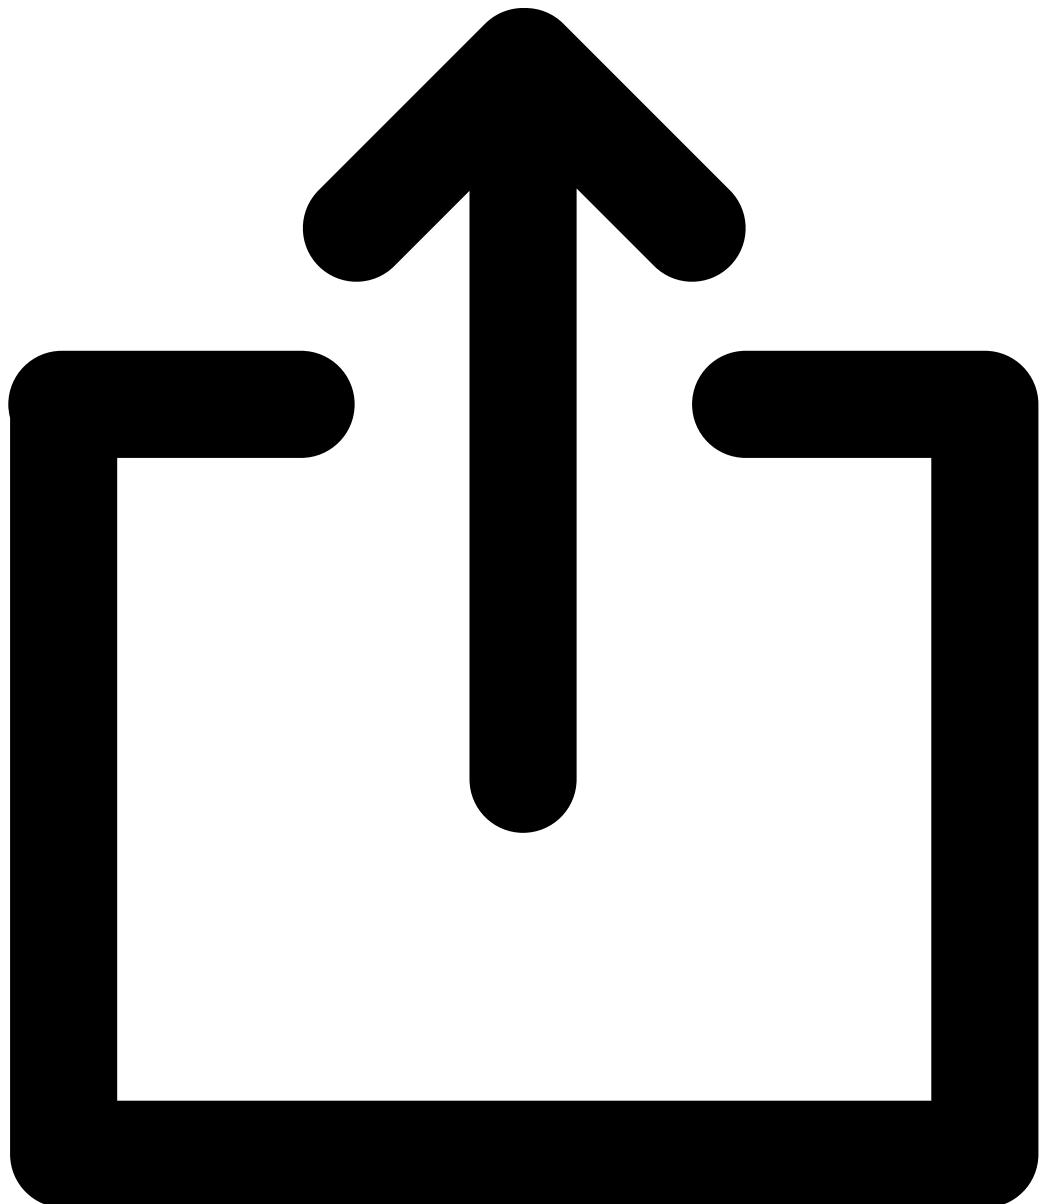
Cotton Sweater

★★★★★ (7)

Show code

ProductCardHorizontal

Product card horizontal component with image, description, rating and add to cart button.





Cream Beach Bag



Size: XXS ▾


Colour: Maroon ▾





\$10.99

★★★★★ (7)

[Show code](#)**Name****Description****Default****Control** [Hide Props items](#)[Hide Props items](#)**Props**

title	Product title string	""	Cream Beach Bag
description	Product description string	""	Find stunning women cocktail and party dresses. Stand out in lace and metallic cocktail dresses and party dresses from all your favorite brands.
regularPrice	Product regular price numberstring	null	Edit number...
scoreRating	Product rating numberboolean	false	4
maxRating	Maximum product rating numberstring	5	5
reviewsCount	Product reviews count numberboolean	false	7
image	Product image. It should be an url of the product string,array,objetc	""	assets/storybook/SfProductCardHorizontal/productA.jpg
imageWidth	Product image width, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	140	
imageHeight	Product image height, without unit. Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. numberstring	200	
link	Link to product page stringobject	undefined	Edit string...
linkTag	*Deprecated. Link element tag. Use slot to replace content string	""	Edit string...
specialPrice	Product special price numberstring	null	Edit number...
wishlistIcon	Wish list icon. This is the default icon for product not yet added to wish list. It can be a icon name from our icons list, or array or string as SVG path(s). stringarrayboolean	"heart"	heart
isInWishlistIcon	Wish list icon for product which has been added to wish list. This is the icon for product added to wish list.Default visible on mobile.Visible only on hover on desktop. It can be a icon name from our icons list, or array or string as SVG path(s). stringarray	"heart_fill"	heart_fill
isInWishlist	Status of whether product is on wish list or not boolean	false	<input type="checkbox"/> FalseTrue
qty	Selected quantity	1	

Name	Description	Default	Control
numberstring			
Hide props items			
	Hide props items		
props			
imageTag	string	""	Set string
nuxtImgConfig	object	""	Set object
Hide Events items			
	Hide Events items		
Events			
click:reviews	Emits click:reviews event when reviews count button is clicked	-	 RAW click:reviews :{ 
input	Emits input event when quantity selector's value is changed	-	 RAW

Name	Description	Default	Control
			input:{  } 
click:wishlist	Emits click:wishlist event when add to wishlist button is clicked	-	 RAW clickwishlist:{  } 
click:addToCart	Emits click:add-to-cart event when add to cart button is clicked	-	-
	<input type="button" value="Hide events items"/>		
	<input type="button" value="Hide events items"/>		
events			
click:add-to-cart	unknown	-	<input type="button" value="Set object"/>

Name	Description	Default	Control
	Hide Slots items		
	Hide Slots items		
Slots			
configuration	Use this slot to place content inside configuration	-	Set object
price	Use this slot to replace price element	-	Set object
reviews	Use this slot to replace reviews element	-	Set object
actions	Use this slot to place content inside actions	-	Set object
add-to-cart	Use this slot to replace add to cart button	-	Set object
wishlist-icon	Use this slot to replace wishlist icon	-	Set object
image	Use this slot to replace image element	-	-
title	Use this slot to replace title element	-	-
description	Use this slot to replace description element	-	-

Stories

With Multiple Images

 Cream Beach Bag 

Size: XXS ▾

Colour: Maroon ▾

\$10.99

★★★★★ (7)

[Show code](#)

Added To Wishlist

 Cream Beach Bag 

Size: XXS ▾

Colour: Maroon ▾

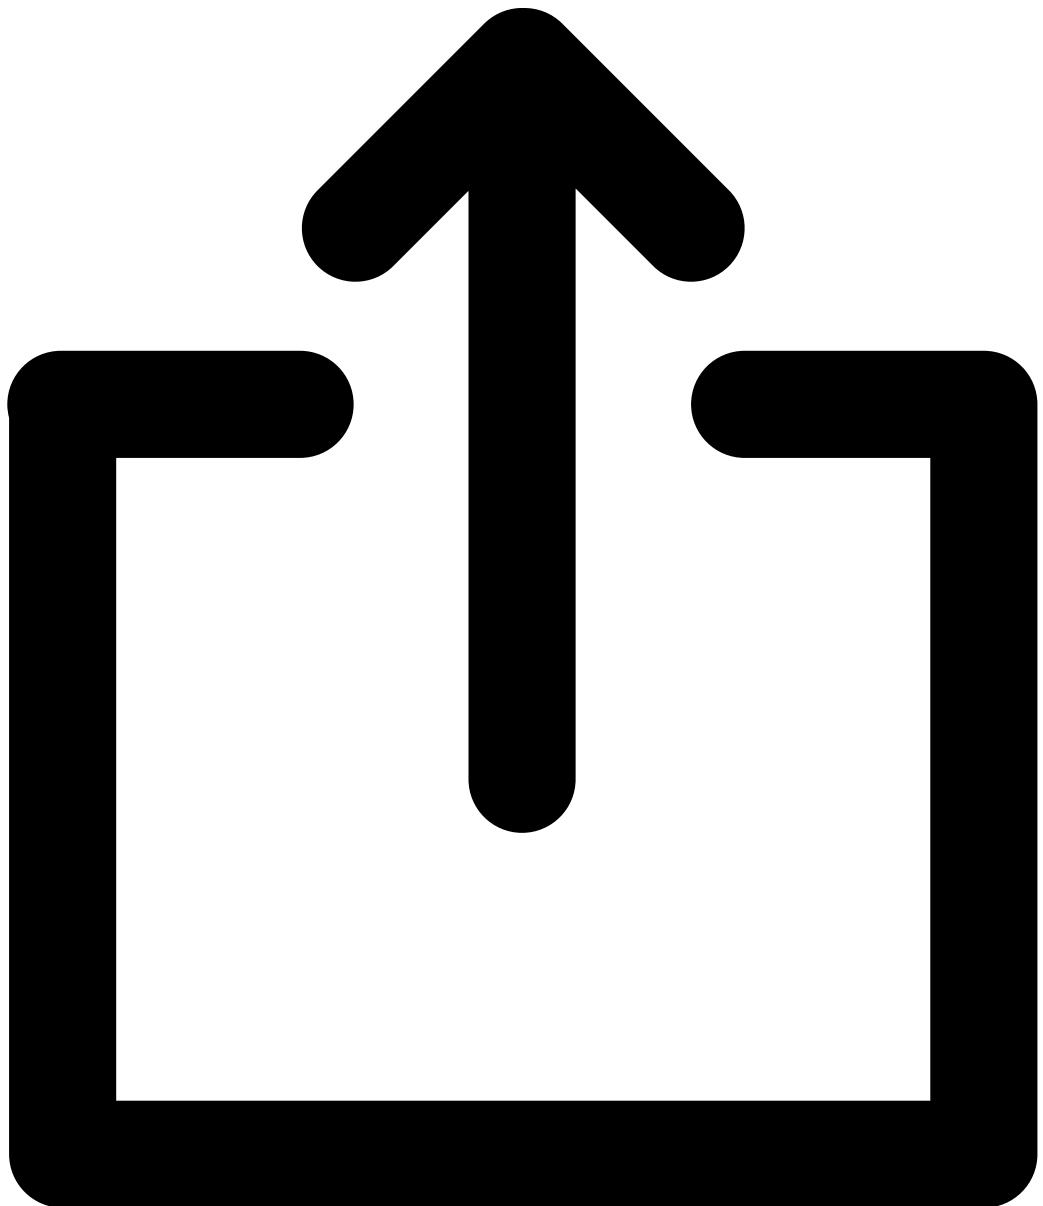
\$10.99

★★★★★ (7)

[Show code](#)

Sidebar

Sidebar component disabling on Cancel button click.



Show code

Name

Description

Default

Control

[Hide Props items](#)



[Hide Props items](#)

Props

visible	The sidebar's visibility boolean	false	<input checked="" type="checkbox"/> FalseTrue
title	The sidebar's title string	""	<input type="text"/> My Cart
subtitle	The sidebar's subtitle string	""	<input type="text"/> Edit string...
headingLevel	The heading's level number	3	<input type="text"/> 3
button	The close button boolean	true	<input checked="" type="checkbox"/> FalseTrue
overlay	The overlay's visibility boolean	true	<input checked="" type="checkbox"/> FalseTrue
persistent	If true clicking outside will not dismiss the sidebar boolean	false	<input type="checkbox"/> FalseTrue
position	Animation class name based on position value string	left	<input type="button"/> Set string

[Hide Events items](#)



[Hide Events items](#)

Events

close	Emits close event when close button or overlay is clicked -
-------	---



Name	Description	Default	Control
------	-------------	---------	---------

close : {

}

No code available

 **No Overlay**

No code available

 **Persistent**

No code available

 **Use Title Slot**

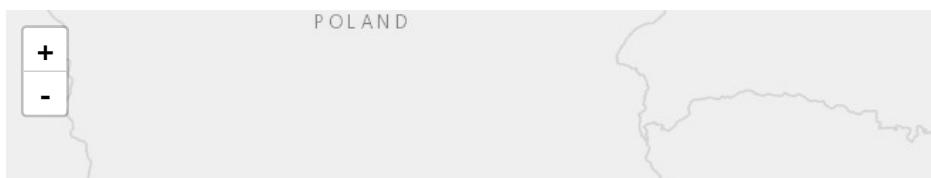
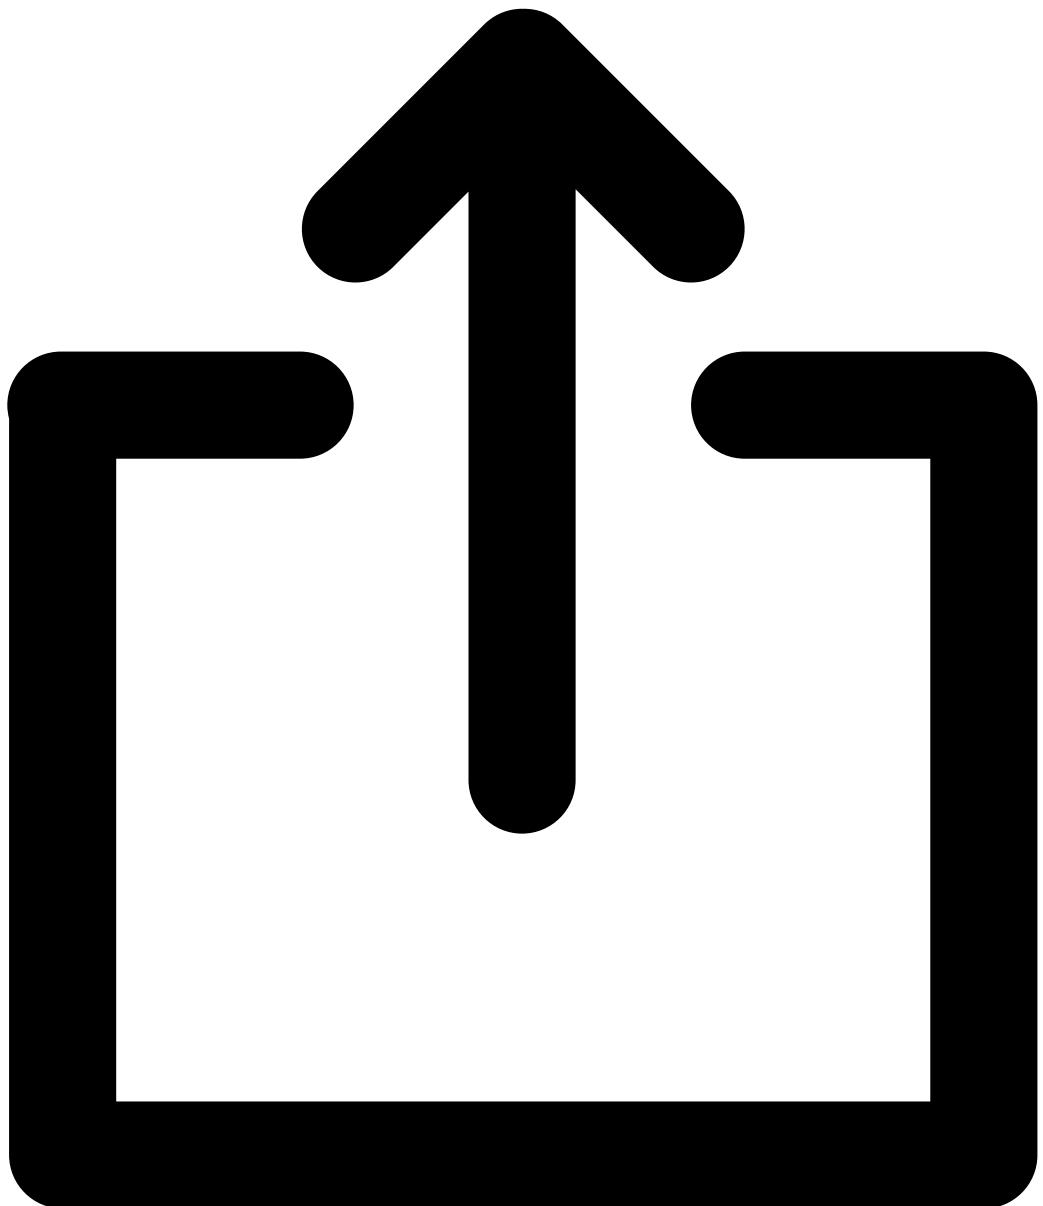
No code available

⌚Use Circle Icon Slot

No code available

StoreLocator

Component locating and marking on map using tile data. Built from main component - SfStoreLocator and internal components - SfStoreLocatorItem.





[Leaflet](#) | Tiles © Esri — Esri, DeLorme, NAVTEQ

Stores found: 1

 Placeholder Store
Budapest, Deák Ferenc u. 19, 1052

 (70) 881 9463

 example@email.com

Show code

Name

Hide Props for main component items

Description

Default

Control 




Hide Props for main component items






Props for main component
center

Initial center of the map, overridden when the user position is captured, supports sync modifier string




RAW
center : [



Name	Description	Default	Control
		0 : 47.5104387	
		1 : 19.0444433	
]	
markerIconSize	Size of the icon [width, height] array	21,28	RAW markerIconSize : [
		0 : 21	

Name	Description	Default	Control
		1 : 28	
]	
markerIconAnchor	Position of the anchor in the icon [x, y] array	10.5,0	 markerIconAnchor : [
		0 : 10.5	
		1 : 0	
			

Name	Description	Default	Control
]	
tileServerUrl	Url of selected tileserver string	string	
tileServerAttribution	Attribution line of selected tileserver string	Tiles © Esri — Esri, DeLorme, NAVTEQ	<input type="button" value="default"/> Tiles © Esri — Esri, DeLorme, NAVTEQ
zoom	Initial zoom of the map number	6	<input type="text" value="6"/>
maxZoom	Max zoom allowed, consider tileserver limitation when setting this number	16	<input type="text" value="16"/>
mapOptions	Options to pass to leaflet map object	{}	 RAW mapOptions : {

Name	Description	Default	Control
tileLayerOptions	Options to pass to leaflet tile-layer object	{ }	 RAW tileLayerOptions : { 
markerOptions	Options to pass to leaflet marker object	{ }	 RAW markerOptions : { 
flyToStoreZoom	Zoom to be set when centering map on clicked store number	15	<input type="text" value="15"/>

Name	Description	Default	Control
Hide Props for SfStore component items			



Hide Props for SfStore component items

Props for SfStore component


latlng

Name of the store (for internal component)
array


[]

RAW
latlng : [

0 : 47.4968864



1 : 19.0531093



Name	Description	Default	Control
address	Url of the picture of the store (for internal component) string	""	Budapest, Deák Ferenc u. 19, 1052
phone	Phone number of the store (for internal component) string	null	(70) 881 9463
email	Email of the store (for internal component) string	null	example@email.com
name	Name of the store (for internal component) string	""	Store
picture	Address of the store (for internal component) string	null	/assets/storybook/SfStore/storeA.png
pictureWidth	Picture width (for internal component). Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. string	null	Edit string...
pictureHeight	Picture height (for internal component). Could be an integer passed as Number or String type, but values like 'auto' or '100%' are not allowed. string	null	Edit string...

[Hide Slots items](#)



[Hide Slots items](#)

Slots		
distance	Named slot for SfStore component. Use this slot to replace distance element	-
media	Named slot for SfStore component. Use this slot to show media elements	-
heading	Named slot for SfStore component. Use this slot to replace name element	-
default	Default slot for SfStoreLocator component. Use this slot to show stores cards	-
marker-icon	Named slot for SfStoreLocator component. Use this slot to change the icon of the stores, remember to update - markerIconSize and markerIconAnchor accordingly	-
map-loading	Named slot for SfStoreLocator component. Use this slot - to customize the loading indicator while the map	-

Name	Description	Default	Control
default	library loads Default slot for SfStore component. Use this slot to place information about store	-	-

[Hide Events items](#)



[Hide Events items](#)

Events

update:zoom	Emits update:zoom event when map zoom is changed	-	-
library:loaded	Emits library:loaded event when vue2-leaflet library is loaded	-	-
map:ready	Emits map:ready event when map component is ready	-	-
location:error	Emits location:error event when access to user geolocation is denied	-	-
update:center	Emits update:center event when center of the map is changed	-	-

Stories

Use Map Loading Slot



Leaflet | Tiles © Esri — Esri, DeLorme, NAVTEQ

Stores found: 1

 Store
Placeholder Budapest, Deák Ferenc u. 19, 1052

 (70) 881 9463

 example@email.com

Show code

Use Marker Icon Slot



[Leaflet](#) | Tiles © Esri — Esri, DeLorme, NAVTEQ

Stores found: 1

 Store
Placeholder Budapest, Deák Ferenc u. 19, 1052


 (70) 881 9463

 example@email.com

Show code

Table

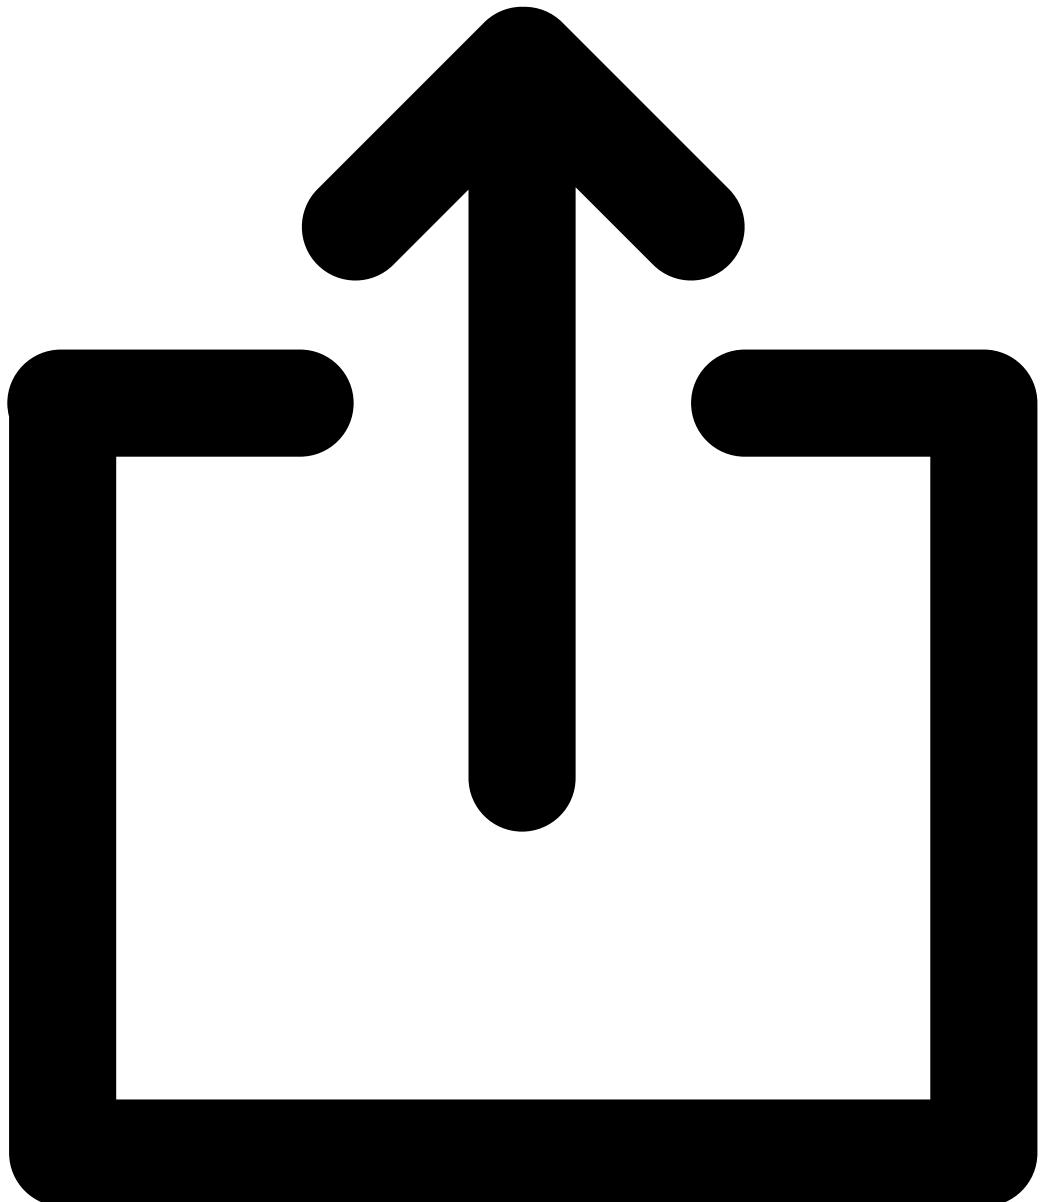Table component with inner rows, headers and data. Built from main component - SfTable and internal components - SfTableData, SfTableHeader, SfTableHeading, SfTableRow.



Order ID
Pay. date

Pay. method
Amount

Status
[Download all](#)

#35767

Paypal

Finalise

Order ID	Pay. method	Status
Pay. date	Amount	
4th Nov	12.00\$	View details
#35767	Visa	In process
4th Nov	15.00\$	View details
#35767	Paypal	Finalise
4th Nov	12.00\$	View details

[Show code](#)

Name	Description	Default	Control
------	-------------	---------	---------

[Hide Slots items](#)[Hide Slots items](#)

Slots

default	Default slot for SfTable component. Use this slot to pass data to your table	-	Set object
default	Default slot for SfTableData component. Use this slot to pass data to <td> tag	-	-
default	Default slot for SfTableHeader component. Use this slot to pass data to <th> tag	-	-
default	Default slot for SfTableHeading component. Use this slot to pass data to <tr> tag in <thead> tag	-	-
default	Default slot for SfTableRow component. Use this slot to pass data to <tr> tag in <tbody> tag	-	-

[Hide CSS Modifiers items](#)[Hide CSS Modifiers items](#)

CSS Modifiers

classes	CSS classes to modify component styling
-	-



Stories

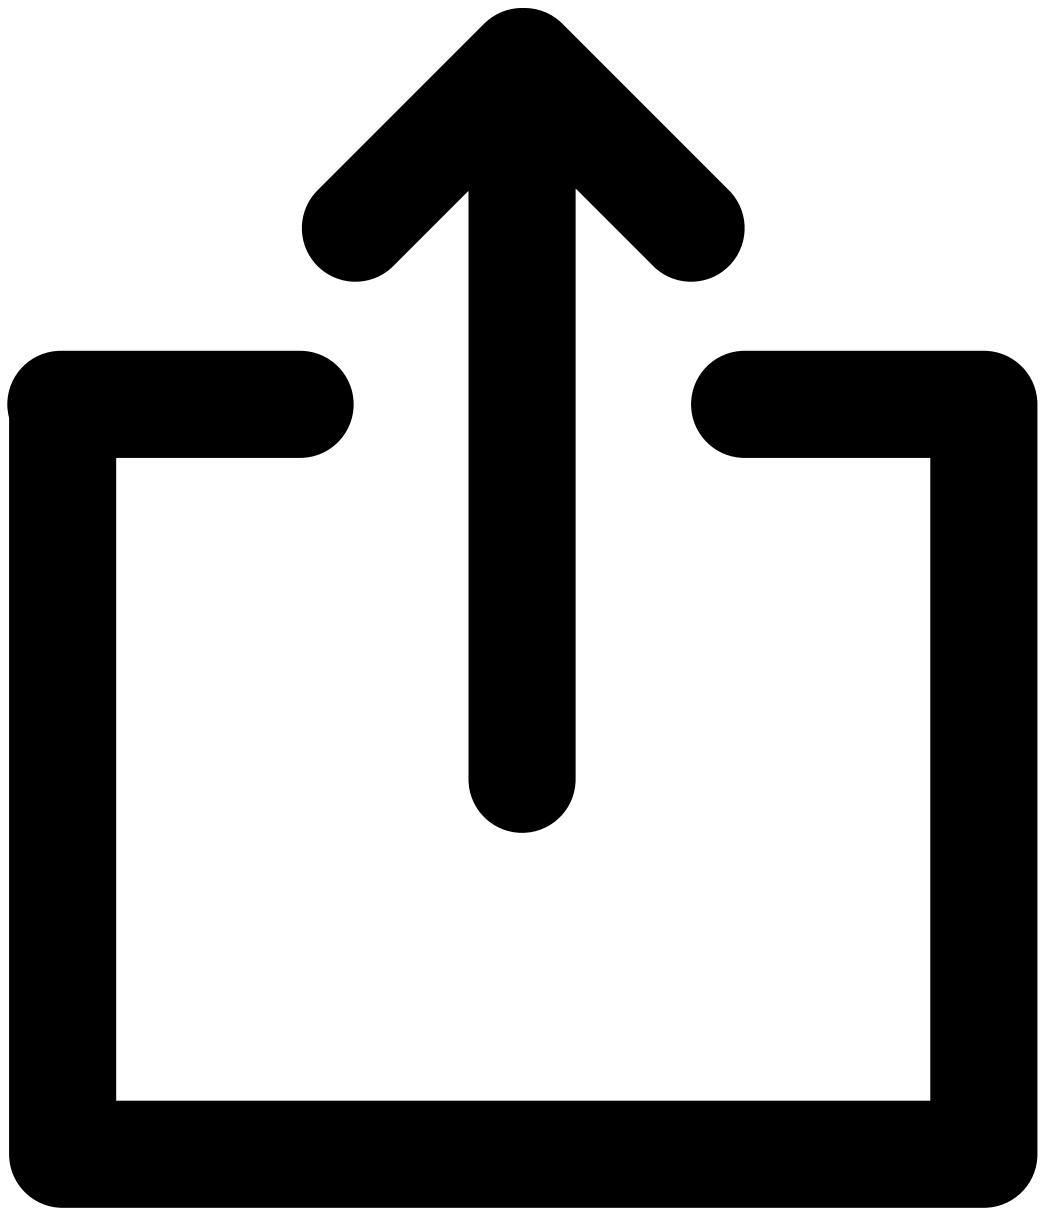
Without Border

Order ID Pay. date	Pay. method Amount	Status Download all
#35767 4th Nov	Paypal 12.00\$	Finalise View details
#35767 4th Nov	Visa 15.00\$	In process View details
#35767 4th Nov	Paypal 12.00\$	Finalise View details

[Show code](#)

Tabs

Component with tab-related content. Built from main component - SfTabs and internal component - SfTab.



Show code

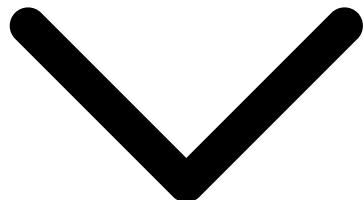
Name

Description

Default

Control 

[Hide Props for main component items](#)



[Hide Props for main component items](#)

Props for main component

openTab

Which tab should be open
number

1

1

tabMaxContentHeight

Max height of visible content
string

""

6.25rem

tabShowText

Text for button showing content
string

""

show

tabHideText

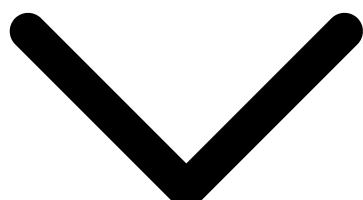
Text for button hiding content
string

""


hide

[Hide Props for SfTab component items](#)

[Hide Props for SfTab component items](#)



Name	Description	Default	Control
Props for SfTab component			
title	Title of the tab string	""	<input type="text" value="Edit string..."/>
<button>Hide Slots items</button>			

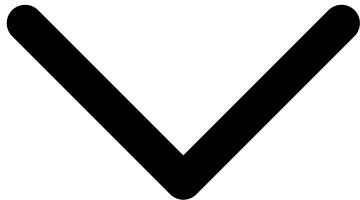


Hide Slots items

Slots

default	Default slot for SfTabs component. Use this slot to pass your tabs	-	<button>Set object</button>
default	Default slot for SfTab component. Use this slot to place tab's content	-	-
title	Named slot title for sfTab component. Use this slot to replace title element	-	-

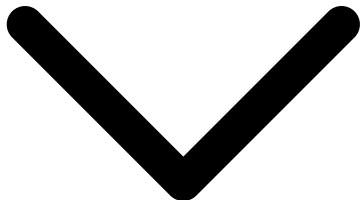Hide Events items



Hide Events items

Events

click:tab	Emits click:tab event with index of the tab when active tab is changed	-	-
-----------	--	---	---

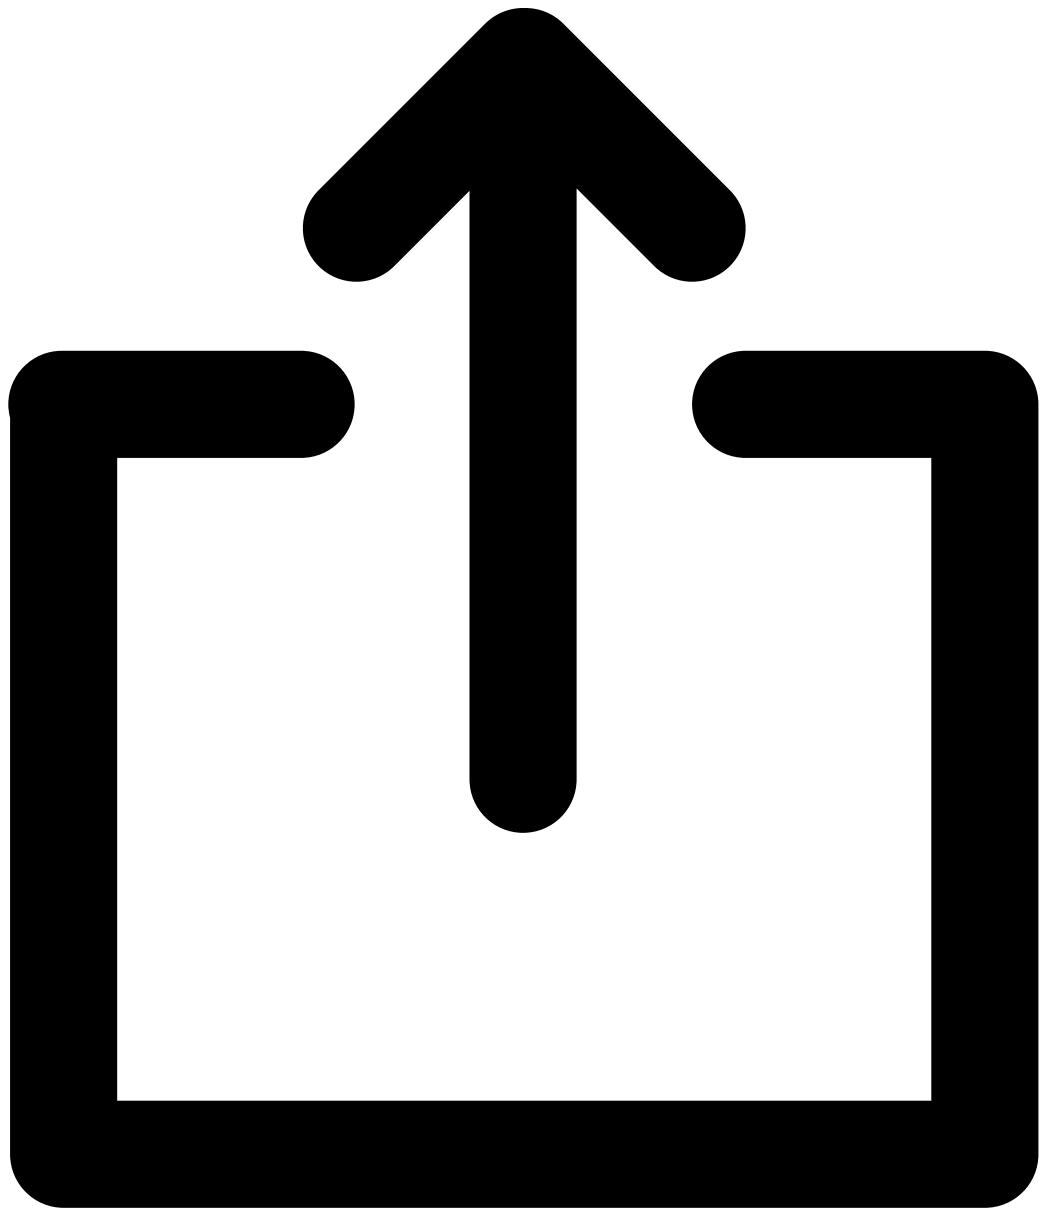
Stories

Change Tabs With Buttons

No code available

TopBar

Top Bar component with right or left aligned content.



[Help & FAQs](#)



\$



[Show code](#)

Name	Description	Default Control
Hide Slots items		



[Hide Slots items](#)

Slots

left	Use this slot to place left content -	Set object
center	Use this slot to place center content -	Set object
right	Use this slot to place right content -	Set object

[Stories](#)

[Use Left Slot](#)

Download our application.

\$



[Show code](#)

[Use Right Slot](#)

Help & FAQs

Download our application.

[Show code](#)

[Use Center Slot](#)

Help & FAQs

#center slot

[Show code](#)

Category example page



280 Items

Filters



+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00





+ Colors

Cream Beach Bag

\$50.00



+ Colors

Cream Beach Bag

\$50.00



← 1 2 3 4 →

Show code

Checkout example page

Details

Shipping

Payment

Review

[LOG INTO YOUR ACCOUNT](#)

or fill the details below:

Personal details

First name *

Last name *

Your email *

Enjoy these perks with your free account!

 Faster checkout

 Earn credits with every purchase

[GO TO SHIPPING](#)

[GO BACK](#)

Order review

Products :	3
Subtotal :	\$90.10
Shipping :	\$0.00
Total price :	\$90.10

Enter promo code

APPLY



Safety

It carefully packaged with a personal touch



Easy shipping

You'll receive dispatch confirmation and an arrival date



Changed your mind?

Rest assured, we offer free returns within 30 days

Show code

② DetailedCart example page

Order review

Products :	0
Subtotal :	\$0.00
Shipping :	
Total price :	\$0.00

Enter promo code

APPLY

 Cream Beach Bag Modern Style ⋮
\$50.00
- + Size : XS Color : White Remove
<hr/>  Cream Beach Bag Modern Style ⋮
\$50.00
- + Size : XS Color : White Remove
<hr/>  Cream Beach Bag Modern Style ⋮
\$50.00

-

+

Size : XS
Color : White

Remove

Show code

[Error example page](#)



Page not found

We are sorry that we can't find the page, please go back or try again

[RETURN HOME](#)

[Back](#)

[Show code](#)

[**Home example page**](#)

SUMMER COLLECTION 2020

Colorful summer dresses are already in store

T-SHIRTS

THE OFFICE LIFE

SUMMER SANDALS

ECO SANDALS

Subscribe to Newsletters

Be aware of upcoming sales and events. Receive gifts and special offers!

[SUBSCRIBE](#)

Match with it

[See all](#)



+ Colors

Cream Beach Bag

\$ 50.00

★★★★★ (8)

+ Colors

Cream Beach Bag

~~\$50.00~~ \$ 25.00

★★★★★ (8)

+ Colors

Cream Beach Bag

\$ 50.00

★★★★★ (8)

+ Colors

Cream Beach Bag

\$ 50.00

★★★★★ (8)

Share Your Look

#YOURLOOK



[Show code](#)

[Login example page](#)

OPEN MODAL

[Show code](#)

MyAccount example page

<

My profile

Personal data

Feel free to edit any of your details below so your account is always up to date

First Name *

Last Name *

Your e-mail *

SAVE CHANGES

At Brand name, we attach great importance to privacy issues and are committed to protecting the personal data of our users. Learn more about how we care and use your personal data in the [Privacy Policy](#).

Password change

Show code

Product example page

 Product A

 Product A  Product B  Product A  Product B

Cashmere Sweater

\$50.00



 (2)

[Read all reviews](#)

Size



- +

ADD TO CART

Description

The Karissa V-Neck Tee features a semi-fitted shape that's flattering for every figure. You can hit the gym with confidence while it hugs curves and hides common 'problem' areas. Find stunning women's cocktail dresses and party dresses.

Product Code : **435435**

Material : **Cotton**

Category : **Pants**

Country : **Poland**

[Read reviews](#)

Additional Information

[Show code](#)

Static example page

<

About us

[Security](#)

Personal information provided on the website and online credit card transactions are transmitted through a secure server. We are committed to handling your personal information with high standards of information security. We take appropriate physical, electronic, and administrative steps to maintain the security and accuracy of personally identifiable information we collect, including limiting the number of people who have physical access to our database servers, as well as employing electronic security systems and password protections that guard against unauthorized access.

[Privacy Policy](#)

[Additional Information](#)

Show code

✉ Thank You example page

Thank you for your order!

Order No.

#80932031-030-00

Your Purchase

You have successfully placed the order. You can check status of your order by using our delivery status feature. You will receive an order confirmation e-mail with details of your order and a link to track its progress.

Primary contacts for any questions

Divante Headquarter
St. Dmowskiego 17, 53-534
Wroclaw, Poland

demo@vuestorefront.io

[ALLOW ORDER NOTIFICATIONS](#)

Your Account

You can log to your account using e-mail and password defined earlier. On your account you can edit your profile data, of transactions, edit subscription to newsletter.

What can we improve

Your feedback is important to us. Let us know what we could improve.

[SEND MY FEEDBACK](#)

[BACK TO HOME PAGE](#)

[Show code](#)

Cart example page

<

My Cart



Cream Beach Bag Modern Style

⋮

\$50.00

-

+

Size: XS

Color: White

[Remove](#)



Cream Beach Bag Modern Style

⋮

\$50.00

-

+

Size: XS

Color: White

[Remove](#)



Cream Beach Bag Modern Style

⋮

\$50.00

Size: XS

Color: White

Total price :

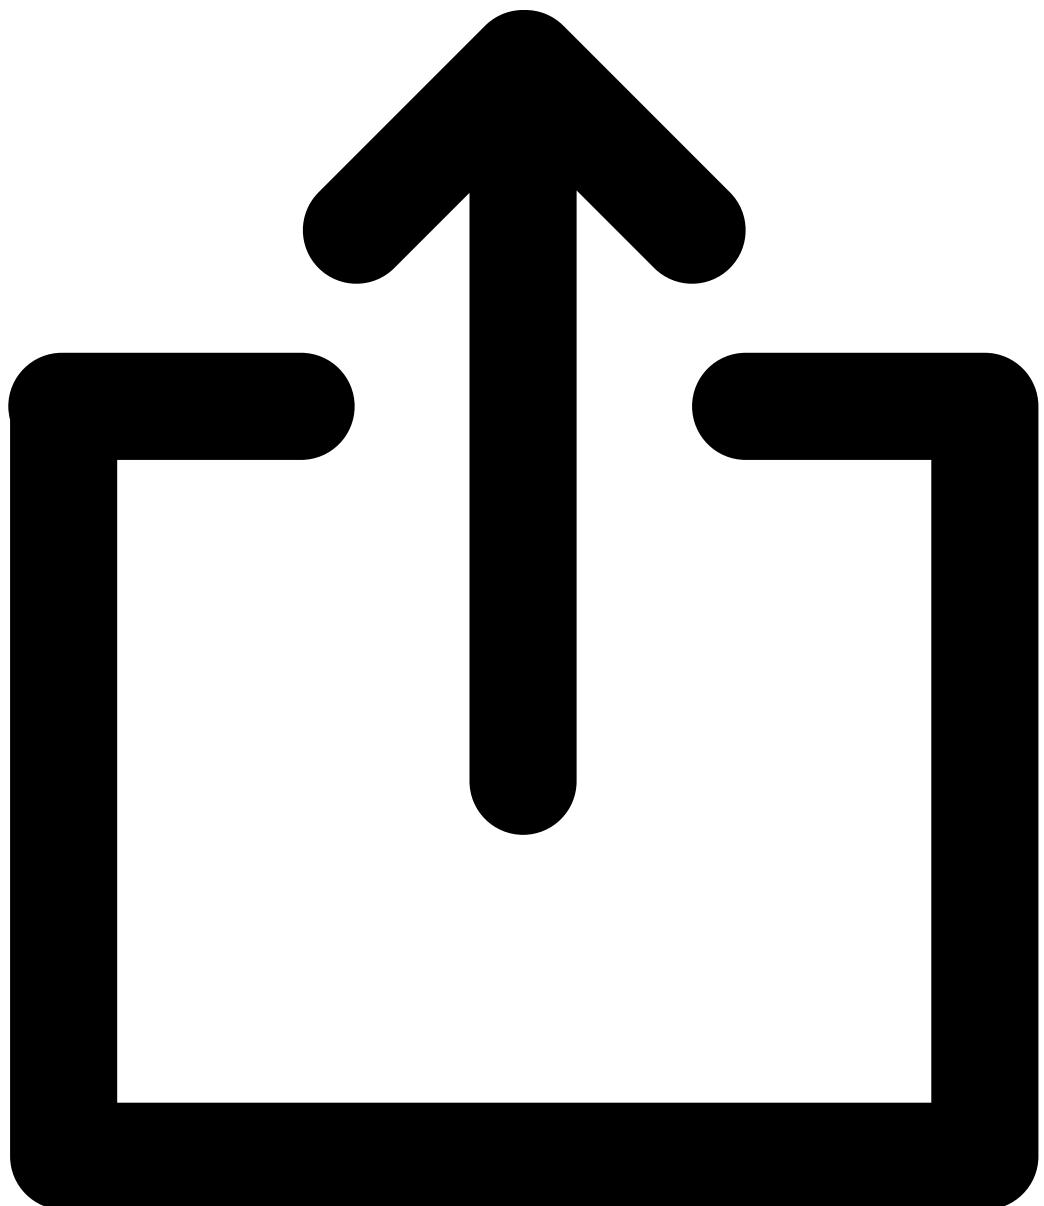
200.00

[GO TO CHECKOUT](#)

[Show code](#)

ConfirmOrder

Component with details of the order. Part of checkout



Order details

Item	Description	Colour
Size	Quantity	Amount
 Placeholder	Cream Beach Bag MSD23-345-324	White
XS	1	\$50.00
 Placeholder	Vila stripe maxi dress MSD23-345-325	White
XS	2	\$20.05
Subtotal :		\$90.10
Shipping :		\$5.99
Total price :		\$96.09

I agree to [Terms and conditions](#)

[Show code](#)

Name

Description

Default

Control





[Hide Props items](#)













[Hide Props items](#)


Props

orderTitle	Heading text string	"Order details"	<input type="text" value="Order details"/>
orderTitleLevel	Heading text size number	2	<input type="text" value="2"/>
order	Order data object	""	 RAW

Name	Description	Default	Control
propertiesNames	The array of names for order summary array	["Subtotal", "Shipping", "Total price"]	 RAW propertiesNames : [
			
			
			
			
			order : {
			}

Name	Description	Default	Control
			0 : "Subtotal"
			
			1 : "Shipping"
			
			2 : "Total price"
			
]
			
tableHeaders	Order table headers array	["Size", "Description", "Quantity", "Colour", "Amount"]	 RAW tableHeaders : [

Name	Description	Default	Control
			0 :"Size"
			
			1 :"Description"
			
			2 :"Quantity"
			
			3 :"Colour"
			
			4 :"Amount"
			
]

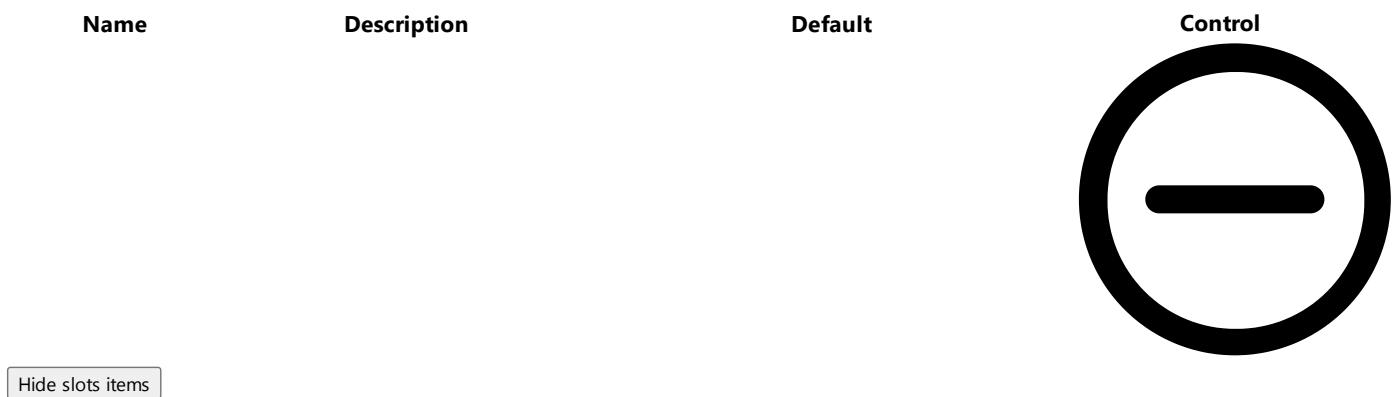

slots

heading	unknown	-	<input type="button" value="Set object"/>
table	unknown	-	<input type="button" value="Set object"/>
summary	unknown	-	<input type="button" value="Set object"/>
checkbox	unknown	-	<input type="button" value="Set object"/>

✉ Form example page

First name *

Last name *

Street name *

House/Apartment number *

City *

Zip-code *

Country *

Phone number *

Email *

Prices



0,00 €

1,00 €

Message *

-

type a message

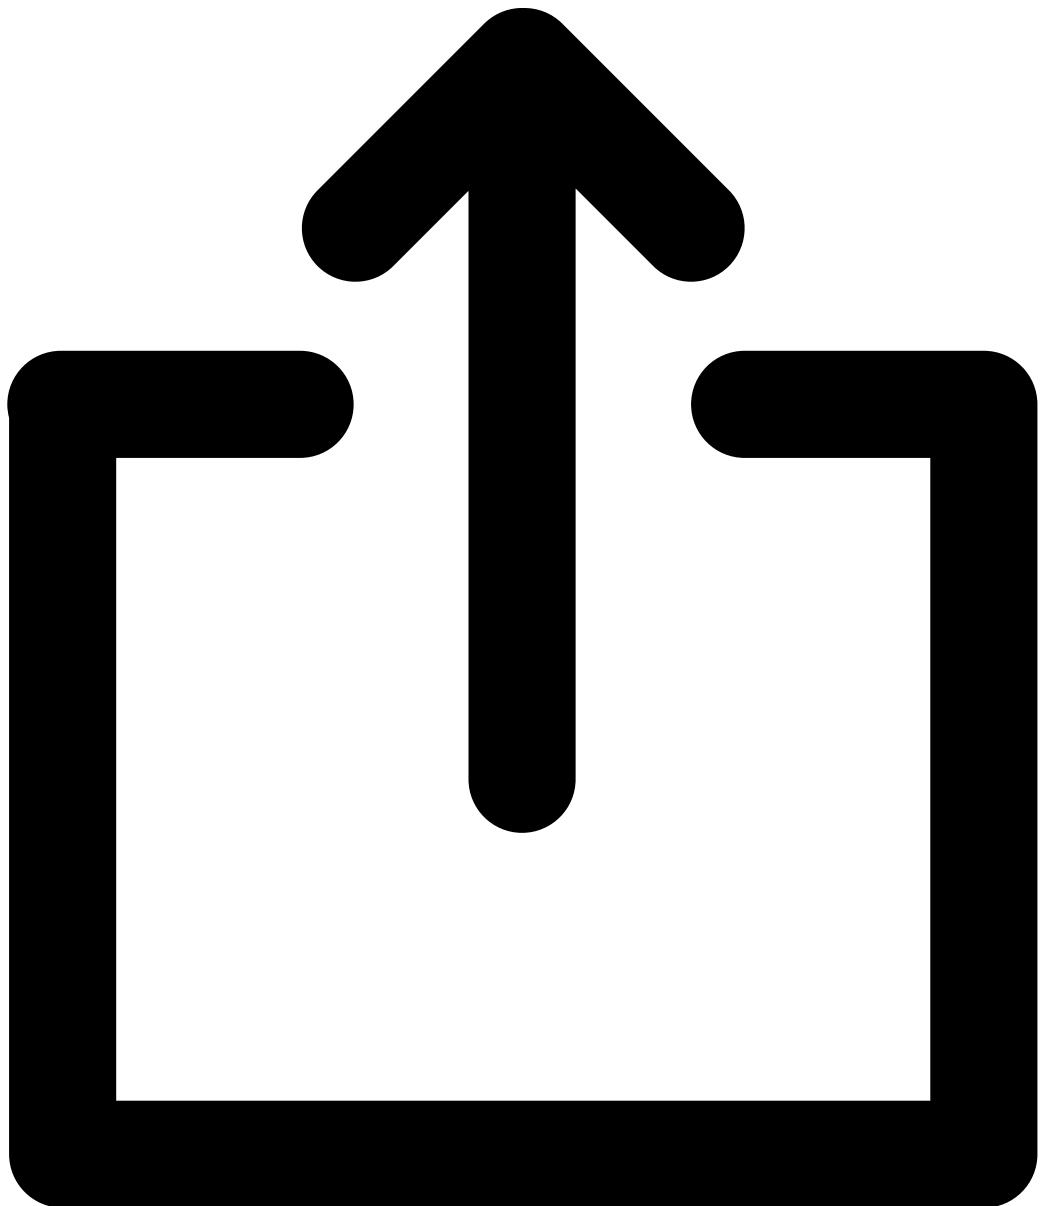
SUBMIT

Reset

Show code

MyNewsletter

Component with sign in for newsletter. Part of account. Can be filled with other content.



My newsletter

Set up your newsletter and we will send you information about new products and trends from the sections you selected every week.

Sections that interest you

Woman

Man

Children

SAVE CHANGES

I have read and understand the [Privacy](#) and [Cookies Policy](#) and agree to receive personalized commercial information from Brand name by email.

Show code

Name

Description

Default

Control





Hide Props items



Hide Props items

Props

tabTitle	Label for tab title string	"My newsletter"	<input type="text" value="My newsletter"/>
tabDescription	Tab description string	"Set up your newsletter and we will send you information about new products and trends from the sections you selected every week."	<input type="text" value="Set up your newsletter and we will send you information about new products and trends from the sections you selected every week."/>
formTitle	Label for from title string	"Sections that interest you"	<input type="text" value="Sections that interest you"/>
buttonText	Label for button text string	"Save changes"	<input type="text" value="Save changes"/>
newsletterSections	Labels for newsletter sections array	["Woman", "Man", "Children"]	 RAW <code>newsletterSections : [</code>

Name	Description	Default	Control
			0 : "Woman"
			
			1 : "Man"
			
			2 : "Children"
			
]
			

[Hide slots items](#)



[Hide slots items](#)

slots

tab-description	unknown	-
form	unknown	-
form-button	unknown	-
notice	unknown	-

[Set object](#)
[Set object](#)
[Set object](#)
[Set object](#)

Name	Description	Default	Control
Hide Events items			




Hide Events items

Events

save-changes	Emits save-changes event with chosen options when button is clicked	-	-
checkbox-clicked	Emits checkbox-clicked event when checkbox is marked	-	-

MyProfile

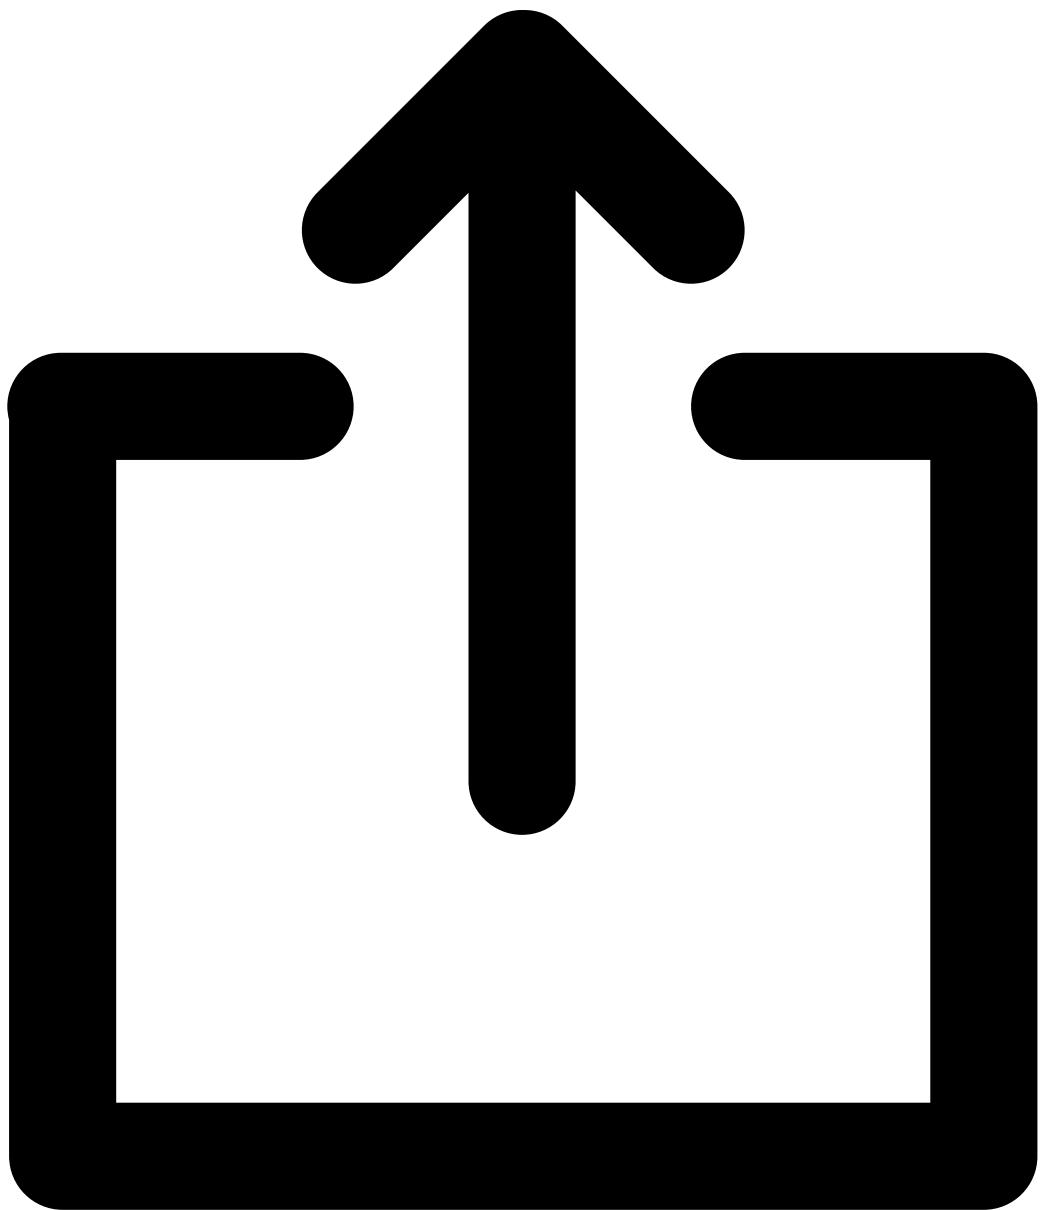Component with profile details, allows to change personal data and password. Part of account.



Personal data

Feel free to edit any of your details below so your account is always up to date

First Name *

Last Name *

Your e-mail *

SAVE CHANGES

At Brand name, we attach great importance to privacy issues and are committed to protecting the personal data of our users. Learn more about how we care and use your personal data in the [Privacy Policy](#).

Password change

<input type="checkbox"/> Show code	Name	Description	Default	Control <input type="button"/>
<input type="button"/> Hide Props items				



Hide Props items

Props


account





Account data
object






{}











account:{




Name	Description	Default	Control
			firstName : "John"
			
			lastName : "Dog"
			
			email : "johndog@email.com"
			
			password : "a*23Et"
			
			shipping : [...] 2 items
			

Name	Description	Default	Control
			orders : [...] 4 items
			
			}
			
tabsTitles	Labels for tabs titles array	["Personal data", "Password change"]	 RAW tabsTitles : [
			
		0 : "Personal data"	
		1 : "Password change"	

Name	Description	Default	Control
personalInputsLabels	Labels for inputs in the first tab array	["First Name", "Last Name", "Your e-mail"]	 RAW personalInputsLabels : [
			
		0 : "First Name"	
		1 : "Last Name"	
		2 : "Your e-mail"	



Name	Description	Default	Control
]	
passwordInputsLabels	Labels for inputs in the second tab array	["Current Password", "New Password", "Repeat Password"]	 RAW passwordInputsLabels : [
			
		0 : "Current Password"	
		1 : "New Password"	
		2 : "Repeat Password"	



Name	Description	Default	Control
personalDataDescription	Description for the first tab string	"Feel free to edit any of your details below so your account is always up to date"	 
saveButtonText	Text for save button string	"Save changes"	 
updateButtonText	Text for update button string	"Update password"	 
Hide Events items			



[Hide Events items](#)

Events

update:personal	Emits update:personal event with personal data when button is clicked	-	 RAW <code>update:personal :{</code>  
update:password	Emits update:password event with updated password when button is clicked	-	 RAW  

Name	Description	Default	Control
			update:password : {  } 

[Hide slots items](#)




[Hide slots items](#)

slots

personal-data-description	unknown	-	Set object
personal-data-form	unknown	-	Set object
personal-data-notice	unknown	-	Set object
password-change-description	unknown	-	Set object
password-change-form	unknown	-	Set object

OrderHistory

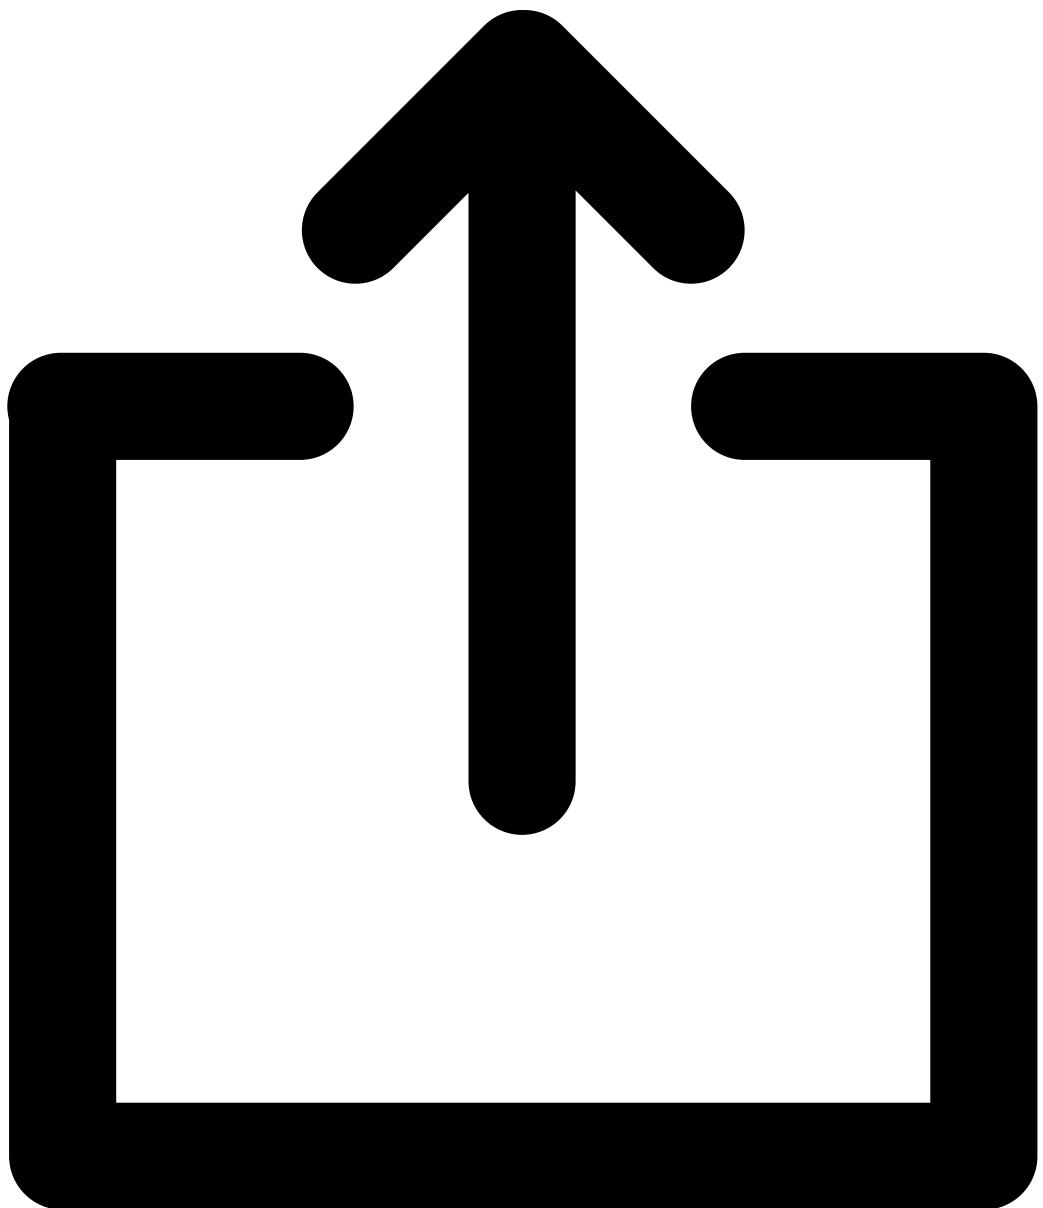Component with order history. Part of the account.



[My orders](#)

Check the details and status of your orders in the online store. You can also cancel your order or request a return.

Order ID Payment date	Payment method Amount	Status Download
#35765 4th Nov, 2019	Visa card \$12.00	In process Download
#35766 4th Nov, 2019	Paypal \$12.00	Finalised Download
#35768 4th Nov, 2019	Mastercard \$12.00	Finalised Download
#35769 4th Nov, 2019	Paypal \$12.00	Finalised Download

Show code

Name _____

Description

Default

Control

Hide Props items



Hide Props items

Props

tabTitle

Label for tab title
string

"My orders"

My orders


orders

Account data array


```
[ ["#35765", "4th Nov, 2019", "Visa card", "$12.00", "In process"], ["#35766", "4th Nov, 2019", "Paypal", "$12.00", "Finalised"], ["#35768", "4th Nov, 2019", "Mastercard", "$12.00", "Finalised"], ["#35769", "4th Nov, 2019", "Paypal", "$12.00", "Finalised"], ]
```












orders : [





0 : [...] 5 items



Name	Description	Default	Control
			1 : [...] 5 items
			
			2 : [...] 5 items
			
			3 : [...] 5 items
			
]
			
tableHeaders	Labels for table headers ["Order ID", "Payment date", "Payment method", "Amount", array "Status",]		  RAW tableHeaders : [

Name	Description	Default	Control
0	"Order ID"		
1	"Payment date"		
2	"Payment method"		
3	"Amount"		
4	"Status"		
]			



Name	Description	Default	Control
orderHistoryDescription	Tab description when there are orders string	"Check the details and status of your orders in the online store. You can also cancel your order or request a return."	
noOrdersDescription	Text when there are no orders string	"You currently have no order history."	
noOrdersButtonText	Button text when there are no orders string	"Start shopping"	

[Hide Events items](#)



[Hide Events items](#)

Events

download	Emits download event when download button is clicked in mobile mode	 RAW download : { }
download-all	Emits download-all event when download all button is clicked	

Name	Description	Default	Control
no-orders	Emits no-orders event when no orders button is clicked	-	-
view-details	Emits view-details event when view details button is clicked	-	-

[Hide slots items](#)




[Hide slots items](#)

slots

order-history-description	unknown	-	Set object
table	unknown	-	Set object
table-headers	unknown	-	Set object
action-header	unknown	-	Set object
table-data	unknown	-	Set object
action-rows	unknown	-	Set object

OrderReview

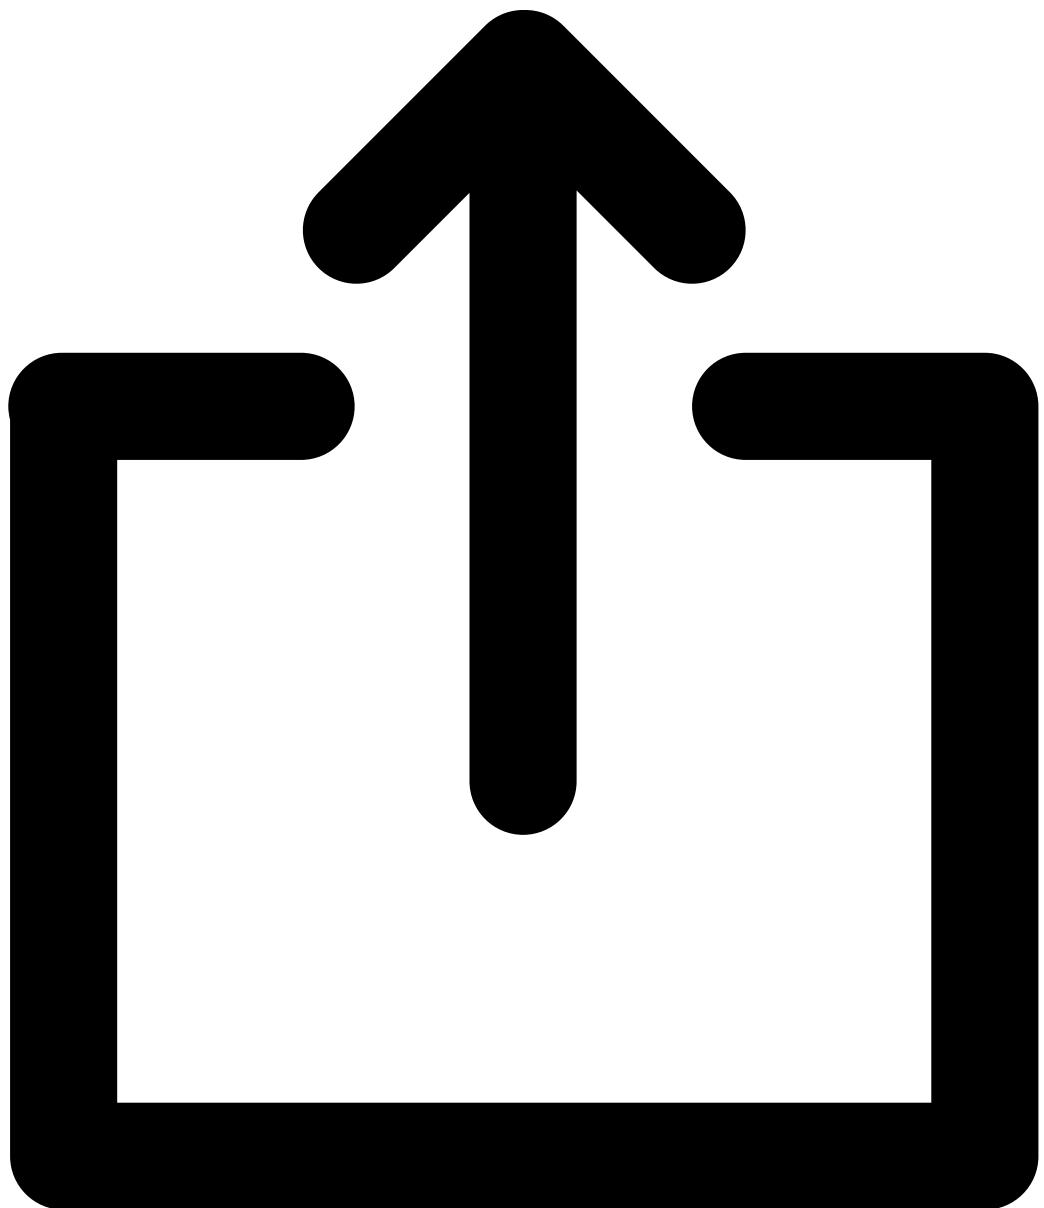Component with review of the order. Can be displayed during different checkout steps.



Order review

Personal details

[Edit](#)

John Dog
Sezame Street 24/193A
53-540, Wroclaw, Poland

john,dog@gmail.com
(00)560 123 456

Shipping details [Edit](#)

Sezame Street 24/193A
53-540, Wroclaw, Poland

Billing address [Edit](#)

home
Sezame Street 24/193A, 53-540
Wroclaw, Poland
(00)560 123 456

Payment method [Edit](#)

debit

Enter promo code

APPLY



Safety

It carefully packaged with a personal touch



Easy shipping

You'll receive dispatch confirmation and an arrival date



Changed your mind?

Rest assured, we offer free returns within 30 days

Show code

Name

Description

Default

Control

Hide Props items



Hide Props items





Props


reviewTitle	Heading text string	"Order review"
reviewTitleLevel	Heading text size number	2
order	Order data object	""

Order review

2




Name	Description	Default	Control
			order : {
			
			firstName : "John"
			
			lastName : "Dog"
			
			email : "john,dog@gmail.com"
			
			shipping : {...} 7 keys
			


Name	Description	Default	Control
buttonText	Order sections button text string	"Edit"	
characteristics	The array of objects with data filling SfCharacteristics components: title, description and icon array	[{ title: "Safety", description: "It carefully packaged with a personal touch", icon: "safety", },]	 characteristics : [
		}	

Name	Description	Default	Control
------	-------------	---------	---------


0 :{...} 3 keys




1 :{...} 3 keys



2 :{...} 3 keys



]



[Hide slots items](#)



[Hide slots items](#)

slots

heading	unknown	-
personal-details	unknown	-
shipping-details	unknown	-
billing-details	unknown	-
payment-details	unknown	-

[Set object](#)

[Set object](#)

[Set object](#)

[Set object](#)

[Set object](#)

Name	Description	Default	Control
promo	unknown	-	<button>Set object</button>




Hide Events items

Events

click:personal-details-edit	Emits click:personal-details-edit event when edit button is clicked	-
click:shipping-details-edit	Emits click:shipping-details-edit event when edit button is clicked	-
click:billing-details-edit	Emits click:billing-details-edit event when edit button is clicked	-
click:payment-details-edit	Emits click:payment-details-edit event when edit button is clicked	-
click:promo-code-apply	Emits click:promo-code-apply event when apply button is clicked	-

OrderSummary

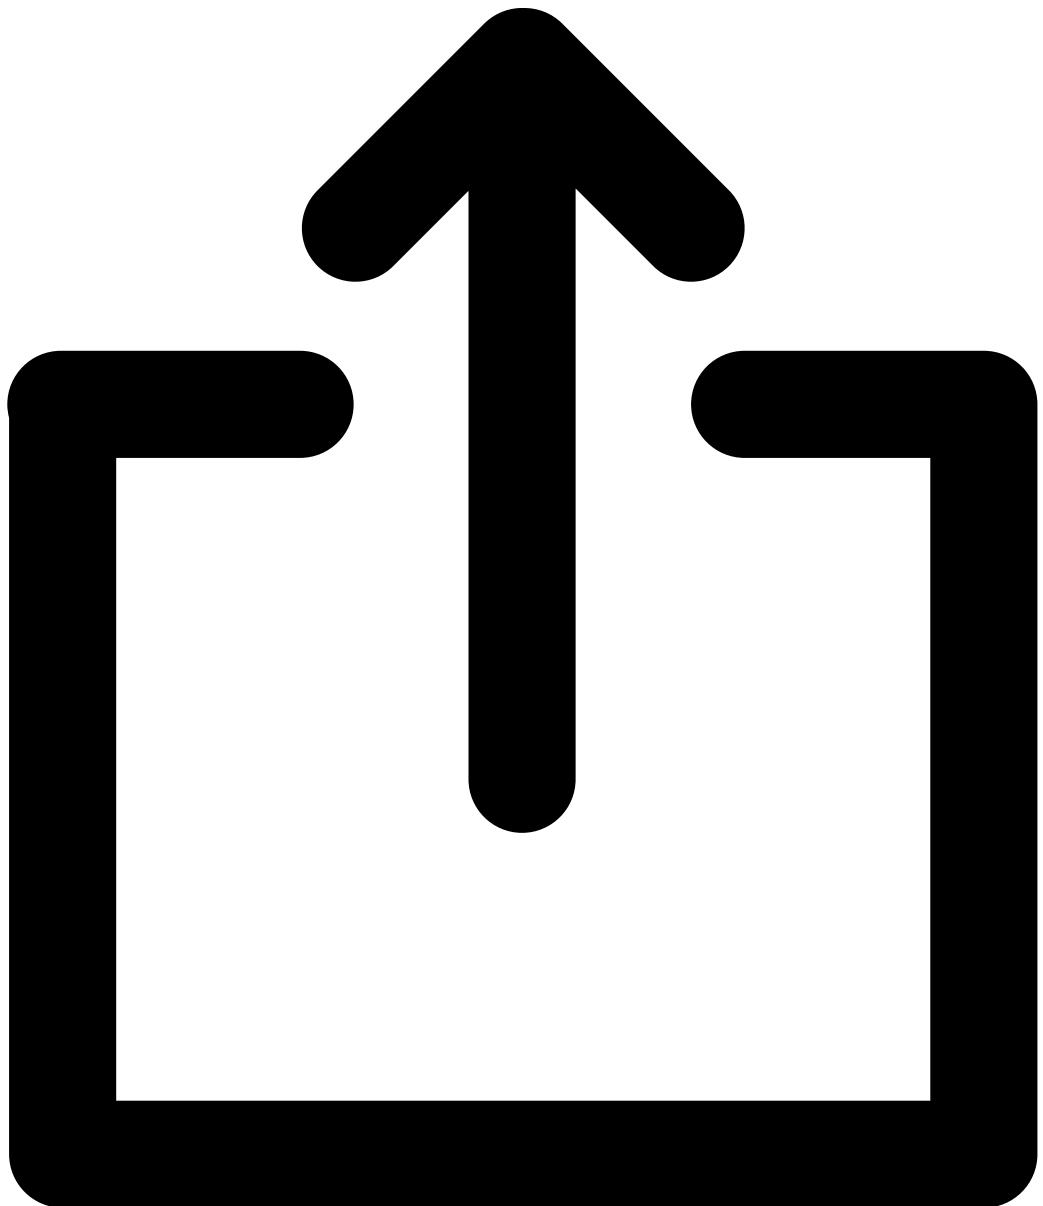Component with summary of the order. Can be displayed at the end of checkout process.



Order review

Products :

0

Subtotal :

\$0.00

Shipping : **\$5.99**

Total price : **\$5.99**
Enter promo code **APPLY**

 Safety
It carefully packaged with a personal touch

 Easy shipping
You'll receive dispatch confirmation and an arrival date

 Changed your mind?
Rest assured, we offer free returns within 30 days

Show code

Name

Description

Default

Control

[Hide Props items](#)













[Hide Props items](#)

Props

orderTitle	Heading text string	"Order review"	<input type="text" value="Order review"/>
orderTitleLevel	Heading text size number	2	<input type="text" value="2"/>
order	Order data object	""	 RAW <code>order : {</code>


`order : {`

Name	Description	Default	Control
			products : [...] 2 items
			
			}
			
propertiesNames	The array of names for order summary array	["Products", "Subtotal", "Shipping", "Total price"]	 RAW propertiesNames : [
			
			0 : "Products"
			
			1 : "Subtotal"
			


Name	Description	Default	Control
			2 : "Shipping"
			
			3 : "Total price"
			
]	
characteristics	The array of objects with data filling SfCharacteristics components: title, description and icon array	[{ title: "Safety", description: "It carefully packaged with a personal touch", icon: "safety", },]	 RAW characteristics : [
			
		0 : [...] 3 keys	

Name	Description	Default	Control
------	-------------	---------	---------


1 : {...} 3 keys



2 : {...} 3 keys



]



[Hide slots items](#)



[Hide slots items](#)

slots

heading	unknown	-	Set object
summary	unknown	-	Set object
promo	unknown	-	Set object

[Hide Events items](#)




[Hide Events items](#)

Events

click:apply-code	Emits click:apply-code event when apply button is clicked	-	-
------------------	---	---	---

Payment

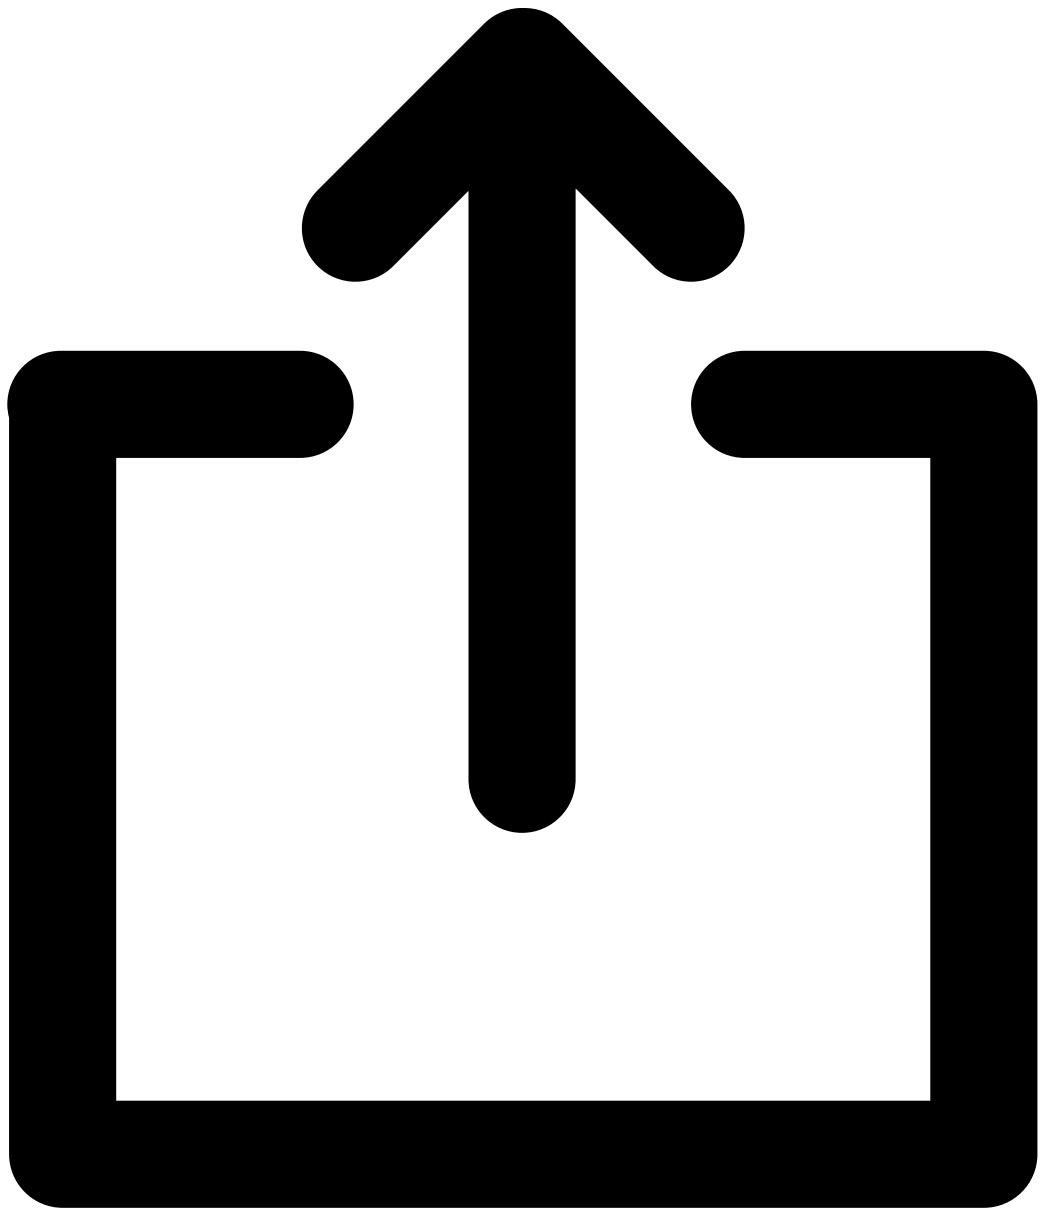Component with form for the billing address and payments. Part of the checkout process.



Billing address

Copy address data from shipping

First name *

Last name *

Street name *

House/Apartment number *

City *

State/Province *

Zip-code *

Austria

▼

Phone number *

I want to generate invoice

Payment methods

 Place

 Place

 Place

Cash on delivery

Check

Show code

Name

Description

Default

Control

Hide Props items



Hide Props items






Props
shipping





Shipping data
object





...








shipping : {





Name	Description	Default	Control
			streetName : "Sezame Street"
			
			apartment : "24/193A"
			
			city : "Wroclaw"
			
			state : "Lower Silesia"
			
			zipCode : "53-540"
			






Name	Description	Default	Control
			country : "Poland"
			
			phoneNumber : "(00)560 123 456"
			
			}
			
countries	List of counties needed for select [] to create billing address array		 RAW countries : [
			





Name	Description	Default	Control
0	"Austria"		
1	"Azerbaijan"		
2	"Belarus"		
3	"Belgium"		
4	"Bosnia and Herzegovina"		






Name	Description	Default	Control
			5 : "Bulgaria"
			6 : "Croatia"
			7 : "Cyprus"
			8 : "Czech Republic"
			9 : "Denmark"





Name	Description	Default	Control
			10 : "Estonia"
			
			11 : "Finland"
			
			12 : "France"
			
			13 : "Georgia"
			
			14 : "Germany"
			






Name	Description	Default	Control
			15 : "Greece"
			
			16 : "Hungary"
			
			17 : "Iceland"
			
			18 : "Ireland"
			
			19 : "Italy"
			





Name	Description	Default	Control
20	"Kosovo"		
21	"Latvia"		
22	"Liechtenstein"		
23	"Lithuania"		
24	"Luxembourg"		

Name	Description	Default	Control
			25 : "Macedonia"
			
			26 : "Malta"
			
			27 : "Moldova"
			
			28 : "Monaco"
			
			29 : "Montenegro"
			






Name	Description	Default	Control
			30 : "The Netherlands"
			
			31 : "Norway"
			
			32 : "Poland"
			
			33 : "Portugal"
			
			34 : "Romania"
			

Name	Description	Default	Control
			35 : "Russia"
			
			36 : "San Marino"
			
			37 : "Serbia"
			
			38 : "Slovakia"
			
			39 : "Slovenia"
			

Name	Description	Default	Control
			40 : "Spain"
			
			41 : "Sweden"
			
			42 : "Switzerland"
			
			43 : "Turkey"
			
			44 : "Ukraine"
			

Name	Description	Default	Control
			45 : "United Kingdom"
			
			46 : "Vatican City"
			
]	
years	Years needed for expiration day on credit card array	 RAW	years : [
			

Name	Description	Default	Control
		0 : "2020"	
		1 : "2021"	
		2 : "2022"	
		3 : "2025"	
]			
months	Months needed for expiration day on credit card array	[]	RAW

Name	Description	Default	Control
			months : [
			
			0 : "January"
			
			1 : "February"
			
			2 : "March"
			
			3 : "April"
			


Name

Description


Default

Control


4 : "May"




5 : "June"




6 : "July"











7 : "August"










8 : "September"





Name	Description	Default	Control
			9 : "October"
			
			10 : "November"
			
			11 : "December"
			
]
			
paymentMethods	Available payment methods array	[]	 RAW

Name	Description	Default	Control
			paymentMethods : [
			
		0 : {..} 2 keys	
		1 : {..} 2 keys	
		2 : {..} 2 keys	
		3 : {..} 2 keys	

Name	Description	Default	Control
			4 : [...] 2 keys 
] 
transition	Transition name for credit card form. Could be one of the default ones .	"sf-fade"	<input type="text" value="sf-fade"/> 
billingHeading	Heading text for the first header	"Billing address"	<input type="text" value="Billing address"/> 
billingHeadingLevel	Heading number for the first header number	2	<input type="text" value="2"/> 
sameAsShippingCheckboxLabel	Label for checkbox that copies address from shipping	"Copy address data from shipping"	<input type="text" value="Copy address data from shipping"/> 
billingInputsLabels	Labels for inputs array	["First name", "Last name", "Street name", "House/Apartment number", "City", "State/Province", "Zip-code", "Phone number",]	<input type="text" value="..."/> 
billingSelectLabel	Label for select string	"Country"	<input type="text" value="Billing address"/> 
generateInvoiceCheckboxLabel	Label for generating invoice	"I want to generate invoice"	<input type="text" value="I want to generate invoice"/> 
paymentHeading	Heading text for the second header	"Payment methods"	<input type="text" value="Payment methods"/> 
paymentHeadingLevel	Heading number for the second header number	2	<input type="text" value="2"/> 
cvcCodeButtonText	Text for button that helps with cvc code	"Where can I find CVC code"	<input type="text" value="Where can I find CVC code"/> 
expiryDateLabel	Label for expiry date for credit card	"Expiry date:"	<input type="text" value="Edit string..."/> 

Name	Description	Default	Control
creditCards	List of credit cards array	["debit", "mastercard", "electron"]	 RAW creditCards : [
			
			
			
			
			

Name	Description	Default	Control
	<input type="button" value="Hide Events items"/>		
			
	<input type="button" value="Hide Events items"/>		
Events			
invoice	Emits invoice event when invoice checkbox is checked/unchecked	 RAW invoice : { 	}
input	Emits input event when one of input fields is changed	 RAW input : { 	

Name	Description	Default	Control
same-as-shipping	Emits same-as-shipping event when copy address checkbox is checked/unchecked	-	-
find-cvc	Emits find-cvc event when cvc code button is clicked	-	-
Hide slots items			




[Hide slots items](#)

slots			
billing-heading	unknown	-	Set object
billing-form	unknown	-	Set object
payment-heading	unknown	-	Set object
payment-form	unknown	-	Set object
payment-methods	unknown	-	Set object
credit-card-form	unknown	-	Set object

Personal Details

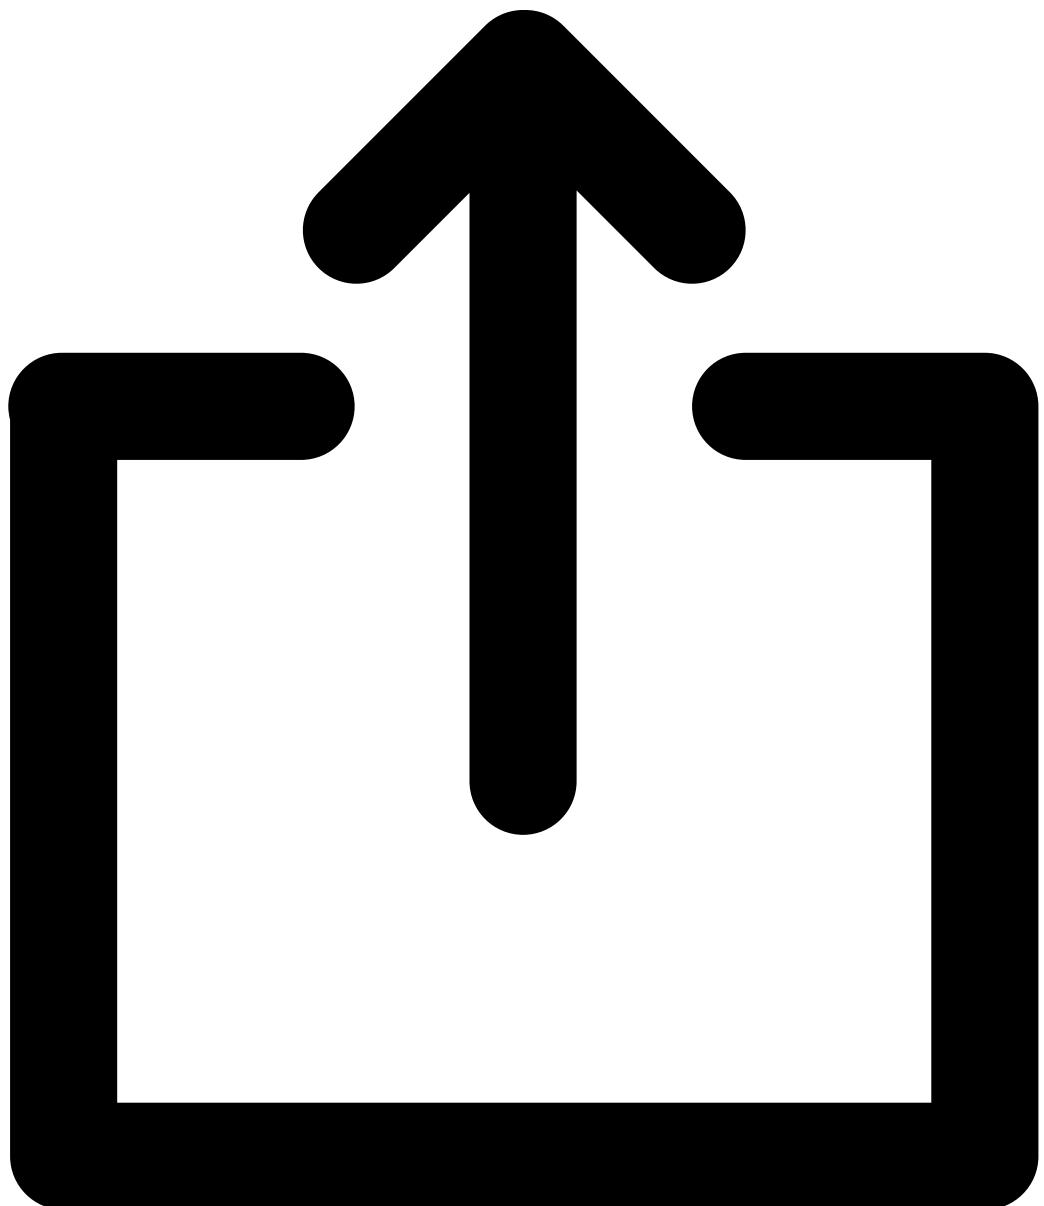Component with personal data form. Part of the checkout process.



[LOG INTO YOUR ACCOUNT](#)

or fill the details below:

Personal details

First name *

Last name *

Your email *

Enjoy these perks with your free account!



Faster checkout



Earn credits with every purchase



Full rewards program benefits




Manage your wishlist

I want to create an account

Show code

Name	Description	Default	Control
Hide Props items			



[Hide Props items](#)

Props

value





Inputs values
object





""







value:{

</

Name	Description	Default	Control
buttonText	Text for login button string	"Log into your account"	
loginInfo	Text for description below login button string	"or fill the details below:"	
headingTitle	Text for heading string	"Personal details"	
headingTitleLevel	Heading number number	2	
inputsLabels	Labels for inputs array	["First name", "Last name", "Your email"]	 RAW inputsLabels : [ 0 : "First name"  1 : "Last name" 

Name	Description	Default	Control
additionalDetails	Additionsl text below inputs string	"Enjoy these perks with your free account!"	 2 : "Your email"
characteristics	Characteristics below inputs array	[{ description: "Faster checkout", icon: "clock", size: "24px" }, { description: "Earn credits with every purchase", icon: "credits", size: "24px" }, { description: "Full rewards program benefits", icon: "rewards", size: "24px" }, { description: "Manage your wishlist", icon: "heart", size: "24px" }]	]  characteristics : [
			
			

Name	Description	Default	Control
transition	Transition for input that creates password for account. Could be one of the "sf-fade" default ones . string	"I want to create an account"	1 : {...} 3 keys  2 : {...} 3 keys  3 : {...} 3 keys ] 
createAccountCheckboxLabel	Checkbox label that shows/hides input for password string	"Create Password"	<input type="text" value="sf-fade"/> <input type="text" value="I want to create an account"/> <input type="text" value="Create Password"/>
createAccountInputLabel	Label for password input string		

Name	Description	Default	Control
Hide slots items			



Hide slots items

slots

log-in	unknown	-	Set object
create-account	unknown	-	Set object
heading	unknown	-	Set object
form	unknown	-	Set object
additional-info	unknown	-	Set object

Hide Events items



Hide Events items


Events

input	Emits input event when one of input fields is changed	-	RAW input:{ }
log-in	Emits log-in event when log in button is clicked	-	

Name	Description	Default	Control
create-account	Emits create-account event when create account checkbox is checked/unchecked	-	-

Shipping

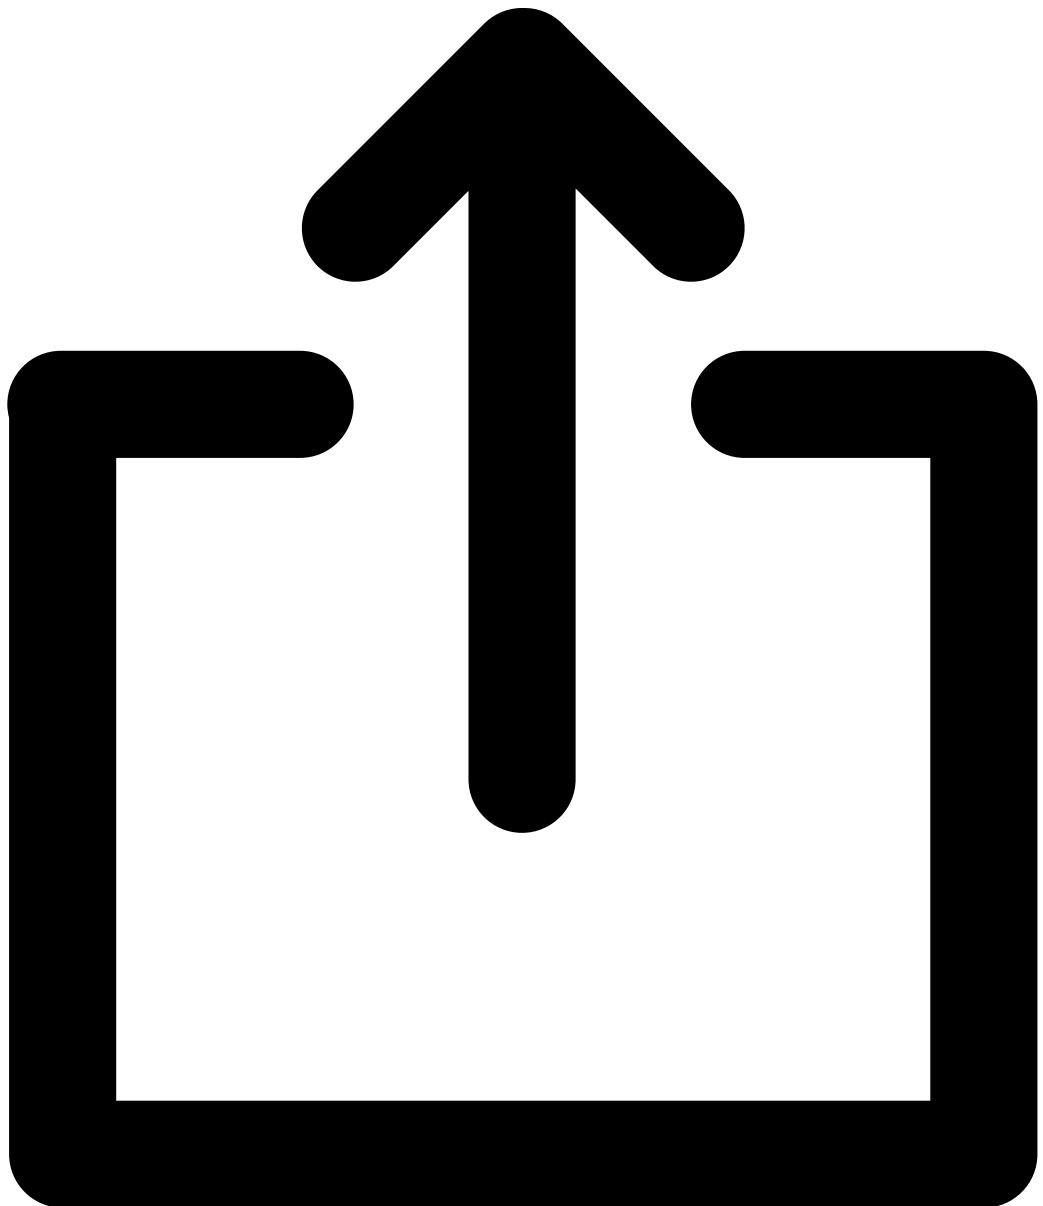Component with the data form for order shipment. Part of the checkout process.



Shipping

First name *

Last name *

Street name *

City *

State/Province *

Zip-code *

Austria

Phone number *

Shipping method

- | | | |
|-----------------------|---------------------------------------|---------|
| <input type="radio"/> | Pickup in the store | FREE |
| | Delivery from 3 to 7
business days | |
| <input type="radio"/> | Delivery to home | \$9.90 |
| | Delivery from 4 to 6
business days | |
| <input type="radio"/> | Paczkomaty InPost | \$9.90 |
| | Delivery from 4 to 6
business days | |
| <input type="radio"/> | 48 hours coffee | \$11.00 |
| | Delivery within 48 hours | |

Urgent 24h \$14.00
Delivery within 24 hours

Show code

Name

Description

Default

Control

Hide Props items



Hide Props items


Props
countries

List of countries needed for
select to create shipping
address
array


[]




countries : [



0 : "Austria"









1 : "Azerbaijan"











Name	Description	Default	Control
			2 : "Belarus"
			3 : "Belgium"
			4 : "Bosnia and Herzegovina"
			5 : "Bulgaria"
			6 : "Croatia"










Name	Description	Default	Control
			7 : "Cyprus"
			
			8 : "Czech Republic"
			
			9 : "Denmark"
			
			10 : "Estonia"
			
			11 : "Finland"
			

Name	Description	Default	Control
			12 : "France"
			
			13 : "Georgia"
			
			14 : "Germany"
			
			15 : "Greece"
			
			16 : "Hungary"
			






Name	Description	Default	Control
			17 : "Iceland"
			
			18 : "Ireland"
			
			19 : "Italy"
			
			20 : "Kosovo"
			
			21 : "Latvia"
			




Name	Description	Default	Control
			22 : "Liechtenstein"
			
			23 : "Lithuania"
			
			24 : "Luxembourg"
			
			25 : "Macedonia"
			
			26 : "Malta"
			





Name	Description	Default	Control
			27 : "Moldova"
			
			28 : "Monaco"
			
			29 : "Montenegro"
			
			30 : "The Netherlands"
			
			31 : "Norway"
			






Name	Description	Default	Control
			32 : "Poland"
			
			33 : "Portugal"
			
			34 : "Romania"
			
			35 : "Russia"
			
			36 : "San Marino"
			




Name	Description	Default	Control
			37 : "Serbia"
			38 : "Slovakia"
			39 : "Slovenia"
			40 : "Spain"
			41 : "Sweden"



Name	Description	Default	Control
			42 : "Switzerland"
			
			43 : "Turkey"
			
			44 : "Ukraine"
			
			45 : "United Kingdom"
			
			46 : "Vatican City"
			
]

Name	Description	Default	Control
shippingMethods	Available shipping methods array	[]	 RAW <code>shippingMethods : [</code> 
			
			
			

Name	Description	Default	Control
headingTitle	Heading text for the first header string	"Shipping"	
headingTitleLevel	Heading number for the first header number	2	
inputsLabels	Labels for inputs array	["First name", "Last name", "Street name", "City", "State/Province", "Zip-code", "Phone number",]	 <input type="button" value="RAW"/> inputsLabels : []
			


Name	Description	Default	Control
0	"First name"		
1	"Last name"		
2	"Street name"		
3	"City"		
4	"State/Province"		

Name	Description	Default	Control
			5 : "Zip-code" 
			6 : "Phone number" 
]	
selectLabel	Label for select string	"Country"	<input type="text" value="Country"/>
methodsHeadingTitle	Heading text for the second header string	"Shipping method"	<input type="text" value="Shipping method"/>
methodsHeadingTitleLevel	Heading number for the second header number	2	<input type="text" value="2"/>
Hide props items			
			
props value	object	""	Set object

Name	Description	Default	Control
	<input type="button" value="Hide Events items"/>		
			
	<input type="button" value="Hide Events items"/>		
Events			
input	Emits input event when one of input fields is changed	-	 RAW <code>input:{</code>  }
toggle-info	Emits toggle-info event when info button is clicked	-	
	<input type="button" value="Hide slots items"/>		
			
	<input type="button" value="Hide slots items"/>		
slots			
shipping-heading	unknown	-	<input type="button" value="Set object"/>
form	unknown	-	<input type="button" value="Set object"/>
shipping-methods-heading	unknown	-	<input type="button" value="Set object"/>
shipping-methods-form	unknown	-	<input type="button" value="Set object"/>

ShippingDetails

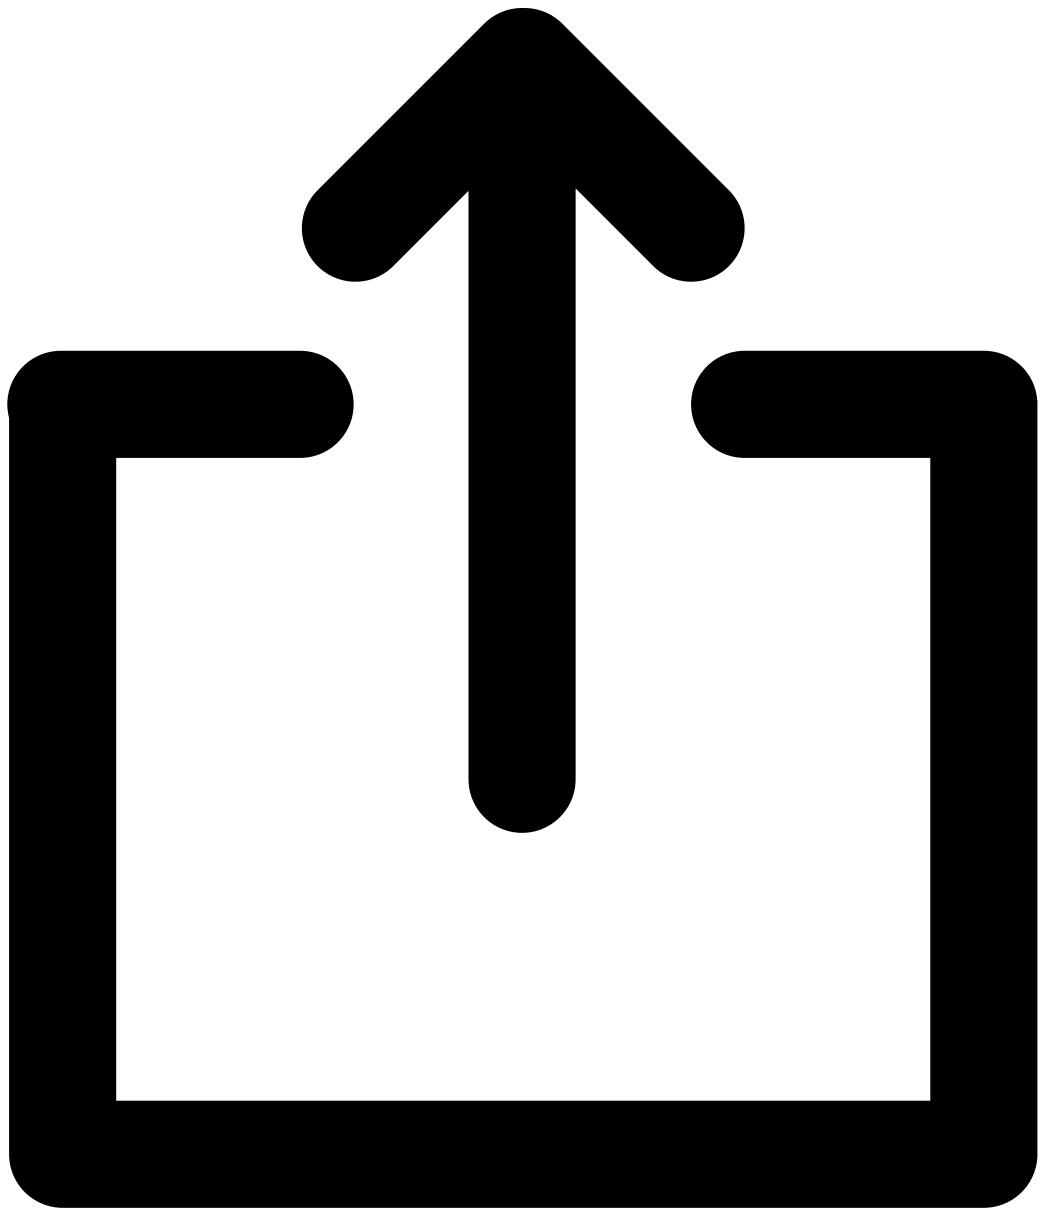Component for managing of shipping details. The element of the account.



Manage all the shipping addresses you want (work place, home address ...) This way you won't have to enter the shipping address manually with each order.

John Dog
Sezame Street 24/193A
53-540 Wroclaw,
Poland

(00)560 123 456

CHANGE 

John Dog
Sezame Street 20/193A
53-603 Wroclaw,
Poland

(00)560 123 456

CHANGE 

ADD NEW ADDRESS

Show code

Name

Description

Default

Control 


Props
account






Account data
object






{}













account:{













Name	Description	Default	Control
			firstName : "John"
			
			lastName : "Dog"
			
			email : "johndog@email.com"
			
			password : "a*23Et"
			
			shipping : [...] 2 items
			





Name	Description	Default	Control
			orders : [...] 4 items
			
		}	
changeAddressDescription	Text when there are no orders string	Keep your addresses and contact details updated.
countries	List of countries. Needed during creation of a new address. array	[]	 RAW countries : [
			
		0 : "Austria"	
		1 : "Azerbaijan"	






Name	Description	Default	Control
			2 : "Belarus"
			
			3 : "Belgium"
			
			4 : "Bosnia and Herzegovina"
			
			5 : "Bulgaria"
			
			6 : "Croatia"
			






Name	Description	Default	Control
			7 : "Cyprus"
			
			8 : "Czech Republic"
			
			9 : "Denmark"
			
			10 : "Estonia"
			
			11 : "Finland"
			






Name	Description	Default	Control
			12 : "France"
			
			13 : "Georgia"
			
			14 : "Germany"
			
			15 : "Greece"
			
			16 : "Hungary"
			



Name	Description	Default	Control
			17 : "Iceland"
			
			18 : "Ireland"
			
			19 : "Italy"
			
			20 : "Kosovo"
			
			21 : "Latvia"
			

Name	Description	Default	Control
			22 : "Liechtenstein"
			
			23 : "Lithuania"
			
			24 : "Luxembourg"
			
			25 : "Macedonia"
			
			26 : "Malta"
			


Name	Description	Default	Control
			
27	"Moldova"		
28	"Monaco"		
29	"Montenegro"		
30	"The Netherlands"		
31	"Norway"		

Name	Description	Default	Control
			32 : "Poland"
			
			33 : "Portugal"
			
			34 : "Romania"
			
			35 : "Russia"
			
			36 : "San Marino"
			

Name	Description	Default	Control
			
37	: "Serbia"		
38	: "Slovakia"		
39	: "Slovenia"		
40	: "Spain"		
41	: "Sweden"		

Name	Description	Default	Control
			42 : "Switzerland"
			
			43 : "Turkey"
			
			44 : "Ukraine"
			
			45 : "United Kingdom"
			
			46 : "Vatican City"
			

]

Name	Description	Default	Control
shipingTabDescription	Shipping tab description string	""	 Manage all the shipping addresses you want (work place, home address ...) This way you won't have to enter the shipping address manually with each order.
shippingTabTitle	Label for the first tab - Shipping details string	"Shipping details"	<input type="button" value="Shipping details"/>
changeAddressTabTitle	Label for the second tab - Change the address. It showhs when Change or Add new address button is clicked string	"Change the address"	<input type="button" value="Change the address"/>
transition	Sets transition name. Could be one of the default ones . string	"sf-fade"	<input type="button" value="sf-fade"/>
changeButtonText	Text for button Change. If there is no value button will not be displayed. string	"Change"	<input type="button" value="Change"/>
deleteButtonText	Text for button Delete. If there is no value button will not be displayed. string	"Delete"	<input type="button" value="Delete"/>
addNewAddressButtonText	Text for button Add new address. If there is no value button will not be displayed. string	"Add new address"	<input type="button" value="Add new address"/>
updateAddressButtonText	Button text for Change Address tab. If there is no value button will not be displayed. string	"Update the address"	<input type="button" value="Update the address"/>
inputsLabels	array	["First Name", "Last Name", "Street Name", "House/Apartment number", "City", "State/Province", "Zip-Code", "Phone number",]	<input type="button" value="Set object"/>
selectLabel	Label for select. Neede during creation of a new address string	"Country"	<input type="button" value="Country"/>

props

Name	Description	Default	Control
cancelButtonText	string	"Cancel"	<button>Set string</button>





Hide Events items

Events



`update:shipping : {`



update:shipping	Emits update:shipping event when update button is clicked	-
-----------------	---	---

}

change-address	Emits change-address event when change button is clicked	-
cancel-editing	Emits cancel-editing event when cancel button is clicked	-
delete-address	Emits delete-address event when delete button is clicked	-

Hide slots items



Hide slots items

slots

change-address-description	unknown	-	<button>Set object</button>
form	unknown	-	<button>Set object</button>
shipping-tab-description	unknown	-	<button>Set object</button>

Name	Description	Default	Control
shipping-list	unknown	-	<input type="button" value="Set object"/>
shipping-details	unknown	-	<input type="button" value="Set object"/>



CURRENT VERSION: **0.13.6**

This is legacy version of StorefrontUI. Check out the [LTS support](#)

@storefront-ui/vue is a UI component library that ships **raw** source, and aims to be:

- Developer-friendly
- Customization-first and
- Performance oriented

➲ Who is using Storefront UI?

AIRFRANCE shopping



[Check out more!](#)

➲ Our core concepts

Storefront UI is designed and built based on two main concepts as below:

- Design inspired from [Google Retail UX Playbook](#).
- [Atomic Design](#) pattern for components

➲ StorefrontUI key characteristics

We are building Storefront UI based on the following 6 fundamentals:

- **Customization:** Along with standard prop-based customization, every component has a set of slots that let you replace any part of it with your own images, icons or even custom HTML markup. You can also customize whole library from a single SCSS file by overriding set of variables.

- **Mobile-first:** Every Storefront UI component is highly optimized for mobile user experience and in many cases behaves completely different on desktop and mobile. Select list becomes full-screen drop-down, tabs are becoming accordion etc.
- **Performance:** You're importing ONLY what you need, and in a raw format which means you can benefit from all build-time optimizations like tree shaking or grouping common chunks. Unused components are treeshaked and global CSS is just < 0,1 kB unminified. Thanks to this initial footprint of the library is unnoticeable. You can use the library for how many components you want, even a single slider. You bundle only what you import.
- **Best practices:** Storefront UI components follow best practices in terms of design and core. Every component is based on the Google Retail UX Playbook and is accessibility-friendly.
- **E-commerce:** As a UI library dedicated to eCommerce, Storefront UI along with standard UI components has all the elements necessary for building modern online stores.
- **Open Source:** Storefront UI is a community effort to deliver the best possible experience to modern web applications and e-commerce shops, with carefully crafted components following best practices. Our team consists of agencies and volunteer contributors from all over the world.

Browser Support

Browser	Status
Chrome	Supported
Firefox	Supported
Opera	Supported
Edge	Supported
IE	Not supported
Safari 10+	Supported

U S E F U L L I N K S



[Getting started](#)

[direct](#)

[How to install and use StorefrontUI in your project](#)



[Styleguides](#)

[colors](#)

[Color, Typography and Sizes](#)



[Components](#)

[Components Playground](#)



[Our Github Repo](#)

[View the source and add issues](#)



[Discord chat](#)

[Chat with maintainers and the community](#)



[Components Design](#)

[Figma designs of how components look](#)



[Contribution Guidelines](#)

[Read the guidelines and start contributing](#)



[Meet the team](#)

[The core team behind StorefrontUI](#)

In collaboration with  Cloudinary

MIT Licensed



CURRENT VERSION: **0.13.6**

This is legacy version of StorefrontUI. Check out the [LTS support](#)

@storefront-ui/vue is a UI component library that ships **raw** source, and aims to be:

- Developer-friendly
- Customization-first and
- Performance oriented

➲ Who is using Storefront UI?

AIRFRANCE shopping



[Check out more!](#)

➲ Our core concepts

Storefront UI is designed and built based on two main concepts as below:

- Design inspired from [Google Retail UX Playbook](#).
- [Atomic Design](#) pattern for components

➲ StorefrontUI key characteristics

We are building Storefront UI based on the following 6 fundamentals:

- **Customization:** Along with standard prop-based customization, every component has a set of slots that let you replace any part of it with your own images, icons or even custom HTML markup. You can also customize whole library from a single SCSS file by overriding set of variables.

- **Mobile-first:** Every Storefront UI component is highly optimized for mobile user experience and in many cases behaves completely different on desktop and mobile. Select list becomes full-screen drop-down, tabs are becoming accordion etc.
- **Performance:** You're importing ONLY what you need, and in a raw format which means you can benefit from all build-time optimizations like tree shaking or grouping common chunks. Unused components are treeshaked and global CSS is just < 0,1 kB unminified. Thanks to this initial footprint of the library is unnoticeable. You can use the library for how many components you want, even a single slider. You bundle only what you import.
- **Best practices:** Storefront UI components follow best practices in terms of design and core. Every component is based on the Google Retail UX Playbook and is accessibility-friendly.
- **E-commerce:** As a UI library dedicated to eCommerce, Storefront UI along with standard UI components has all the elements necessary for building modern online stores.
- **Open Source:** Storefront UI is a community effort to deliver the best possible experience to modern web applications and e-commerce shops, with carefully crafted components following best practices. Our team consists of agencies and volunteer contributors from all over the world.

Browser Support

Browser	Status
Chrome	Supported
Firefox	Supported
Opera	Supported
Edge	Supported
IE	Not supported
Safari 10+	Supported

U S E F U L L I N K S



[Getting started](#)

[direct](#)

[How to install and use StorefrontUI in your project](#)



[Styleguides](#)

[colors](#)

[Color, Typography and Sizes](#)



[Components](#)

[Components Playground](#)



[Our Github Repo](#)

[View the source and add issues](#)



[Discord chat](#)

[Chat with maintainers and the community](#)



[Components Design](#)

[Figma designs of how components look](#)



[Contribution Guidelines](#)

[Read the guidelines and start contributing](#)



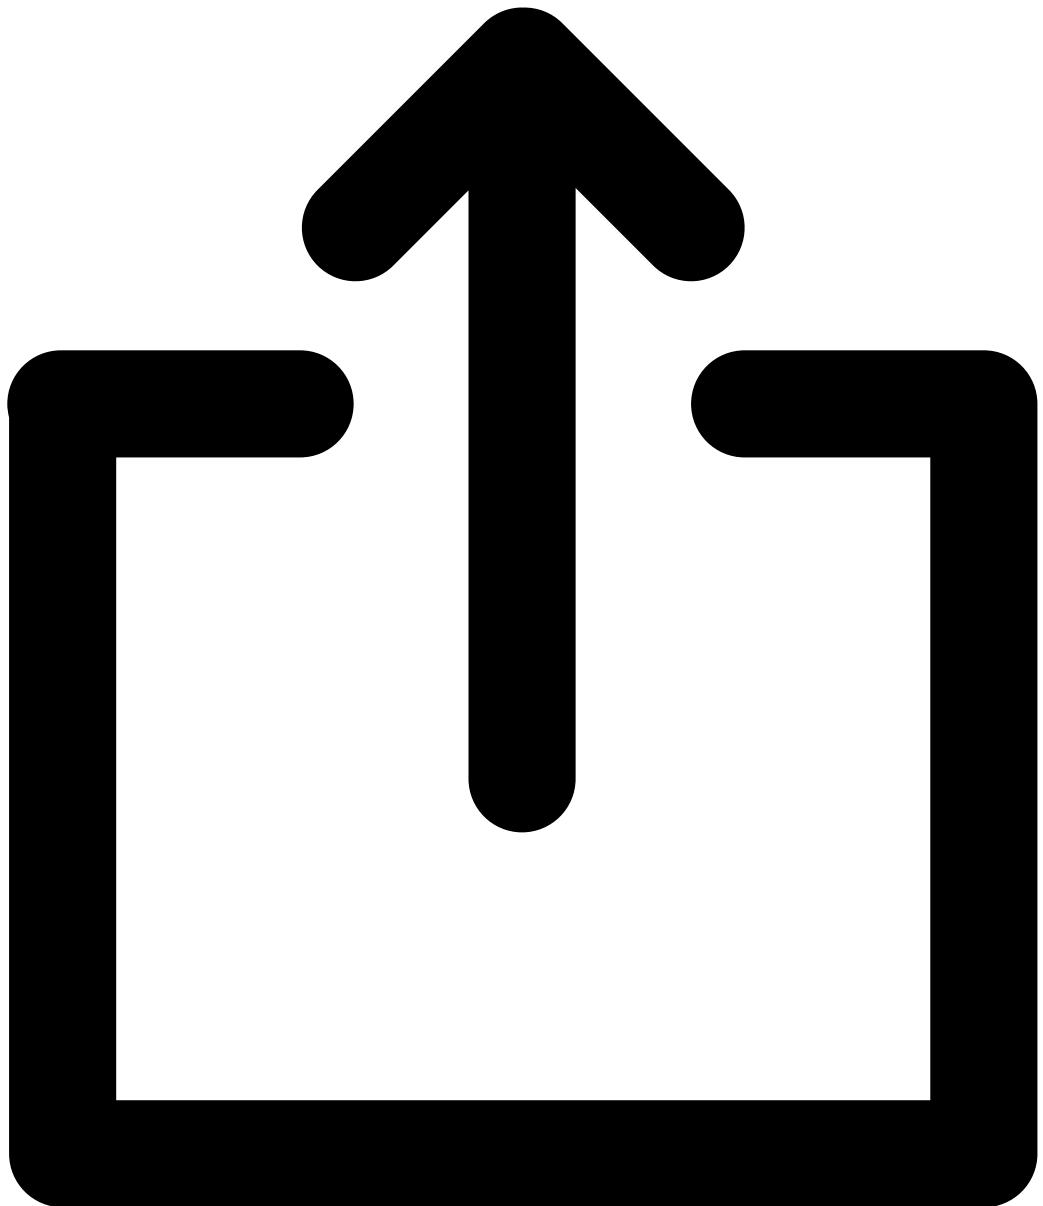
[Meet the team](#)

[The core team behind StorefrontUI](#)

In collaboration with  Cloudinary

MIT Licensed

Transitions



CLICK TO SEE EFFECT

Show code

Name	Description Default	Control
Hide Class items		



[Hide Class items](#)

Class

effect

-



[sf-fade](#) ▾

Stories

Slide Left

CLICK TO SEE EFFECT

[Show code](#)

Slide Right

CLICK TO SEE EFFECT

[Show code](#)

Collapse Top

CLICK TO SEE EFFECT

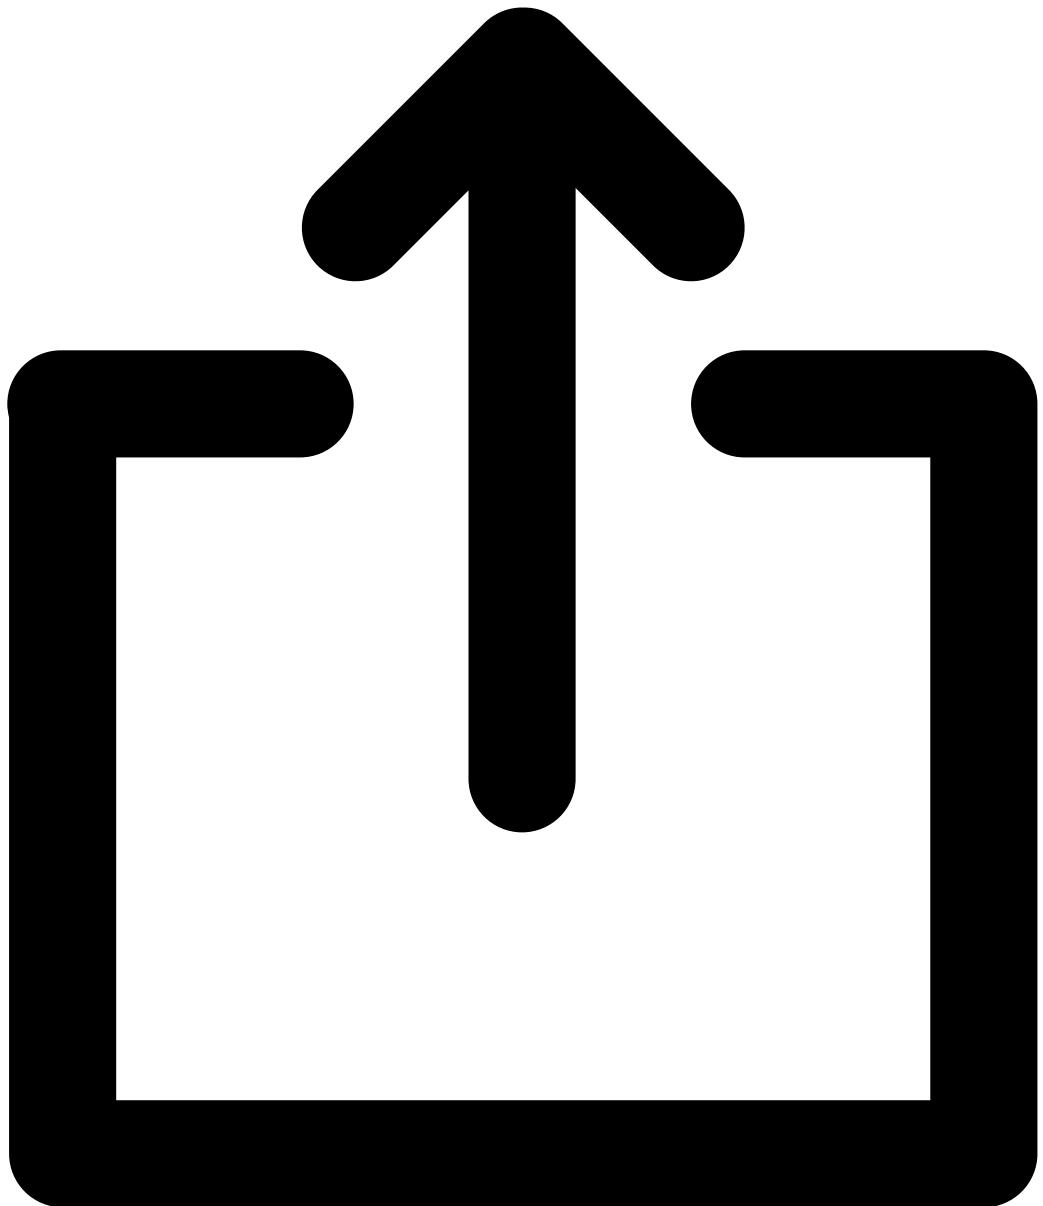
[Show code](#)

Collapse Bottom

CLICK TO SEE EFFECT

[Show code](#)

Transitions



CLICK TO SEE EFFECT

Show code

Name	Description Default	Control
Hide Class items		



[Hide Class items](#)

Class

effect

-



[sf-fade](#) ▾

Stories

Slide Left

CLICK TO SEE EFFECT

[Show code](#)

Slide Right

CLICK TO SEE EFFECT

[Show code](#)

Collapse Top

CLICK TO SEE EFFECT

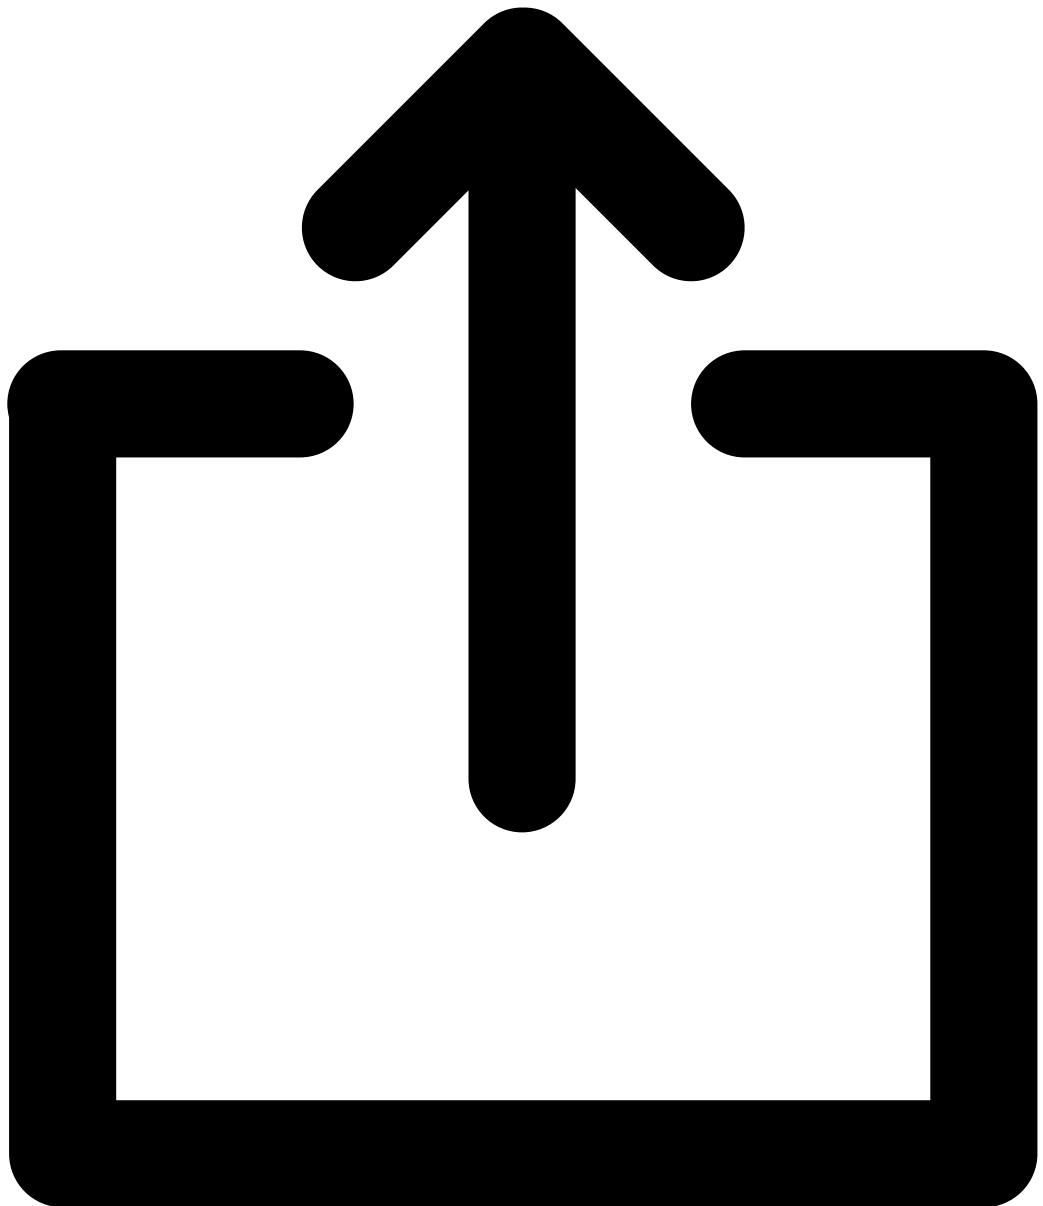
[Show code](#)

Collapse Bottom

CLICK TO SEE EFFECT

[Show code](#)

Transitions



CLICK TO SEE EFFECT

Show code

Name	Description Default	Control
Hide Class items		



[Hide Class items](#)

Class

effect

-



[sf-fade](#) ▾

Stories

Slide Left

CLICK TO SEE EFFECT

[Show code](#)

Slide Right

CLICK TO SEE EFFECT

[Show code](#)

Collapse Top

CLICK TO SEE EFFECT

[Show code](#)

Collapse Bottom

CLICK TO SEE EFFECT

[Show code](#)



CURRENT VERSION: **0.13.6**

This is legacy version of StorefrontUI. Check out the [LTS support](#)

@storefront-ui/vue is a UI component library that ships **raw** source, and aims to be:

- Developer-friendly
- Customization-first and
- Performance oriented

➲ Who is using Storefront UI?

AIRFRANCE shopping



[Check out more!](#)

➲ Our core concepts

Storefront UI is designed and built based on two main concepts as below:

- Design inspired from [Google Retail UX Playbook](#).
- [Atomic Design](#) pattern for components

➲ StorefrontUI key characteristics

We are building Storefront UI based on the following 6 fundamentals:

- **Customization:** Along with standard prop-based customization, every component has a set of slots that let you replace any part of it with your own images, icons or even custom HTML markup. You can also customize whole library from a single SCSS file by overriding set of variables.

- **Mobile-first:** Every Storefront UI component is highly optimized for mobile user experience and in many cases behaves completely different on desktop and mobile. Select list becomes full-screen drop-down, tabs are becoming accordion etc.
- **Performance:** You're importing ONLY what you need, and in a raw format which means you can benefit from all build-time optimizations like tree shaking or grouping common chunks. Unused components are treeshaked and global CSS is just < 0,1 kB unminified. Thanks to this initial footprint of the library is unnoticeable. You can use the library for how many components you want, even a single slider. You bundle only what you import.
- **Best practices:** Storefront UI components follow best practices in terms of design and core. Every component is based on the Google Retail UX Playbook and is accessibility-friendly.
- **E-commerce:** As a UI library dedicated to eCommerce, Storefront UI along with standard UI components has all the elements necessary for building modern online stores.
- **Open Source:** Storefront UI is a community effort to deliver the best possible experience to modern web applications and e-commerce shops, with carefully crafted components following best practices. Our team consists of agencies and volunteer contributors from all over the world.

Browser Support

Browser	Status
Chrome	Supported
Firefox	Supported
Opera	Supported
Edge	Supported
IE	Not supported
Safari 10+	Supported

U S E F U L L I N K S



[Getting started](#)

[direct](#)

[How to install and use StorefrontUI in your project](#)



[Styleguides](#)

[colors](#)

[Color, Typography and Sizes](#)



[Components](#)

[Components Playground](#)



[Our Github Repo](#)

[View the source and add issues](#)



[Discord chat](#)

[Chat with maintainers and the community](#)



[Components Design](#)

[Figma designs of how components look](#)



[Contribution Guidelines](#)

[Read the guidelines and start contributing](#)



[Meet the team](#)

[The core team behind StorefrontUI](#)

In collaboration with Cloudinary

MIT Licensed