

# Seminar 4

---

## Multiversioning

# Monitoring Locks

---

- SQL Server Profiler
- sp\_lock
- sys.dm\_tran\_locks
- sys.dm\_tran\_active\_transactions

# Resource Types

---

- RID – row in a heap
- Key – row in an index
- Page
- HoBT – heap or B-tree
- Object – table, view, etc
- File
- Database
- Metadata
- Application

# Isolation Levels in SQL Server

---

- **READ UNCOMMITTED**
  - allows dirty reads (a transaction can see uncommitted changes made by another ongoing transaction)
  - no S locks when reading data
- **READ COMMITTED** (default isolation level)
  - a transaction can read data that has been previously read (but not modified) by another ongoing transaction
  - allows unrepeatable reads
  - S locks - released as soon as the SELECT operation is performed

# Isolation Levels in SQL Server

---

- **READ COMMITTED**
  - X locks - released at the end of the transaction
- **REPEATABLE READ**
  - holds S locks and X locks until the end of the transaction
  - dirty reads, unrepeatable reads - avoided
  - phantom reads can occur

# Isolation Levels in SQL Server

---

- **SERIALIZABLE**
  - highest isolation level
  - holds locks (including key-range locks) during the entire transaction
  - dirty reads, unrepeatable reads, phantom reads - avoided
- **SNAPSHOT**
  - working on a snapshot of the data
- SQL syntax
  - **SET TRANSACTION ISOLATION LEVEL ...**

# Multiversioning

---

- in a DBMS with multiversioning, every write operation on a data object  $O$  results in a new copy (i.e., *version*) of  $O$
- every time object  $O$  is read, the DBMS picks one of  $O$ 's versions
- writes do not overwrite each other

# Row-Level Versioning (RLV)

- introduced in SQL Server 2005
- useful when the user needs *committed* data, but not necessarily *the most recent version* of the data
- Read Committed Snapshot Isolation & Full Snapshot Isolation:
  - the reader never blocks; instead, it obtains data that has been previously committed
- the tempdb database stores the older versions of the data:
  - a snapshot of the database can be assembled using these old(er) versions



# Read Committed Snapshot Isolation

---

```
ALTER DATABASE MyDatabase  
SET READ_COMMITTED_SNAPSHOT ON
```

- operations see the most recent committed data as of the beginning of their execution =>
  - snapshot of the data at the command level
  - consistent reads at the command level
  - READ COMMITTED isolation level

# Full Snapshot Isolation


---

```
ALTER DATABASE MyDatabase  
SET ALLOW_SNAPSHOT_ISOLATION ON
```

- operations see the most recent committed data as of the beginning of their transaction =>
  - snapshot of the data at the transaction level
  - consistent reads at the transaction level
  - SNAPSHOT isolation level

# Row-Level Versioning

- each version of a row is marked with the *transaction sequence number (XSN)* of the transaction that changed the row
- all versions are kept in a linked list:

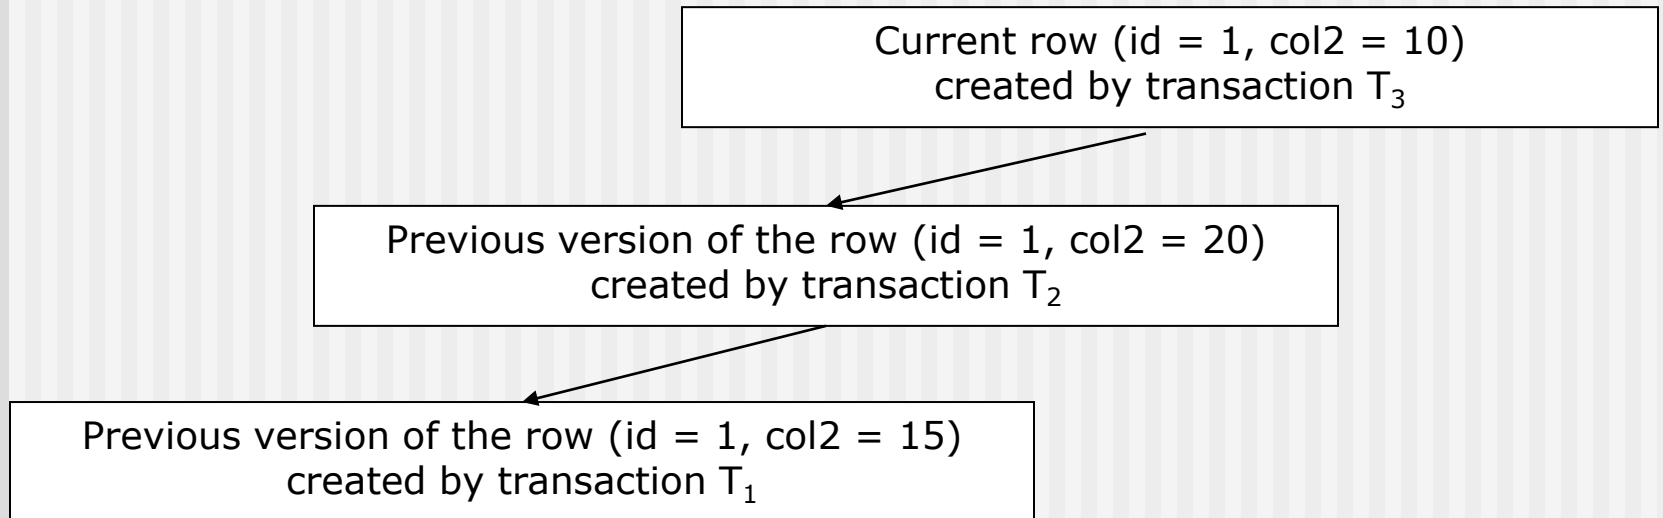

# Row-Level Versioning

---

- advantages:
  - increased concurrency level
  - positive impact - triggers / indexes
- drawbacks:
  - monitoring the usage of the *tempdb* database => extra management requirements
  - update operations – slower
  - read operations – also affected (browsing the linked lists)

# Row-Level Versioning

---

- drawbacks
  - solves the writer-reader conflict, but simultaneous writers are still not allowed

# Triggers & RLV

---

- triggers can access 2 *pseudo-tables*:
  - the *deleted* table – contains removed rows or previous versions of updated rows
  - the *inserted* table – contains added rows or new versions of updated rows
- row versioning is used to create the *inserted* / *deleted* tables
- before SQL Server 2005:
  - the *deleted* table was created using the transaction log – affected performance

# Index Creation & RLV

---

- index creation / rebuilding in previous versions of SQL Server:
  - *clustered index* - table exclusively locked, data entirely inaccessible
  - *non-clustered index* - index not available
- using RLV:
  - indexes are created and rebuilt online
  - all requests are processed on versioned data

# Isolation Levels and Concurrency Anomalies

concurrency problem / isolation level	read uncommitted	read committed locking	read committed snapshot	repeatable read	snapshot	serializable
dirty reads	yes	no	no	no	no	no
unrepeatable reads	yes	yes	yes	no	no	no
phantoms	yes	yes	yes	yes	no	no
update conflicts	no	no	no	no	yes	no
concurrency model	pessimistic	pessimistic	optimistic	pessimistic	optimistic	pessimistic



# Query Governor and DBCC LOG

- SET QUERY\_GOVERNOR\_COST\_LIMIT *value*
  - *value*
    - the longest time in which a query can run
  - queries with an estimated cost greater than *value* are not allowed to run
  - value 0 – all queries are allowed to run
- DBCC LOG – transaction log
  - DBCC LOG (<DBname>,<Output>)
  - Output - level of detail (0-4)

# PIVOT / UNPIVOT

- change a table-valued expression into another table
- PIVOT rotates a table-valued expression; it transforms the unique values in one column in the expression into multiple columns in the output; aggregations are performed where necessary on any remaining column values that are required in the output
- UNPIVOT performs the opposite operation; it rotates columns in a table-valued expression into column values

# PIVOT

```
SELECT <non-pivoted column>,  
    [first pivoted column] AS <column name>,  
    [second pivoted column] AS <column name>,  
    ...  
    [last pivoted column] AS <column name>  
FROM  
    (<SELECT query that produces the data>) AS  
        <source query alias>  
PIVOT  
(  
    <aggregation function>(<column being aggregated>)  
FOR  
    [<column that contains values that become column headers>]  
    IN ( [first pivoted column], [second pivoted column],  
        ... [last pivoted column])  
) AS <alias for the pivot table>  
<optional ORDER BY clause>;
```

# Recap - The OUTPUT Clause

- provides access to *inserted*, *updated*, *deleted* records
- can implement certain functionalities which can otherwise be performed only via triggers

```
UPDATE Courses
SET cname = 'Database Management Systems'
OUTPUT inserted.cid, deleted.cname, inserted.cname,
      GETDATE(), SUSER_SNAME()
INTO CourseChanges
WHERE cid = 'DB2'
```

# Recap - The MERGE Statement

---

■ a source table is compared with a target table; INSERT, UPDATE, DELETE statements can be executed based on the result of the comparison, i.e., INSERT / UPDATE / DELETE operations can be executed on the target table based on the result of a join with the source table

# Recap - MERGE – General Syntax

---

```
MERGE TargetTable AS Target
USING SourceTable AS Source
ON (Search terms)
WHEN MATCHED THEN
    UPDATE SET
    or
    DELETE
WHEN NOT MATCHED [BY TARGET] THEN
    INSERT
WHEN NOT MATCHED BY SOURCE THEN
    UPDATE SET
    or
    DELETE
```

# Recap - MERGE example

## Books table

	BookID	Title	Author	ISBN	Pages
1	1	In Search of Lost Time	Marcel Proust	NULL	NULL
2	2	In Search of Lost Time	NULL	NULL	350
3	3	In Search of Lost Time	NULL	9789731246420	NULL

# Recap - MERGE example

---

MERGE Books  
USING

```
(SELECT MAX(BookID) BookID, Title, MAX(Author)  
Author, MAX(ISBN) ISBN, MAX(Pages) Pages  
FROM Books  
GROUP BY Title
```

```
) MergeData ON Books.BookID = MergeData.BookID  
WHEN MATCHED THEN  
    UPDATE SET Books.Title = MergeData.Title,  
    Books.Author = MergeData.Author,  
    Books.ISBN = MergeData.ISBN,  
    Books.Pages = MergeData.Pages  
WHEN NOT MATCHED BY SOURCE THEN DELETE;
```



# Recap - MERGE example

---

	BookID	Title	Author	ISBN	Pages
1	3	In Search of Lost Time	Marcel Proust	9789731246420	350