



CosmicWatch: The Desktop Muon Detectors, exploring gamma-ray spectroscopy

Andrés Felipe Vargas-Londoño

Universidad Nacional de Colombia
Facultad de Ciencias
Departamento de Física
Sede Bogotá, Colombia
2024

CosmicWatch: The Desktop Muon Detectors, exploring gamma-ray spectroscopy

Andrés Felipe Vargas-Londoño

Tesis presentada como requisito parcial para optar por el título de:
Físico

Director(a):
Prof. Luis Fernando Cristancho Mejia
Codirector(a):
Prof. Spencer Axani

Línea de investigación:
Espectroscopía gamma
Grupo de investigación:
Grupo de Física Nuclear Universidad Nacional (GFNUN)
Axani Group (AxLab)

Universidad Nacional de Colombia
Facultad de Ciencias
Departamento de Física
2024

Cita 01.

Autor

Fuente

Wenn du es nicht einfach erklären kannst, hast du es nicht genug verstanden - Si no eres capaz de explicar algo claramente, es que aún no lo has entendido lo suficiente.

Albert Einstein

Declaración

Me permito afirmar que he realizado ésta tesis de manera autónoma y con la única ayuda de los medios permitidos y no diferentes a los mencionados el presente texto. Todos los pasajes que se han tomado de manera textual o figurativa de textos publicados y no publicados, los he reconocido en el presente trabajo. Ninguna parte del presente trabajo se ha empleado en ningún otro tipo de tesis.

Sede Bogotá., Fecha entrega

Andrés Felipe Vargas-Londoño

Acknowledgments

This goes to my family, my mom and my dad, who no matter how many mistakes I make, there is never a hint of judgement or disappointment. To every teacher who put his soul into letting me explore a corner of their vast knowledge. And to every friend who stood there when things did not seem to be going anywhere. But also specially to myself, for not letting me ever down.

Listado de símbolos y abreviaturas

Resumen

CosmicWatch: Los Detectores de Muones de Escritorio, explorando la espectroscopía gamma

Texto del resumen.

Palabras clave: Use palabras clave que estén en Theasaurus

Abstract

CosmicWatch: The Desktop Muon Detectors, exploring gamma-ray spectroscopy

Abstract text.

Keywords: Use keywords available in Theasaurus

Table of contents

Acknowledgments	II
Listado de símbolos y abreviaturas	III
Resumen	IV
Abstract	V
List of Figures	VIII
List of Tables	IX
1. Introduction	1
2. Physical aspects	2
2.1. Radioactivity	2
2.2. Cosmic Radiation	2
2.3. Particle interactions with matter	2
3. Detector description	3
3.1. History	3
3.2. Plastic vs. LYSO	3
3.3. Power Consumption	3
3.4. KiCad	3
3.5. Accessories	3
3.6. 3D printed case	3
4. Detection methods	4
4.1. Scintillation	4
4.2. Single photon detectors	4
4.3. PMT's	4

4.4. SiPM advantages	4
5. Electronics	5
5.1. Amplifier	5
5.2. Peak Detector	6
5.2.1. Basic Peak Detector	6
5.2.2. Basic Peak Detector + Buffer	6
5.2.3. Nuclear Phoenix	6
5.3. Trigger	7
5.4. Microcontroller	7
5.5. DC to DC booster	7
5.6. Single photons	7
6. Geant4 Simulation	8
6.1. What is Geant4?	8
6.2. Geometry	8
6.3. Muons going through the scintillator	8
6.4. Photons collected vs. produced	8
6.5. Optimum SiPM placement	8
6.6. Simulated Spectra	8
7. Measurements	9
7.1. Rohde&Schwarz RTO6 oscilloscope	9
7.2. CosmicWatch electronics	9
7.3. NIM	9
8. Ongoing work and future directions	10
8.1. Odd features in Cesium spectra	10
8.2. Adding LYSO radioactivity to Geant4	10
9. Conclusion	11
A. RaspberryPi Pico code	12
Bibliography	13

List of Figures

5-1. Amplifier circuit schematic.	5
5-2. Basic peak detector design, also used in previous versions of CosmicWatch detectors.	6

List of Tables

Chapter 1

Introduction

CosmicWatch: The Desktop Muon Detectors [1], are a self-contained, low-cost, and easy-to-build particle detector for students, scientists, and cosmic-ray enthusiasts. It aims to make particle detection interactive and available to anyone interested in learning about the electronics and physics involved in this area of expertise. With this in mind, the detector design prioritizes the user experience across the board, from its construction to data acquisition and processing. It uses a silicon photomultiplier (SiPM) to collect light emitted by a plastic scintillator after a charged particle, like a cosmic-ray muon, deposits some of its energy in it. This project aims to further expand the capabilities of CosmicWatch by exploiting the already existing electronics and implementing the necessary features to transform the detector into a portable gamma-ray spectrometer

Using a Cerium doped Lutetium-based scintillation crystal (LYSO), we have achieved an energy resolution of $4,86\sqrt{E}$ [MeV] while testing in a Rohde&Schwarz RTO6 oscilloscope to sample the data.

The human body is known to have many limitations, our senses are often not the best tools to delve into the intricacies of nature. For many years scientists have taken advantage of the sensitivity of materials to further expand our capabilities to explore the world around us, bringing to our reach worlds once invisible. Scintillating crystals for example have allowed us to develop a type of detector able to distinguish the energy deposition in it, making elusive particles trackable, no longer letting them escape our curiosity. The wonders of these types of detectors are sadly not easily available to everyone, scintillating and solid-state detectors are often out of the economic capacities of most. CosmicWatch Desktop Muon Detectors are therefore an extremely powerful tool to bring particle detection closer to the public, students, and young scientists like myself. This work thus aims to further explore and expand the capabilities of CosmicWatch, hoping to one day provide a self-contained, low-cost, and easy-to-build particle detector suited for gamma-ray spectroscopy.

Chapter 2

Physical aspects

2.1. Radioactivity

2.2. Cosmic Radiation

2.3. Particle interactions with matter

Chapter 3

Detector description

3.1. History

3.2. Plastic vs. LYSO

3.3. Power Consumption

3.4. KiCad

3.5. Accessories

3.6. 3D printed case

In order to make the crystal easier to mount on the SiPM PCB it was necessary to design a 3D printed case. With this we made sure that the crystal would not move with respect to the SiPM, preventing scratches and providing a more stable optical coupling with the photomultiplier.

The design keeps in mind that the crystal has to be wrapped in teflon tape to increase reflectivity, which is why it comes in two pieces that come together around the crystal, lowering the risk of tears. Once the crystal is placed in the case it can be kept together by means of electrical tape.

Chapter 4

Detection methods

4.1. Scintillation

4.2. Single photon detectors

4.3. PMT's

4.4. SiPM advantages

Chapter 5

Electronics

CosmicWatches have to be mainly low-cost and easy to build, in order to achieve this the components selected for the construction have been carefully curated to make sure this restrictions were met. This however might be greatly responsible for some of the odd features found while testing the detector, like the lack of linearity. The full KiCad project can be found in the GitHub repository: [CosmicWatch-gamma-spectroscopy-PCB](#).

5.1. Amplifier

An op-amp on its own amplifies the voltage difference between the non-inverting and inverting inputs by its internal gain A_{int} , having then $V_{out} = A_{int}(V_+ - V_-)$. In this case, however, we are interested in controlling the gain of the circuit and therefore the amplification. In order to achieve this we introduce a feedback loop in the op-amp through R_4 and R_6 , which controls how much of the output voltage is fed back into the op-amp. The theoretical amplification is therefore given by $V_{out} = (1 + R_6/R_4)V_{in}$. A simple schematic showcasing the component arrangement is shown in Figure 5-1.

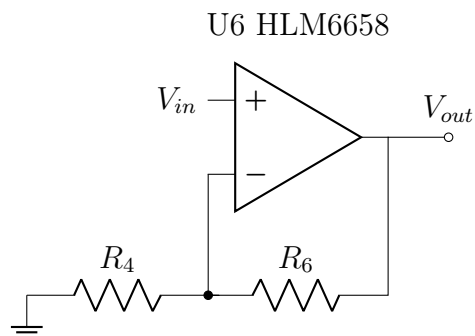


Figura 5-1: Amplifier circuit schematic.

5.2. Peak Detector

The idea behind the peak detector is to store charge in a capacitor (C_{25}) through a diode (D_3), retaining the highest voltage the input signal reaches. A diode is placed before the capacitor so that once the signal's voltage goes below the peak voltage, the diode will be reverse biased, therefore preventing current from flowing while maintaining the voltage on the capacitor.

In order to measure the voltage in the capacitor, a discharging resistor has to be added (R_{15}/R_{19}). The time it takes the capacitor to discharge is given by $t = RC$. Although for example in the case of CosmicWatch-V2's peak detector, the values of R_{14} and R_{24} also play a role in the discharging time that hasn't proved to be as trivial as calculating the equivalent resistance R_t of all three and simply take $t = R_t C$.

In order to test multiple peak-detector designs, the schematics and PCB shown in [CosmicWatch-gamma-spectroscopy-PCB](#), include the connections and footprints necessary to place the components that make the designs illustrated in Subsections 5.2.1-3.

5.2.1. Basic Peak Detector

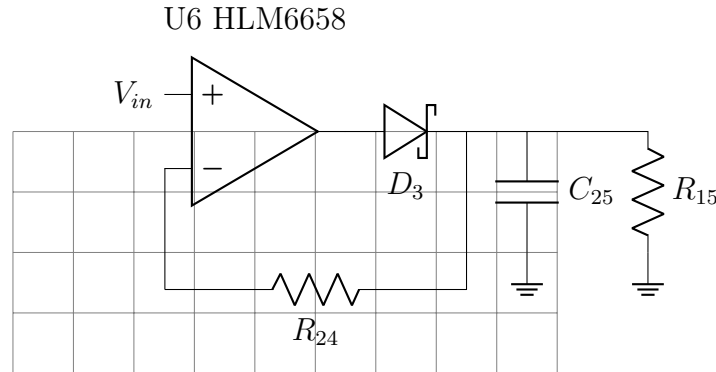


Figura 5-2: Basic peak detector design, also used in previous versions of CosmicWatch detectors.

5.2.2. Basic Peak Detector + Buffer

5.2.3. Nuclear Phoenix

5.3. Trigger

5.4. Microcontroller

5.5. DC to DC booster

5.6. Single photons

Chapter 6

Geant4 Simulation

- 6.1. What is Geant4?
- 6.2. Geometry
- 6.3. Muons going through the scintillator
- 6.4. Photons collected vs. produced
- 6.5. Optimum SiPM placement
- 6.6. Simulated Spectra

Chapter 7

Measurements

7.1. Rohde&Schwarz RTO6 oscilloscope

7.2. CosmicWatch electronics

7.3. NIM

Chapter 8

Ongoing work and future directions

8.1. Odd features in Cesium spectra

8.2. Adding LYSO radioactivity to Geant4

Chapter 9

Conclusion

Appendix A

RaspberryPi Pico code

Bibliography

- [1] Spencer N. Axani. The physics behind the cosmicwatch desktop muon detectors, 2019.
- [2] Nuclear Phoenix. Open-gamma-detector, 2024.