


Java

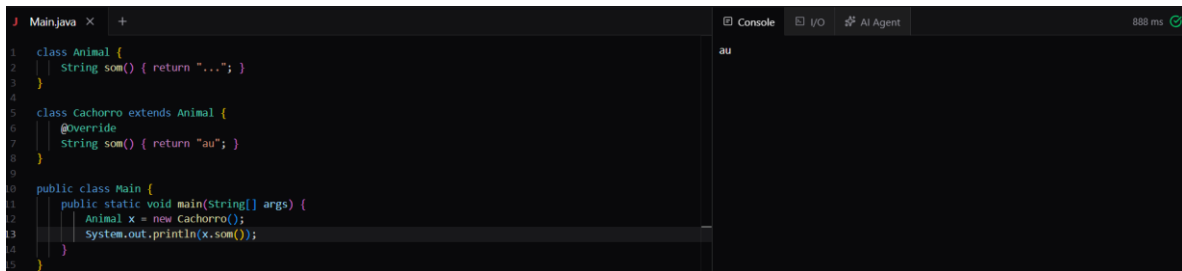


The screenshot shows a Java IDE with a file named 'Main.java'. The code defines a class hierarchy: 'Animal' with a 'som()' method returning "..."; 'Cachorro' extends 'Animal' and overrides 'som()' to return "au"; and 'Main' with a 'main()' method that creates a 'Cachorro' object and prints its 'som()' result. The console on the right shows the output 'au' and a runtime time of 888 ms.

```
1 class Animal {  
2     String som() { return "..."; }  
3 }  
4  
5 class Cachorro extends Animal {  
6     @Override  
7     String som() { return "au"; }  
8 }  
9  
10 public class Main {  
11     public static void main(String[] args) {  
12         Animal x = new Cachorro();  
13         System.out.println(x.som());  
14     }  
15 }
```

Retorna “au”, decisão na execução.

C++

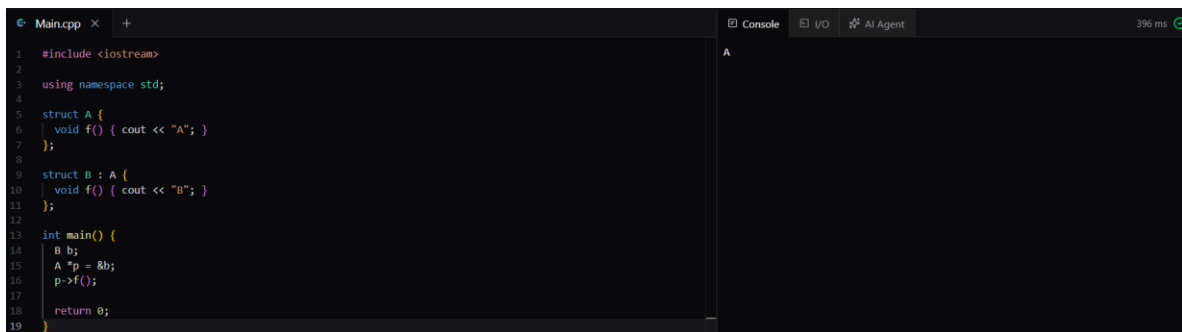


The screenshot shows a C++ IDE with a file named 'Main.cpp'. The code defines two structs: 'A' with a 'f()' method that prints 'A'; and 'B' which inherits from 'A' and overrides 'f()' to print 'B'. The 'main()' function creates a 'B' object, casts it to 'A', and calls 'f()'. The console on the right shows the output 'A' and a runtime time of 396 ms.

```
1 #include <iostream>  
2  
3 using namespace std;  
4  
5 struct A {  
6     void f() { cout << "A"; }  
7 };  
8  
9 struct B : A {  
10     void f() { cout << "B"; }  
11 };  
12  
13 int main() {  
14     B b;  
15     A *p = &b;  
16     p->f();  
17     return 0;  
18 }
```

Retorna “a”, decisão na compilação.

Java

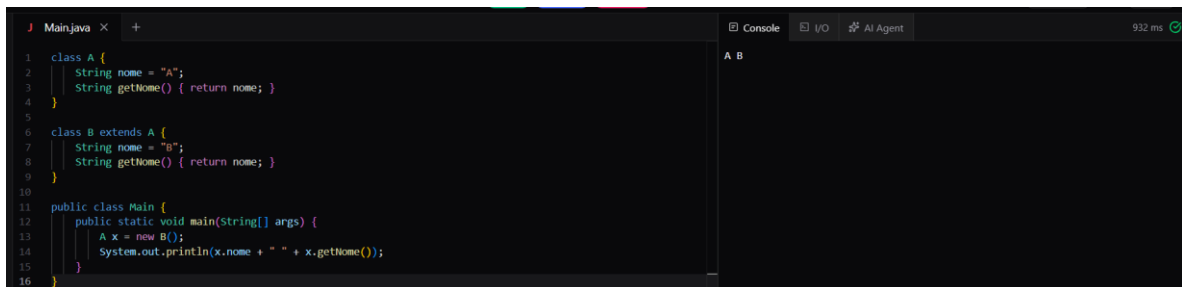

The screenshot shows a Java IDE with a file named 'Main.java'. The code defines a class hierarchy: 'A' with a 'nome' attribute and a 'getNome()' method returning 'A'; 'B' extends 'A' and overrides 'getNome()' to return 'B'; and 'Main' with a 'main()' method that creates a 'B' object and prints its 'nome' and 'getNome()' result. The console on the right shows the output 'A B' and a runtime time of 932 ms.

```
1 class A {  
2     String nome = "A";  
3     String getNome() { return nome; }  
4 }  
5  
6 class B extends A {  
7     String nome = "B";  
8     String getNome() { return nome; }  
9 }  
10  
11 public class Main {  
12     public static void main(String[] args) {  
13         A x = new B();  
14         System.out.println(x.nome + " " + x.getNome());  
15     }  
16 }
```

Retorna “A B”, decisão dividida entre compilação e execução.

Python

```
main.py x +
1 class Contador:
2     total = 0
3     def __init__(self):
4         Contador.total += 1
5         self.id = Contador.total
6
7 a = Contador(); b = Contador()
8 print(a.id, b.id, a.total)
```

Console I/O AI Agent 141 ms

1 2 2

Retorna “1 2 2”, decisão em execução.

Java

```
Main.java x +
1 class A {
2     static String quem() { return "A"; }
3 }
4
5 class B extends A {
6     static String quem() { return "B"; }
7 }
8
9 public class Main {
10     public static void main(String[] args) {
11         A x = new B();
12         System.out.println(x.quem());
13     }
14 }
```

Console I/O AI Agent 869 ms

A

Retorna “A”, decisão em compilação.

GO

```
main.go x
1 package main
2
3 import "fmt"
4
5 type Animal struct{}
6
7 func (Animal) Som() string { return "..."}
8
9 func (a Animal) Falar() string {
10     return "faz " + a.Som()
11 }
12
13 type Cao struct{ Animal }
14
15 func (Cao) Som() string { return "au"}
16
17 func main() {
18     fmt.Println(Cao{}.Falar(), Cao{}.Som())
19 }
```

Console I/O AI Agent 265 ms

faz ... au

Retorna “faz ... au”, decisão em execução.