

# Selected Exercises from Fundamentals of Database Systems

Andrew Kowalczyk

I selected around 40 questions from the 6<sup>th</sup> edition of *Fundamentals of Database Systems* by Ramez Elmasri and Shamkant Navathe. This was part of my requirement for my Introduction to Database Systems course taken in the Fall of 2013.

# Contents

<b>Chapter 1</b>	<b>3</b>
1.8 . . . . .	3
1.9 . . . . .	3
1.10 . . . . .	3
1.11 . . . . .	4
1.12 . . . . .	4
<b>Chapter 2</b>	<b>5</b>
2.12 . . . . .	5
<b>Chapter 3</b>	<b>5</b>
3.11 . . . . .	5
<b>Chapter 4</b>	<b>8</b>
4.9 . . . . .	8
4.12 . . . . .	9
<b>Chapter 6</b>	<b>10</b>
6.15 . . . . .	10
6.16 . . . . .	12
<b>Chapter 7</b>	<b>16</b>
7.16 . . . . .	17
7.18 . . . . .	19
7.19 . . . . .	20
<b>Chapter 9</b>	<b>22</b>
9.3 . . . . .	22
<b>Chapter 11</b>	<b>22</b>
11.31 . . . . .	22

# Chapter 1

## 1.8 Identify some informal queries and update operations that you would expect to apply to the database shown in Figure 1.2.

### Queries

1. What are the prerequisites of the Database course?
2. Find the names of all students majoring in Mathematics.
3. Find the transcript of the student named Brown.

### Updates

1. Insert a new student in the database whose Name=Kowalczyk, Student\_number=25, Class=4, and Major=CS.
2. Change the grade that Brown received in Discrete Mathematics to a D.

## 1.9 What is the difference between controlled and uncontrolled redundancy? Illustrate with examples.

Redundancy is the term given when the same data is stored multiple times in several places in a database. If you look at Figure 1.5(a) in the text, you can see that the name of the student with Student\_number=8 is Brown is stored multiple times. Redundancy is controlled when the database management system (DBMS) ensures that multiple copies of the same data are consistent. To illustrate this, let's say we are adding a new record with Student\_number=8 to be stored in the database of Figure 1.5(a). If we were to have uncontrolled redundancy, the DBMS would have no control over this. If we were to have controlled redundancy, the DBMS would ensure that Student\_name=Brown in that record.

## 1.10 Specify all the relationships among the records of the database shown in Figure 1.2.

1. Every GRADE\_REPORT record is related to one STUDENT record and one SECTION record.

2. Every SECTION record is related to a COURSE record.
3. Every PREREQUISITE record relates two COURSE records. One being a course and the other being a prerequisite to that course.

**1.11 Give some additional views that may be needed by other user groups for the database shown in Figure 1.2.**

1. A view of each class section that groups all the students who took that section and their respective grade.
2. A view that gives the number of courses taken and the grade point average for each student.

**1.12 Cite some examples of integrity constraints that you think can apply to the database shown in Figure 1.2.**

**Key constraints**

1. Student\_number must be unique for each STUDENT record.
2. Course\_number must be unique for each COURSE record.

**Referential integrity constraints**

1. The Course\_number in a SECTION record must also exist in some COURSE record.
2. The Student\_number in a GRADE\_REPORT record must also exist in some STUDENT record.

**Domain constraints**

1. Grades in a a given GRADE\_REPORT record must be one of these values: A, B, C, D, F, I, W.

## Chapter 2

**2.12 Think of different users for the database shown in Figure 1.2. What types of applications would each user need? To which user category would each belong, and what type of interface would each need?**

1. Students add and drop classes. Actions that they can do are as listed:
  - (a) Register themselves in a section of a course
  - (b) Drop themselves from a section of a course
2. Registrar. They enter data of registration of students in sections of courses, and later enter the grades of the students. Actions that they can do are as listed:
  - (a) Check whether a student who is registered in a course has the appropriate prerequisite courses
  - (b) Add a student to a section of a course
  - (c) Enter the student grades for a section
3. Admissions. Their main application would be to enter newly accepted students into the database. Actions that they can do are as listed:
  - (a) Add students to the school's records

## Chapter 3

**3.11 Suppose that each of the following Update operations is applied directly to the database state shown in Figure 3.6. Discuss all integrity constraints violated by each operation, if any, and the different ways of enforcing these constraints.**

In each of examples, the different ways of enforcing the constraints is listed in preferential order (*i.e.* 1 is most preferred, 2 is less preferred, etc.).

**(a) Insert <"Robert", "F", "Scott", "943775543", "1972-06-21", "2365 Newcastle Rd, Bellaire, TX", M, 58000, "888665555", 1> into EMPLOYEE.**

No constraints violated.

**(b) Insert <"ProductA", 4, "Bellaire", 2> into PROJECT.**

Since there is no tuple in the DEPARTMENT relation with DNUM=2, this insertion would violate referential integrity for that very reason. We can enforce the constraint with these options:

1. Rejecting the insertion
2. Changing the value of DNUM in the new PROJECT tuple to an existing DNUMBER value in the DEPARTMENT relation
3. Inserting a new DEPARTMENT tuple with DNUMBER=2

**(c) Insert <"Production", 4, "943775543", "2007-10-01"> into DEPARTMENT.**

Oh no! Since there already exists a DEPARTMENT tuple with DNUMBER=4, this would violate the key constraint. Enforcement of this constraint would happen by:

1. Rejecting the insertion
2. Changing the value of DNUMBER in the new DEPARTMENT tuple to a value that does not violate the key constraint

Also, since there is no tuple in the EMPLOYEE relation with SSN="943775543", this insertion also happens to violate referential integrity. Let us enforce the constraint by either:

1. Rejecting the insertion
2. Changing the value of MGRSSN to an existing SSN value in EMPLOYEE
3. Inserting a new EMPLOYEE tuple with SSN="943775543"

**(d) Insert <"677678989", NULL, "40.0"> into WORKS\_ON.**

Since PNO (part of the primary key of WORKS\_ON) is null, this violates entity integrity. We have these options to enforce this constraint:

1. Rejecting the insertion
2. Changing the value of PNO in the new WORKS\_ON tuple to a value of PNUMBER that exists in the PROJECT relation

Since there is no tuple in the EMPLOYEE relation with SSN="677678989", this insertion would violate referential integrity. We may enforce the constraint by:

1. Rejecting the insertion
2. Changing the value of ESSN to an existing SSN value in EMPLOYEE
3. Inserting a new EMPLOYEE tuple with SSN="677678989"

**(e) Insert <'453453453','John','M','1990-12-12','spouse'> into DEPENDENT.**

Nope! Not a single constraint was violated.

**(f) Delete the WORKS\_ON tuples with Essn = '333445555'.**

No constraints violated in the making of this delete.

**(g) Delete the EMPLOYEE tuple with Ssn = '987654321'.**

Unfortunately, the employee trying to be deleted is referenced in the WORKS\_ON, DEPENDENT, DEPARTMENT, and EMPLOYEE relations. We can enforce such an abolishment by either:

1. Rejecting the deletion
2. Deleting all tuples in the WORKS\_ON, DEPENDENT, DEPARTMENT, and EMPLOYEE relations whose values for ESSN, ESSN, MGRSSN, and SUPERSSN, respectively, is equal to '987654321'

**(h) Delete the PROJECT tuple with Pname='ProductX'.**

This deletion would completely violate referential integrity because two tuples exist in the WORKS\_ON relation that reference the tuple being deleted from PROJECT. Silly us, let's enforce the constraint by:

1. Rejecting the deletion
2. Deleting the tuples in the WORKS\_ON relation whose value for the primary key PNUMBER for the tuple being deleted from PROJECT with PNO=1

**(i) Modify the Mgr\_ssn and Mgr\_start\_date of the DEPARTMENT tuple with Dnumber = 5 to '123456789' and '2007-10-01', respectively.**

No violation of constraints.

**(j) Modify the Super\_ssn attribute of the EMPLOYEE tuple with Ssn = '999887777' to '943775543'.**

Goodness gracious, great balls of fire! Since there is no tuple in the EMPLOYEE relation with SSN='943775543', this update would violate referential integrity. In order to enforce this constraint, we can choose from:

1. Rejecting the deletion
2. Inserting a new EMPLOYEE tuple with SSN='943775543'

**(k) Modify the Hours attribute of the WORKS\_ON tuple with Essn = '999887777' and Pno = 10 to '5.0'.**

No constraints violated.

## **Chapter 4**

### **4.9 How can the key and foreign key constraints be enforced by the DBMS? Is the enforcement technique you suggest difficult to implement? Can the constraint checks be executed efficiently when updates are applied to the database?**

In order to check efficiently for the key constraint, one can create an index on all of the attributes that form each primary or secondary key. Even before the new record



is inserted, each index is searched to insure that no value currently exists in the index that matches the key value in the new record. If this is the case, the record is inserted successfully and we are happy.

In order to check efficiently for the foreign key constraint, the primary key is given an index for each referenced relation. Due to this, the check is efficient enough for our purposes. Each time a new record is inserted in a referencing relation, we search the index for the primary key of the referenced relation. The value of its foreign key is used to accomplish this. The new record can be successfully inserted in the referencing relation if the referenced record exists. For the deletion of any given referenced record, an index on the foreign key of each of the referencing relations is very useful. We want to efficiently determine whether any records reference that given record. If the techniques described above do not exist, then, unfortunately, we must do linear searches to check for any of the above constraints. This would make the checks quite inefficient, and it would make us unhappy.

#### 4.12 Specify the following queries in SQL on the database schema of Figure 1.2.

(a) Retrieve the names of all senior students majoring in "CS" (computer science).

```
SELECT Name
FROM STUDENT
WHERE Major="CS"
      AND Class="4"
```

(b) Retrieve the names of all courses taught by Professor King in 2007 and 2008.

```
SELECT Course_name
FROM COURSE,
      SECTION
WHERE COURSE.Course_number=SECTION.Course_number
      AND Instructor="King"
      AND (Year="07" OR Year="08")
```

(c) For each section taught by Professor King, retrieve the course number, semester, year, and number of students who took the section.

```
SELECT Course_number ,
       Semester ,
       Year ,
```

```

COUNT(*)
FROM SECTION,
GRADE_REPORT
WHERE Instructor="King"
AND SECTION.Section_identifier=GRADE_REPORT.Section_identifier
GROUP BY Course_number, Semester, Year

```

(d) Retrieve the name and transcript of each senior student (Class = 4) majoring in CS. A transcript includes course name, course number, credit hours, semester, year, and grade for each course completed by the student.

```

SELECT Name,
       C.Course_name,
       C.Course_number,
       Credit_hours,
       Semester,
       Year,
       Grade
FROM STUDENT ST,
      COURSE C,
      SECTION S,
      GRADE_REPORT G
WHERE Class=4
      AND Major="CS"
      AND ST.StudentNumber=G.StudentNumber
      AND G.Section_identifier=S.Section_identifier
      AND S.Course_number=C.Course_number

```

## Chapter 6

6.15 Show the result of each of the sample queries in Section 6.5 as it would apply to the database state in Figure 3.6.

Query 1: Find the name and address of all employees who work for the 'Research' department.

FNAME	LNAME	ADDRESS
John	Smith	731 Fondren, Houston, TX
Franklin	Wong	638 Voss, Houston, TX
Ramesh	Narayan	975 Fire Oak, Humble, TX
Joyce	English	5631 Rice, Houston, TX

**Query 2:** For every project located in 'Stafford', list the project number, the controlling department number, and the department manager's last name, address, and birth date.

PNUMBER	DNUM	LNAME	ADDRESS	BDATE
10	4	Wallace	291 Berry, Bellaire, TX	20-JUN-31
30	4	Wallace	291 Berry, Bellaire, TX	20-JUN-31

**Query 3:** Find the names of all employees who work on all the projects controlled by department number 5.

LNAME	FNAME
-------	-------

**Query 4:** Make a list of project numbers for projects that involve an employee whose last name is 'Smith' as a worker or as a manager of the department that controls the project.

PNO
1
2

**Query 5:** List the names of all employees with two or more dependents.

LNAME	FNAME
Smith	John
Wong	Franklin

**Query 6:** List the names of employees who have no dependents.

LNAME	FNAME
Zelaya	Alicia
Narayan	Ramesh
English	Joyce
Jabbar	Ahmad
Borg	James

**Query 7:** List the names of managers who have at least one dependent.

LNAME	FNAME
Wallace	Jennifer
Wong	Franklin

**6.16 Specify the following queries on the COMPANY relational database schema shown in Figure 5.5, using the relational operators discussed in this chapter. Also show the result of each query as it would apply to the database state in Figure 3.6.**

I use the symbol  $\sigma$  for SELECT,  $\pi$  for PROJECT,  $\bowtie$  for EQUIJOIN,  $*$  for NATURAL JOIN, and  $\mathfrak{F}$  for FUNCTION.

**(a) Retrieve the names of employees in department 5 who work more than 10 hours per week on the "ProductX" project.**

**Relational Operators**

$EMP\_W\_X \leftarrow (\sigma_{PNAME="ProductX"}(PROJECT)) \bowtie_{(PNUMBER),(PNO)} (WORKS\_ON)$   
 $EMP\_WORK\_10 \leftarrow (EMPLOYEE) \bowtie_{(SSN),(ESSN)} (\sigma_{HOURS>10}(EMP\_W\_X))$   
 $RESULT \leftarrow \pi_{LNAME,FNAME} (\sigma_{DNO=5}(EMP\_WORK\_10))$

**Result**

LNAME	FNAME
Smith	John
English	Joyce

**(b) List the names of employees who have a dependent with the same first name as themselves.**

**Relational Operators**

$E \leftarrow (EMPLOYEE) \bowtie_{(SSN,FNAME),(ESSN,DEPENDENT\_NAME)} (DEPENDENT)$   
 $R \leftarrow \pi_{LNAME,FNAME} (E)$

**Result**

LNAME	FNAME
-------	-------

(c) Find the names of employees that are directly supervised by "Franklin Wong".

#### Relational Operators

$WONG\_SSN \leftarrow \pi_{SSN} ( \sigma_{FNAME='Franklin' \text{ AND } LNAME='Wong'} (EMPLOYEE))$   
 $WONG\_EMPS \leftarrow (EMPLOYEE) \triangleright \triangleleft_{(SUPERSSN),(SSN)} (WONG\_SSN)$   
 $RESULT \leftarrow \pi_{LNAME,FNAME} (WONG\_EMPS)$

#### Result

LNAME	FNAME
Smith	John
Narayan	Ramesh
English	Joyce

(d) For each project, list the project name and the total hours per week (by all employees) spent on that project.

#### Relational Operators

$PROJ\_HOURS(PNO,TOT\_HRS) \leftarrow_{PNO} \mathfrak{F}_{SUM\ HOURS} (WORKS\_ON)$   
 $RESULT \leftarrow \pi_{PNAME,TOT\_HRS} ( (PROJ\_HOURS) \triangleright \triangleleft_{(PNO),(PNUMBER)} (PROJECT) )$

#### Result

PNAME	TOT_HRS
ProductX	52.5
ProductY	37.5
ProductZ	50.0
Computerization	55.0
Reorganization	25.0
Newbenefits	55.0

(e) Retrieve the names of employees who work on every project.

#### Relational Operators

$PROJ\_EMPS(PNO,SSN) \leftarrow \pi_{PNO,ESSN} (WORKS\_ON)$   
 $ALL\_PROJS(PNO) \leftarrow \pi_{PNUMBER} (PROJECT)$

$EMPS\_ALL\_PROJS \leftarrow PROJ\_EMPS \div ALLPROJS$   
 $RESULT \leftarrow \pi_{LNAME, FNAME} (EMPLOYEE * EMP\_ALL\_PROJS)$

**Result**

LNAME	FNAME
-------	-------

(f) Retrieve the names of employees who do not work on any project.

**Relational Operators**

$ALL\_EMPS \leftarrow \pi_{SSN} (EMPLOYEE)$   
 $WORKING\_EMPS(SSN) \leftarrow \pi_{ESSN} (WORKS\_ON)$   
 $NON\_WORKING\_EMPS \leftarrow ALL\_EMPS - WORKING\_EMPS$   
 $RESULT \leftarrow \pi_{LNAME, FNAME} (EMPLOYEE * NON\_WORKING\_EMPS)$

**Result**

LNAME	FNAME
-------	-------

(g) For each department, retrieve the department name and the average salary of all employees working in that department.

**Relational Operators**

$DEPT\_AVG\_SALS(DNUMBER, AVG\_SAL) \leftarrow DNO \bowtie_{AVG\_SALARY} (EMPLOYEE)$   
 $RESULT \leftarrow \pi_{DNUMBER, AVG\_SAL} (DEPT\_AVG\_SALS * DEPARTMENT)$

**Result**

DNUMBER	AVG_SAL
Research	33250
Administration	31000
Headquarters	55000

(h) Retrieve the average salary of all female employees.

**Relational Operators**

$RESULT(AVG\_F\_SAL) \leftarrow \bowtie_{AVG\_SALARY} ( \sigma_{SEX='F'} (EMPLOYEE) )$

## Result

$$\frac{\text{AVG\_F\_SAL}}{31,000}$$

(i) Find the names and addresses of employees who work on at least one project located in Houston but whose department has no location in Houston.

## Relational Operators

$E\_P\_HOU(SSN) \leftarrow \pi_{ESSN} (WORKS\_ON \triangleright \triangleleft (PNO),(PNUMBER) ( \sigma_{PLOCATION="Houston"} (PROJECT)))$   
 $D\_NO\_HOU \leftarrow \pi_{DNUMBER} (DEPARTMENT) - \pi_{DNUMBER} ( \sigma_{DLOCATION="Houston"} (DEPARTMENT))$   
 $E\_D\_NO\_HOU \leftarrow \pi_{SSN} (EMPLOYEE \triangleright \triangleleft (PNO),(DNUMBER) (D\_NO\_HOU))$   
 $RESULT\_EMPS \leftarrow E\_P\_HOU - E\_D\_NO\_HOU$   
 $RESULT \leftarrow \pi_{LNAME,FNAME,ADDRESS} (EMPLOYEE * RESULT\_EMPS)$

## Result

LNAME	FNAME	ADDRESS
Wallace	Jennifer	291 Berry, Bellaire, TX

(j) List the last names of department managers who have no dependents.

## Relational Operators

$DEPT\_MANAGERS(SSN) \leftarrow \pi_{MGRSSN} (DEPARTMENT)$   
 $EMPS\_WITH\_DEPENDENTS(SSN) \leftarrow \pi_{ESSN} (DEPENDENT)$   
 $RESULT\_EMPS \leftarrow DEPT\_MANAGERS - EMPS\_WITH\_DEPENDENTS$   
 $RESULT \leftarrow \pi_{LNAME,FNAME} (EMPLOYEE * RESULT\_EMPS)$

## Relational Operators

LNAME	FNAME
Borg	James

## Chapter 7

7.16 Consider the following set of requirements for a UNIVERSITY database that is used to keep track of students' transcripts. This is similar but not identical to the database shown in Figure 1.2.


- (a) The university keeps track of each student's name, student number, Social Security number, current address and phone number, permanent address and phone number, birth date, sex, class (freshman, sophomore, ..., graduate), major department, minor department (if any), and degree program (B.A., B.S., ..., Ph.D.). Some user applications need to refer to the city, state, and ZIP Code of the student's permanent address and to the student's last name. Both Social Security number and student number have unique values for each student.
- (b) Each department is described by a name, department code, office number, office phone number, and college. Both name and code have unique values for each department.
- (c) Each course has a course name, description, course number, number of semester hours, level, and offering department. The value of the course number is unique for each course.
- (d) Each section has an instructor, semester, year, course, and section number. The section number distinguishes sections of the same course that are taught during the same semester/year; its values are 1, 2, 3, ..., up to the number of sections taught during each semester.




- (e) A grade report has a student, section, letter grade, and numeric grade (0, 1, 2, 3, or 4).

Design an ER schema for this application, and draw an ER diagram for the schema. Specify key attributes of each entity type, and structural constraints on each relationship type. Note any unspecified requirements, and make appropriate assumptions to make the specification complete.

7.16 (cont)

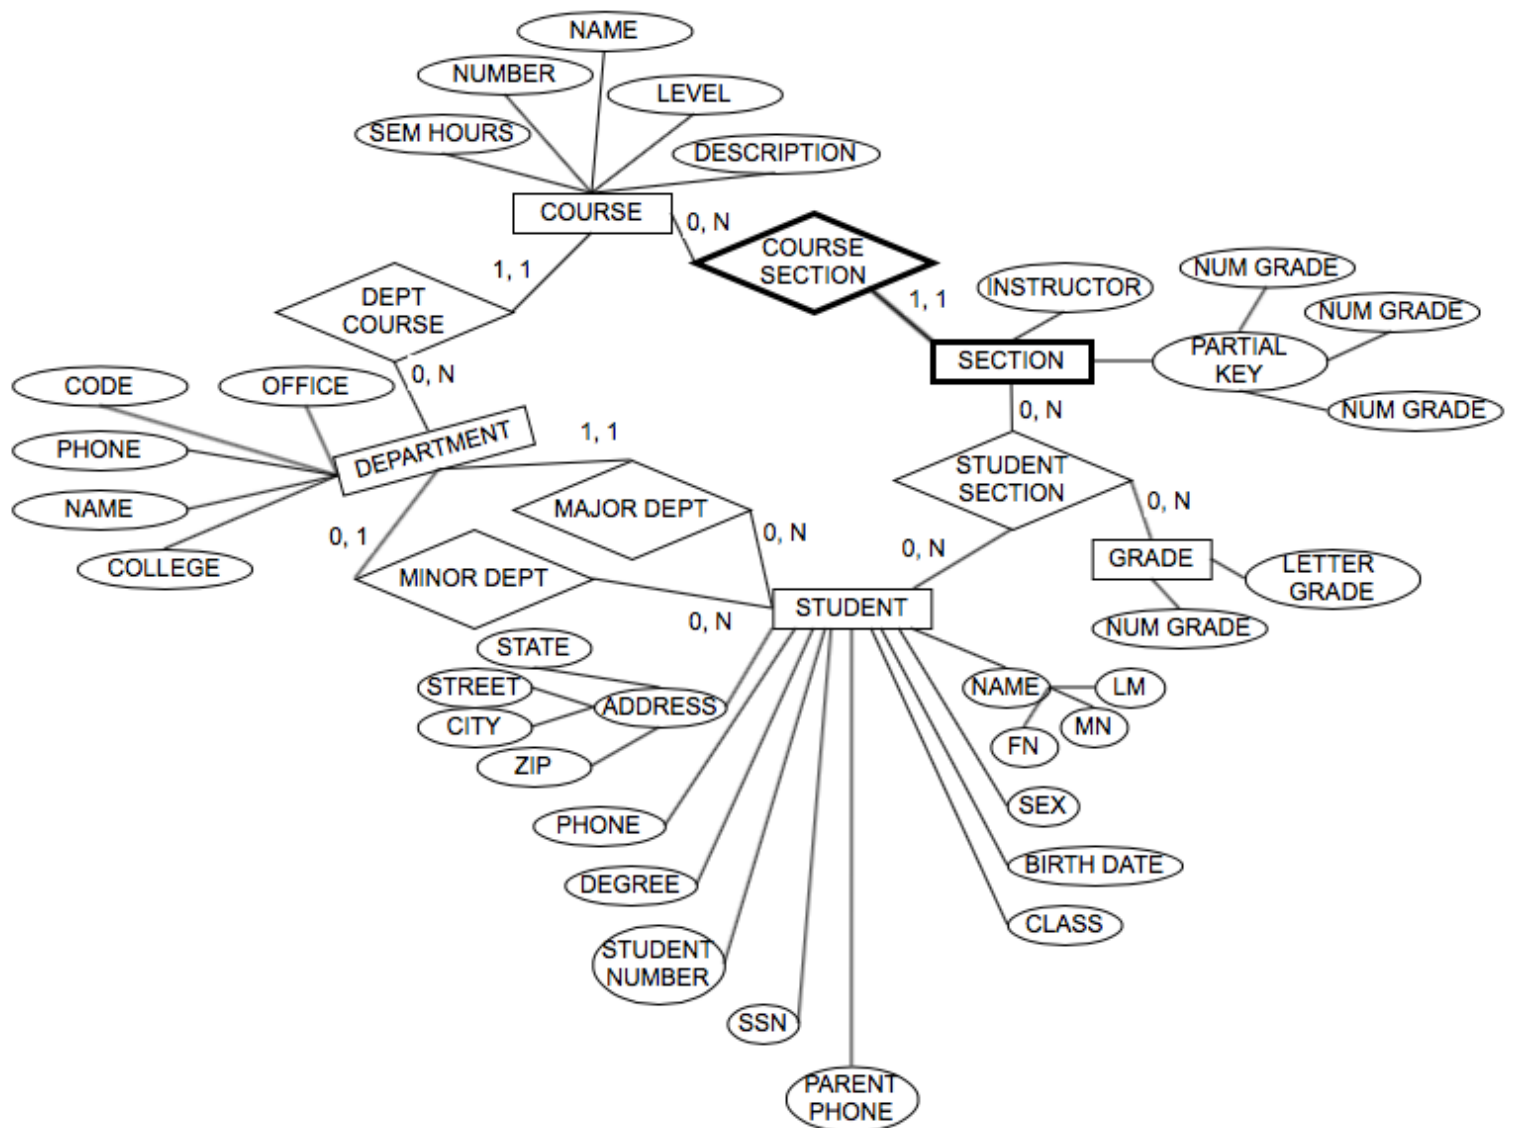

**7.18** Show an alternative design for the attribute described in Exercise 7.17 that uses only entity types (including weak entity types, if needed) and relationship types.

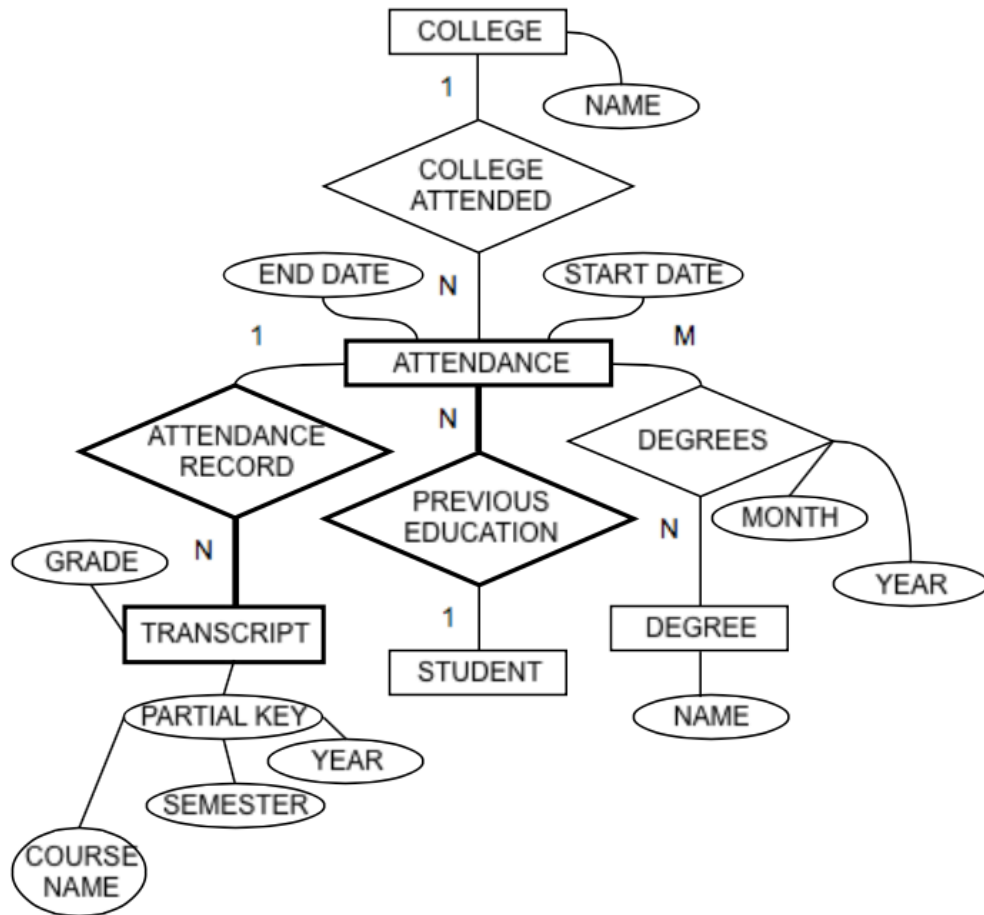


**7.19 Consider the ER diagram in Figure 7.20, which shows a simplified schema for an airline reservations system. Extract from the ER diagram the requirements and constraints that produced this schema. Try to be as precise as possible in your requirements and constraints specification.**

1. The given database represents any given AIRPORT. It keeps its unique Airport\_code, AIRPORT name, city and state in which it is located.
2. For each LEG\_INSTANCE, the customer RESERVATIONS includes a Customer\_name, Cphone, and Seat\_no(s).
3. One can see that each FLIGHT has its unique number, its Airline, and the Weekdays on which it is scheduled.
4. Information on AIRPLANES and AIRPLANE TYPEs are also kept. Every AIRPLANE TYPE stores the Type\_name, manufacturing Company, and Maximum Number of Seats, and AIRPORTs in which planes of that type CAN\_LAND. For each AIRPLANE, the airplane ID, Total number of seats, and TYPE are kept.
5. On a specific Date, a LEG\_INSTANCE is an instance of a FLIGHT\_LEG. After any FLIGHT\_LEG has been concluded, the DEPARTURE\_AIRPORT, ARRIVAL\_AIRPORT, the arrival times, number of available seats, and the AIRPLANE used are recorded for that FLIGHT\_LEG.
6. Any given FLIGHT has one or more FLIGHT\_LEGs. Each FLIGHT\_LEG has a DEPARTURE\_AIRPORT and ARRIVAL\_AIRPORT, with their respective Scheduled\_dep\_time and Scheduled\_arr\_time.


## Chapter 8

8.17 Consider the BANK ER schema in Figure 7.21, and suppose that it is necessary to keep track of different types of ACCOUNTS (SAVINGS\_ACCTS, CHECKING\_ACCTS, ...) and LOANS (CAR\_LOANS, HOME\_LOANS, ...). Suppose that it is also desirable to keep track of each ACCOUNT's TRANSACTIONS (deposits, withdrawals, checks, ...) and each LOAN's PAYMENTS; both of these include the amount, date, and time. Modify the BANK schema, using ER and EER concepts of specialization and generalization. State any assumptions you make about the additional requirements.

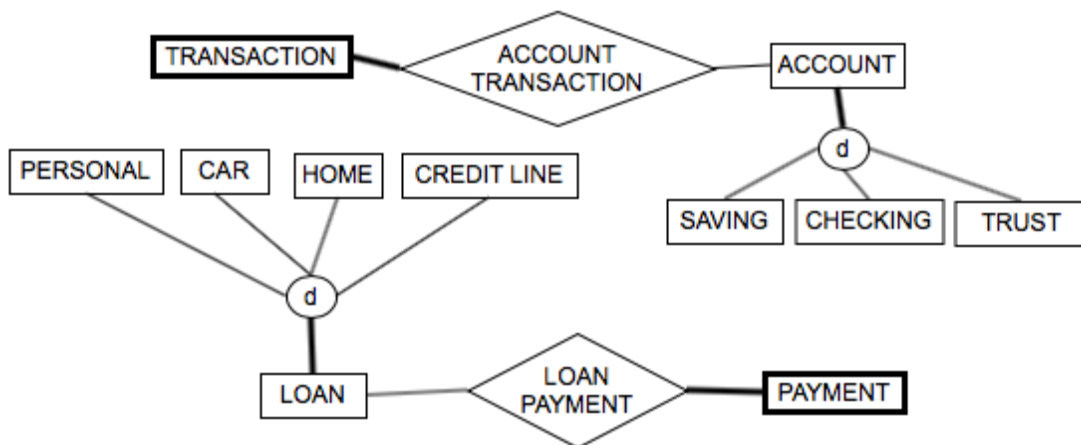

## Chapter 9

9.3 Try to map the relational schema in Figure 6.14 into an ER schema. This is part of a process known as reverse engineering, where a conceptual schema is created for an existing implemented database. State any assumptions you make.

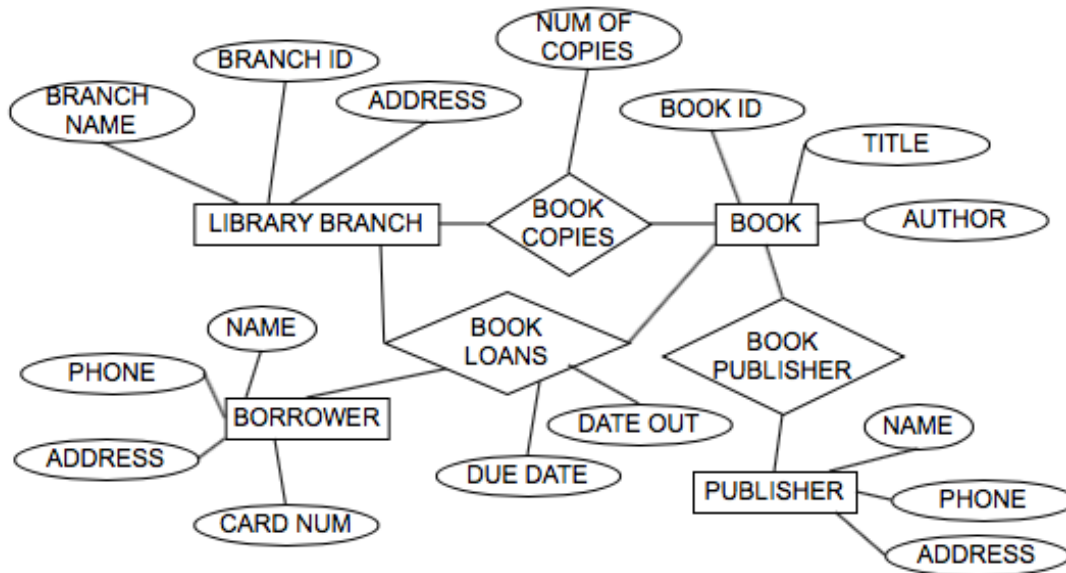

Book authors, in this particular diagram, are represented as a multi-valued attribute of books.

## Chapter 11

11.31 Map the COMPANY ER schema in Figure 7.2 into ODL classes. Include appropriate methods for each class.

```
class Employee
( extent      employees
  key         ssn
)
{ attribute   struct name { string fname,
```

```

                                string mname,
                                string lname } name;

attribute    string          ssn;
attribute    date           bdate;
attribute    enum           GenderM, F sex;
attribute    string          address;
attribute    float          salary;
attribute    Employee        supervisor;
relationship Department works_for inverse Department:: has_employees;
relationship set<Hours_Worked> work inverse Hours_Worked:: work_by;
short        age();
void         give_raise(in float raise);
void         change_address(in string new_address);
void         reassign_emp(in string new_dname) raises (dname_not_valid); };

```

**class** Department

```

( extent      departments
  key         dname, dnumber )
{ attribute   string          dname;
  attribute   short          dnumber;
  attribute   struct          Dept_Mgr Employee manager, date startdate mgr;
  attribute   set<string>      locations;
  relationship set<Employee> has_employees inverse Employee:: works_for;
  relationship set<Project> controls inverse Project:: controlled_by;
  short       no_of_employees();
  void        add_emp(in string new_essn) raises (essn_not_valid);
  void        add_proj(in string new_pname) raises (pname_not_valid);
  void        change_manger(in string new_mssn; in date startdate) raises (mssn_not_

```

```

class Project
( extent      projects
  key         pname, pnumber )
{ attribute   string      pname;
  attribute   short       pnumber;
  attribute   string      location;
  relationship Department controlled_by inverse Department:: controls;
  relationship set<Hours_Worked> work_at inverse Hours_Worked:: work_on;
  void        reassign_proj(in string new_dname) raises (dname_not_valid) };

```

```

class Hours_Worked
( extent      hours_worked )
{ attribute   float       hours;
  relationship Employee work_by inverse Employee:: work;
  relationship Project work_on inverse Project:: work_at;
  void        change_hours(in float new_hours); };

```

```

class Dependent
( extent      dependents )
{ attribute   string      name;
  attribute   date        bdate;
  attribute   enum        Gender{M, F} sex;
  attribute   string      relationship;
  attribute   Employee    supporter;
  short      age(); };

```