HTTPS://FULLSTACK.NEXUS/
ROOM 2224

Full-Stack Nexus

2/13/25

CSS TRANSITIONS & ANIMATIONS

CSS Transitions & Animations

Allows the manipulation of continuous properties of an HTML element over a timed interval.

-Width & Height

-Background Color

-Text Color

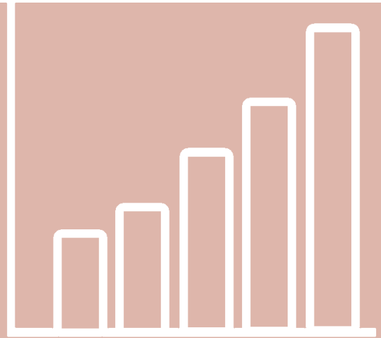

<– Transitions

- Used for single-state transformations
- Extremely simple to implement

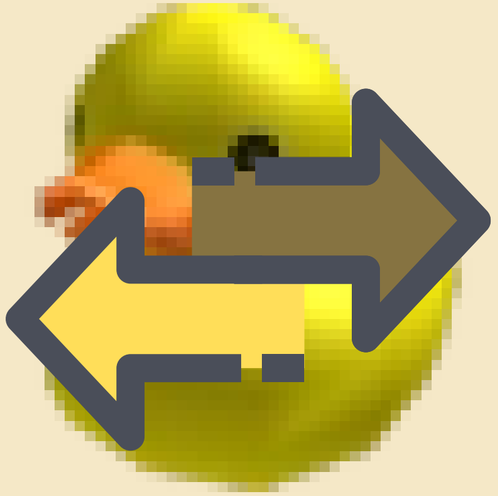

- Used for transformations with multiple stages
- More control

Animations –>

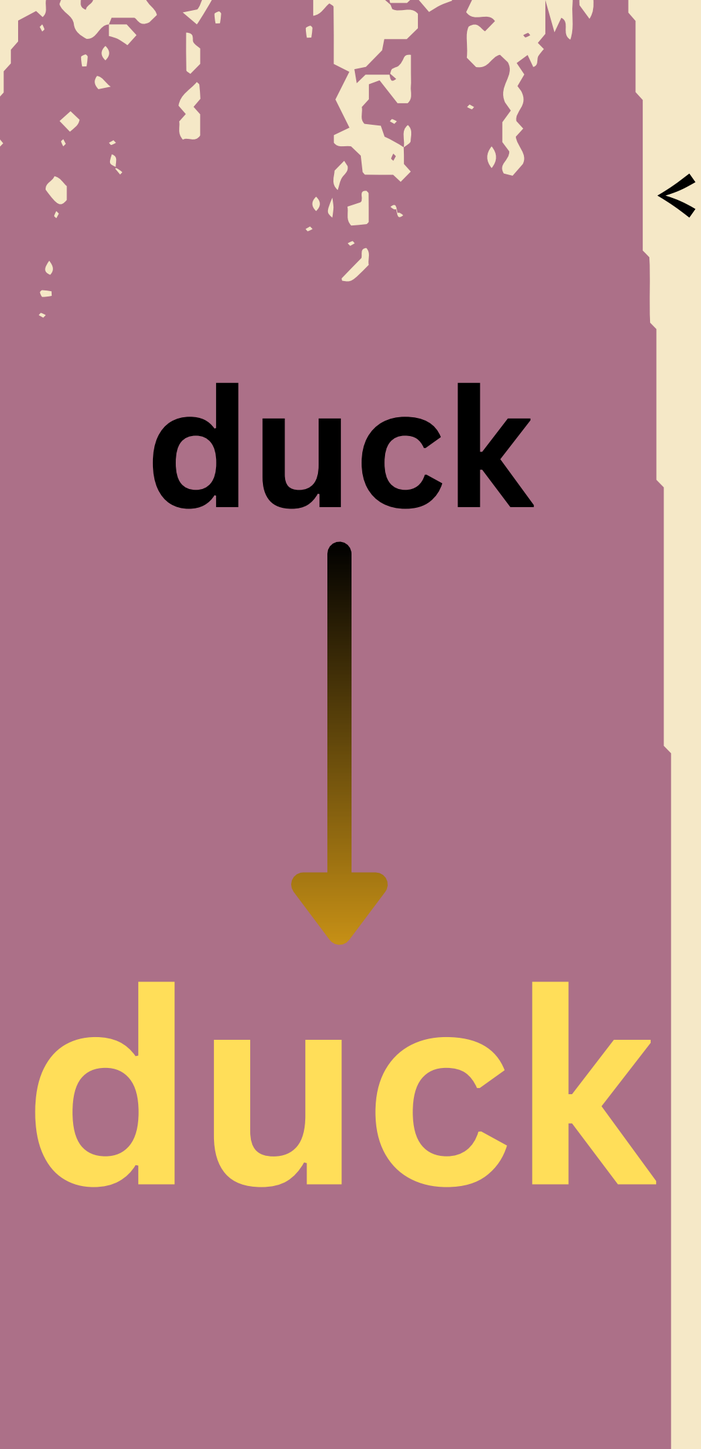

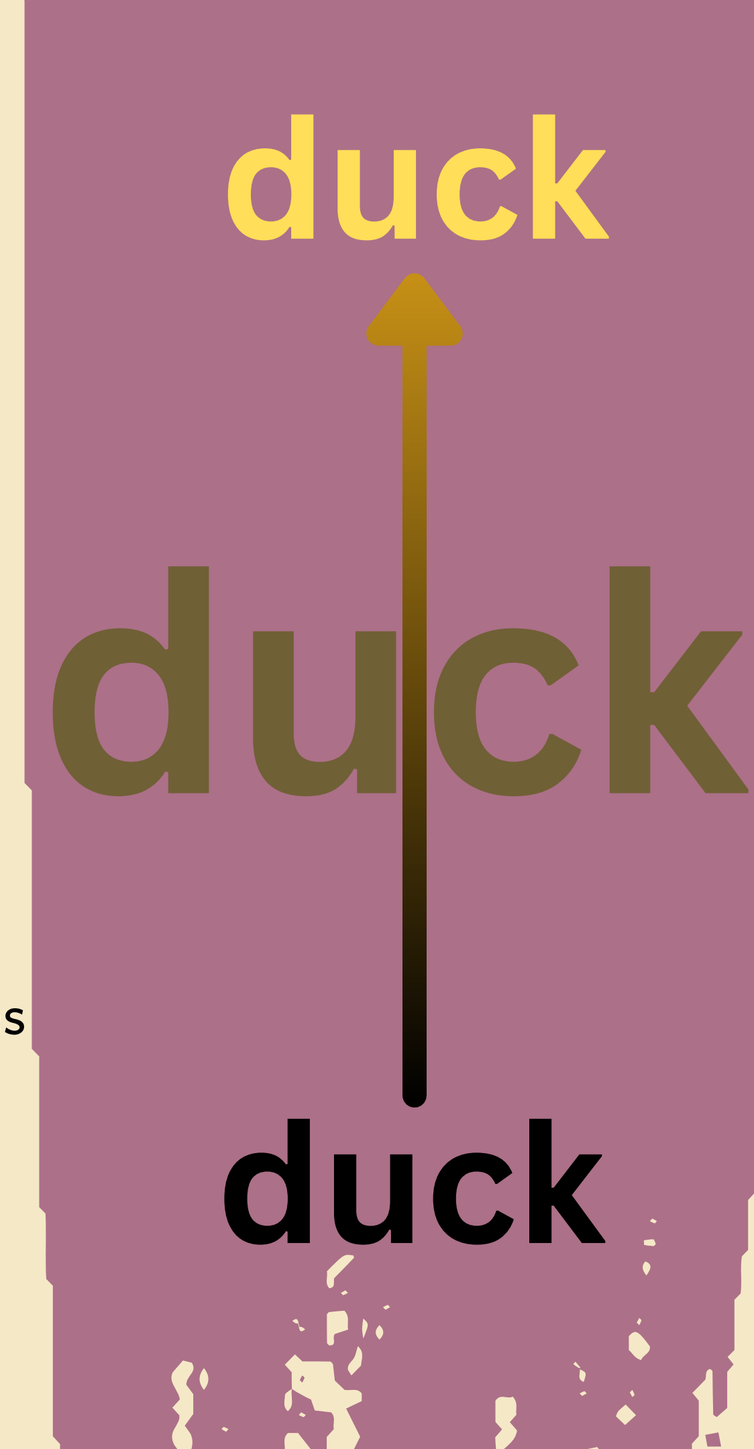

Implementing Transitions

For the element(s) you want to animate, select them using CSS selectors in CSS and apply the ‘transition’ rule as seen below:

```
#duck {
    background-color: blue;
    font-size: 1em;

    transition: 400ms ease
    background-color;
    /* for animating single
properties */
    transition: 400ms ease;
    transition-property: background-color,
                         font-size;
    /* for animating two or more properties */

}
```

```
#duck:hover {
    background-color: gold;
    font-size: 2em;

    transition: 400ms ease
    background-color;
    /* transitions whenever
#duck is hovered over */
}
```

For animating two or more properties
For animating single properties

400ms

Duration of the transition in milliseconds

ease

The “curvature” of the transition

background-color

The rule(s) that the transition will apply to

Now, whenever you change the background-color or font-size of the element, it will have a smooth transition specified by the transition rule.

Implementing Animations

We will be using keyframes to do more complex animations.

The different percent values represent the state of the animation at that timeframe

keyframes

- percent values inside dictate timestamps (see example ->)
- properties and their values inside dictate the properties of the element at that timestamp

```
@keyframes duck_a {
    /* based on 400ms */
    0% { /* at 0ms */
        font-size: 1em;
        color: black;
    }
    50% { /* at 200ms */
        font-size: 2em;
        color: yellow;
    }
    100% { /* at 400ms */
        font-size: 1em;
        color: gold;
    }
}
```

```
#duck {
    font-size: 14px;
    color: black;
}

#duck:hover {
    animation: duck_a
    400ms ease-in;
    /* this code will
animate when the #duck
element is hovered over
*/
}
```

::before and ::after

```
.duck-class:before {
    content: “CHICKEN“;
    color: red;
    /* every .duck-class element
now has “CHICKEN“ before it */
}

.duck-class:after {
    content: “CHICKEN“;
    color: blue;
    /* every .duck-class element
now has “CHICKEN“ after it */
}
```

- A pseudo-element that acts like a blank HTML element inserted before and after every element selected by CSS
- Useful when you have to insert anything before any element of a certain type without having to copy-paste a lot of code.

#element::before

a blank HTML element placed before the parent element

#element::after

a blank HTML element placed after the parent element

VISIT:

https://bit.ly/3PBjSs4