
Migrating Voyager database to Oracle 11g at local computer step by step


Andy Tang

Kilgore College


Install Oracle 11G
Specify the database name and SID

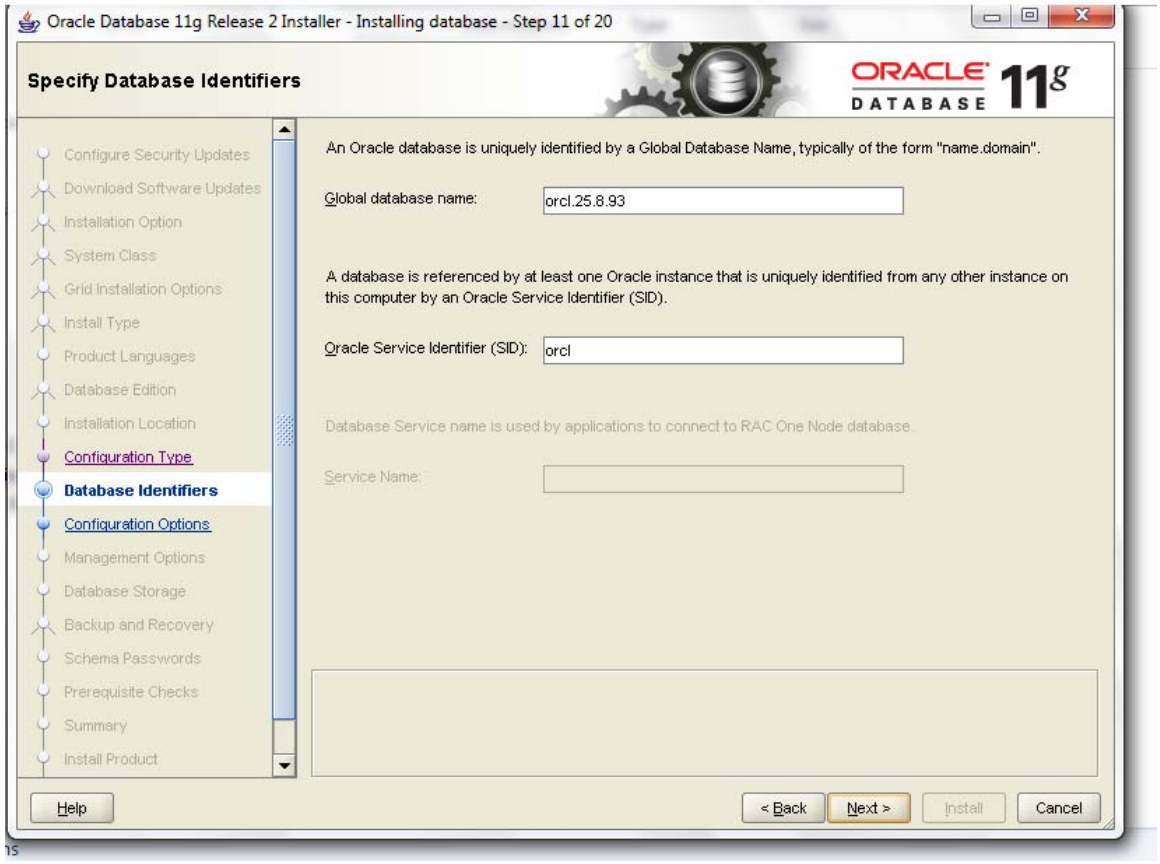


Specify the database location

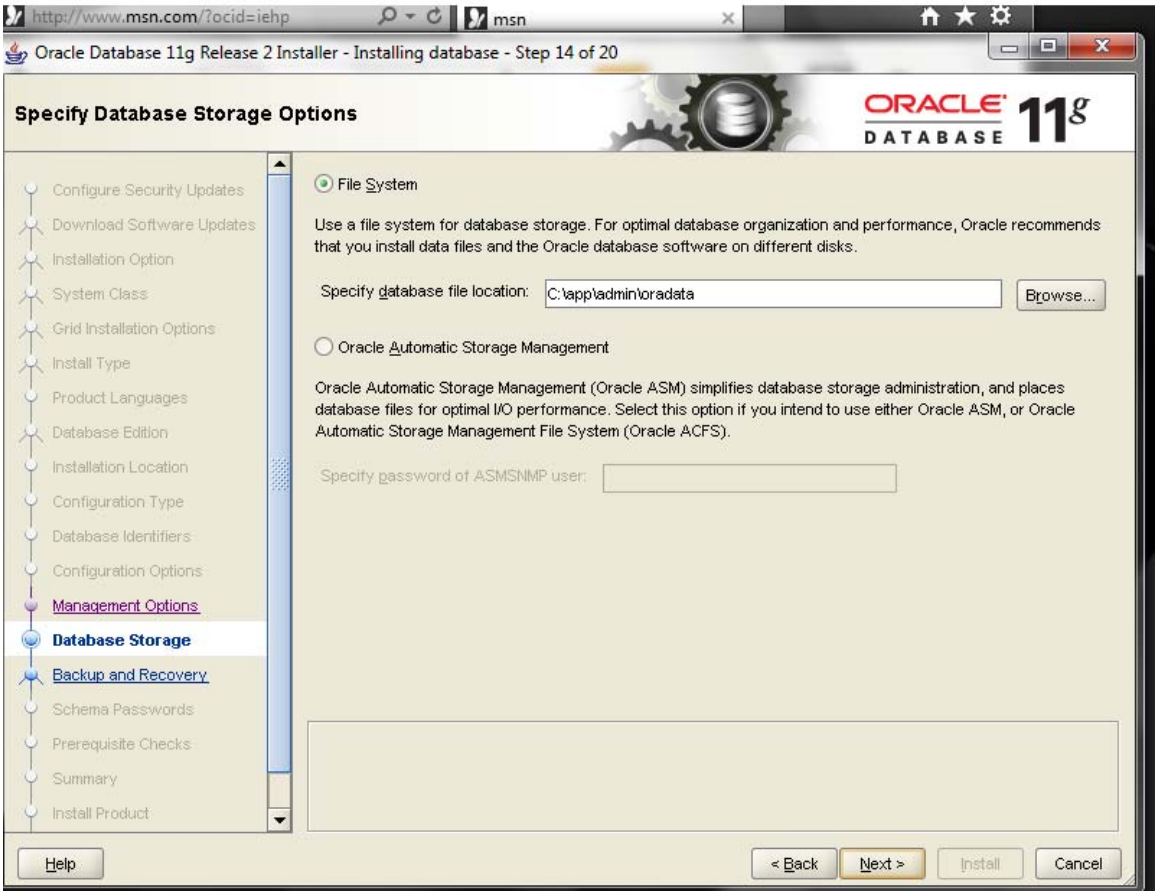


Specify the password

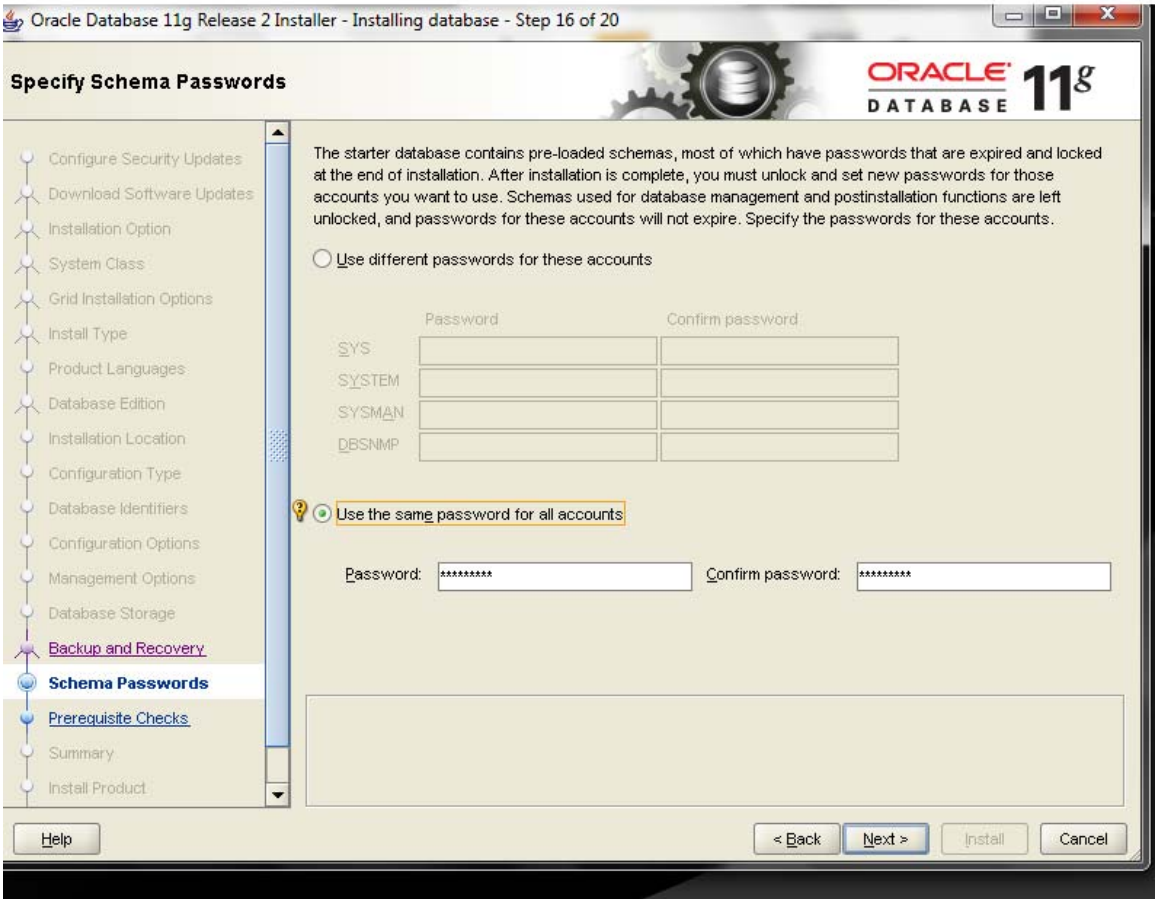


Create and allocate priviledge and authority to user

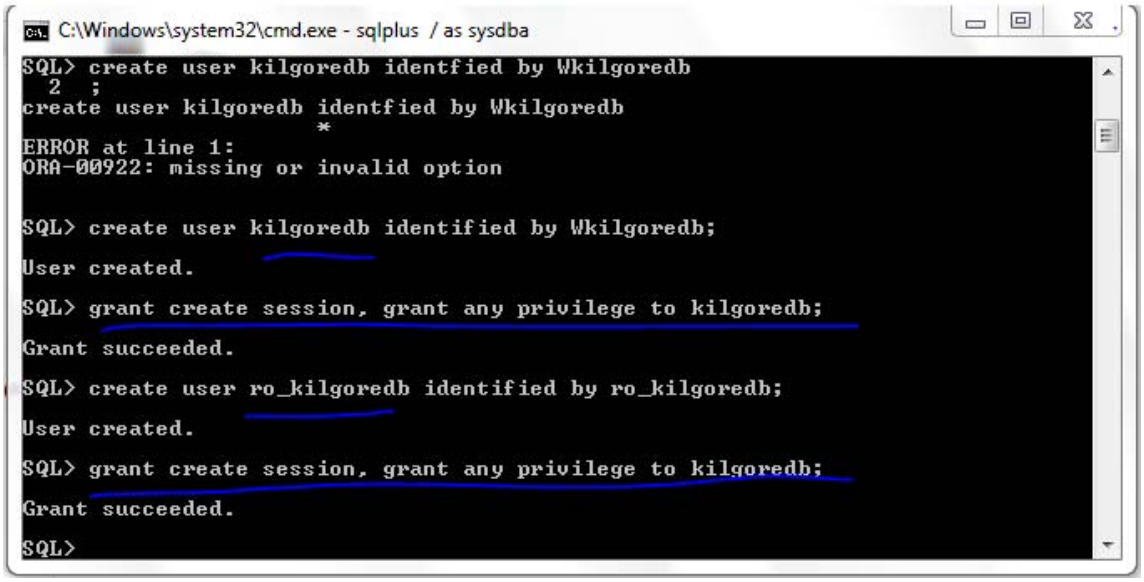

Create directory and allocate authority to directory

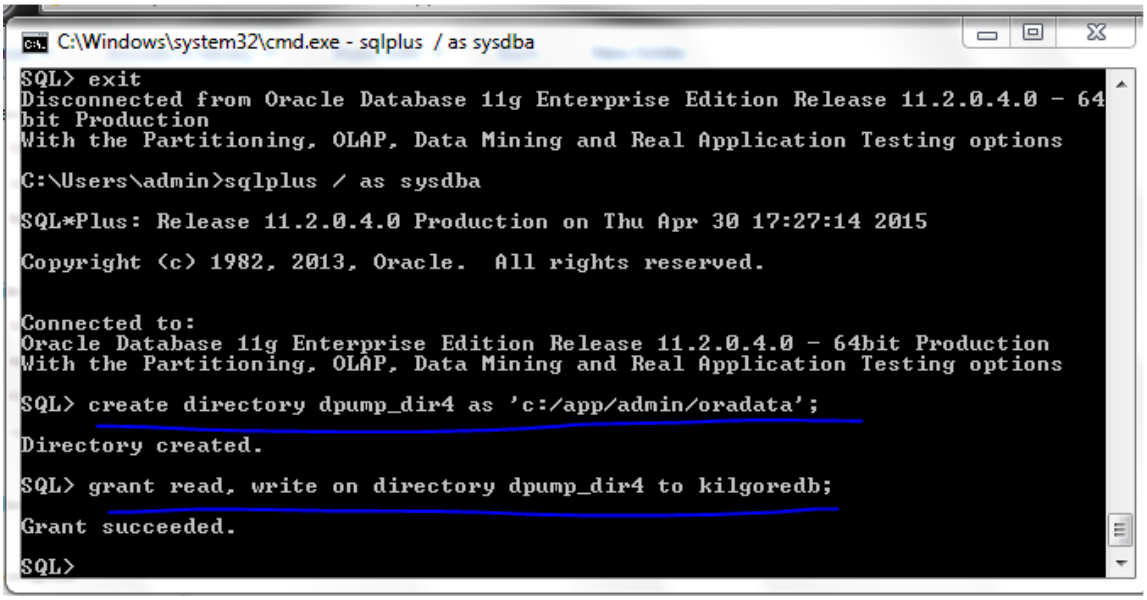

Before migrating Voyager database, check the tablespace

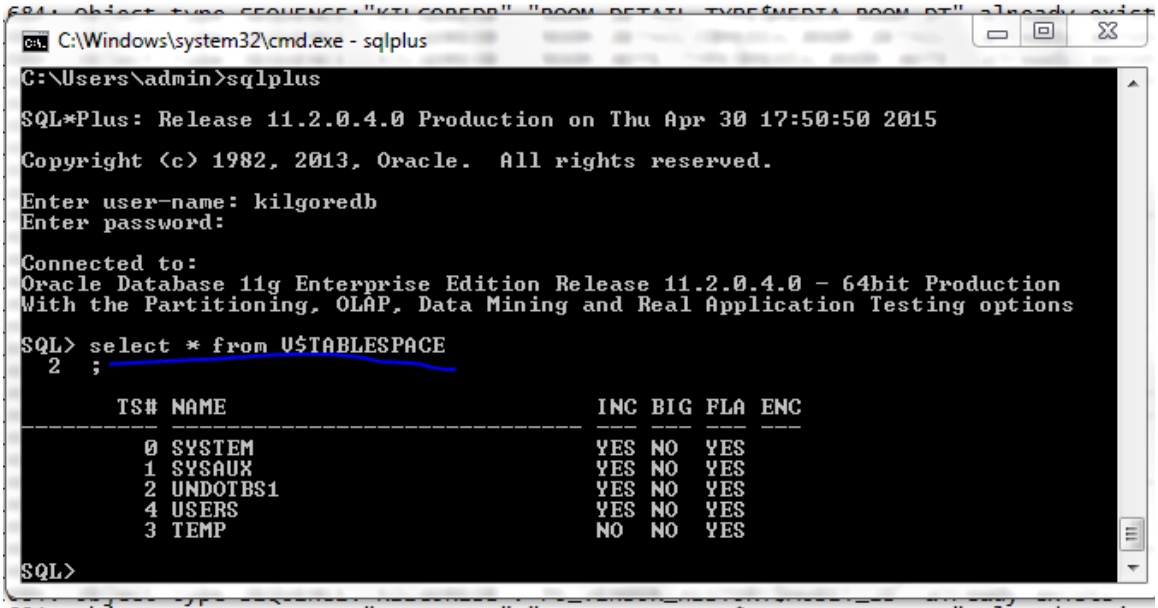



```
.684: Object type SEQUENCE:"KILGOREDB"."PRINT_LOCATION$PRINT_LOCATION_" already exist
.684: Object type SEQUENCE:"KILGOREDB"."PURCHASE_ORDER$PO_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."RECORD_SET$RECORD_SET_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."REMOTE_STORAGE_QUEUE$QUEUE_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."REQUEST_GROUP$GROUP_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."RESERVE_LIST$RESERVE_LIST_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."ROLLOVER_AUDIT$AUDIT_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."ROLLOVER_AUDIT$RUN_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."ROLLOVER_RULES$RULE_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."ROUTING_LIST$ROUTING_LIST_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."RULE_DOC$RULE_DOC_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."RULE_SET$RULE_SET_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SAVED_SEARCHES$SAVED_S_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SERIAL_CLAIM$CLAIM_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SERIAL_CLAIM$CLAIM_THREAD" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SERIAL_SUPPLIER_REP$AUDIT_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SHORT_LOAN$SHORT_LOAN_ID" already exists
.684: Object type SEQUENCE:"KILGOREDB"."SNV_FIELDS$SNV_FIELDS_ID" already exists
sing object type SCHEMA_EXPORT/TABLE/TABLE
)083: Object type TABLE:"KILGOREDB"."ITEM_STATUS_TYPE" failed to create with error:
)959: tablespace 'KILGOREDB' does not exist
ıg sql is:
```


Query the service name




Check the content in folder c:\app\admin\product \11.2.0\dbhome_1\database

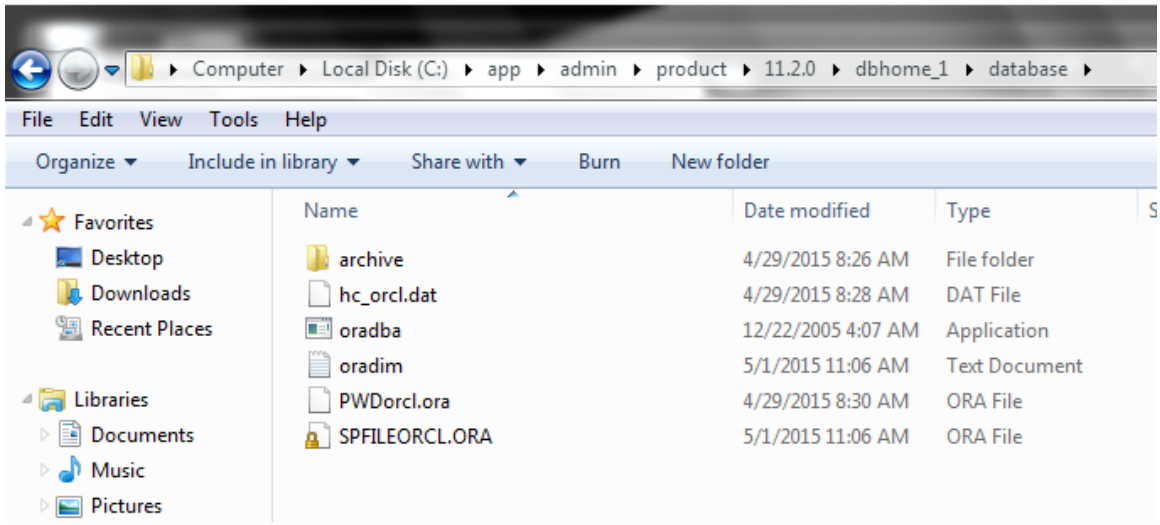


List the spfile I will use later

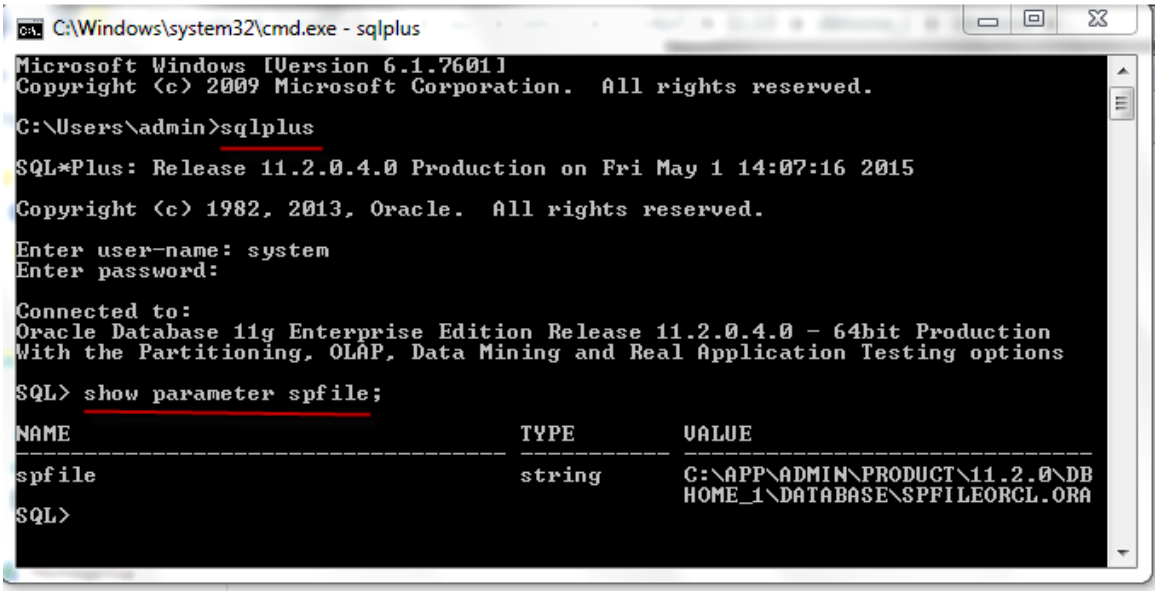


Login Sqlplus as sysdba

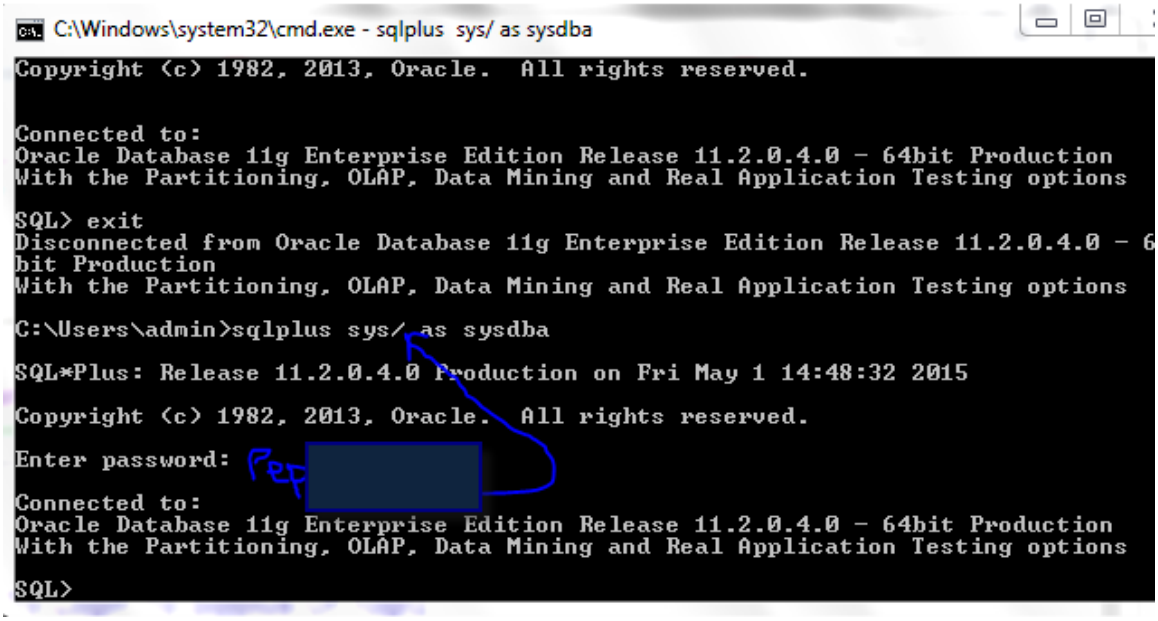


sqlplus sys/ as sysdba

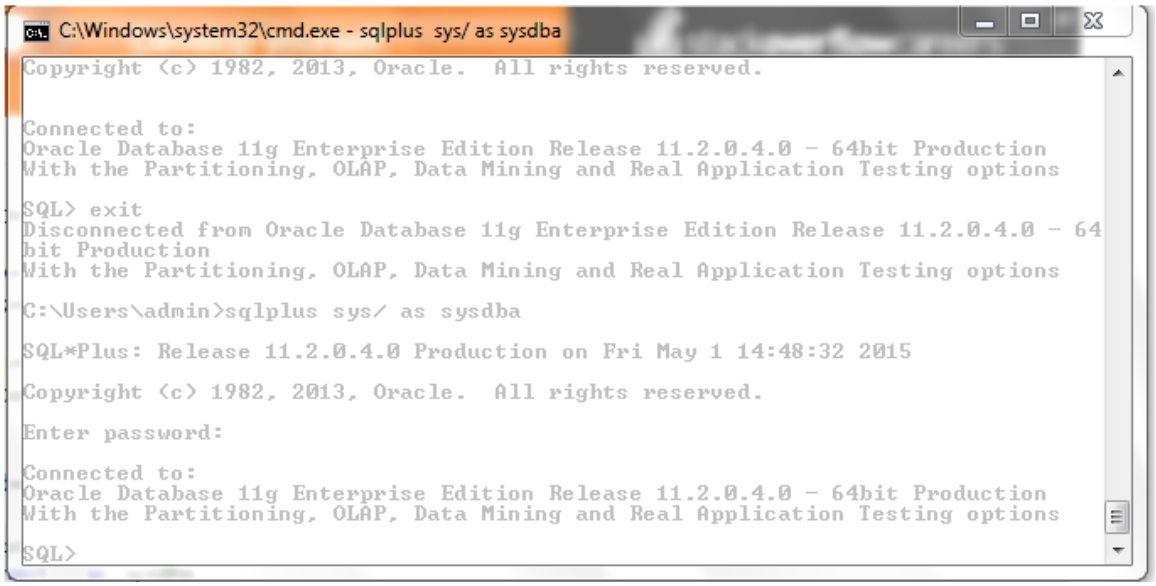


Check the content in DBA_tablespaces

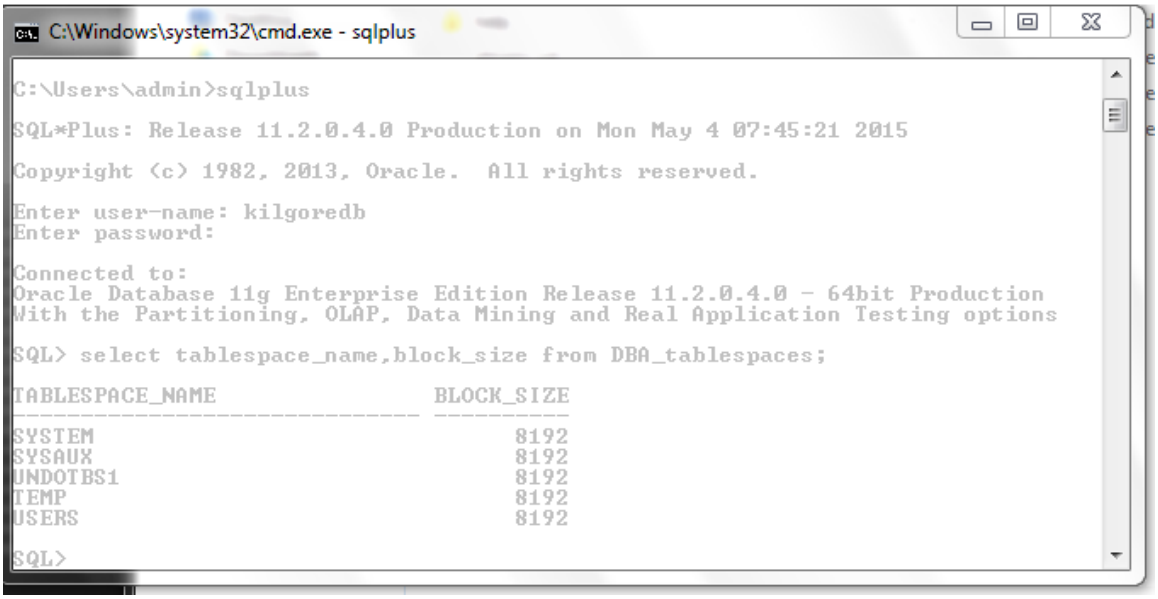


Create instance VGER first, then check the status of this VGER.

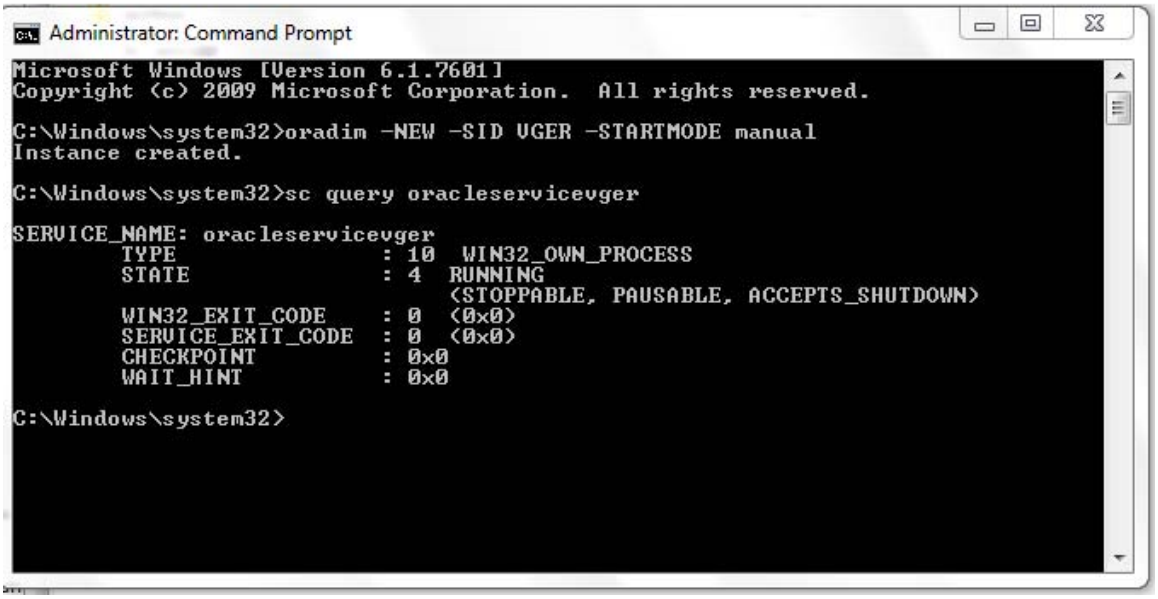


Check the services and ensure OracleServiceVGER is started

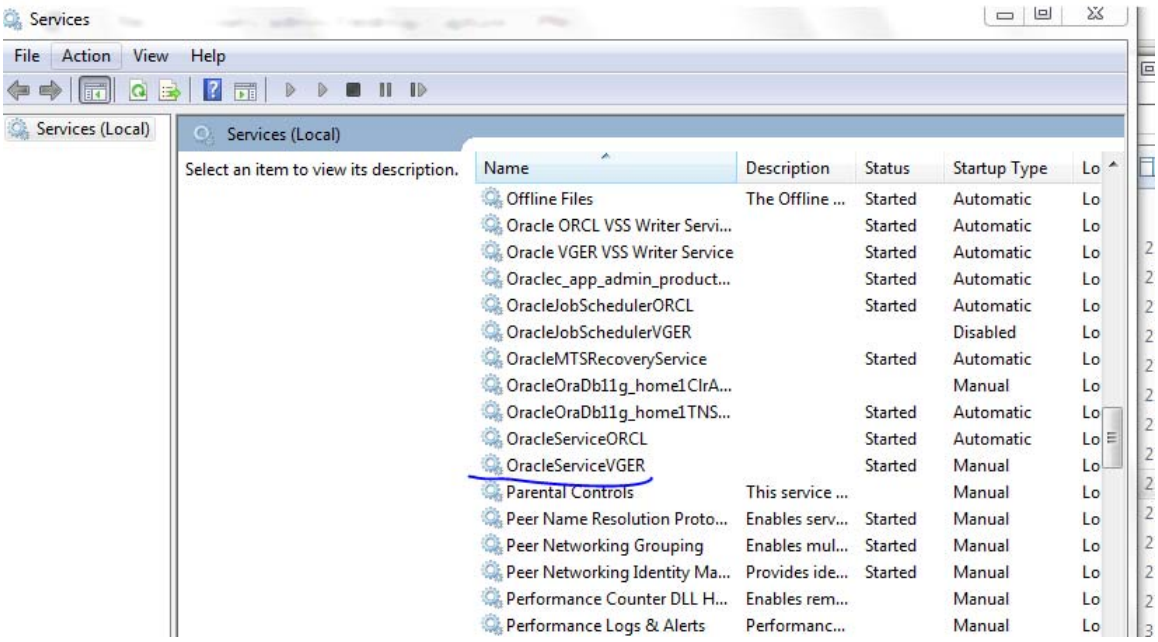


Create spfile from the ora we created before

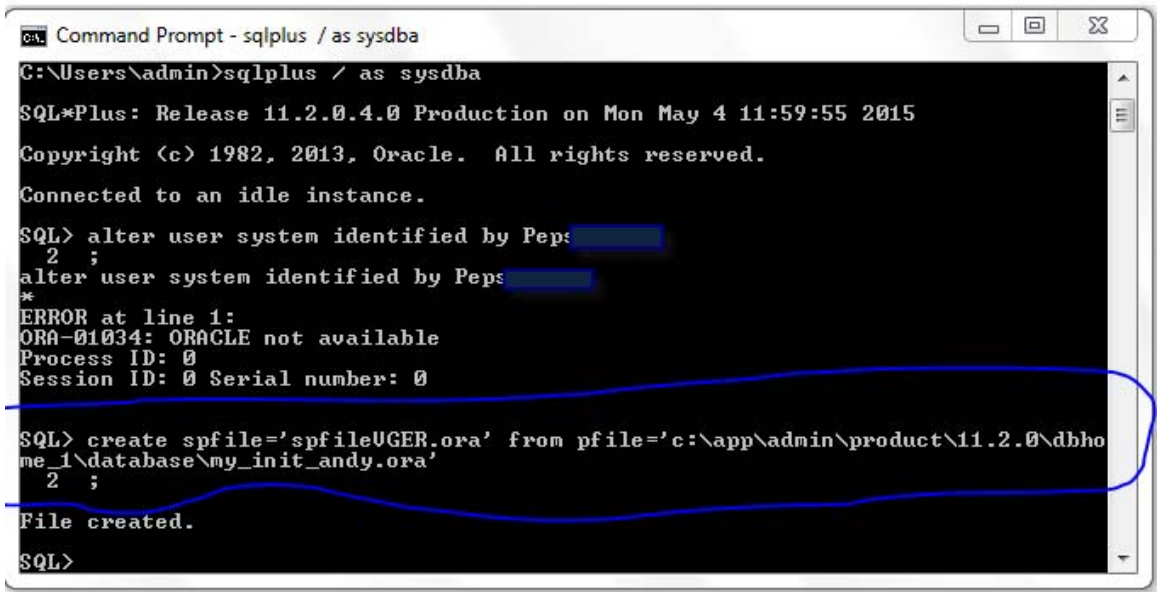


Start Oracle instance

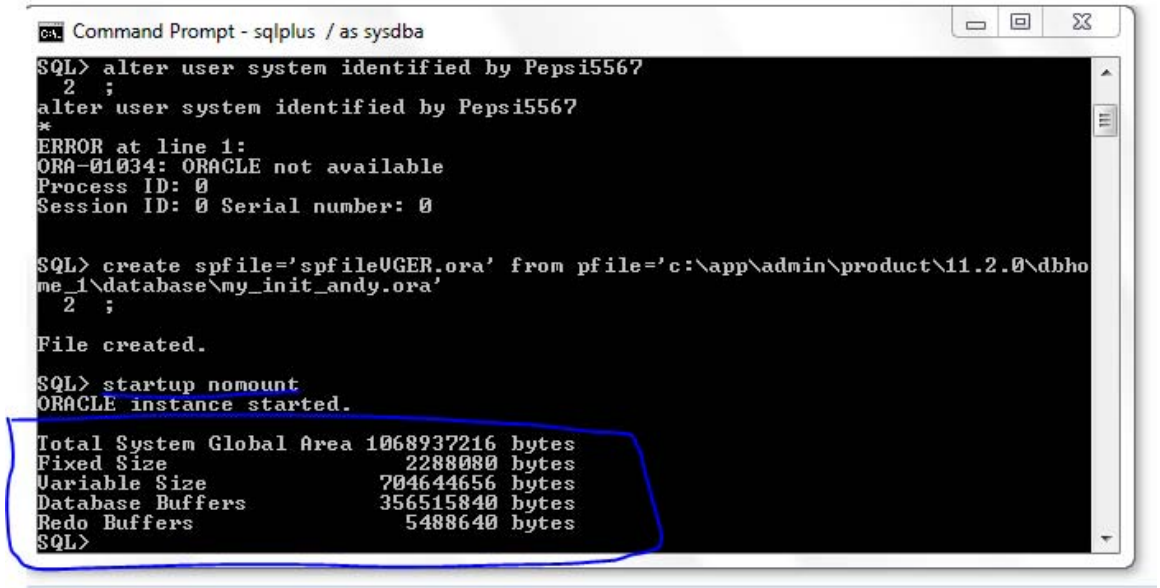


Login as sysdba and find it connected to an idle instance

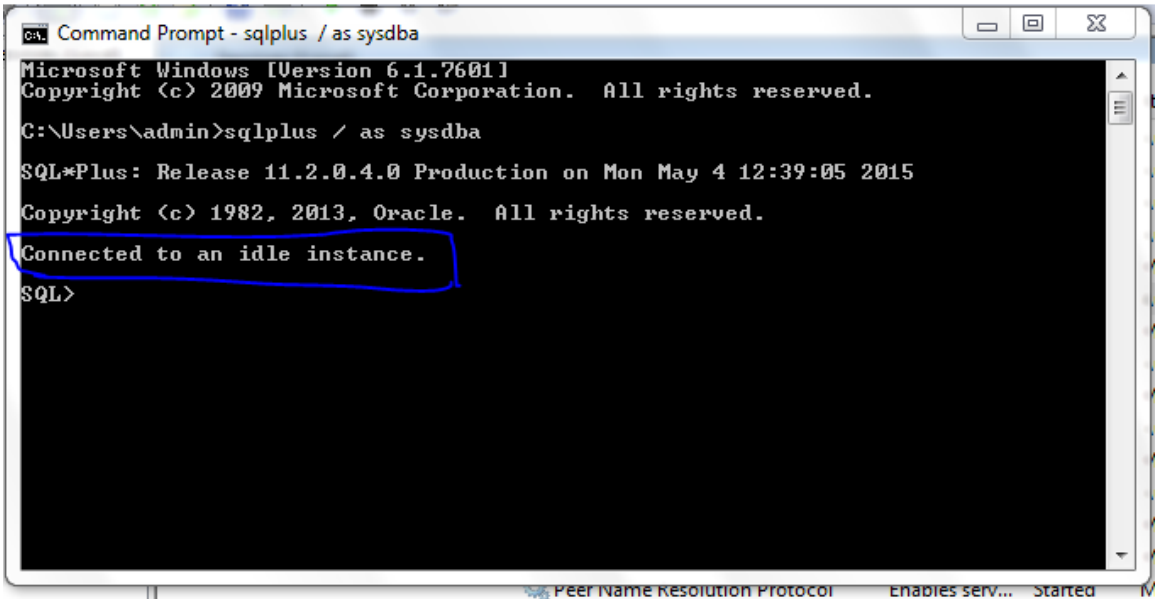


Write a SQL query for creating database VGER

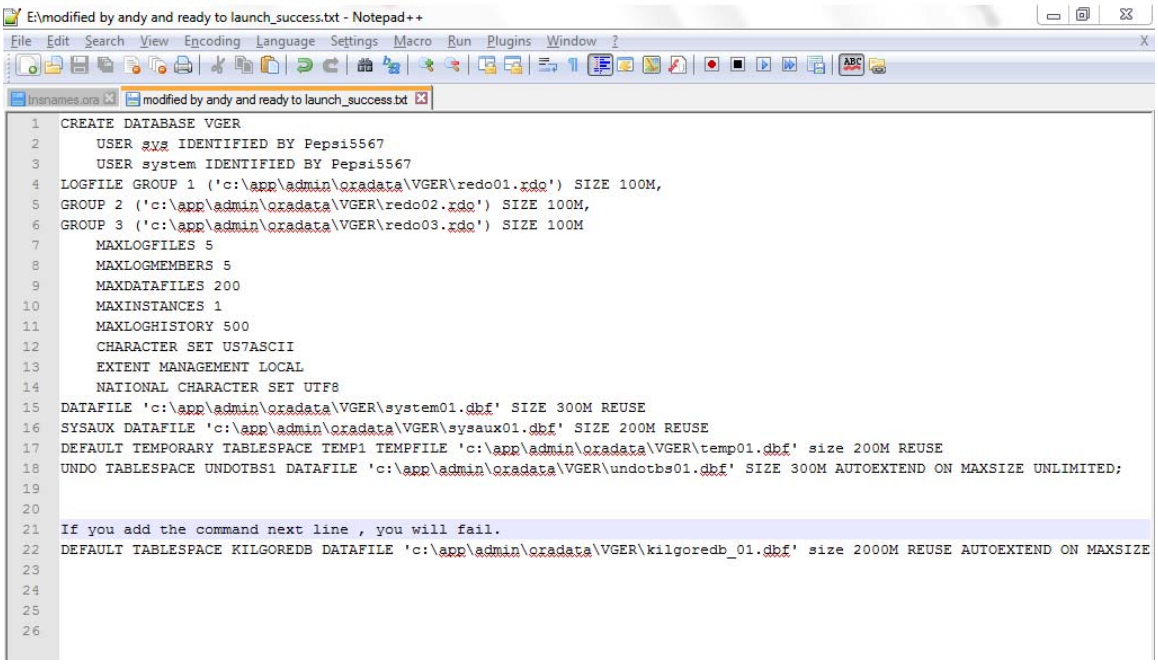


Login by sysdba identity and run this SQL query to create database VGER

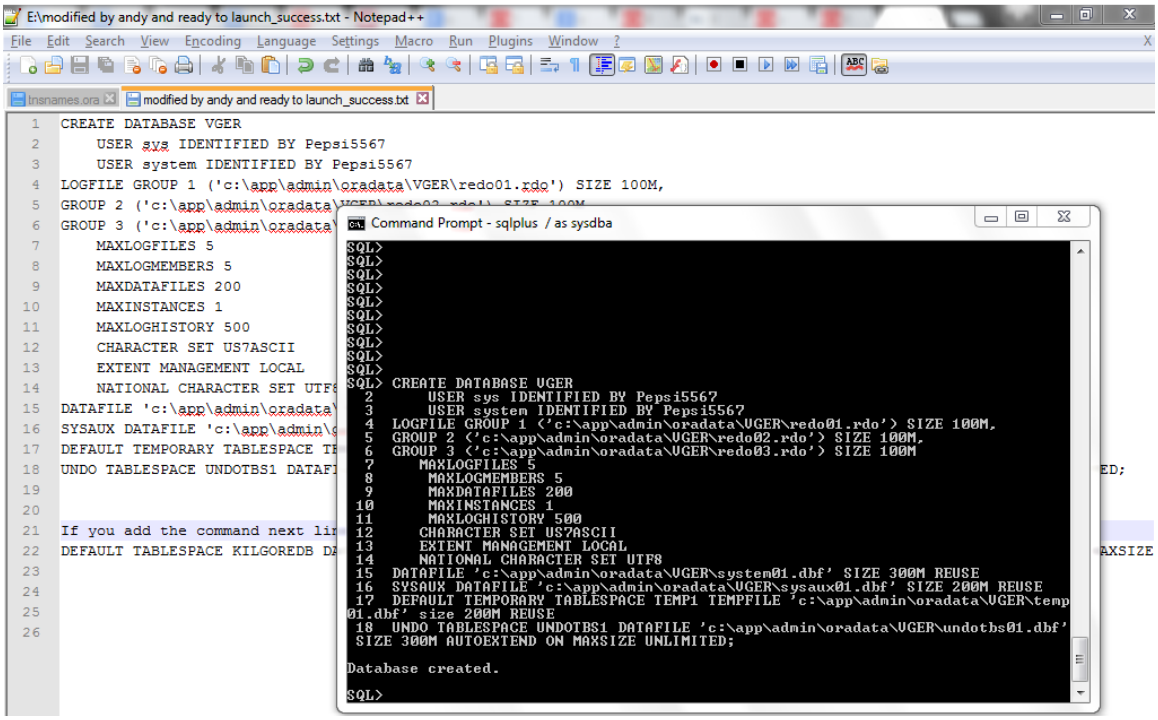


Write a SQL query to create tablespace in VGER database

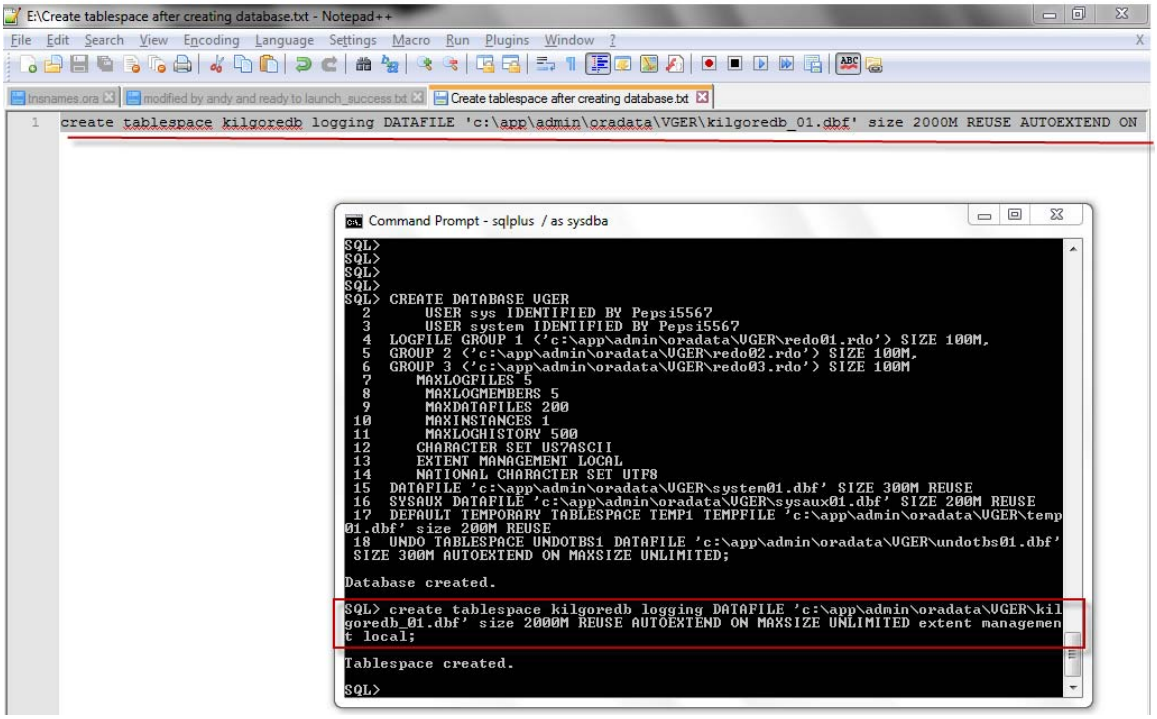

Shut down the database and restart it. Then, alter the archivelog and database status. The archive mode should be enabled now.

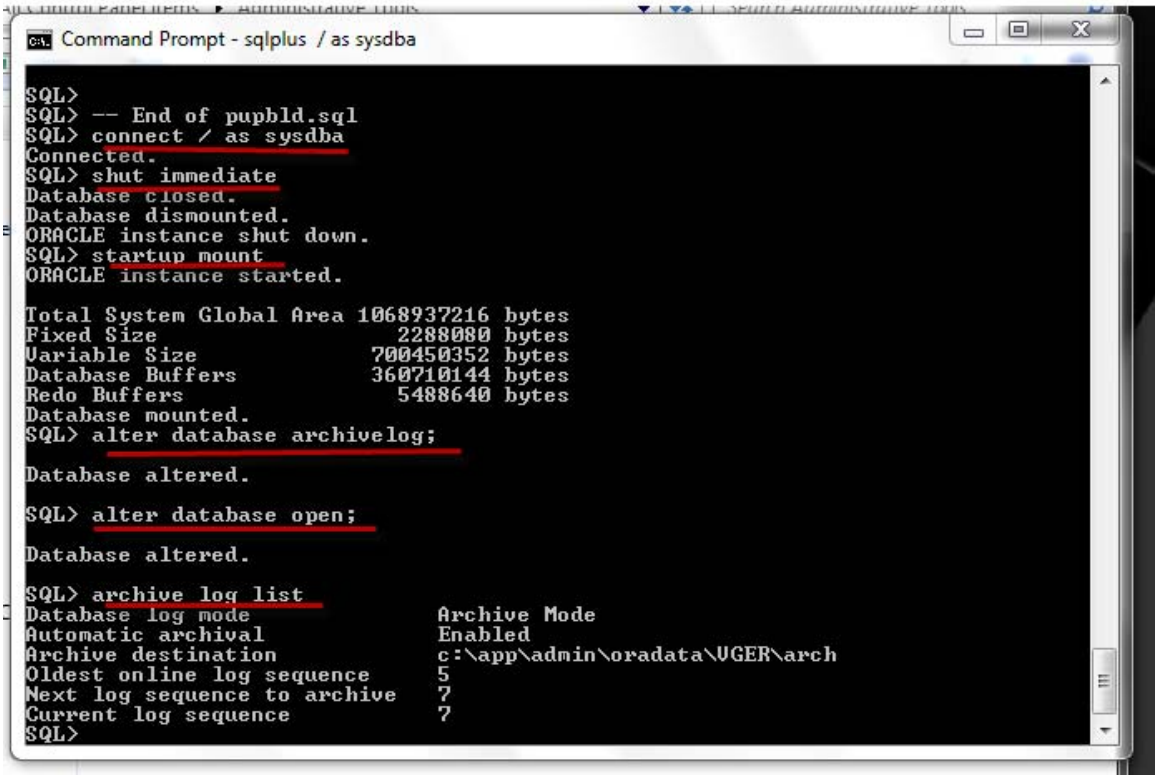

Check comp_id, version, and status from dba_registry table

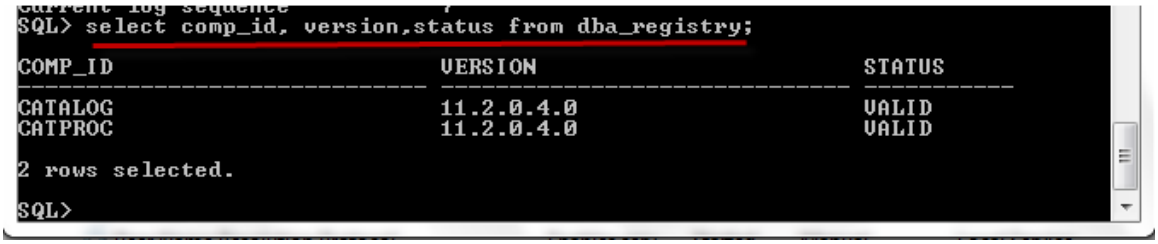

Create user kilgoredb and ro_kilgoredb and grant appropriate authority to them

```
SQL> create user kilgoredb identified by Wkilgoredb
  2  ;

User created.

SQL> grant creat session, grant any priviledge to kilgoredb;
grant creat session, grant any priviledge to kilgoredb
      *
ERROR at line 1:
ORA-00990: missing or invalid privilege


SQL> grant create session, grant any priviledge to kilgoredb;
grant create session, grant any priviledge to kilgoredb
                      *
ERROR at line 1:
ORA-00990: missing or invalid privilege


SQL> grant create session, grant any privilege to kilgoredb;

Grant succeeded.
```

```
SQL> create user ro_kilgoredb identified by ro_kilgoredb;

User created.

SQL> grant create session, grant any privilege to ro_kilgoredb;

Grant succeeded.

SQL> _
```

Create data dump directory

```
SQL> create directory dpump_dir4 as 'c:/app/admin/oradata';


Directory created.

SQL> grant read,write on directory dpump_dir4   to kilgoredb;


Grant succeeded.

SQL>
```

Dump the data into database

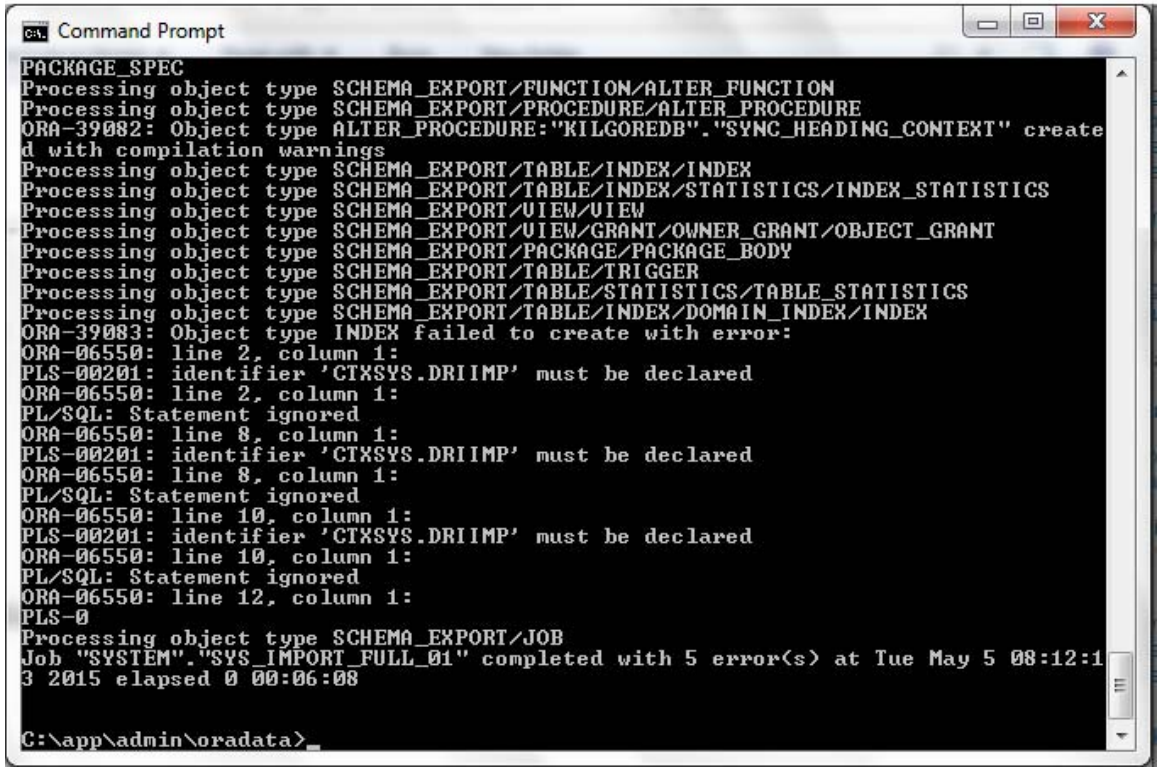

Check the Oracle database services status

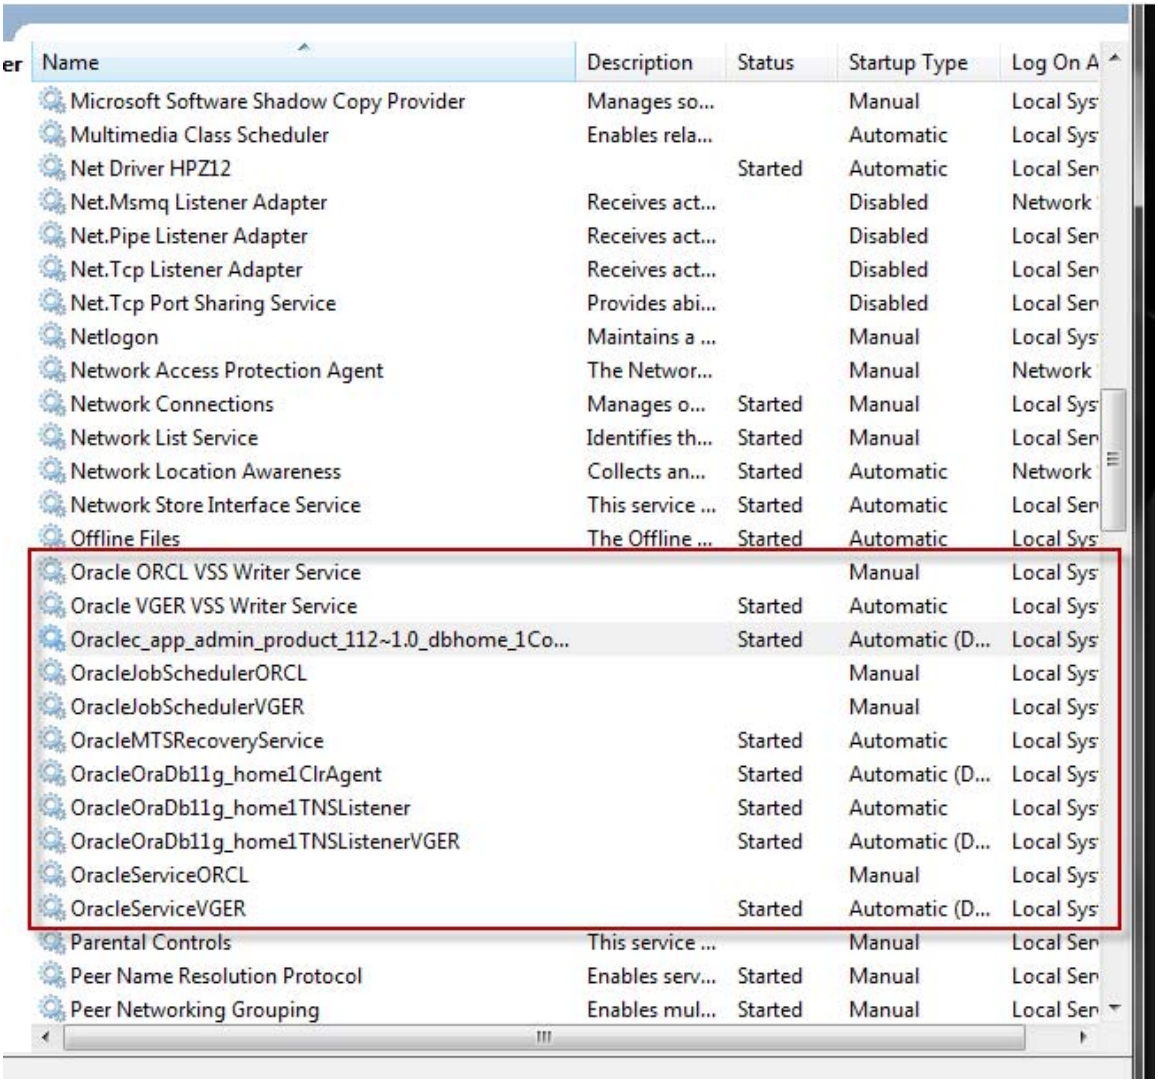

Name	Description	Status	Startup Type	Log On A
Microsoft Software Shadow Copy Provider	Manages so...		Manual	Local Sys
Multimedia Class Scheduler	Enables rela...		Automatic	Local Sys
Net Driver HPZ12		Started	Automatic	Local Ser
Net.Msmq Listener Adapter	Receives act...		Disabled	Network
Net.Pipe Listener Adapter	Receives act...		Disabled	Local Ser
Net.Tcp Listener Adapter	Receives act...		Disabled	Local Ser
Net.Tcp Port Sharing Service	Provides abi...		Disabled	Local Ser
Netlogon	Maintains a ...		Manual	Local Sys
Network Access Protection Agent	The Networ...		Manual	Network
Network Connections	Manages o...	Started	Manual	Local Sys
Network List Service	Identifies th...	Started	Manual	Local Ser
Network Location Awareness	Collects an...	Started	Automatic	Network
Network Store Interface Service	This service ...	Started	Automatic	Local Ser
Offline Files	The Offline ...	Started	Automatic	Local Sys
Oracle ORCL VSS Writer Service			Manual	Local Sys
Oracle VGER VSS Writer Service		Started	Automatic	Local Sys
Oraclec_app_admin_product_112~1.0_dbhome_1Co...		Started	Automatic (D...	Local Sys
OracleJobSchedulerORCL			Manual	Local Sys
OracleJobSchedulerVGER			Manual	Local Sys
OracleMTSRecoveryService		Started	Automatic	Local Sys
OracleOraDb11g_home1ClrAgent		Started	Automatic (D...	Local Sys
OracleOraDb11g_home1TNSListener		Started	Automatic	Local Sys
OracleOraDb11g_home1TNSListenerVGER		Started	Automatic (D...	Local Sys
OracleServiceORCL			Manual	Local Sys
OracleServiceVGER		Started	Automatic (D...	Local Sys
Parental Controls	This service ...		Manual	Local Ser
Peer Name Resolution Protocol	Enables serv...	Started	Manual	Local Ser
Peer Networking Grouping	Enables mul...	Started	Manual	Local Ser

Startup database by using sys identity

```
C:\Users\admin>sqlplus /nolog


SQL*Plus: Release 11.2.0.4.0 Production on Tue May 5 09:03:45 2015

Copyright (c) 1982, 2013, Oracle.  All rights reserved.

SQL> startup
ORA-01031: insufficient privileges
SQL> connect sys
Enter password:
Connected to an idle instance.
SQL> startup
ORACLE instance started.

Total System Global Area 1068937216 bytes
Fixed Size                  2288080 bytes
Variable Size             700450352 bytes
Database Buffers          360710144 bytes
Redo Buffers                5488640 bytes
Database mounted.
Database opened.
SQL> connect system
Enter password:
Connected.
SQL>
```

Midify the file listener.ora

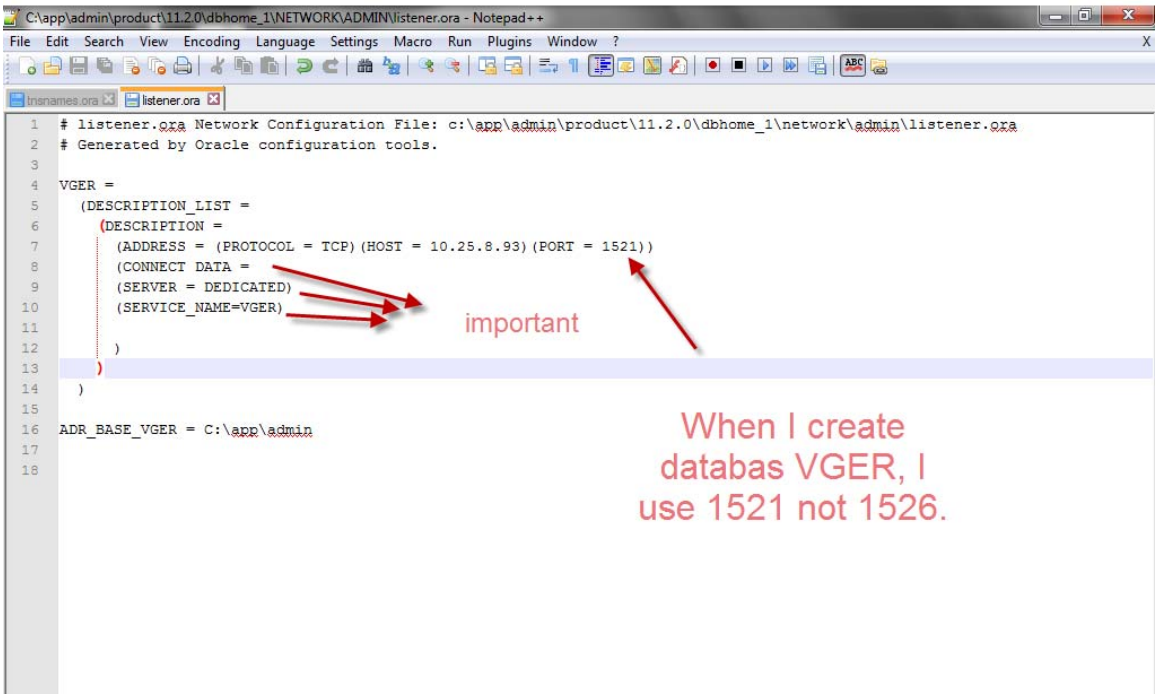

Connect to kilgoredb and query the content of one table named ITEM_STATUS_DESC in tablespace

```
SQL> connect kilgoredb
Enter password:
Connected.
SQL> select * from ITEM_STATUS_TYPE;

ITEM_STATUS_TYPE ITEM_STATUS_DESC
---------------- ------------------------
               1 Not Charged
               2 Charged
               3 Renewed
               4 Overdue
               5 Recall Request
               6 Hold Request
               7 On Hold
               8 In Transit
               9 In Transit Discharged
              10 In Transit On Hold
              11 Discharged


ITEM_STATUS_TYPE ITEM_STATUS_DESC
---------------- ------------------------
              12 Missing
              13 Lost--Library Applied
              14 Lost--System Applied
              15 Claims Returned
              16 Damaged
              17 Withdrawn
              18 At Bindery
              19 Cataloging Review
              20 Circulation Review
              21 Scheduled
              22 In Process

ITEM_STATUS_TYPE ITEM_STATUS_DESC
---------------- ------------------------
              23 Call Slip Request
              24 Short Loan Request
              25 Remote Storage Request

25 rows selected.

SQL> ^P
```

Create user in tablespace kilgoredb and grant appropriate authority to this user

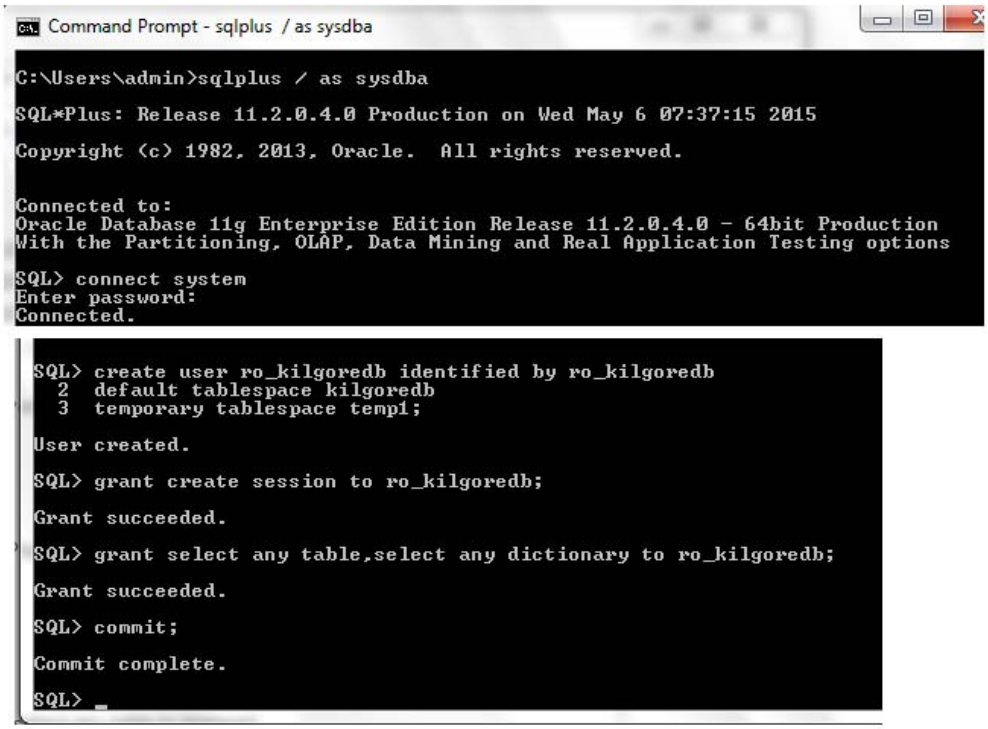

Login by using the user we created in previous step and run a search query to test. It is successful. However, because "ro" in ro_kilgoredb represents "readonly", the user ro_kilgoredb is not authorized to run update SQL query.

```
C:\Users\admin>sqlplus ro_kilgoredb

SQL*Plus: Release 11.2.0.4.0 Production on Wed May 6 07:45:33 2015

Copyright (c) 1982, 2013, Oracle.  All rights reserved.

Enter password:

Connected to:
Oracle Database 11g Enterprise Edition Release 11.2.0.4.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options
```

```
SQL> select * from kilgoredb.item_type;

ITEM_TYPE_ID ITEM_TYPE_ ITEM_TYPE_NAME
------------ ---------- -------------------------
ITEM_TYPE_DISPLAY
-----------------------------------------
           2 Book       Book
Book


           3 Videodisk  Videodisk
```

```
SQL> update kilgoredb.item_type
  2  set item_type_code='Tester'
  3  where item_type_code='Test';
update kilgoredb.item_type
       *
ERROR at line 1:
ORA-01031: insufficient privileges


SQL> _
```


The user ro_kilgoredb has no authority and priviledge to run update SQL query.

1526 is not correct port for the listener to run. We can test it by using command "tnsping VGER" as below.

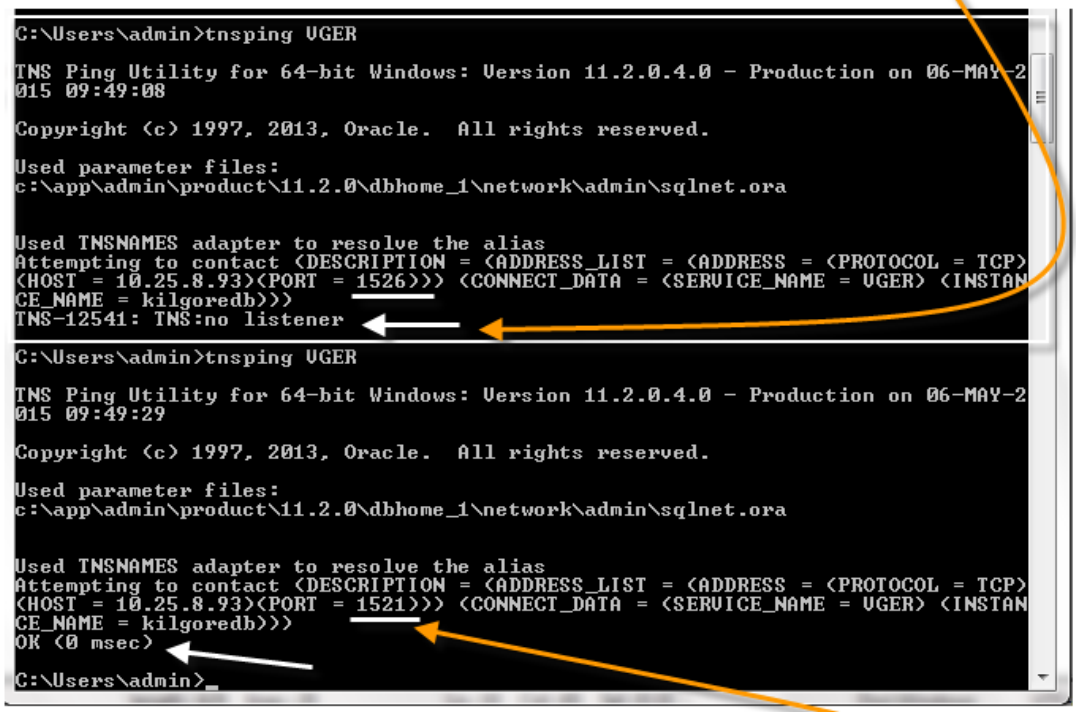


If we change the listener port to 1521, it will be succesful for the listener to run.

Like previously we demonstrated, 1521 is the correct port for the listener to run.

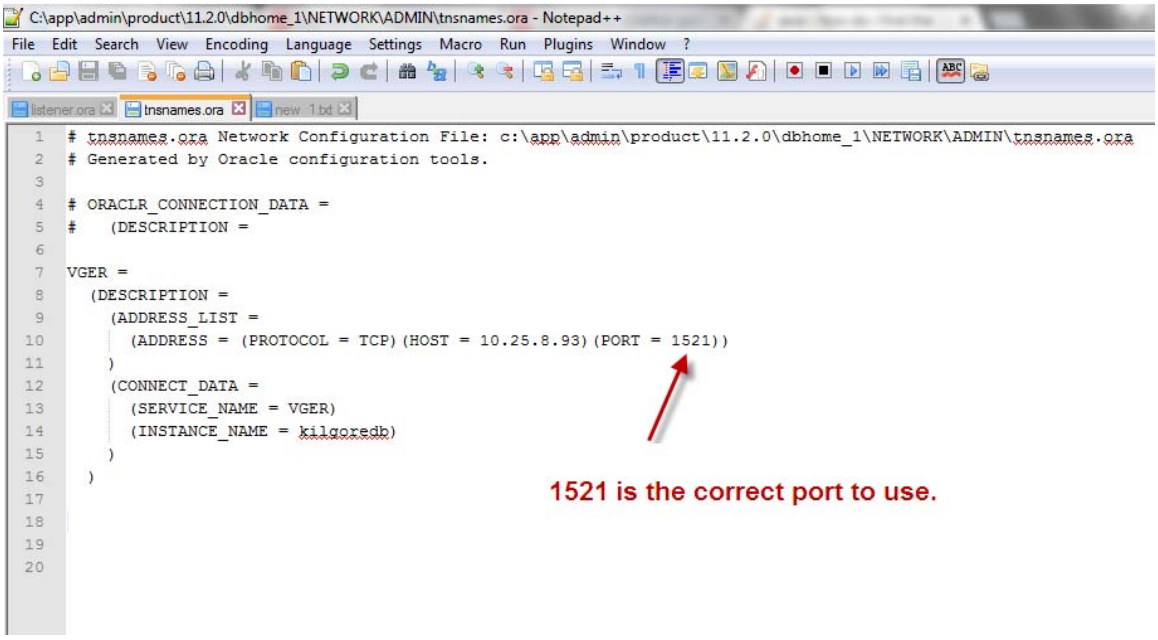

1521 is the correct port to use.

Oracle Net Manager is used to test connection to Voyager oracle database. The test is successful.

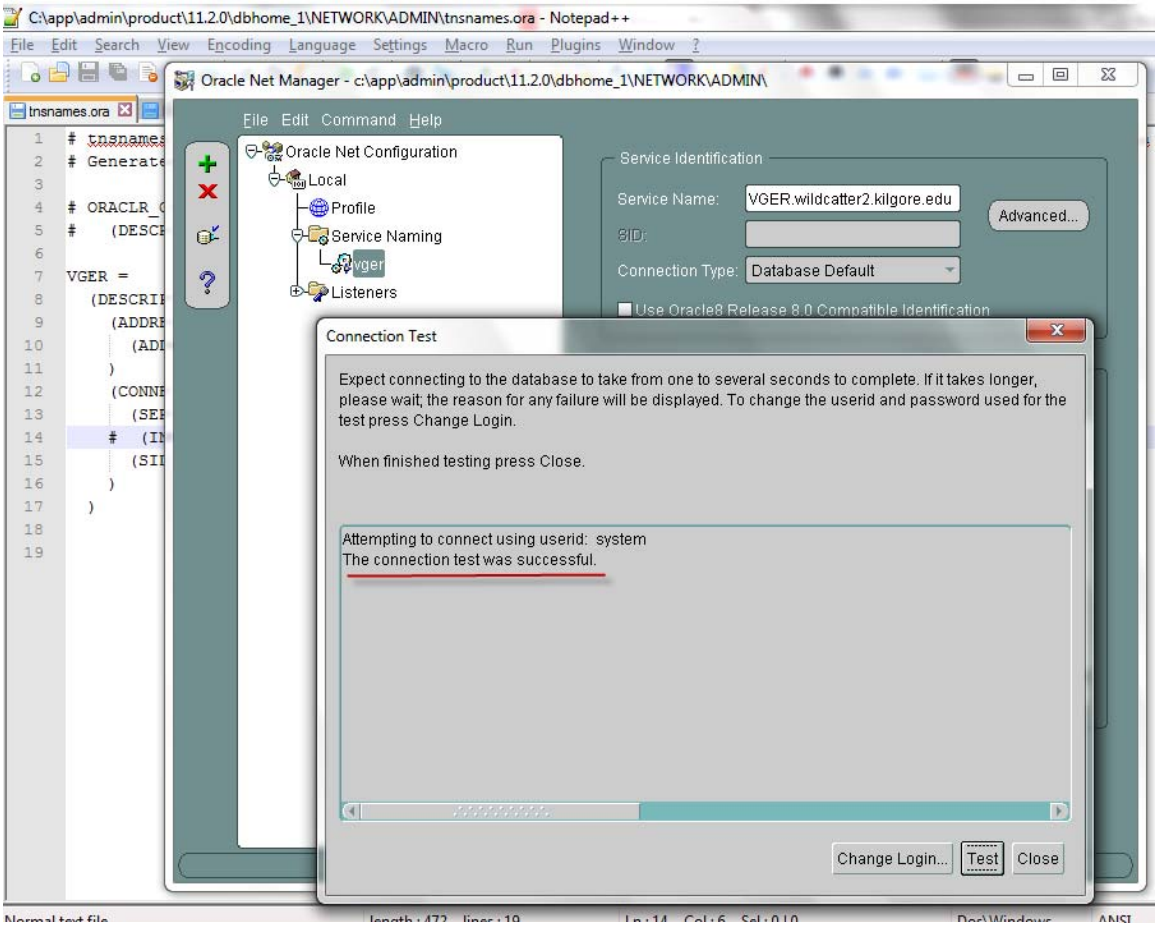

Please be advised, the Voyager database service name is VGER+ domain name. In this example, it is VGER.wildcatter2.kilgore.edu.


```
SQL> select value from v$parameter where name='service_names';

VALUE
--------------------------------------------------------------------------------


VGER.wildcatter2.kilgore.edu

SQL> connect kilgoredb
```

The correct service name (VGER.wildcatter2.kilgore.edu) is the key point to connect successfully.

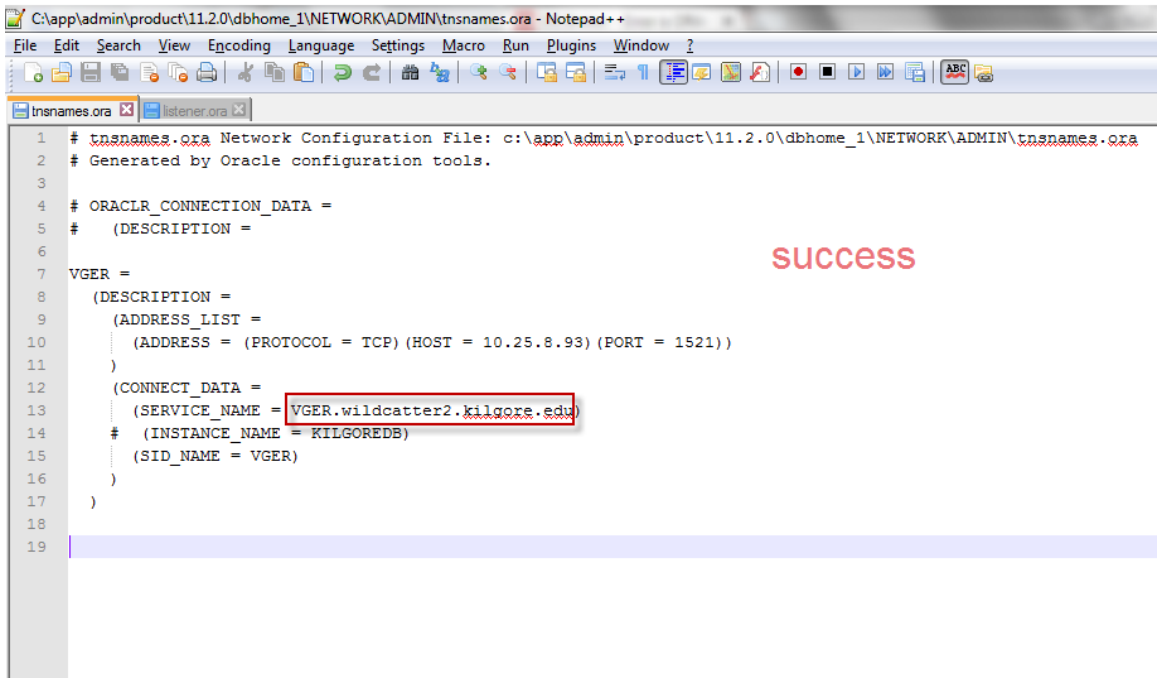

This is the final version of listener.org file.

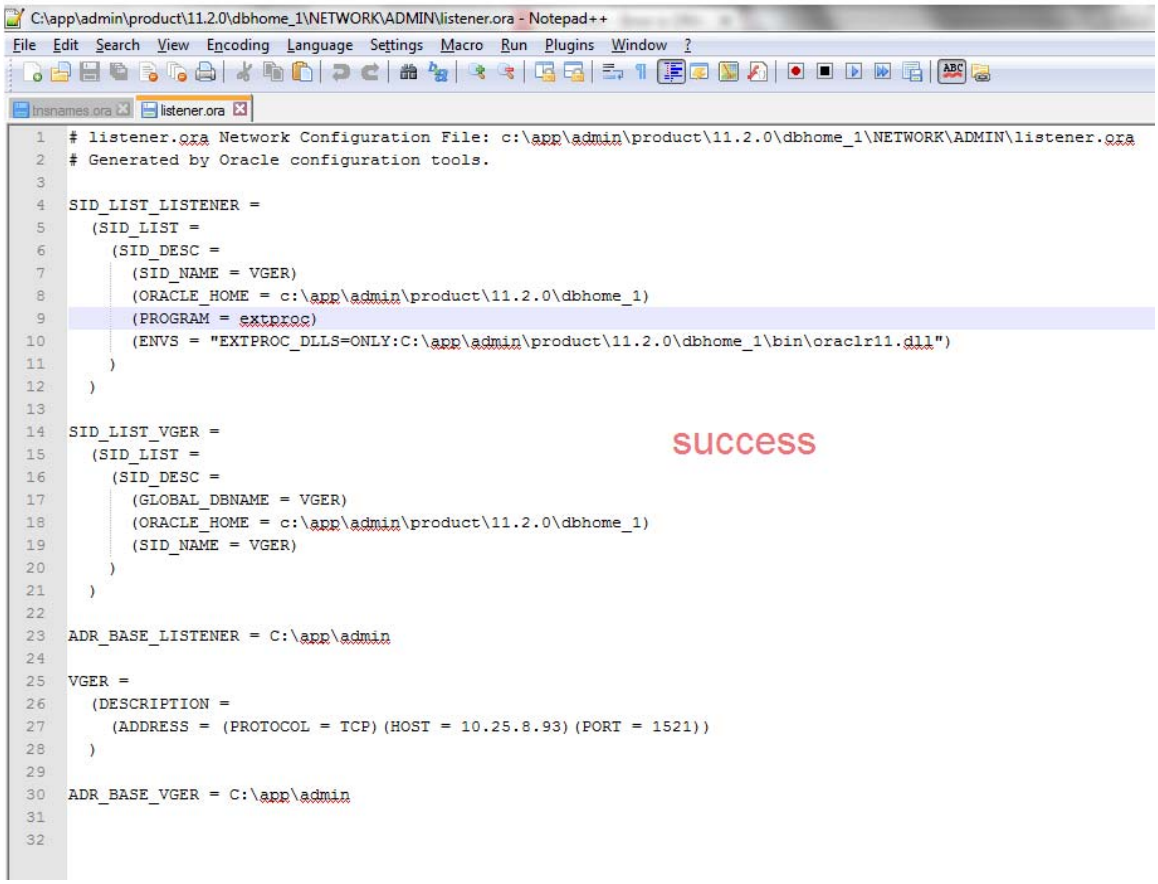

The End