Patterns


Anti-Patterns and Refactoring

YEGOR BUGAYENKO

Lecture #6 out of 16 80 minutes

The slidedeck was presented by the author in this YouTube Video

All visual and text materials presented in this slidedeck are either originally made by the author or taken from public Internet sources, such as web sites. Copyright belongs to their respected authors.

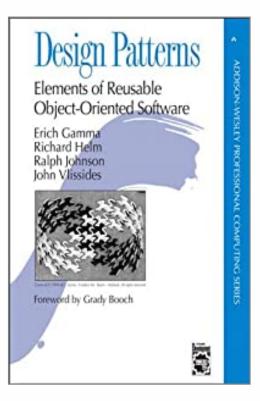

"Experienced designers evidently know something inexperienced ones don't. What is it? One thing expert designers know <u>not</u> to do is solve every problem from first principles. Rather, they reuse solutions that have worked for them in the past. When they find a good solution, they use it again and again. Such experience is part of what makes them experts."

Design Patterns: Elements of Reusable Object-Oriented
 Software, Erich Gamma et al.



"When I see patterns in my programs, I consider it a sign of trouble. The shape of a program should reflect only the problem it needs to solve. Any other regularity in the code is a sign, to me at least, that I'm using abstractions that aren't powerful enough—often that I'm generating by hand the expansions of some macro that I need to write."

Revenge of the Nerds, Paul Graham

Some Patterns

Some Anti-Patterns

Anti-OOP Patterns

Some Refactorings

Books, Venues, Call-to-Action

Chapter #1:

Some Patterns

Design Patterns and Anti-Patterns, Love and Hate (2016)



36 patterns (22 anti-patterns)

[Decorator RAII]

Adapter, Eacade, Proxy, Decorator, Bridge

```
String sql(String q);

void echo(Book b) {
    print(b.title());
    print(b.author());

class BookInDatabase implements Book {
    private Database d;
    private int id;
    String title() {
        return d.sql("SELECT title FROM book WHERE id=%1", id);
    }
}
```

[Decorator RAII]

Resource Acquisition Is Initialization (RAII)

```
std::FILE* h;
public:
    File(const char* name) {
        h = std::fopen(name, "w+");
    }
    ~File() {
        std::fclose(h);
    }
}
void foo() {
    f File("foo.txt");
    // write to f
}
```

https://www.yegor256.com/2017/08/08/raii-in-java.html \rightarrow

Chapter #2:

Some Anti-Patterns

GOTO

```
void foo(int a) {
   if (a % 2 == 0) {
    printf("Even!");
    goto exit;
   printf("Odd!");
   exit:
9 void foo(int a) {
   if (a % 2 == 0) {
   printf("Even!");
  } else {
    printf("Odd!");
14
15 }
```

Magic Numbers


```
def points
File.readlines("/data/users.csv") # why here?
.map { |t| t.split(',', 11) } # what is 11?
.map { a[7].to_i } # why 7?
.inject(&:+)
end
```

Magic Numbers ... Not!

```
def h2sec(h)
return h * 60 * 60
end

def h2sec(h)
seconds_in_minutes = 60
minutes_in_hours = 60
return h * seconds_in_minutes * minutes_in_hours
end
```



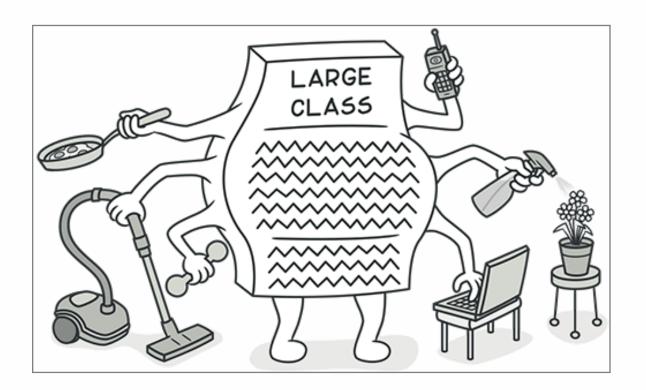


Spaghetti Code

```
A weird program for calculating Pi written in Fortran.
         From: Fink, D.G., Computers and the Human Mind, Anchor Books, 1966.
          PROGRAM PI
          DIMENSION TERM(100)
 7 TERM(N)=((-1)**(N+1))*(4./(2.*N-1.))
         N=N+1
          IF (N-101) 3,6,6
10 6 N=1
11 7 SUM98 = SUM98+TERM(N)
12 WRITE(*,28) N, TERM(N
         WRITE(*,28) N, TERM(N)
        IF (N-99) 7, 11, 11
15 11 SUM99=SUM98+TERM(N)
SUM100=SUM99+TERM(N+1)

IF (SUM98-3.141592) 14,23,23

14 IF (SUM99-3.141592) 25,23,15
19 15 IF (SUM100-3.141592) 16,23,23
20 16 AV89=(SUM98+SUM99)/2.
       AV90=(SUM99+SUM100)/2.
      COMANS=(AV89+AV90)/2.
23 IF (COMANS-3.1415920) 21,19,19
24 19 IF (COMANS-3.1415930) 20,21,21
25 20 WRITE(*,26)
26 GO TO 22
27 21 WRITE(*,27) COMANS
28 22 STOP
29 +23 WRITE(*,25)
30 GO TO 22
31 25 FORMAT('ERROR IN MAGNITUDE OF SUM')
26 FORMAT('PROBLEM SOLVED')
27 FORMAT('PROBLEM UNSOLVED', F14.6)
34 \ 28 FORMAT(I3, F14.6)
```

Lasagna and Ravioli

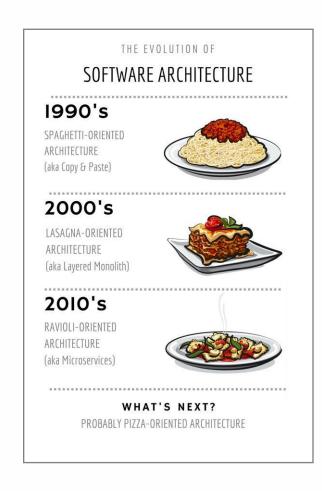

Chapter #3:

Anti-OOP Patterns

Anti-Patterns in OOP (2014)



Eleven: NULL, Utility Classes, Mutable Objects, Getters and Setters, Data Transfer Object (DTO), Object-Relational Mapping (ORM), Singletons, Controllers/Managers/Validators, Public Static Methods, Class Casting, Traits and Mixins.

[DTO Utility Singleton ORM]

Data Transfer Object (DTO) Getters and Setters

```
// Getters and Setters: WRONG!
Dog dog = new Dog();
dog.setWeight("23kg");
w = dog.getWeight();

// Smart objects: RIGHT!
Dog dog = new Dog("23kg");
int w = dog.weight();
```



https://www.yegor256.co m/2014/09/16/getters-an d-setters-are-evil.html

 $\xrightarrow{}$

 $\texttt{s.html} \, \to \,$

[DTO Utility Singleton ORM]

```
Juilly Class Somber Utils {
    public static int max(int a, int b) {
      return a > b ? a : b;
                                                                https://www.yegor256.co
                                                                m/2014/05/05/oop-altern
                                                                ative-to-utility-classe
6 public class Max implements Number {
    private final int a;
    private final int b;
    public Max(int x, int y) { this.a = x; this.b = y; }
    public int intValue() {
      return this.a > this.b ? this.a : this.b;
12
13 | }
```

[DTO Utility Singleton ORM]

```
public static Database INSTANCE = new Database();
   private Database() { /* start */ }
   public java.sql.Connection connect() { /* fetch http://www.yegor256.co
5
6 c = Database.INSTANCE.connect();
7 class Foo {
   private final Database d;
   void foo() {
     this.d.connect();
11
12 }
```

[DTO Utility Singleton ORM]

Object-Relational Mapping (ORM)

```
Post post = new Post();
post.setDate(new Date());
post.setTitle("How to cook an omelette");
session.save(post);

// Objects: RIGHT!
Post post = new Post();
post.setDate(new Date());
```




https://www.yegor256.co m/2014/12/01/orm-offens ive-anti-pattern.html

 $\xrightarrow{}$

Chapter #4:

Some Refactorings



"Whenever I do refactoring, the first step is always the same. I need to build a solid set of tests for that section of code. The tests are essential because even though I follow refactorings structured to avoid most of the opportunities for introducing bugs, I'm still human and still make mistakes. Thus I need solid tests."

Refactoring: Improving the Design of Existing Code,
 Martin Fowler


Extract Method

```
def root(a, b, c)
d = Math.sqrt(b * b - 4 * a * c)
r1 = (-b + d) / (2 * a)
r2 = (-b - d) / (2 * a)
5 [r1, r2]
6 end
8 def root(a, b, c)
| d = Math.sqrt(b * b - 4 * a * c) |
[r(a, b, d, 1), r(a, b, d, -1)]
11 end
12 def r(a, b, d, m)
| (-b + d * m) / (2 * a) |
14 end
```


$$x_{1,2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Chapter #5:


Books, Venues, Call-to-Action




"Working Effectively with Legacy Code" by MICHAEL FEATHERS



"Refactoring: Improving the Design of Existing Code" by MARTIN FOWLER



"Design Patterns: Elements of Reusable Object-Oriented Software" by Erich Gamma et al.

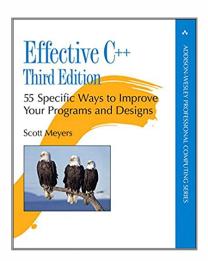

"Effective C++: 55 Specific Ways to Improve Your Programs and Designs" by Scott Meyers

Where to publish:

SPLASH: ACM SIGPLAN conference on Systems, Programming, Languages, and Applications

International Conference on Code Quality (ICCQ), in cooperation with ACM SIGPLAN/SIGSOFT and IEEE

Call to Action:

In your application demonstrate the usage of 4+ design patterns. Also, perform 4+ refactorings, each one in its own pull request.

Still unresolved issues:

- How to prove certain patterns are anti-patterns?
- How to find methods for automated refactoring?
- How to guarantee validity during refactoring?
- How to mine patterns from code?

Bibliography