

# Experimental Quantum Generative Adversarial Networks for Image Generation

He-Liang Huang,<sup>1, 2, 3,\*</sup> Yuxuan Du,<sup>4,\*</sup> Ming Gong,<sup>1, 2, 3</sup> Youwei Zhao,<sup>1, 2, 3</sup> Yulin Wu,<sup>1, 2, 3</sup>  
 Chaoyue Wang,<sup>4</sup> Shaowei Li,<sup>1, 2, 3</sup> Futian Liang,<sup>1, 2, 3</sup> Jin Lin,<sup>1, 2, 3</sup> Yu Xu,<sup>1, 2, 3</sup> Rui Yang,<sup>1, 2, 3</sup>  
 Tongliang Liu,<sup>4</sup> Min-Hsiu Hsieh,<sup>5</sup> Hui Deng,<sup>1, 2, 3</sup> Hao Rong,<sup>1, 2, 3</sup> Cheng-Zhi Peng,<sup>1, 2, 3</sup> Chao-Yang  
 Lu,<sup>1, 2, 3</sup> Yu-Ao Chen,<sup>1, 2, 3</sup> Dacheng Tao,<sup>4, †</sup> Xiaobo Zhu,<sup>1, 2, 3, ‡</sup> and Jian-Wei Pan<sup>1, 2, 3, §</sup>

<sup>1</sup>Hefei National Laboratory for Physical Sciences at the Microscale and Department of Modern Physics,  
 University of Science and Technology of China, Hefei 230026, China

<sup>2</sup>Shanghai Branch, CAS Center for Excellence in Quantum Information and Quantum Physics,  
 University of Science and Technology of China, Shanghai 201315, China

<sup>3</sup>Shanghai Research Center for Quantum Sciences, Shanghai 201315, China

<sup>4</sup>School of Computer Science, Faculty of Engineering, University of Sydney, Australia

<sup>5</sup>Centre for Quantum Software and Information,

Faculty of Engineering and Information Technology, University of Technology Sydney, Australia

(Dated: October 14, 2020)


Quantum machine learning is expected to be one of the first practical applications of near-term quantum devices. Pioneer theoretical works suggest that quantum generative adversarial networks (GANs) may exhibit a potential exponential advantage over classical GANs, thus attracting widespread attention. However, it remains elusive whether quantum GANs implemented on near-term quantum devices can actually solve real-world learning tasks. Here, we devise a flexible quantum GAN scheme to narrow this knowledge gap, which could accomplish image generation with arbitrarily high-dimensional features, and could also take advantage of quantum superposition to train multiple examples in parallel. For the first time, we experimentally achieve the learning and generation of real-world handwritten digit images on a superconducting quantum processor. Moreover, we utilize a gray-scale bar dataset to exhibit the competitive performance between quantum GANs and the classical GANs based on multilayer perceptron and convolutional neural network architectures, respectively, benchmarked by the Fréchet Distance score. Our work provides guidance for developing advanced quantum generative models on near-term quantum devices and opens up an avenue for exploring quantum advantages in various GAN-related learning tasks.

Generative adversarial networks (GANs) are at the forefront of the generative learning and have been widely used for image processing, video processing, and molecule development [1]. Although GANs have achieved wide success, the huge computational overhead makes them approach the limits of Moore’s law. Specifically, to deal with the complicated learning tasks, classical generative models are getting increasingly larger and require enormous computational resources to estimate the joint distribution [2]. For example, Big GAN with 158 million parameters is

trained to generate  $512 \times 512$  pixel images using 14 million examples and 512 TPU for two days [3].

Quantum machine learning algorithms have the potential to provide speed-ups over their classical counterparts for a variety of tasks [4–11], due to the ability of representing a  $N$ -dimensional vector using  $\log N$  qubits, and performing some linear algebra calculations, such as matrix manipulation, in time  $O(\text{poly}(\log N))$ . Recently, theoretical works show that quantum generative models may exhibit an exponential advantage over classical counterparts [12–14], arousing widespread research interest in the theories and experiments of quantum GANs [12, 15–17]. Previous experiments of quantum generative adversarial learning on digital quantum computers, hurdled by algorithm development and accessible quantum resources in current stage, mainly focus on single-qubit quantum state generation and quantum state loading [16, 17], e.g., finding a quantum channel to approximate a given single-qubit quantum state [16]. Such a task can be regarded as the approximation of a low-dimensional distribution with an explicit formulation. However, the explicit formula implies that these studies cannot be treated as general generative tasks, since the data space structure is exactly known. A crucial question that remains to be addressed in quantum generative learning is whether current quantum devices have the capacity for real-world generative learning, which is directly related to the practical application of quantum generative learning on near-term quantum devices.

We develop a resource-efficient quantum GAN scheme to answer the above question. By adopting advanced techniques in classical machine learning, our scheme could use limited quantum resources to accomplish generative learning tasks with arbitrarily high-dimensional features, and could also take advantage of quantum superposition to train multiple examples in parallel for batch gradient descent given sufficient quantum resources. We experimentally implement the scheme on a superconducting quantum processor and validate the capability to use

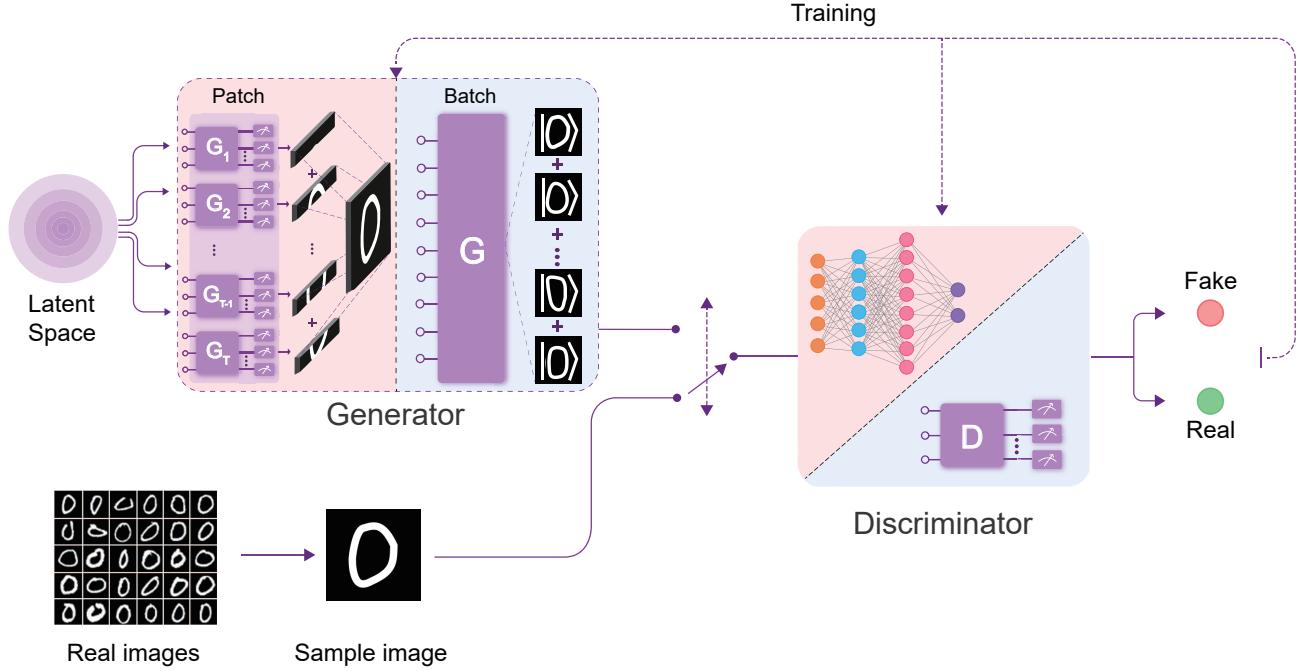

**FIG. 1: The resource-driven quantum GAN scheme.** The scheme contains a quantum generator  $G$  and a discriminator  $D$  that can either be classical or quantum. The implementation of  $G$  with varied construction strategies, highlighted in pink or blue region, targets to adequately utilize the available quantum resources in the settings  $N < \lceil \log M \rceil$  and  $N > \lceil \log M \rceil$ , respectively. (I) The quantum patch GAN mechanism is as follows. First, the latent state  $|z\rangle$  sampled from the latent space is input into quantum generator  $G$  consisting of  $T$  sub-generators (highlighted in pink region), where each  $G_t$  is built by a PQC  $U_{G_t}(\theta_t)$ . Next, the generated image is acquired by measuring the generated states  $\{U_{G_t}(\theta_t)|z\rangle\}_{t=1}^T$  along the computation basis. Subsequently, the patched generated image and the real image are input into the classical discriminator  $D$  (highlighted in pink region) in sequence, where  $D$  is implemented by the deep neural networks such as a *Fully-Connected Neural Network* (FCNN) (highlighted in pink region). Finally, a classical optimizer uses the classified results, as the output of  $D$  to update the trainable parameters for  $G$  and  $D$ . This completes one iteration. (II) The quantum batch GAN mechanism mainly is generally the same as in (I), but with four modifications: (1) we set  $T = 1$  and introduce the quantum index register into  $G$  (highlighted in blue region); (2) the generated state  $U_G(\theta)|z\rangle$  directly operates with quantum discriminator  $D$  (highlighted in blue region) in the training procedure; (3) the real image is encoded into the quantum state to operate with  $D$ ; and (4) the discriminator  $D$  is replaced with a PQC, where the output is acquired by using a simple measurement.

near-term quantum devices to accomplish the real-world hand-written digit image generative task. We note that the hand-written digit dataset [18] is still commonly used for training and testing in the field of classical machine learning. Moreover, we show that quantum GAN has the potential advantage of reducing training parameters, and can achieve performance comparable to two classical GANs, the classical GAN model with multilayer perceptron neural network architecture (“GAN-MLP” for short) and the classical GAN model with convolutional neural network architecture (“GAN-CNN” for short), for learning the gray-scale bar image dataset (a synthesized dataset). The achieved results suggest that our approach offers a promising avenue for the near-term application of quantum computing in a wide range of generative learning tasks.

Following the routine of GAN [1, 12], our proposal exploits a two-player minimax game between a generator  $G$  and a discriminator  $D$ . The generator  $G$  is built by quantum circuits, while the discriminator  $D$  can be

built by quantum circuits or neural networks depending on the available quantum resources. Given a latent vector  $z$  sampled from a certain distribution,  $G$  aims to output the generated data  $G(z) \sim P_g(G(z))$  with  $P_g(G(z)) \approx P_{data}(x)$  to fool  $D$ . Meanwhile,  $D$  tries to distinguish the true example  $x \sim P_{data}(x)$  from  $G(z)$ . In the optimal case, Nash equilibrium is achieved with  $P_g(G(z)) = P_{data}(x)$ .

The main ingredient of our proposal is to flexibly adapt and optimally utilize the available quantum resources under different stages, driven by the rapid growth of quantum resources, e.g., the available number of qubits will explosively increase from shortage to adequacy in the next few years [19–23]. Denote that the available quantum device has  $N$ -qubits with  $O(\text{poly}(N))$  circuit depth, and the feature dimension of the training example is  $M$ . We devise two flexible strategies, i.e., the patch strategy and batch strategy, that enables our quantum GAN to adequately exploit the supplied resources under the setting  $N < \lceil \log M \rceil$  and  $N > \lceil \log M \rceil$ , respec-

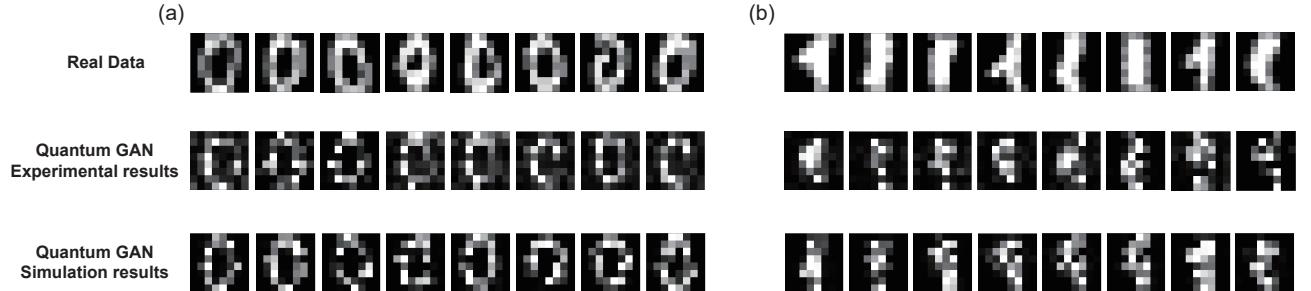


FIG. 2: **Hand-written digit image generation.** (a) Experimental results for the handwritten digit ‘0’. From top to bottom, the first row illustrates real data examples, the second and third rows show the examples generated by quantum patch GAN trained using a superconducting processor and noiseless numerical simulator, respectively. The number of parameters for quantum generator is set to 100, and the total number of iterations is about 350. (b) Experimental results for the handwritten digit ‘1’, with the rows showing the same as in (a).


tively. These two strategies are then used to instantiate two resource-efficient quantum GANs, i.e., the quantum patch GAN and the quantum batch GAN, in corresponding settings. As shown in Fig. 1, both quantum patch GAN and quantum batch GAN exploit parameterized quantum circuits (PQCs) [24, 25] to implement  $G$  with varied structures, while the  $D$  is implemented by neural networks and PQCs for quantum patch GAN and quantum batch GAN, respectively. It is noteworthy that, celebrated by the strong expressive power of variational quantum circuits [26, 27], the ability of representing vectors in  $M$ -dimensional spaces using  $\log M$  qubits, and performing manipulations of sparse and low-rank matrices in time  $O(\text{poly}(\log M))$ , quantum GANs exhibit a potential exponential advantage over classical GANs for high-dimensional data sets [12]. Moreover, the proposed two strategies can not only be seamlessly embedded into various architectures of quantum GAN, but can also sufficiently employ the available resources to seek other potential quantum advantages.

The quantum patch GAN with  $N < \lceil \log M \rceil$  consists of the quantum generator and the classical discriminator. A potential benefit of the quantum generator is that it may possess stronger expressive power to fit data distributions compared with classical generators. This is supported by complexity theory with  $P \subseteq BQP$  [28], and theoretical evidences showing that certain distributions generated by quantum circuits can not be efficiently simulated by classical circuits unless the polynomial hierarchy collapses [29–31]. Figure 1 illustrates the implementation of quantum patch GAN, where the patch strategy is applied to manipulate large  $M$  with small  $N$ . Specifically, the quantum generator  $G$  is composed of a set of sub-generators  $\{G_t\}_{t=1}^T$ , where each  $G_t$  refers to a PQC  $U_{G_t}(\boldsymbol{\theta}_t)$ . The aim of  $G_t$  is to output a state  $|G_t(\mathbf{z})\rangle$  with  $|G_t(\mathbf{z})\rangle = U_{G_t}(\boldsymbol{\theta}_t)|\mathbf{z}\rangle$  that represents a specific portion of the high-dimensional feature vectors. All sub-generators that scale with  $T \sim O(\lceil \log M \rceil / N)$  can either be effectively built on distributed quantum devices

to train in parallel or on a single quantum device to train in sequence. The generated example  $\tilde{\mathbf{x}}$  is obtained by measuring  $T$  states  $\{|G_t(\mathbf{z})\rangle\}_{t=1}^T$  along the computation basis. Given  $\tilde{\mathbf{x}}$  and  $\mathbf{x}$ , we employ a loss function  $\mathcal{L}$  to optimize the trainable parameters  $\boldsymbol{\theta}$  and  $\gamma$  for  $G$  and  $D$ , i.e.,  $\min_{\boldsymbol{\theta}} \max_{\gamma} \mathcal{L}(D_{\gamma}(\mathbf{x}), D_{\gamma}(G_{\boldsymbol{\theta}}(\mathbf{z})))$  (see Methods). In principle, our quantum GAN can accomplish image generation task with an arbitrarily large  $M$ . Although the use of multiple sub-generators differs from the classical case, we can easily extend the conclusion from the classical GAN to prove that quantum GAN can converge to Nash equilibrium in the optimal case (see Supplementary for proof details).

We implement the proposed quantum patch GAN using a superconducting processor (see Methods for details) to accomplish the real-world hand-written digit image generation for ‘0’ and ‘1’. Two training datasets are collected from the optical recognition of handwritten digit dataset [18]. Each training example is an  $8 \times 8$  pixel image with  $M = 64$ . In the experimental settings for quantum patch GAN, we set  $T = 4$ ,  $N = 5$ , and the total number of trainable parameters is 100. An immediate observation is that the experimental quantum GAN obtained similar quality images to the simulated quantum GAN (see Fig. 2), suggesting that our proposal is insensitive to noise at our current noise levels and for this system size.

Theoretically, as a kind of generative model, GANs are trained to explore the probability distribution of observed samples. To accurately evaluate the well-trained generative models, we aim to introduce the quantitative metrics to measure the distance between real and generated distributions. However, considering the limitations of data numbers (only about 180 ‘0’ and ‘1’ examples are obtained from Ref. [18]) and implicit data distribution, it is hard to calculate accurately metrics for the hand-written digit images dataset in [18]. Therefore, we construct a synthesized dataset, the gray-scale bar image dataset (See Supplementary for the construction rules, and some examples are shown in Fig. 3), which follows explicit variable

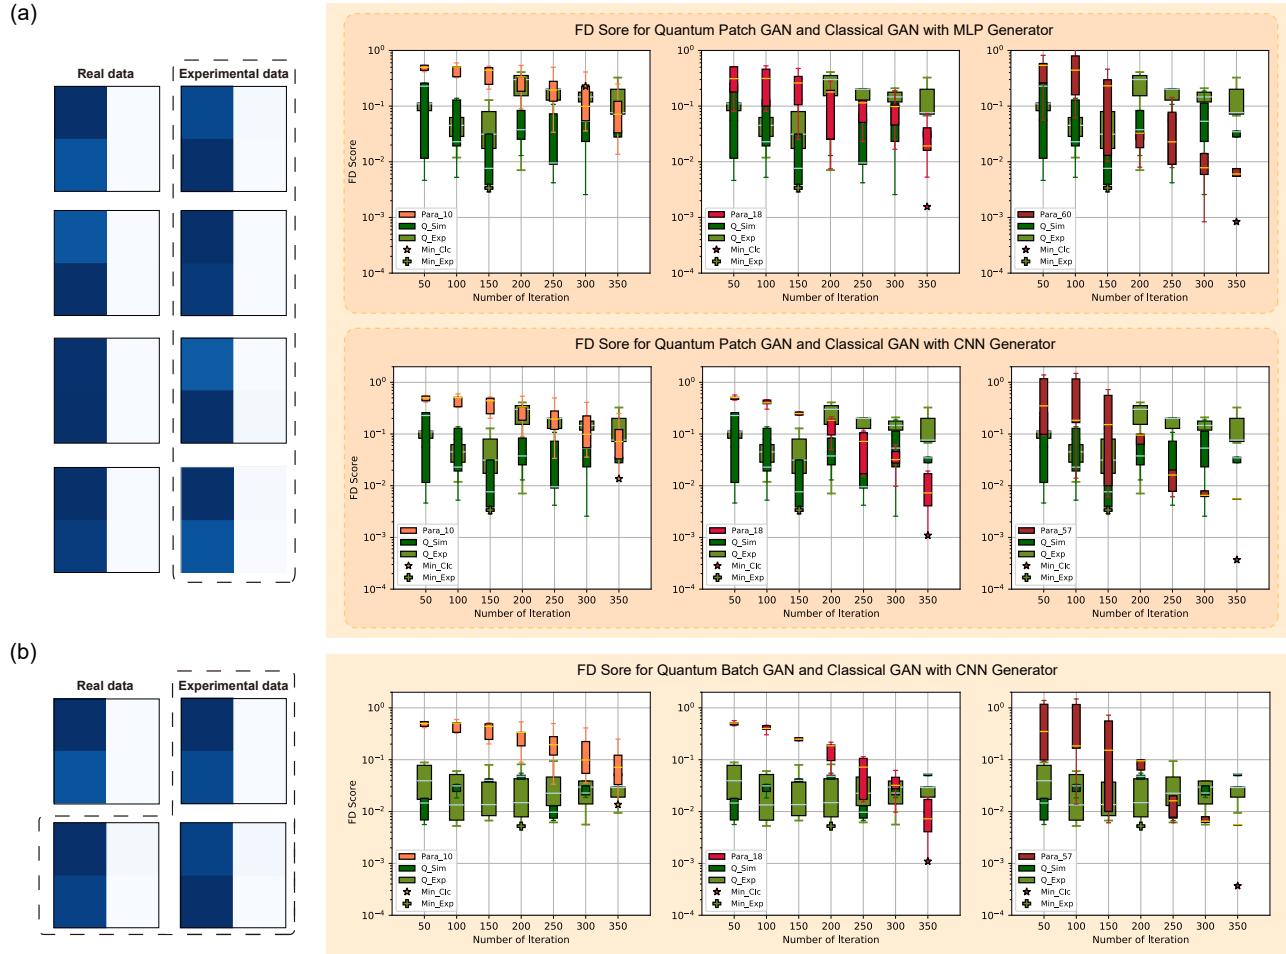

**FIG. 3: Gray-scale bar image generation.** (a) Experiment results of quantum patch GAN for  $2 \times 2$  image dataset. The left panel illustrates real examples and generated examples by quantum GAN. The right panel, highlighted in the yellow region, shows box plots that illustrate the FD scores achieved using different generative models. A lower FD score equates to better performance of the generative model. Specifically, we set the total number of trainable parameters for the quantum generator to  $N_p = 9$ , set the number of iterations to 350, sample 1000 generated examples to evaluate the FD score after every 50 iterations, and repeat each setting five times to collect statistical results. The label ‘para- $\ell$ ’ refers to the FD score of the classical GAN employing the generator with  $\ell$  trainable parameter. The labels ‘Q\_exp’ and ‘Q\_sim’ refers to FD scores of quantum GANs built using a quantum processor and noiseless numerical simulator, respectively. The labels ‘Min\_Clk’ and ‘Min\_Ex’ represents the achieved best FD scores for classical and quantum GANs, respectively. The left FD score plot compares the performance between classical and quantum GAN where  $\ell$  approximates to  $N_p$ , i.e.,  $\ell = 10$ , and the results show that quantum GAN have a better performance than GAN-MLP and GAN-CNN with similar number of parameters. The middle and right FD score plots show the required value  $\ell$ , i.e.,  $\ell = 18(18)$  and  $\ell = 60(57)$  for GAN-MLP (GAN-CNN), which enables the classical GANs to achieve the comparable and even better performance over quantum GANs. The performance is evaluated by the average score (middle line of the shaded box) and the minimal FD score. (b) Experiment results of quantum batch GAN for  $2 \times 2$  image dataset. The three plots indicate that the quantum batch GAN could achieve a similar performance to the quantum patch GAN.

distributions. Utilizing the specific distribution, we can easily acquire an unlimited number of data samples for both training and test. Next, we use the Fréchet Distance (FD) score [32, 33] to directly measure the Fréchet distance (i.e., 2-Wasserstein distance) between real and generated distributions. Such quantitative metrics could help us to comprehensively evaluate different GANs.

In the experiment, we collect a training dataset with  $N_e = 1000$  examples for the  $2 \times 2$  gray-scale bar image dataset. The experimental parameter settings for

quantum patch GAN are  $T = 1$ ,  $N = 3$ , and total number of trainable parameters for the quantum generator is  $N_p = 9$ . Two types of classical GANs, GAN-MLP and GAN-CNN (see the Supplementary for details), are employed as references to benchmark the performance of quantum GAN. Figure 3 (a) shows our experimental results. To obtain similar FD scores, these two classical GANs request more training parameters than the quantum patch GAN, showing that quantum GAN has the potential advantage of reducing training parameters. Note

that in our experiment, grid-search is applied to find the optimal hyper-parameters (e.g., learning rate, nesterov momentum) for classical GANs, while we did not search for the optimal hyperparameters of quantum GAN. In addition, from the results, we find that GAN-CNN performs better than GAN-MLP, and more training parameters leads to better generative performance, suggesting that introducing more complex and advanced quantum neural network architectures, such as quantum CNN [34–36], and more training parameters maybe helpful for boosting the performance of quantum GAN.

The quantum batch GAN with  $N > \lceil \log M \rceil$  consists of both a quantum generator and discriminator. Its implementation is shown in Fig. 1. As with the quantum patch GAN, the quantum generator and discriminator play a minimax game accompanied by a loss function (see Methods). The major difference to the first proposal is the way in which quantum resources are optimally utilized under the setting  $N > \lceil \log(M) \rceil$ . Specifically, we separate  $N$  qubits into the feature register  $\mathcal{R}_F$  and the index register  $\mathcal{R}_I$ , i.e.,  $\mathcal{R}_F$  with  $N_F$  qubits encodes the feature information, while  $\mathcal{R}_I$  with  $N_I$  qubits records a batch of generated/real examples. The training examples with batch size  $N_e$  are encoded as  $\frac{1}{\sqrt{N_e}} \sum_i |i\rangle_I |\mathbf{x}_i\rangle_F$  by using amplitude encoding method (see the Supplementary for data encoding). The attached index register enables us to simultaneously manipulate  $N_e$  examples to effectively acquire the gradient information, which dominates the computational cost to train the GAN. Recall that classical GAN uses the mini-batch gradient descent [37] to update trainable parameters, e.g.,  $\gamma_k = \gamma_{k-1} - \eta_D \sum_{i \in B_k} \nabla_{\gamma} \mathcal{L}(G_{\theta}(\mathbf{x}_i), D_{\gamma}(G(\mathbf{z}_i)))$  at iteration  $k$ , with  $B_k \subset [N_E]$  collecting the indexes of a mini-batch examples. Empirical studies have shown that increasing the batch size  $|B_k|$  contributes to improve the performance of classical GAN, albeit at the expense of computational cost [3, 38]. In contrast to classical GAN, we show that the term  $\sum_{i \in B_k} \nabla \mathcal{L}$  can be efficiently calculated in quantum GAN accompanied due to that we can naturally train  $N_e$  examples simultaneously by using the quantum superposition (see the Supplementary for details), resulting in a new potential advantage of quantum batch GAN for efficiently processing big data. In addition, since quantum batch GAN employ the quantum discriminator for binary classification, theoretically, measuring one qubit is enough to distinguish between ‘real’ and ‘fake’ images. Thus, the number of measurements required for quantum batch GAN during the training procedure is quite small.

We also use the quantum batch GAN to accomplish the gray-scale bar image generation task to validate its generative capability. The experimental parameter settings are  $T = 1$ ,  $N = 3$ ,  $|B_k| = 1$  (or  $N_I = 0$ ), and total number of trainable parameters for the quantum generator is  $N_p = 9$ . Figure 3 (b) shows that quantum batch GAN can achieve similar FD scores to the quantum patch

GAN, thereby empirically showing that quantum batch GAN can be used to tackle image generation problems. We remark that the slightly degraded performance of the quantum batch GAN compared with the quantum patch GAN is mainly caused by the limited number of training parameters used in its quantum discriminator, i.e., 12 versus 96 in these two settings.

In conclusion, our experimental results provide the following insights. First, quantum generative learning may be a central application in near-term quantum devices, since quantum GANs implemented on a real quantum processor have shown the ability to tackle real-world digit image generation tasks. Second, this work paves the way for using quantum GAN to tackle more complicated real-world learning tasks, not least due to the rapid growth of available quantum resources. Our future work is devising more advanced quantum machine learning techniques, such as more efficient data encoding methods, more powerful loss functions, optimization methods, and effective nonlinear mapping.

**Acknowledgements.** The authors thank the Laboratory of Microfabrication, University of Science and Technology of China, Institute of Physics CAS, and National Center for Nanoscience and Technology for supporting the sample fabrication. The authors also thank QuantumCTek Co., Ltd., for supporting the fabrication and the maintenance of room-temperature electronics. We thank Johannes Majer for helpful discussion. **Funding:** This research was supported by the National Key Research and Development Program of China (Grants No. 2017YFA0304300), NSFC (Grants No. 11574380, No. 11905217), the Chinese Academy of Science and its Strategic Priority Research Program (Grants No. XDB28000000), the Science and Technology Committee of Shanghai Municipality, Shanghai Municipal Science and Technology Major Project (Grant No.2019SHZDZX01), and Anhui Initiative in Quantum Information Technologies. H.-L. H. is supported by the Open Research Fund from State Key Laboratory of High Performance Computing of China (Grant No. 201901-01), NSFC (Grants No. 11905294), and China Postdoctoral Science Foundation.

**Author contributions.** X. Z., D. T., and J.-W. P. conceived the research. H.-L. H., Y. D., M.G., Y. Z. and X. Z. designed and performed the experiment. Y. D. and H.-L. H. performed numerical simulations. H.-L. H., Y. D., M.-H. H., T. L., and C. W. analyzed the results. H. D. and H. R. prepared the sample. Y. W. developed the programming platform for measurements. F.L., J.L., Y.X., and C.-Z. P. developed room-temperature electronics equipment. All authors contributed to discussions of the results and the development of the manuscript. X. Z. and J.-W. P. supervised the whole project.

**Competing interests.** The authors declare competing interests.

**Note added.** Our first version was submitted to the journal in January 2020.

\* These two authors contributed equally

† dacheng.tao@sydney.edu.au

‡ xbzhu16@ustc.edu.cn

§ pan@ustc.edu.cn

- 
- [1] Goodfellow, I. *et al.* Generative adversarial nets. In *Advances in neural information processing systems*, 2672–2680 (2014).
- [2] Bishop, L. S., Bravyi, S., Cross, A., Gambetta, J. M. & Smolin, J. Quantum volume (2017).
- [3] Brock, A., Donahue, J. & Simonyan, K. Large scale GAN training for high fidelity natural image synthesis. In *International Conference on Learning Representations* (2019).
- [4] Biamonte, J. *et al.* Quantum machine learning. *Nature* **549**, 195 (2017).
- [5] Lloyd, S., Mohseni, M. & Rebentrost, P. Quantum principal component analysis. *Nature Physics* **10**, 631 (2014).
- [6] Lloyd, S., Garnerone, S. & Zanardi, P. Quantum algorithms for topological and geometric analysis of data. *Nature Communications* **7**, 1–7 (2016).
- [7] Rebentrost, P., Mohseni, M. & Lloyd, S. Quantum support vector machine for big data classification. *Physical Review Letters* **113**, 130503 (2014).
- [8] Dunjko, V. & Briegel, H. J. Machine learning & artificial intelligence in the quantum domain: a review of recent progress. *Reports on Progress in Physics* **81**, 074001 (2018).
- [9] Cai, X.-D. *et al.* Entanglement-based machine learning on a quantum computer. *Physical Review Letters* **114**, 110504 (2015).
- [10] Huang, H.-L. *et al.* Demonstration of topological data analysis on a quantum processor. *Optica* **5**, 193–198 (2018).
- [11] Havlíček, V. *et al.* Supervised learning with quantum-enhanced feature spaces. *Nature* **567**, 209 (2019).
- [12] Lloyd, S. & Weedbrook, C. Quantum generative adversarial learning. *Physical Review Letters* **121**, 040502 (2018).
- [13] Gao, X., Zhang, Z.-Y. & Duan, L.-M. A quantum machine learning algorithm based on generative models. *Science Advances* **4**, eaat9004 (2018).
- [14] Romero, J. & Aspuru-Guzik, A. Variational quantum generators: Generative adversarial quantum machine learning for continuous distributions. *arXiv:1901.00848* (2019).
- [15] Dallaire-Demers, P.-L. & Killoran, N. Quantum generative adversarial networks. *Physical Review A* **98**, 012324 (2018).
- [16] Hu, L. *et al.* Quantum generative adversarial learning in a superconducting quantum circuit. *Science Advances* **5**, eaav2761 (2019).
- [17] Zoufal, C., Lucchi, A. & Woerner, S. Quantum generative adversarial networks for learning and loading random distributions. *arXiv:1904.00043* (2019).
- [18] Dua, D. & Graff, C. UCI machine learning repository (2017).
- [19] Preskill, J. Quantum computing in the NISQ era and beyond. *Quantum* **2**, 79 (2018).
- [20] Arute, F. *et al.* Quantum supremacy using a programmable superconducting processor. *Nature* **574**, 505–510 (2019).
- [21] Ye, Y. *et al.* Propagation and localization of collective excitations on a 24-qubit superconducting processor. *Physical Review Letters* **123**, 050502 (2019).
- [22] Moll, N. *et al.* Quantum optimization using variational algorithms on near-term quantum devices. *Quantum Science and Technology* **3**, 030503 (2018).
- [23] Zhang, J. *et al.* Observation of a many-body dynamical phase transition with a 53-qubit quantum simulator. *Nature* **551**, 601 (2017).
- [24] Benedetti, M., Lloyd, E., Sack, S. & Fiorentini, M. Parameterized quantum circuits as machine learning models. *Quantum Science and Technology* **4**, 043001 (2019).
- [25] Zhu, D. *et al.* Training of quantum circuits on a hybrid quantum computer. *Science Advances* **5**, eaaw9918 (2019).
- [26] Biamonte, J. Universal variational quantum computation. *arXiv:1903.04500* (2019).
- [27] McClean, J. R., Romero, J., Babbush, R. & Aspuru-Guzik, A. The theory of variational hybrid quantum-classical algorithms. *New Journal of Physics* **18**, 023023 (2016).
- [28] Bernstein, E. & Vazirani, U. Quantum complexity theory. *SIAM Journal on computing* **26**, 1411–1473 (1997).
- [29] Bremner, M. J., Jozsa, R. & Shepherd, D. J. Classical simulation of commuting quantum computations implies collapse of the polynomial hierarchy. In *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*, rspa20100301 (The Royal Society, 2010).
- [30] Aaronson, S. & Arkhipov, A. The computational complexity of linear optics. In *Proceedings of the forty-third annual ACM symposium on Theory of computing*, 333–342 (ACM, 2011).
- [31] Bravyi, S., Gosset, D. & Koenig, R. Quantum advantage with shallow circuits. *Science* **362**, 308–311 (2018).
- [32] Dowson, D. & Landau, B. The fréchet distance between multivariate normal distributions. *Journal of multivariate analysis* **12**, 450–455 (1982).
- [33] Heusel, M., Ramsauer, H., Unterthiner, T., Nessler, B. & Hochreiter, S. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems*, 6626–6637 (2017).
- [34] Cong, I., Choi, S. & Lukin, M. D. Quantum convolutional neural networks. *Nature Physics* **15**, 1273–1278 (2019).
- [35] Liu, J. *et al.* Hybrid quantum-classical convolutional neural networks. *arXiv:1911.02998* (2019).
- [36] Henderson, M., Shakya, S., Pradhan, S. & Cook, T. Convolutional neural networks: powering image recognition with quantum circuits. *Quantum Machine Intelligence* **2**, 1–9 (2020).
- [37] Li, M., Zhang, T., Chen, Y. & Smola, A. J. Efficient mini-batch training for stochastic optimization. In *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, 661–670 (ACM, 2014).
- [38] Salimans, T., Zhang, H., Radford, A. & Metaxas, D. Improving GANs using optimal transport. In *International Conference on Learning Representations* (2018).
- [39] Goodfellow, I., Bengio, Y. & Courville, A. *Deep learning* (MIT press, 2016).

## Methods

**Quantum patch GAN.** The three core components of quantum patch GAN are the quantum generator, classical discriminator, and optimization rule. Here we briefly introduce the primary mechanism of these three elements, with the details presented in the Supplementary.

The employed quantum generator consists of  $T$  sub-generators  $\{G_t\}_{t=1}^T$ , and each sub-generator is assigned to generate a specific portion of the feature vector. We exemplify the implementation of the sub-generator  $G_t$  at the  $k$ -th iteration, since the identical methods are applied to all quantum sub-generators. Suppose that the available quantum device has  $N$  qubits, we first divide it into two parts, where the first  $N_G$  qubits aim to generate a feature vector of length  $2^{N_G}$ , and the remaining  $N_A$  qubits aim to conduct the nonlinear mapping, which is an essential operation in deep learning (see the Supplementary for details). We then prepare the input state  $|\mathbf{z}^{(k)}\rangle$ , where the mathematical form of the input state is  $|\mathbf{z}^{(k)}\rangle = (\bigotimes_{i=1}^N R_Y(\alpha_z^{(k)}))|0\rangle^{\otimes N}$ , where  $R_Y$  refers to the rotation single qubit gate along the y-axis and  $\alpha_z^{(k)}$  is sampled from the uniform distribution, e.g.,  $\alpha_z^{(k)} \sim \text{unif}(0, \pi)$ . Note that at each iteration, the same latent state  $|\mathbf{z}^{(k)}\rangle$  is input into all sub-generators. We then input  $|\mathbf{z}^{(k)}\rangle$  into  $G_t$ , namely, a trainable unitary  $U(\theta_t^{(k)})$ . Figure M1(a) shows the implementation of  $U(\theta_t^{(k)})$ . The generated quantum state of  $G_t$  is

$$|\Psi_t^{(k)}(\mathbf{z})\rangle = U(\theta_t^{(k)})|\mathbf{z}^{(k)}\rangle . \quad (1)$$

We finally partially measure the generated state  $|\Psi_t^{(k)}(\mathbf{z})\rangle$  to obtain the classical generated result. In particular, the  $j$ -th entry with  $j \in [2^{N_{G_t}}]$  is

$$P_t^{(k)}(j) = \langle \Psi_t^{(k)}(\mathbf{z}) | j \rangle \langle j | \otimes (|0\rangle \langle 0|)^{\otimes N_A}) |\Psi_t^{(k)}(\mathbf{z})\rangle . \quad (2)$$

Overall, the generated image  $\tilde{\mathbf{x}}^{(k)}$  at the  $k$ -th training iteration is produced by combining  $T$  measured distributions, with  $\tilde{\mathbf{x}}^{(k)} = [P_1^{(k)}, P_2^{(k)}, \dots, P_T^{(k)}] \in \mathbb{R}^M$ .

The employed discriminator is implemented with a classical deep neural network, i.e., the fully-connected neural network [39]. The implementation method exactly follows the classical GAN [1]. The input of the discriminator can either be a generated image  $\tilde{\mathbf{x}}$  or a real image  $\mathbf{x}$  sampled from  $\mathcal{D}$ . The output of the discriminator  $D(\mathbf{x})$  or  $D(\tilde{\mathbf{x}})$  is in the range between 0 (label ‘False’) and 1 (label ‘True’).

Quantum GAN training is analogous to classical GAN training. A loss function  $\mathcal{L}$  is employed to iteratively optimize the quantum generator  $G$  and the classical discriminator  $D$  during  $K$  iterations. The mathematical form of the loss function is

$$\mathcal{L}(\theta, \gamma) = \frac{1}{M'} \sum_{i=1}^{M'} \left[ \log(D_\gamma(\mathbf{x}^{(i)})) + \log(1 - D_\gamma(G_\theta(\mathbf{z}^{(i)}))) \right] , \quad (3)$$

where  $\mathbf{x}^{(i)} \in \mathcal{D}$ ,  $\mathbf{z}^{(i)} \sim P(\mathbf{z})$ ,  $M'$  is the size of mini-batch, and  $\theta$  and  $\gamma$  are trainable parameters for  $G$  and  $D$ , respectively. The objectives of the generator and the discriminator are to minimize and maximize the loss function (classification accuracy), i.e.,  $\max_\gamma \min_\theta \mathcal{L}(\theta, \gamma)$ . The updating rule for  $G$  is  $\theta^{(k+1)} = \theta^{(k)} - \eta_G * \partial_\theta \mathcal{L}(\theta^{(k)}, \gamma^{(k)}) / \partial \theta^{(k)}$ . Similarly, the updating rule for  $D$  is  $\gamma^{(k+1)} = \gamma^{(k)} + \eta_D * \partial_\gamma \mathcal{L}(\theta^{(k)}, \gamma^{(k)}) / \partial \gamma^{(k)}$ , where  $\eta_G$  ( $\eta_D$ ) refers to the learning rate of  $G$  and  $D$ .


**Quantum batch GAN.** Following the same routine as the first proposal, the quantum batch GAN is composed of a quantum generator, quantum discriminator, and an optimization rule. In particular, the same loss function is employed to optimize  $\theta$  and  $\gamma$ . We briefly explain the main differences to the first proposal, with the details provided in the Supplementary.

The main architecture of quantum batch GAN is illustrated in Fig. M1(b). Both  $G$  and  $D$  are constructed using PQCs. In the training procedure, we first adopt a pertained oracle to generate the latent state  $|\mathbf{z}^{(k)}\rangle$ , i.e.,  $|\mathbf{z}^{(k)}\rangle = 2^{-N_F} \sum_i |i\rangle_I |\mathbf{z}_i^{(k)}\rangle_F$ . Note that  $N_F$  qubits, as in the first proposal does, are decomposed into two parts, where the first  $N_G$  qubits are used to generate feature vectors and the remaining  $N_A$  are used to introduce nonlinearity. We then apply the quantum generator  $U_G(\theta^{(k)})$  with  $U_G(\theta^{(k)}) \in \mathbb{C}^{2^{N_F} \times 2^{N_F}}$  to the latent state, where the generated state is  $(\mathbb{I}_{2^N} \otimes U_G(\theta^{(k)}))|\mathbf{z}\rangle$ . We then apply the discriminator  $U_D(\gamma^{(k)}) \in \mathbb{C}^{2^{N_F} \times 2^{N_F}}$  to the generated state, i.e.,

$$|\Psi_t^{(k)}(\mathbf{z})\rangle = (\mathbb{I}_{2^N} \otimes (U_D(\gamma^{(k)}) U_G(\theta^{(k)})))|\mathbf{z}^{(k)}\rangle . \quad (4)$$

Finally, we employ a *Positive Operator Value Measurements* (POVM)  $\Pi$  to obtain the output of the discriminator  $D(G(\mathbf{z}))$ , i.e.,  $D(G(\mathbf{z})) = \text{Tr}(\Pi |\Psi_t^{(k)}(\mathbf{z})\rangle \langle \Psi_t^{(k)}(\mathbf{z})|)$  with  $\Pi = \mathbb{I}_{2^{N-1}} \otimes |0\rangle \langle 0|$ . Similarly, we have  $D(\mathbf{x}) = \langle \Psi_t^{(k)}(\mathbf{x}) | \Pi | \Psi_t^{(k)}(\mathbf{x}) \rangle$  with  $|\Psi_t^{(k)}(\mathbf{x})\rangle = (\mathbb{I}_{2^N} \otimes U_D(\gamma^{(k)}))|\mathbf{x}^{(k)}\rangle$ .

**Experimental set-up.** In all experiments, the six qubits (see Fig. M1(c)) are chosen from a 12-qubit superconducting quantum processor. The processor has qubits lying on a 1D chain, and the qubits are capacitively coupled to their nearest neighbors. Each qubit has a microwave drive line (XY), a fast flux-bias line (Z) and a readout resonator. The single-qubit rotation gates are implemented by driving the XY control lines, and the average gate fidelity of single-qubit gates is about 0.9994. The controlled-Z (CZ) gate is implemented by driving the Z line using the “fast adiabatic” method, whose average gate fidelity is about 0.985. During the experiments, we only calibrated qubit readouts every hour but did not calibrate the quantum gate operations, even over four days of training. Thus, the optimization of our quantum GAN scheme is very robust to noise.

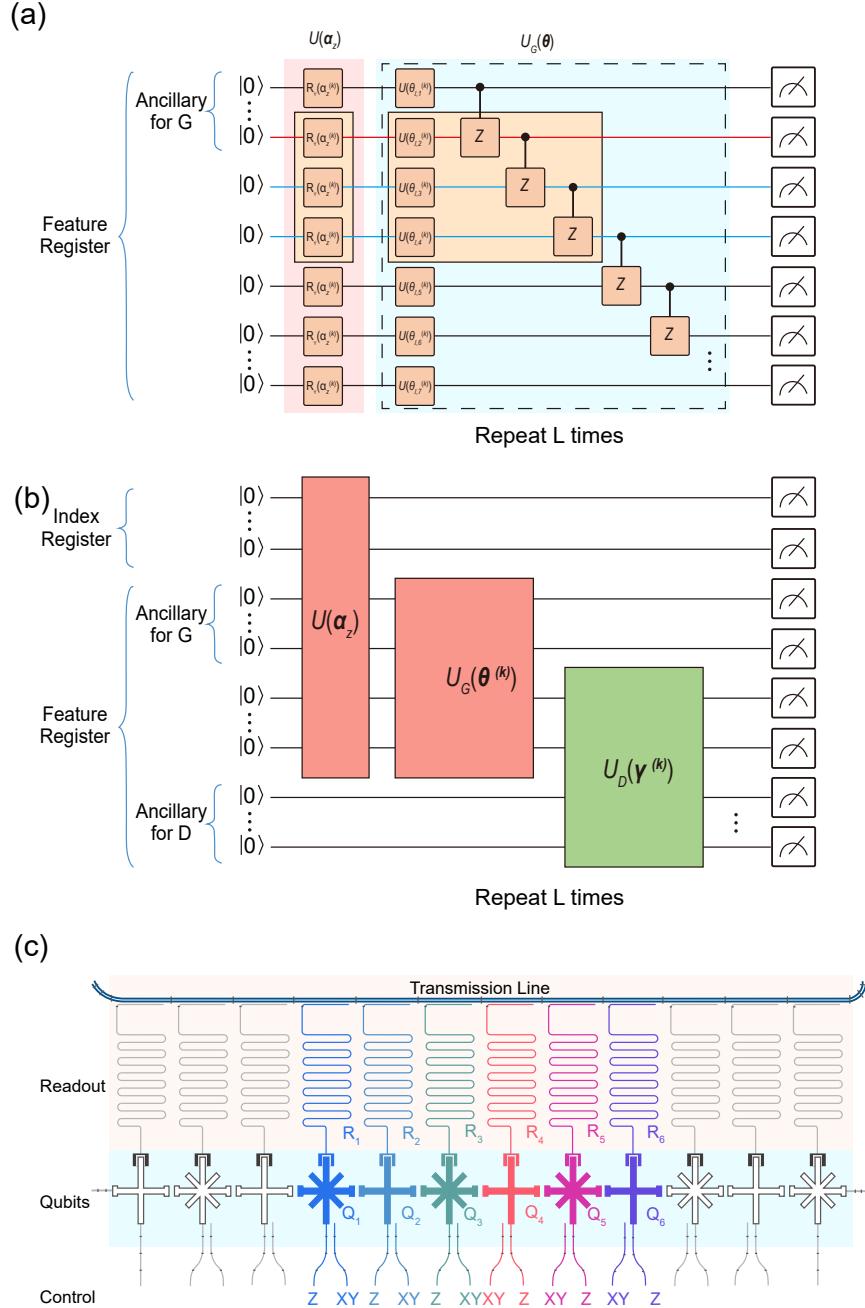

**FIG. M1: Experimental implementations.** (a) The implementation of  $G_t$  for t quantum patch GAN. The sub-generator  $G_t$ , or equivalently, the trainable unitary  $U_G(\theta_t)$ , is constructed by PQC and highlighted by the blue region with a dashed outline. Let  $U_G(\theta_t) := \prod_{l=1}^L (U_E U_l(\theta_t))$ , where  $U_l(\theta_t) := \bigotimes_{i=1}^N (U_S(\theta_t^{(i,l)}))$  is the  $l$ -th trainable layer,  $U_S(\theta_t^{(i,l)})$  is the trainable unitary with  $U_S \in SU(2)$ , and  $U_E$  is the entanglement layer with  $U_E := \bigotimes_{i=1}^{2i+1 \leq N} CZ(2i, 2i+1) \bigotimes_{i=1}^{2i \leq N} CZ(2i-1, 2i)$ . For example, we set  $U_S(\theta) = R_Y(\theta)$ ,  $L = 3$ , and  $N = 3$  to accomplish the gray-scale bar image generation in case  $m = 2$ , where the employed qubits are highlighted by the blue line and the used quantum gates are highlighted by yellow region. (b) The main architecture of the quantum batch GAN. A pre-trained unitary  $U(\alpha_z)$ , the quantum generator  $U_G(\theta^{(k)})$ , and the quantum discriminator  $U_D(\gamma^{(k)})$  are applied to the input state  $|0\rangle^{\otimes N}$  in sequence. We adopt the same rules used in (a) to build  $U_G(\theta^{(k)})$  and  $U_D(\gamma^{(k)})$ . (c) Experiment set-up. There are 12 qubits in total in our superconducting quantum processor, from which we choose six adjacent qubits labelled with  $R_1$  to  $R_6$  to perform the experiment. Each qubit couples to a corresponding resonator for state readout. For each qubit, individual capacitively-coupled microwave control lines ( $XY$ ) and inductively-coupled bias lines ( $Z$ ) enable full control of qubit operations.

# Supplementary Information for “Experimental Quantum Generative Adversarial Networks for Image Generation”

## I. SM (A): PRELIMINARIES

Here we briefly introduce the essential backgrounds used in this paper to facilitate both physics and computer science communities. Please see [1, 2] for more elaborate descriptions. In particular, we define necessary notations and exemplify a typical deep neural network, i.e., fully-connected neural network, in the first two subsections. We then present a classical GAN and illustrate its working mechanism. Afterwards, we provide the definition of box-plot, which is employed to analyze the performance of the generated data. Ultimately, we recap the parameter quantum circuits, as the building block of quantum GAN.

### A. Notations

We unify some basic notations used throughout the whole paper. We denote the set  $\{1, 2, \dots, n\}$  as  $[n]$ . Given a vector  $\mathbf{v} \in \mathbb{R}^n$ ,  $\mathbf{v}_i$  or  $\mathbf{v}(i)$  represents the  $i$ -th entry of  $\mathbf{v}$  with  $i \in [n]$  and  $\|\mathbf{v}\|$  refers to the  $\ell_2$  norm of  $\mathbf{v}$  with  $\|\mathbf{v}\| = \sqrt{\sum_{i=1}^n \mathbf{v}_i^2}$ . The notation  $\mathbf{e}_i$  always refers to the  $i$ -th unit basis vector. We use Dirac notation that is broadly used in quantum computation to write the computational basis  $\mathbf{e}_i$  and  $\mathbf{e}_i^\top$  as  $|i\rangle$  and  $\langle i|$ . A pure quantum state  $|\psi\rangle$  is represented by a unit vector, i.e.,  $\langle\psi|\psi\rangle = 1$ . A mixed state of a quantum system  $\rho$  is denoted as  $\rho = \sum_i p_i |\phi_i\rangle\langle\phi_i|$  with  $\sum_i p_i = 1$  and  $\text{Tr}(\rho) = 1$ . The symbol ‘ $\circ$ ’ is used to represent the composition of functions, i.e.,  $f \circ g(x) = f(g(x))$ . The observable  $\mathbf{x}$  sampled from the certain distribution  $p(\mathbf{x})$  is denoted as  $\mathbf{x} \sim P(\mathbf{x})$ . Given two sets  $A$  and  $B$ ,  $A$  minus  $B$  is written as  $A \setminus B$ . We employ the floor function that takes real number  $x$  and outputs the greatest integer  $x' := \lfloor x \rfloor$  with  $x' \leq x$ . Likewise, we employ the ceiling function that takes real number  $x$  and outputs the least integer  $x' := \lceil x \rceil$  with  $x' \geq x$ .

### B. Fully-connected neural network

Fully-connected neural network (FCNN), as the biologically inspired computational model, is the workhorses of deep learning [2]. Various advanced deep learning models are devised by combining FCNN with additional techniques, e.g., convolutional layer [3], residue connections [4], and attention mechanisms [5]. FCNN and its variations have achieved state-of-the-art performance over other computation models in many machine learning tasks.

The basic architecture of FCNN is shown in the left panel of Fig. 1, which includes an input layer,  $L$  hidden layers with  $L \geq 1$ , and an output layer. The node in each layer is called ‘neuron’. A typical feature of FCNN is that a neuron at  $l$ -th layer is only allowed to connect to a neuron at  $(l+1)$ -th layer. Denote that the number of neurons and the output of  $l$ -th layer as  $n_l$  and  $\mathbf{x}^{(l)}$ , respectively. Mathematically, the output of  $l$ -th layer can be treated as a vector  $\mathbf{x}^{(l)} \in \mathbb{R}^{n_l}$  and each neuron represents an entry of  $\mathbf{x}^{(l)}$ . Let the connected edge between the  $l$ -th layer and  $(l+1)$ -layer be  $\Theta^{(l)}$ . The connected edge refers to a weight matrix  $\Theta^{(l)} \in \mathbb{R}^{n_l \times n_{l+1}}$ . The calculation rule for the  $j$ -th neuron at  $l+1$ -th layer  $\mathbf{x}^{(l+1)}(j)$  is demonstrated in the right panel of Fig. 1. In particular, we have  $\mathbf{x}^{(l+1)}(j) := g_l(\mathbf{x}^{(l)}) = f(\Theta^{(l)}(j,:) \mathbf{x}^{(l)})$ , where  $f(\cdot)$  refers to the activation function. Example activation functions include the sigmoid function with  $f(\mathbf{x}) = (1 + e^{-\mathbf{x}})$  and the Rectified Linear Unit (ReLU) function with  $f(\mathbf{x}) = \max(\mathbf{x}, 0)$  [2]. Since the output of the  $l$ -th layer is used as an input for the  $l+1$ -th layer, an  $L$ -layers FCNN model is given by

$$\mathbf{x}^{(out)} = g_L \circ \dots \circ g_1(\mathbf{x}^{(in)}) , \quad (1)$$

where  $\mathbf{x}^{(in)}$  and  $\mathbf{x}^{(out)}$  refer to the input and output vector, and  $g_l$  with  $l \in [L]$  is parameterized by  $\{\Theta^{(l)}\}_{l=1}^L$ . In the training process, the weight matrices  $\{\Theta^{(l)}\}_{l=1}^L$  are optimized to minimize a predefined loss function  $\mathcal{L}_\Theta(\mathbf{x}^{(out)}, \mathbf{y})$  that measures the difference between the output  $\mathbf{x}^{(out)}$  and the expected result  $\mathbf{y}$ .

In deep learning, the most effective method to optimize trainable weight matrix  $\Theta$  with  $\Theta = [\Theta^{(1)}, \dots, \Theta^{(L)}]$  is gradient descent [6]. From the perspective of how many training examples are used to compute the gradient, we can mainly divide various gradient descent methods into three categories, i.e., stochastic gradient descent, batch gradient descent, and mini-batch gradient descent [7]. For the sake of simplicity, we explain the mechanism of these three methods in the binary classification task. Suppose that the given dataset  $\mathcal{D}$  consists of  $M$  training examples with  $\mathcal{D} = \{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^M$  and  $\mathbf{y}_i \in \{0, 1\}$ . Let  $\mathcal{L}$  be the loss function to be optimized and  $\eta$  be the learning rate. The batch gradient descent computes the gradient of the loss function of the whole dataset at each iteration, i.e., the optimization

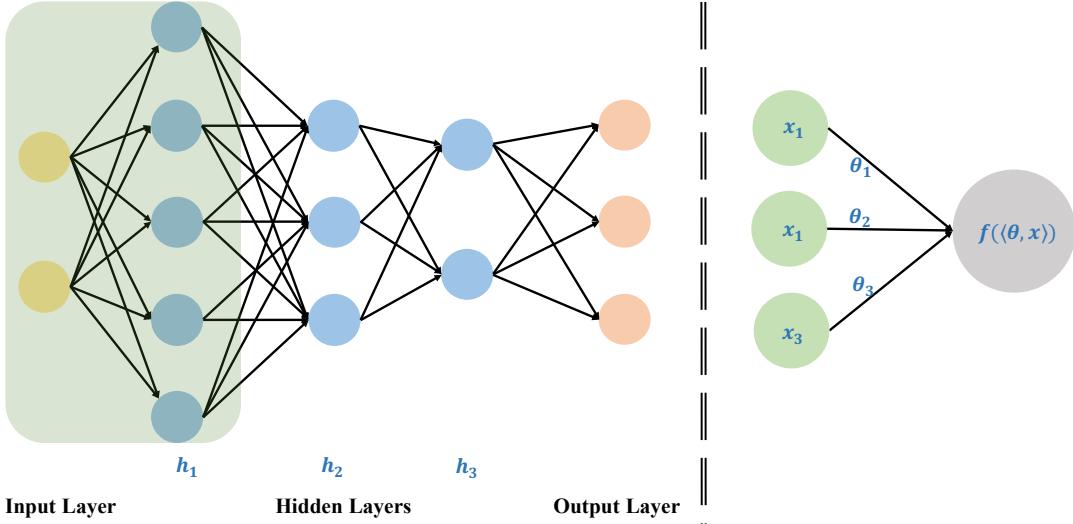


FIG. 1: **An example of FCNN.** The left panel illustrates the basic structure of FCNN that consists of an input layer, one hidden layer, and an output layer. In the green region, the number of neurons for the input layer and the first hidden layer is 2 and 5, respectively. The right panel shows the calculation rule of a single neuron. The neuron, highlighted by gray region, is calculated by  $f(\langle \theta, x \rangle)$ , where  $\theta$  represents the weight,  $x$  refers to the outputs of the green neurons, and  $f(\cdot)$  is the predefined activation function.

at  $k$ -th iteration step is

$$\Theta_k = \Theta_{k-1} - \eta \frac{1}{M} \sum_{i=1}^M \nabla_{\Theta} \mathcal{L}(\mathbf{x}_i, \mathbf{y}_i) . \quad (2)$$

The stochastic gradient descent (SGD), in contrast to batch gradient descent, performs a parameter update by using single training example that is randomly sampled from the dataset  $\mathcal{D}$ . The mathematical representation is

$$\Theta_k = \Theta_{k-1} - \eta \nabla_{\Theta} \mathcal{L}(\mathbf{x}_i, \mathbf{y}_i) \text{ with } \mathbf{x}_i \in \mathcal{D} . \quad (3)$$

Mini-batch gradient descent employs  $M'$  training examples that are randomly sampled from  $\mathcal{D}$  with  $M' \ll M$  to update parameters at each iteration. In particular, we have

$$\Theta_k = \Theta_{k-1} - \eta \frac{1}{M'} \sum_{i=1}^{M'} \nabla_{\Theta} \mathcal{L}(\mathbf{x}_i, \mathbf{y}_i) \text{ with } \{\mathbf{x}_i\}_{i=1}^{M'} \subset \mathcal{D} . \quad (4)$$

Celebrated by its flexibility and performance guarantees, the mini-batch gradient descent method is prevalently employed in deep learning compared with the rest two methods [7].

With the aim to achieve better convergence guarantee, advanced mini-batch gradient descent methods are highly desirable. Recall that vanilla mini-batch gradient descent defined in Eqn. (4) usually encounters kinds of difficulties, e.g., how to choose a proper learning rate, and how to set learning rate schedules that adjust the learning rate during training. To remedy the weakness of vanilla mini-batch gradient descent, various improved mini-batch gradient descent optimization algorithms have been proposed, i.e., momentum methods [8], Adam [9], Adagrad [10], to name a few. Since Adam can be employed to train quantum batch GAN, we briefly introduced its working mechanism. Specifically, Adam is a method that computes adaptive learning rates for each parameter. At  $k$ -th iteration, let  $\mathbf{g}_k$  be  $\mathbf{g}_k = \frac{1}{M'} \sum_{i=1}^{M'} \nabla_{\Theta} \mathcal{L}(\mathbf{x}_i, \mathbf{y}_i)$ . Define  $\mathbf{m}_k$  and  $\mathbf{v}_k$  as  $\mathbf{m}_k = \beta_1 \mathbf{m}_{k-1} + (1 - \beta_1) \mathbf{g}_k$  and  $\mathbf{v}_k = \beta_2 \mathbf{v}_{k-1} + (1 - \beta_2) \mathbf{g}_k^2$ , where  $\beta_1$  and  $\beta_2$  are constants with default settings  $\beta_1 = 0.9$  and  $\beta_2 = 0.999$ . The the update rule of Adam is

$$\Theta_{k+1} = \Theta_k - \frac{\eta}{\sqrt{\frac{\mathbf{v}_k}{1-\beta_2^k}} + \epsilon} \frac{\mathbf{m}_k}{1-\beta_1^k} , \quad (5)$$

where  $\epsilon$  is the predefined tolerate rate with default setting  $\epsilon = 10^{-8}$ .

### C. Generative adversarial network

Generative model takes a training dataset  $\mathcal{D}$  with limited examples that are sampled from distribution  $P_{data}$  and aims to estimate  $P_{data}$  [2]. Generative adversarial network (GAN), proposed by Goodfellow in 2014 [11], is one of the most powerful generative models. Here we briefly review the theory of GAN and explain how to use FCNN to implement GAN.

The fundamental mechanism of GAN and its variations [12–18] can be summarized as follows. GAN sets up a two-players game, where the first player is called the generator  $G$  and the second player is called the discriminator  $D$ . The generator  $G$  creates data that pretends to come from  $P_{data}$  to fool the discriminator  $D$ , while  $D$  tries to distinguish the fake generated data from the real training data. Both  $G$  and  $D$  are typically implemented by deep neural networks, e.g., fully connected neural network and convolution neural network [3, 19]. From the mathematical perspective,  $G$  and  $D$  corresponds to two differentiable functions. The input and output of  $G$  are a latent variables  $\mathbf{z}$  and an observed variable  $\mathbf{x}'$ , respectively, i.e.,  $G : G(\mathbf{z}, \boldsymbol{\theta}) \rightarrow \mathbf{x}'$  with  $\boldsymbol{\theta}$  being trainable parameters for  $G$ . The employed latent variable  $\mathbf{z}$  ensures GAN to be a structured probabilistic model [2]. In addition, the input and output of  $D$  are the given example (can either be the generated data  $\mathbf{x}'$  or the real data  $\mathbf{x}$ ) and the binary classification result (real or fake), respectively. Mathematically, we have  $D : D(\mathbf{x}, \boldsymbol{\gamma}) \rightarrow (0, 1)$  with  $\boldsymbol{\gamma}$  being trainable parameters for  $D$ . If the distribution  $P(G(\mathbf{z}))$  learned by  $G$  equals to the real data distribution, i.e.,  $P(G(\mathbf{z})) = P(\mathbf{x})$ , then the probability that discriminator predicts all inputs as real inputs is 50%. This unique solution that  $D$  can never discriminate between the generated data and the real data is called Nash equilibrium [11].

The training process of GANs involves both finding the parameters of a discriminator  $\boldsymbol{\gamma}$  to maximize the classification accuracy, and finding the parameters of a generator  $\boldsymbol{\theta}$  to maximally confuse the discriminator. The two-player game set up for GAN is evaluated by a loss function  $\mathcal{L}(D_\gamma(G_\theta(\mathbf{z})), D_\gamma(\mathbf{x}))$  that depends on both the generator and the discriminator. For example, by labeling the true data as 1 and the fake data as 0, the training procedure of original GAN can be treated as:

$$\min_{\boldsymbol{\theta}} \max_{\boldsymbol{\gamma}} \mathcal{L}(D_\gamma(G_\theta(\mathbf{z})), D_\gamma(\mathbf{x})) := \mathbb{E}_{\mathbf{x} \sim P_{data}(\mathbf{x})} [\log D_\gamma(\mathbf{x})] + \mathbb{E}_{\mathbf{z} \sim P(\mathbf{z})} [\log(1 - D_\gamma(G_\theta(\mathbf{z})))], \quad (6)$$

where  $P_{data}(\mathbf{x})$  refers to the distribution of training dataset, and  $P(\mathbf{z})$  is the probability distribution of the latent variable  $\mathbf{z}$ . During training, the parameters of two models are updated iteratively using gradient descent methods [20], e.g., the vanilla mini-batch gradient descent and Adam introduced in Subsection IB. When parameters  $\boldsymbol{\theta}$  of  $G$  are updated, parameters  $\boldsymbol{\gamma}$  of  $D$  are keeping fixed.

To overcome the training hardness, e.g., the optimized parameters generally converge to the saddle points, various GANs are proposed to attain better generative performance. The improved performance is guaranteed by introducing stronger neural network models for  $G$  and  $D$  [21], powerful loss functions [12] and advanced optimization methods, e.g., batch normalization and spectral normalization [22, 23].

### D. Box plot

Box-plot, as a popular statistical tool, is made up of five components to give a robust summary of the distribution of a dataset [24]. As shown in Fig. 2, the five components are the median, the upper hinge, the lower hinge, the upper extreme, and the lower extreme. Denote the first quantile as  $Q_1$ , the second quantile as  $Q_2$ , and the third quantile as  $Q_3$  [48]. The upper (or lower) hinge represents the  $Q_3$  and  $Q_1$ , respectively. The median of the box-plot refers to the  $Q_2$ . Let Inter quantile range (IQR) be  $Q_3 - Q_1$ . The upper and lower extreme are defined as  $Q_3 + 1.5\text{IQR}$  and  $Q_1 - 1.5\text{IQR}$ , respectively. The data point, which is out of the region between the upper and lower extreme, is treated as the outlier.

### E. Parameterized quantum circuit

Parameterized quantum circuit (PQC) is a special type of quantum circuit model that can be efficiently implemented on near-term quantum devices [25]. The basic components of PQC are quantum fixed two qubits gates, e.g., controlled-Z (CZ) gates, and trainable single qubit gates, e.g., the rotation gates  $RY(\theta)$  along y-axis. A PQC is used to implement a unitary transformation operator  $U(\boldsymbol{\theta})$  with  $O(\text{poly}(N))$  parameterized quantum gates, where  $N$  is the number of input qubits and  $\boldsymbol{\theta}$  is trainable parameters. The parameters  $\boldsymbol{\theta}$  are updated by a classical optimizer to minimize the loss function  $\mathcal{L}_\theta$  that evaluates the dissimilarity between the output of PQCs and the target result.

One typical PQC is multilayer parameterized quantum circuit (MPQC), which has a wide range of applications in quantum machine learning [26–29]. The trainable unitary operator  $U(\boldsymbol{\theta})$ , represented by MPQC, is composed of  $L$

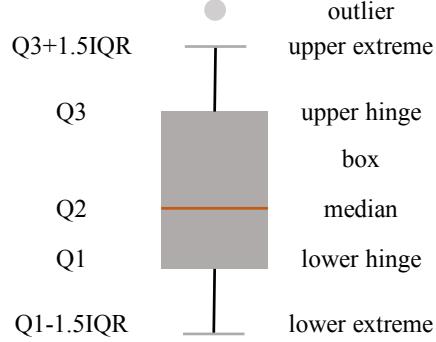


FIG. 2: **An example of the box-plot.** The gray circle refers to the outlier of the given data. The orange line represents the median of the given data. The two thick gray lines correspond to the upper extreme and lower extreme, respectively. The upper edge and lower edge of the gray box stand for the upper hinge and the lower hinge, respectively. The distance from the upper extreme to the upper hinge (or from the lower extreme to the lower hinge) equals to 1.5IQR.

layers and each layer has an identical arrangement of quantum gates. Fig. 3 (a) illustrates the general framework of MPQC. Mathematically, we have  $U(\boldsymbol{\theta}) := \prod_{l=1}^L (U_E U_l(\boldsymbol{\theta}))$  with  $L \sim O(\text{poly}(N))$ , where  $U_l(\boldsymbol{\theta})$  is the  $l$ -th trainable layer and  $U_E$  is the entanglement layer. In particular, we have  $U_l(\boldsymbol{\theta}) = \bigotimes_{i=1}^N (U_S(\boldsymbol{\theta}^{(i,l)}))$ , where  $\boldsymbol{\theta}^{(i,l)}$  represents the  $(i,j)$ -th entry of  $\boldsymbol{\theta} \in \mathcal{R}^{N \times L}$ ,  $U_S$  is the trainable unitary with  $U_S \in SU(2)$ , e.g., the rotation single qubit gates RX, RY, and RZ. The entangle layer  $U_E$  consists of fixed two qubits gates, e.g., CNOT and CZ, where the control and target qubits can be randomly arranged. We exemplify the implementation of  $U_l$  and  $U_E$  in Fig. 3 (b).

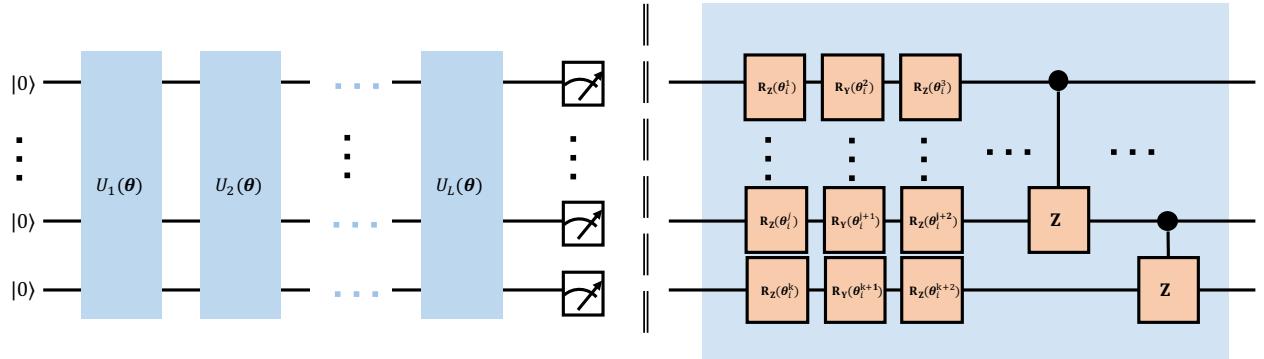


FIG. 3: **The implementation of MPQC.** (a) A general framework of MPQC. The trainable unitary  $U_l(\boldsymbol{\theta})$  with  $l \in [L]$  refers to the  $l$ -th layer of MPQC. The arrangement of quantum gates in each layer is identical. (b) A paradigm for the trainable unitary  $U_l(\boldsymbol{\theta})$  and  $U_E$ . For  $U_l(\boldsymbol{\theta})$ , the trainable qubit gates  $U_S$  are rotation single qubit gates along  $Z$  and  $Y$  axis. The trainable parameter refers to the rotation angle. For  $U_E$ , the fixed two qubits gates, i.e., CZ gates, are applied onto the adjacent qubits.

## II. SM (B): THE IMPLEMENTATION OF QUANTUM PATCH GAN

The quantum patch GAN under the setting  $N < \lceil \log M \rceil$  is composed of a quantum generator, a classical discriminator, and a classical optimizer. Here we separately explain the implementation of these three components.

### A. Quantum generator

Recall that the same construction rule is applied to all  $T$  sub-generators. Here we mainly exemplify  $t$ -th sub-generator  $G_t$ . Quantum sub-generator  $G_t$ , analogous to classical generator, receives the input latent state  $|\mathbf{z}\rangle$  and outputs the generated result  $G_t(\mathbf{z})$ . We first introduce the preparation of the latent state  $|\mathbf{z}\rangle$ . We then describe the construction rule of the computation model  $U_G(\boldsymbol{\theta})$  used in  $G_t$ . We last illustrate how to transform the generated quantum state to the generated example  $G_t(\mathbf{z})$ .

**Input latent state.** As explained in the main text, the latent state is prepared by applying a set of rotation single qubit gates  $U_S(\boldsymbol{\alpha}_z(i))$  to the input state  $|0\rangle^{\otimes N}$  with  $\boldsymbol{\alpha}_z \in \mathbb{R}^N$  and  $U_S(\boldsymbol{\alpha}_z(i)) \in \{\text{RX}, \text{RY}, \text{RZ}\}$ , i.e.,  $|\mathbf{z}\rangle = (\bigotimes_{i=1}^N U_S(\boldsymbol{\alpha}_z(i))) |0\rangle^{\otimes N}$ . The exploitation of the latent variable input state  $|\mathbf{z}\rangle$ , analogous to classical GAN, ensures quantum GAN to be a probabilistic generative model [6]. In the training procedure, the same  $|\mathbf{z}\rangle$  is employed to input into all  $T$  sub-generators. Such an operation guarantees that quantum patch GAN is capable of converging to Nash equilibrium, as classical GAN claimed. The technical proof is shown in Section SM (C).

**Computation model  $U_{G_t}(\boldsymbol{\theta})$ .** The computation model  $U_{G_t}(\boldsymbol{\theta})$  aims to map the input state  $|\mathbf{z}\rangle$  to a specific quantum state that well approximates the target data. Two key elements of our computation model are MPQC formulated in Section SM (A) and the nonlinear transformation. The motivation to use MPQC comes from two aspects. First, the structure of MPQC can be flexibly modified to adapt the limitations of quantum hardware, e.g., the restricted circuit depth and the allowable number of quantum gates [30]. Second, MPQC possesses a strong expressive power over classical circuit, which may contribute to quantum GANs to estimate the real data distribution [31]. The adoption of the nonlinear transformation intends to close the gap between the intrinsic mechanism of quantum computation and the required setting for generative models. Specifically, generative model essentially tries to learn a nonlinear map that transforms the distribution  $P(\mathbf{z})$  to the target data distribution  $P_{\text{data}}(\mathbf{x})$ . The intrinsic property of quantum computation implies that the trainable unitary, e.g., MPQC, can only linearly transform the input state to the output state. Consequently, a nonlinear transformation strategy is demanded for the quantum generator.

Here we introduce one efficient method that enables  $G_t$  to achieve the nonlinear map. The central idea is adding an ancillary subsystem in  $G_t$  and then tracing it out. Similar ideas have been broadly used in quantum discriminative models [32–34]. Supposed that  $G_t$  is an  $N$  qubits system, we decompose it into the ancillary subsystem  $\mathcal{A}$  with  $N_A$  qubits and the data subsystem with  $N - N_A$  qubits. We define the input state  $|\mathbf{z}\rangle$  as the following form, i.e.,

$$|\mathbf{z}\rangle = \left( \bigotimes_{i=1, i \in S}^{N_S} \text{RY}(\boldsymbol{\alpha}_z(i)) \bigotimes_{k=1, k \in [N] \setminus S}^{N-N_S} \text{I}_k \right) |0\rangle^{\otimes N} , \quad (7)$$

where  $S$  is the index set with  $S \subset [N]$  and  $|S| = N_S$ ,  $\text{RY}(\boldsymbol{\alpha}_z(i))$  applies to the  $i$ -th qubit, identity gate  $\text{I}_k$  applies to the  $k$ -th qubit, and  $\boldsymbol{\alpha}_z(i)$  refers to the  $i$ -th entry of the vector  $\boldsymbol{\alpha} \in \mathbb{R}^{N_S}$  with  $\boldsymbol{\alpha}$  being sampled from a predefined distribution. We denote MPQC as the giant unitary  $U_{G_t}(\boldsymbol{\theta})$  with  $U_{G_t}(\boldsymbol{\theta}) \in \mathbb{C}^{2^N \times 2^N}$ . The generated state  $|\Psi_t(\mathbf{z})\rangle$  for  $G_t$  after interacting  $U_t(\boldsymbol{\theta})$  with  $|\mathbf{z}\rangle$  is

$$|\Psi_t(\mathbf{z})\rangle = U_{G_t}(\boldsymbol{\theta}) |\mathbf{z}\rangle . \quad (8)$$

We then take the partial measurement  $\Pi_{\mathcal{A}}$  on the ancillary subsystem  $\mathcal{A}$  of  $|\Psi_t(\mathbf{z})\rangle$ , i.e., the post-measurement quantum state  $\rho_t(\mathbf{z})$  is

$$\rho_t(\mathbf{z}) = \frac{\text{Tr}_{\mathcal{A}}(\Pi_{\mathcal{A}} |\Psi_t(\mathbf{z})\rangle \langle \Psi_t(\mathbf{z})|)}{\text{Tr}(\Pi_{\mathcal{A}} \otimes \mathbb{I}_{2^{N-N_A}} |\Psi_t(\mathbf{z})\rangle \langle \Psi_t(\mathbf{z})|)} . \quad (9)$$

An immediate observation is that state  $\rho_t(\mathbf{z})$  is a nonlinear map for  $|\mathbf{z}\rangle$ , since both the nominator and denominator of Eqn. (9) are the function of the variable  $|\mathbf{z}\rangle$ .

**Output.** The output of  $G_t$ , denoted as  $G_t(\mathbf{z})$ , is obtained by measuring  $\rho_t(\mathbf{z})$  using a complete set of computation bases  $\{|j\rangle\}_{j=0}^{2^{(N-N_A)}-1}$ . For image generation, the measured result  $P(j)$  of the computation basis  $|j\rangle$  represents the  $j$ -th pixel value for the  $t$ -th sub-generator, i.e.,

$$P(J = j) = \text{Tr}(|j\rangle \langle j| \rho_t(\mathbf{z})) . \quad (10)$$

Consequently, we have  $G_t(\mathbf{z})$

$$G_t(\mathbf{z}) = [P(J = 0), \dots, P(J = 2^{(N-N_A)} - 1)] , \quad (11)$$

and the output for the generator  $G(\mathbf{z})$  is

$$G(\mathbf{z}) = [G_1(\mathbf{z}), \dots, G_T(\mathbf{z})] . \quad (12)$$

*Remark.* Other advanced nonlinear mapping methods can be seamlessly embedded into our quantum generator. For example, it is feasible to employ classical activation function  $f(\cdot)$ , e.g., sigmoid function, to the generated result  $G(\mathbf{z})$ . It is intrigued to explore what kind of nonlinear mapping will lead to a better performance for our quantum GAN scheme.

## B. Discriminator

The discriminator  $D$  is constructed by employing classical neural networks, i.e., FCNN. The input of the discriminator is the training data  $\mathbf{x}$  or generated data  $G(\mathbf{z})$ . The output of  $D$  is a scalar in the range between 0 and 1, i.e.,  $D(\mathbf{x}), D(G(\mathbf{z})) \in [0, 1]$ . Recall that we label the training data as 1 (True) and the generated data as 0 (False). The output of the discriminator can be treated as the confidence about the input data to be true or false. The ReLU mapping is employed to build FCNN. We customize the depth of the hidden layers and the number of neurons in each layer for different tasks.

## C. Loss function and optimization rule

We modify the loss function defined in Eqn. (6) to train quantum patch GAN, i.e.,

$$\min_{\boldsymbol{\theta}} \max_{\boldsymbol{\gamma}} \mathcal{L}(D_{\boldsymbol{\gamma}}(G_{\boldsymbol{\theta}}(\mathbf{z})), D_{\boldsymbol{\gamma}}(\mathbf{x})) := \mathbb{E}_{\mathbf{x} \sim P_{data}(\mathbf{x})} [\log D_{\boldsymbol{\gamma}}(\mathbf{x})] + \mathbb{E}_{\mathbf{z} \sim P(\mathbf{z})} [\log(1 - D_{\boldsymbol{\gamma}}(G_{\boldsymbol{\theta}}(\mathbf{z})))], \quad (13)$$

where the modified part is setting  $G_{\boldsymbol{\theta}}(\mathbf{z}) = [G_{\boldsymbol{\theta},1}(\mathbf{z}), \dots, G_{\boldsymbol{\theta},T}(\mathbf{z})]$ . In the training process, we optimize the trainable parameters  $\boldsymbol{\theta}$  and  $\boldsymbol{\gamma}$  iteratively, which is analogous to classical GAN. Especially, we leverage a zeroth-order method [35] and an automatic differentiation package of PyTorch [36] to optimize trainable parameters for the quantum generator and classical discriminator, respectively. In particular, to optimize the classical discriminator  $D$ , we fix parameters  $\boldsymbol{\theta}$  and use back-propagation to update the parameters  $\boldsymbol{\gamma}$  according to the obtained loss [2]. To optimize the quantum generator  $G$ , we keep the parameters  $\boldsymbol{\gamma}$  fixed and employ the parameter shift rule [35] to compute the gradients of PQC in a way that is compatible with back-propagation. Denote  $N_G$  and  $N_D$  be the number of parameters for  $G$  and  $D$ , i.e.,  $N_G = |\boldsymbol{\theta}|$  and  $N_D = |\boldsymbol{\gamma}|$ . The derivative of the  $i$ -th parameter  $\boldsymbol{\theta}(i)$  with  $i \in [N_G]$  can be computed by evaluating the original expectation twice, but with shifting  $\boldsymbol{\theta}(i)$  to  $\boldsymbol{\theta}(i) + \pi/2$  and  $\boldsymbol{\theta}(i) - \pi/2$ . In particular, we have

$$\frac{\partial \mathcal{L}(\boldsymbol{\theta}, \boldsymbol{\gamma})}{\partial \boldsymbol{\theta}(i)} = \frac{\mathcal{L}(\boldsymbol{\theta}(1), \dots, \boldsymbol{\theta}(i) + \pi/2, \dots, \boldsymbol{\theta}(N_G), \boldsymbol{\gamma}) - \mathcal{L}(\boldsymbol{\theta}(1), \dots, \boldsymbol{\theta}(i) - \pi/2, \dots, \boldsymbol{\theta}(N_G), \boldsymbol{\gamma})}{2}. \quad (14)$$

The update rule for  $\boldsymbol{\theta}$  at  $k$ -th iteration is

$$\boldsymbol{\theta}^{(k)} = \boldsymbol{\theta}^{(k-1)} - \eta_G \frac{\partial \mathcal{L}(\boldsymbol{\theta}^{(k-1)}, \boldsymbol{\gamma}^{(k-1)})}{\partial \boldsymbol{\theta}^{(k-1)}}, \quad (15)$$

where  $\eta_G$  is the learning rate. Analogous to the classical GAN, we iteratively update parameters  $\boldsymbol{\theta}$  and  $\boldsymbol{\gamma}$  in total  $K$  iterations.

## III. SM (C): THE CONVERGENCE GUARANTEE OF QUANTUM PATCH GAN

Recall that classical GAN employs the following Lemma to prove its convergence.

**Lemma 1** (Proposition 1, [11]). *For classical GAN, when  $G$  is fixed, the optimal discriminator  $D$  is*

$$D^*(\mathbf{x}) = \frac{P_{data}(\mathbf{x})}{P_g(\mathbf{x}) + P_{data}(\mathbf{x})}.$$

In favor of Lemma 1, the convergence property of classical GAN is summarized by the following two lemmas.

**Lemma 2** (Theorem 1, [11]). *Denote  $C(G)$  as  $C(G) := \max_D \mathcal{L}(G, D)$ , with  $L(G, D)$  being loss function. The global minimum of the virtual training criterion  $C(G)$  is achieved if and only if  $P_g = P_{data}$ . At that point,  $C(G)$  achieves the value  $-\log 4$ .*

**Lemma 3** (Proposition 2,[11]). *Denote  $C(D)$  as  $C(D) := \min_G \mathcal{L}(G, D)$ , with  $L(G, D)$  being loss function. If the generator  $G$  and discriminator  $D$  have enough capacity, and at each iteration of GAN, the discriminator is allowed to reach its optimum given  $G$ , and the generated distribution  $P_g$  is updated so as to improve the criterion  $C(D)$  then  $P_g(\mathbf{x})$  converges to  $P_{data}(\mathbf{x})$ .*

We now prove that the quantum patch GAN possesses the identical convergence property as classical GAN does. Let  $P(\mathbf{z})$  be the distribution of the latent variable  $\mathbf{z}$ . We denote the probability distribution of generated images as  $P_g(\mathbf{x})$  with  $P_g(\mathbf{x}) = P_g(G(\mathbf{z}))$  and  $G(\mathbf{z}) = [G_1(\mathbf{z}), G_2(\mathbf{z}), \dots, G_T(\mathbf{z})]$ .

**Theorem 4.** In quantum patch GAN, for  $G$  fixed, the optimal discriminator  $D$  is

$$D^*(\mathbf{x}) = \frac{P_{data}(\mathbf{x})}{P_g(\mathbf{x}) + P_{data}(\mathbf{x})} .$$

*Proof.* Given fixed generator  $G$ , we formulate the relation between  $P_g(\mathbf{x})$  and  $P(\mathbf{z})$  as follows.

$$P_g(\mathbf{x}) = \int_{\{[G_1(\mathbf{z}), G_2(\mathbf{z}), \dots, G_T(\mathbf{z})] = \mathbf{x}\}} P(\mathbf{z}) d\mathbf{z} = \int_{\{G(\mathbf{z}) = \mathbf{x}\}} P(\mathbf{z}) d\mathbf{z} , \quad (16)$$

We then expand the loss function of quantum patch GAN and obtain

$$\begin{aligned} & \mathbb{E}_{\mathbf{x} \sim P_{data}} [\log(D(\mathbf{x}))] + \mathbb{E}_{\mathbf{z} \sim P(\mathbf{z})} [\log(1 - D(G(\mathbf{z})))] \\ &= \int_{\mathbf{x}} P_{data}(\mathbf{x}) \log(D(\mathbf{x})) d\mathbf{x} + \int_{\mathbf{z}} P(\mathbf{z}) \log(1 - D(G(\mathbf{z}))) d\mathbf{z} . \end{aligned} \quad (17)$$

In conjunction with Eqn. (16) and Eqn. (17), we have

$$\begin{aligned} & \mathbb{E}_{\mathbf{x} \sim P_{data}} [\log(D(\mathbf{x}))] + \mathbb{E}_{\mathbf{z} \sim P(\mathbf{z})} [\log(1 - D(G(\mathbf{z})))] \\ &= \int_{\mathbf{x}} P_{data}(\mathbf{x}) \log(D(\mathbf{x})) d\mathbf{x} + \int_{\mathbf{z}} P(\mathbf{z}) \log(1 - D(G(\mathbf{z}))) d\mathbf{z} \\ &= \int_{\mathbf{x}} P_{data}(\mathbf{x}) \log(D(\mathbf{x})) d\mathbf{x} + \int_{\{G(\mathbf{z}) = \mathbf{x}\}} P(\mathbf{z}) \log(1 - D(G(\mathbf{z}))) d\mathbf{z} d\mathbf{x} \\ &= \int_{\mathbf{x}} P_{data}(\mathbf{x}) \log(D(\mathbf{x})) d\mathbf{x} + \int_{\mathbf{x}} \log(1 - D(\mathbf{x})) d\mathbf{x} \int_{\{G(\mathbf{z}) = \mathbf{x}\}} P(\mathbf{z}) d\mathbf{z} \\ &= \int_{\mathbf{x}} P_{data}(\mathbf{x}) \log(D(\mathbf{x})) + P_g(\mathbf{x}) \log(1 - D(\mathbf{x})) d\mathbf{x} \end{aligned} \quad (18)$$

Since both  $P_g(\mathbf{x})$  and  $P_{data}(\mathbf{x})$  are fixed, the minimum of the above equation is

$$D^*(\mathbf{x}) = \frac{P_{data}(\mathbf{x})}{P_g(\mathbf{x}) + P_{data}(\mathbf{x})} .$$

□

An immediate observation of Theorem 4 is that

**Corollary 1.** For quantum GAN, the global minimum is achieved if and only if  $P_g = P_{data}$ . If the generator  $G$  and discriminator  $D$  have enough capacity, and the discriminator can reach its optimum given  $G$  at each iteration, and the generated distribution  $P_g$  is updated so as to improve the criterion  $C(D)$  then  $P_g(\mathbf{x})$  converges to  $P_{data}(\mathbf{x})$ .

*Proof.* The same optimal discriminator (as indicated by Lemma 1 and Theorem 4), loss function, and updating rule imply that the convergence results obtained by classical GAN are also satisfied to quantum patch GAN. □

#### IV. SM (D): THE IMPLEMENTATION OF QUANTUM BATCH GAN

The proposed quantum batch GAN under the setting  $N > \lceil \log M \rceil$  employs a quantum generator and discriminator to play a minimax game. Given an  $N$ -qubits quantum system, we divide  $N$ -qubits into the index register  $\mathcal{R}_I$  with  $N_I$  qubits and the feature register  $\mathcal{R}_F$  with  $N_F$  qubits, i.e.,  $N = N_I + N_F$ . The feature register  $\mathcal{R}_F$  can be further partitioned into three parts, i.e.,  $N_D$  qubits are used to generate fake examples,  $N_{A_G}$  qubits are used to conduct nonlinear operations for  $G$ , and  $N_{A_D}$  qubits are used to conduct nonlinear operations for  $D$  with  $N_F = N_D + N_{A_G} + N_{A_D}$ . Such a decomposition enables us to effectively acquire the mini-batch gradient information by simple measurements. Considering that the mechanism of the quantum batch GAN is in the same vein with the quantum patch GAN, here we mainly concentrate on the distinguished techniques used in the quantum batch GAN.

**Input state.** To capture the mini-batch gradient information, we employ two oracles  $U_{\mathbf{z}}$  and  $U_{\mathbf{x}}$  to encode different latent vectors and classical training examples into quantum states, respectively. Following the same notations used in the main text, we denote the mini-batch size as  $|B_k| = 2^{N_I}$ . For  $U_{\mathbf{z}}$ , we have  $U_{\mathbf{z}} : |0\rangle_I^{\otimes N_I} |0\rangle_F^{\otimes N_F} \rightarrow 2^{-N_I} \sum_i |i\rangle_I |\mathbf{z}^{(i)}\rangle_F$ .

With a slight abuse of notation,  $\mathbf{z}^{(i)}$  refers to  $i$ -th latent vector and  $|\mathbf{z}^{(i)}\rangle = |\bar{\mathbf{z}}^{(i)}\rangle|0\rangle^{\otimes N_{AD}}$ , where  $|\bar{\mathbf{z}}^{(i)}\rangle \in \mathbb{C}^{2^{N_I+N_{AG}}}$  follows the same form defined in Eqn. (7). Similarly, for  $U_{\mathbf{x}}$ , we have  $U_{\mathbf{x}} : |0\rangle_I|0\rangle_F \rightarrow 2^{-N_I} \sum_i |i\rangle_I |\mathbf{x}^{(i)}\rangle_F$ . For a dataset of  $2^{N_I}$  inputs with  $M$  features, the complexity of encoding a full data set by the quantum system using amplitude encoding method is  $O(2^{N_I}M/(N_I \log(M)))$  [37–41]. Thus, for data encoding, the runtime of state preparation for quantum machine learning using amplitude encoding is basically consistent with that of classic machine learning, since the encoding complexity of classic machine learning is at least  $O(2^{N_I}M)$ . However, the number of qubits required for quantum machine learning is  $N_I \log(M)$ , while classical quantum machine learning requires at least  $O(2^{N_I}M)$  bits.

An accurate construction of  $U_{\mathbf{z}}$  and  $U_{\mathbf{x}}$  requires numerous multi-controlled quantum gates, which is inhospitable to near-term quantum devices. To overcome this issue, an effective way is to employ the pertained oracles that approximate  $U_{\mathbf{z}}$  and  $U_{\mathbf{x}}$  to accomplish the learning tasks. Such a pre-training method have been broadly investigated [26, 42–45].

**Computation model  $U_G(\boldsymbol{\theta})$ .** The quantum generator  $G$  is built by MPQC  $U_G(\boldsymbol{\theta})$  associated with the nonlinear mappings. As illustrated in the main text,  $U_G(\boldsymbol{\theta}) \in \mathbb{C}^{2^{N_D+N_{AG}} \times 2^{N_D+N_{AG}}}$  only operates with the feature register  $\mathcal{R}_F$ . In particular, to generate fake data, we first apply  $\mathbb{I}_{2^{N_I}} \otimes U_G(\boldsymbol{\theta}) \otimes \mathbb{I}_{2^{N_{AD}}}$  to the input state, i.e.,  $|\Psi(\mathbf{z})\rangle = 2^{-N_I} \sum_i |i\rangle_I U_G \otimes \mathbb{I}_{2^{N_{AD}}}(\boldsymbol{\theta}) |\mathbf{z}^{(i)}\rangle$ . We then take a partial measurement  $\Pi_{\mathcal{A}_G}$  as defined in Eqn. (9), e.g.,  $\Pi_{\mathcal{A}_G} = (|0\rangle\langle 0|)^{\otimes N_{AG}}$ , to introduce the nonlinearity. The generated state  $|G(\mathbf{z})\rangle$  corresponding to  $|B_k\rangle$  fake examples is

$$|G(\mathbf{z})\rangle := 2^{-N_I} \sum_i |i\rangle_I |G(\mathbf{z}^{(i)})\rangle_F = \frac{\mathbb{I}_{2^{N_I}} \otimes \Pi_{\mathcal{A}_G} \otimes \mathbb{I}_{2^{N_D+N_{AD}}} |\Psi(\mathbf{z})\rangle}{\sqrt{\text{Tr}(\mathbb{I}_{2^{N_I}} \otimes \Pi_{\mathcal{A}_G} \otimes \mathbb{I}_{2^{N_D+N_{AD}}} |\Psi(\mathbf{z})\rangle \langle \Psi(\mathbf{z})|)}} . \quad (19)$$

In the training procedure, we directly apply the quantum discriminator to operate with the generated state  $|G(\mathbf{z})\rangle$ . In the image generation stage, we employ POVM to measure the state  $|G(\mathbf{z})\rangle$ , i.e., the  $i$ -th image  $G(\mathbf{z}^{(i)})$  with  $i \in B_k$  is  $G(\mathbf{z}^{(i)}) = [\text{P}(J=0|I=i), \dots, \text{P}(J=2^{N_D}-1|I=i)]$  with  $\text{P}(J=j|I=i) = \text{Tr}(|i\rangle_I |j\rangle_F \langle i|_I \langle j|_F |G(\mathbf{z})\rangle \langle G(\mathbf{z})|)$ .

**Computation model  $U_D(\boldsymbol{\gamma})$ .** Quantum discriminator  $D$ , implemented by MPQC  $U_D(\boldsymbol{\gamma})$  associated with the nonlinear operations, aims to output a scalar that represents to the averaged classification accuracy. Given a state  $|\mathbf{x}\rangle$  that represents  $|B_k\rangle$  real examples, we first apply  $\mathbb{I}_{2^{N_I+N_{AG}}} \otimes U_D(\boldsymbol{\gamma})$  to the state  $|\mathbf{x}\rangle$ , i.e.,  $|\Phi(\mathbf{x})\rangle = 2^{-N_I} \sum_i |i\rangle_I \mathbb{I}_{2^{N_{AG}}} \otimes U_D(\boldsymbol{\gamma}) |\mathbf{x}^{(i)}\rangle_F$ . We then use a partial measurement  $\Pi_{\mathcal{A}_D}$ , e.g.,  $\Pi_{\mathcal{A}_D} = (|0\rangle\langle 0|)^{\otimes N_{AD}}$ , to introduce the nonlinearity. The generated state  $|D(\mathbf{x})\rangle$  corresponding to the classification result for  $|B_k\rangle$  examples is

$$|D(\mathbf{x})\rangle := 2^{-N_I} \sum_i |i\rangle_I |D(\mathbf{x}^{(i)})\rangle_F = \frac{\mathbb{I}_{2^{N-N_{AD}}} \otimes \Pi_{\mathcal{A}_D} |\Psi(\mathbf{x})\rangle}{\sqrt{\text{Tr}(\mathbb{I}_{2^{N-N_{AD}}} \otimes \Pi_{\mathcal{A}_D} |\Psi(\mathbf{x})\rangle \langle \Psi(\mathbf{x})|)}} . \quad (20)$$

Similarly, given the state  $|G(\mathbf{z})\rangle$  in Eqn. (19) that represents  $|B_k\rangle$  fake examples, we adopt the same method to obtain the state  $|D(G(\mathbf{z}))\rangle$  with  $|D(G(\mathbf{z}))\rangle = 2^{-N_I} \sum_i |i\rangle_I |D(G(\mathbf{z}^{(i)}))\rangle_F$ . For each example  $\mathbf{x}^{(i)}$  or  $G(\mathbf{z}^{(i)})$ , the classification accuracy  $D(\mathbf{x}^{(i)})$  or  $D(G(\mathbf{z}^{(i)}))$  is obtained by applying POVM  $\Pi_o = \mathbb{I}_{2^{N_D+N_{AD}}}$  on  $|D(\mathbf{x}^{(i)})\rangle$  or  $|D(G(\mathbf{z}^{(i)}))\rangle$ , i.e.,  $D(\mathbf{x}^{(i)}) = \text{Tr}(\Pi_o |D(\mathbf{x}^{(i)})\rangle \langle D(\mathbf{x}^{(i)})|)$  or  $D(G(\mathbf{z}^{(i)})) = \text{Tr}(\Pi_o |D(G(\mathbf{z}^{(i)}))\rangle \langle D(G(\mathbf{z}^{(i)}))|)$ . As formulated in Eqn. (20), the averaged classification accuracy  $2^{-N_I} D(\mathbf{x})$  is acquired by applying POVM  $\Pi_o = \mathbb{I}_{2^{N-1}} |0\rangle\langle 0|$  to  $|D(\mathbf{x})\rangle$ , i.e.,  $2^{-N_I} D(\mathbf{x}) = \text{Tr}(\Pi_o |D(\mathbf{x})\rangle \langle D(\mathbf{x})|)$ . Likewise, the averaged classification accuracy for the generated examples  $2^{-N_I} D(G(\mathbf{z}))$  is acquired by applying  $\Pi_o$  to  $|D(G(\mathbf{z}))\rangle$ , i.e.,  $2^{-N_I} D(G(\mathbf{z})) = \text{Tr}(\Pi_o |D(G(\mathbf{z}))\rangle \langle D(G(\mathbf{z}))|)$ . In conjunction with Eqn. (4) and Eqn. (13), the mini-batch gradient information can be effectively acquired by taking  $\Pi_o$  on two states  $|D(G(\mathbf{z}))\rangle$  and  $|D(\mathbf{x})\rangle$ .

#### Remark.

1). It is noteworthy that, by introducing  $N_I$  additional qubits to encode  $2^{N_I}$  inputs as a superposition state, quantum batch GAN could obtain the batch gradient descent of all the  $2^{N_I}$  inputs in one training process. This shows that quantum batch GAN has the potential to efficiently process big data.

2). Analogous to binary classification task, we need to measure output state to acquire the information about if the input is ‘fake’ or ‘real’. Since quantum batch GAN employ the quantum discriminator, theoretically, measuring one qubit is enough to distinguish between ‘real’ and ‘fake’ images, and then obtain the gradient information. Therefore, the number of measurements required for quantum batch GAN during training procedure is quite small, and theoretically will not increase with the size of the system. For example, the statistical error of 10,000 measurements on a qubit is about 0.01, which is basically enough for the training procedure in most cases. In addition, as discussed in [46], finite number of measurements could lead to a unbiased estimators for the gradient, which effectively avoids the saddle points and possesses the convergence guarantees.

## V. SM (E): EXPERIMENT DETAILS

In this section, we first specify the parameter settings of the exploited superconducting quantum processor. We next provide the experiment details for the hand-written digit image generation task. We last demonstrate the experiment details for the gray-scale bar image generation.

### A. Superconducting quantum processor

Our superconducting quantum processor has 12 frequency-tunable transmon qubits of the Xmon variety. The qubits are arranged in a line with neighbouring qubits coupled capacitively, and the nearest-neighbor coupling strength is about 12 MHz. All readout resonators are coupled to a common transmission line for state readout. The performances of the five qubits we chosen in our experiment are listed in Table. I.

Qubit	Q1	Q2	Q3	Q4	Q5	Q6	AVG
$\omega_{10}/2\pi$ (GHz)	4.210	5.006	4.141	5.046	4.226	5.132	-
$T_1$ ( $\mu$ s)	37.2	34.5	35.1	30.1	39.4	36.3	35.4
$T_2^*$ ( $\mu$ s)	2.6	4.8	1.5	8.6	2.4	5.4	4.2
$f_{00}$	0.947	0.955	0.959	0.982	0.962	0.981	0.964
$f_{11}$	0.873	0.913	0.889	0.919	0.904	0.93	0.905
X/2 gate fidelity	0.9993	0.9993	0.9992	0.9995	0.9993	0.9996	0.9994
CZ gate fidelity	0.987	0.985	0.986	0.972	0.994	0.985	

TABLE I: **Performance of qubits.**  $\omega_{10}$  is idle points of qubits.  $T_1$  and  $T_2^*$  are the energy relaxation time and dephasing time, respectively.  $f_{00}$  ( $f_{11}$ ) is the possibility of correctly readout of qubit state in  $|0\rangle$  ( $|1\rangle$ ) after successfully initialized in  $|0\rangle$  ( $|1\rangle$ ) state. X/2 gate fidelity and CZ gate fidelity are single and two-qubit gate fidelities obtained via performing randomized benchmarking.

### B. Hand-written digit image generation

Here, we provide the hyper-parameter settings of quantum patch GAN in hand-written digits ‘0’ and ‘1’ image generation tasks. In particular, we set  $N_S = N = 5$  defined in Eqn. (7) to generate latent states. The number of sub-generators and layers for each  $U_{G_t}$  are set as  $T = 4$  and  $L = 5$ , respectively. To compress the depth of the quantum circuits, we set all trainable single qubit gates as RY. Equivalently, the total number of trainable parameters for quantum generator  $G$  is in total  $T \times L \times N = 100$ . The number of measurements to readout the quantum state is set as 3000. Moreover, the employed discriminator used for quantum patch GAN is implemented by FCNN with two hidden layers, and the number of hidden neurons for the first and second hidden layer is 64 and 16, respectively. In the training procedure, we set the learning rates as  $\eta_G = 0.05$  and  $\eta_D = 0.001$  for quantum patch GAN. The number of measurements to estimate the partial derivation in Eqn. (14) is set as 3000.

#### 1. Some discussion about the setting about the number of measurements

Here we devise a numerical simulation to indicate that, for the hand-written image generation task that using quantum patch GAN with 5 qubits,  $K = 3000$  shots measurement is a good hyper-parameter to achieve the desired generative performance under a reasonable running time. Specifically, we employ the quantum generator used in quantum patch GAN to accomplish the discrete Gaussian distribution approximation task. Formally, the discrete Gaussian distribution  $\pi(x; \mu, \sigma)$  is defined as

$$\pi(x; \mu, \sigma) = \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right) / Z, \quad (21)$$

where  $x \in [0, 31]$  and  $Z$  being the normalization factor. The discrete Gaussian  $\pi(x; \mu, \sigma)$  can be effectively represented by the quantum state using five qubits. Let the target quantum state expressed by five qubits be  $|\pi\rangle$ , where the outcome measured by the computation basis  $|k\rangle$  with  $k \in [0, 31]$  is  $\exp(-\frac{(k - \mu)^2}{2\sigma^2}) / Z$ .

We now exploit quantum generator used in quantum patch GAN approximate the target state  $|\pi\rangle$ , or equivalently, to learn the discrete Gaussian distribution  $\pi(x; \mu, \sigma)$ . Denote the generated state of the employed quantum generator as  $|\psi(\boldsymbol{\theta})\rangle$ ,

$$|\psi(\boldsymbol{\theta})\rangle = \prod_{i=1}^L U_i(\boldsymbol{\theta}) |0\rangle^{\otimes 5}, \quad (22)$$

where  $U_i(\boldsymbol{\theta})$  refers to PQC. The probability distribution formulated by  $|\psi(\boldsymbol{\theta})\rangle$  is denoted as  $q_{\boldsymbol{\theta}}$ , i.e.,  $q(X = k) = |\langle k|\psi(\boldsymbol{\theta})\rangle|^2$ . In the training procedure, we continuously update  $\boldsymbol{\theta}$  to minimize the maximum mean discrepancy (MMD)  $\mathcal{L}$  between two distributions  $q(x)$  and  $p(x)$ , i.e.,

$$\mathcal{L}(q(x), p(y)) = \mathbb{E}_{x \sim q(x), y \sim p(y)} [\mathbb{K}(x, y)] - 2\mathbb{E}_{x \sim q(x), y \sim \pi(y)} [\mathbb{K}(x, y)] + \mathbb{E}_{x \sim \pi(x), y \sim \pi(y)} [\mathbb{K}(x, y)], \quad (23)$$

where  $\mathbb{K}(x, y) = \frac{1}{c} \sum_{i=1}^c \exp(-|x - y|^2/(2\sigma_i^2))$  and  $c \in \mathbb{N}$  is a hyper-parameter. At each iteration, we first readout the probability distribution  $q_{\boldsymbol{\theta}}$  and compute the gradient  $\partial\mathcal{L}/\partial\boldsymbol{\theta}$ . The hyper-parameter setting is as follows. The total number of iteration is set as  $T = 800$ . The learning rate is set as  $lr = 0.01$ . The circuit depth  $L$  is set as  $L = 5$ . Figure 4 illustrates the simulation results. As shown in upper panel, with setting  $K = 3000$ , the approximated Gaussian distribution can well match the target distribution. Moreover, the lower panel shows that, for the setting and (highlighted by red color), the training loss is continuously decreasing with the increased number of iterations. Celebrated by such a simulation result, we conclude that  $K = 3000$  is sufficient to acquire optimization information, which ensures the performance of quantum patch GAN.

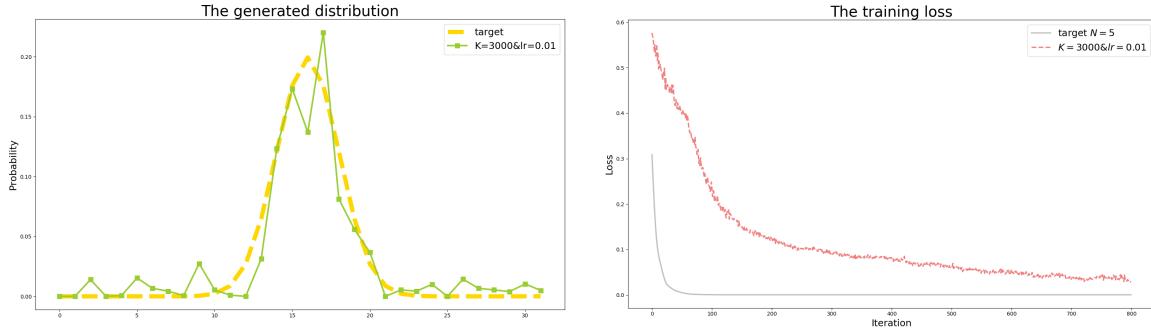


FIG. 4: The simulation results for approximating discrete Gaussian distribution with finite measurements  $K = 3000$ . The left panel shows the performance of approximated discrete Gaussian. The label ‘target’ refers to the target Gaussian distribution to be approximated. The label ‘lr’ refers to learning rate. Similarly, the right panel illustrates the corresponding training loss.

### C. Gray-scale bar image generation

#### 1. The gray-scale bar image dataset

Here, we first address the motivation of constructing the grey-scale bar dataset, and discuss the requirements that need to be considered for constructing such a dataset. The gray-scale bar image dataset is used to explore how the performance of quantum patch GAN and quantum batch GAN. To evaluate the performance of two quantum GANs, the employed dataset should satisfy the following two requirements:

- Given a dataset, the preparation of quantum state that corresponds to the classical input, is required to be efficient, which only cost shallow or constant circuit depth.
- The employed dataset  $\mathcal{D}$  should be sampled from a continuous distribution, i.e.,  $\mathcal{D} \sim P_{data}(\mathbf{x})$ .

The Requirement 1 origins from the practical limitation. Considering that the noise of quantum system is exponentially increased in terms of the circuit depth, it is unfavorable that encoding classical input into quantum states affects our analysis results. Equivalently, an efficient method to prepare quantum input facilitates us to eliminate the effects of the encoding issue, and enables us to better explore how the performance of quantum batch GAN. The Requirement 2 ensures that the employed dataset is sufficiently ‘complicated’ to learn.

The construction rules for the gray-scale bar dataset are as follows. Denote the training dataset as  $\mathcal{D} = \{\mathbf{x}_i\}_{i=1}^{N_e}$  with  $\mathcal{D} \sim P_{data}(\mathbf{x})$ , where  $N_e$  is the number of examples and  $\mathbf{x}_i \in \mathbb{R}^M$  refers to the  $i$ -th example with feature dimension  $M$ .

Denote the pixel value at the  $i$ -th row and  $j$ -th column as  $\mathbf{x}_{ij}$ , a valid gray-scale bar image  $\mathbf{x} \in \mathbb{R}^{m \times m}$  with  $M = m^2$  satisfies  $\mathbf{x}_{i0} \sim \text{unif}(0.4, 0.6)$ ,  $\mathbf{x}_{i1} = 1 - \mathbf{x}_{i0}$ , and  $\mathbf{x}_{ij} = 0$ ,  $\forall i \in [m]$  and  $\forall j \in [m] \setminus \{0, 1\}$ . In our experiment, we collect a training dataset with  $N_e = 1000$  examples for the case  $m = 2$ .

The gray-scale bar dataset cleverly meets the two requirements nominated above, which motivates us to use it to investigate the performance of quantum GAN. On the one hand, we can effectively encode the training data into quantum state by using one circuit depth that is composed of RY gates. For example, for the  $2 \times 2$  pixels setting, the image  $\mathbf{x} = [0.45, 0, 0.55, 0]$ , the corresponding quantum state can be generated by applying  $\text{RY}(\gamma_1) \otimes \text{RY}(\gamma_2)$  to the initial state  $|00\rangle$ , where  $\gamma_1 = 2 * \arccos(\sqrt{0.45})$  and  $\gamma_2 = 0$ . On the other hand, since the data distribution of gray-scale bar images is continuous, we can better evaluate if quantum GAN learns the real data distribution from finite training examples.

In our experiments, to evaluate the FD score, we sample 1000 generated examples after every 50 iterations, and usually we calculate the FD score of the generated examples after the training is completely over. In order to flexibly monitor the training procedure, we set a constraint to the gray-scale bar dataset that  $x_{i0} \sim \text{unif}(0.4, 0.6)$ . Instead of calculating FD score after training, we can check if the generated image satisfies such a constraint to roughly evaluate the performance of quantum generator at each iteration during the training procedure.

## 2. Experimental details

In the main text, we first apply the quantum patch GAN to generate  $2 \times 2$  gray-scale bar images. Specifically, the hyper-parameters setting for quantum patch GAN is  $N = 3$ ,  $N_S = N$ , and  $L = 3$ . In addition, we fix all  $U_S$  to be RY, and the learning rates are set as  $\eta_G = 0.05$  and  $\eta_D = 0.001$ . The number of measurements to readout the quantum state is set as 3000. The total number of trainable parameters for the quantum generator is 9 with  $T = 1$ .

We then apply the quantum batch GAN to generate gray-scale bar images. The hyper-parameters setting is identical to the quantum patch GAN, except for the construction of discriminator. In particular, any quantum discriminative model based on amplitude-encoding method can be employed as the discriminator of quantum batch GAN. Here we utilize the quantum discriminator model proposed by [47] as our quantum discriminator. The total number of trainable parameters for the quantum discriminator is 12. Experiments demonstrate that the quantum batch GAN achieved reasonable generation performance, even though the quantum discriminator employed much fewer parameters than other configurations (The classical discriminator used in the classical GAN-MLP, classical GAN-CNN and quantum patch GAN has 96 parameters).

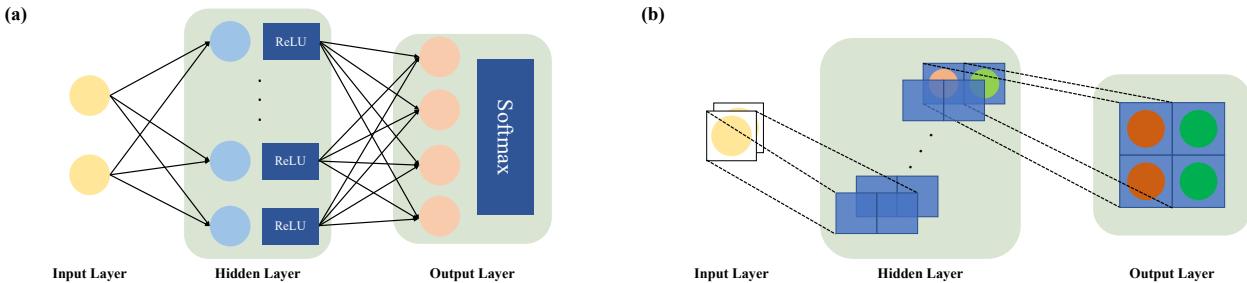


FIG. 5: The architectures of employed two types of classical GANs. (a) the generator of GAN-MLP, a classical GAN model with multilayer perceptron generator. (b) the generator of GAN-CNN, a classical GAN model with convolutional generator.

To better justify the capability and performance of both the quantum patch GAN and quantum batch GAN, we implemented two types of classical GANs as reference. Firstly, we built multilayer perceptron (MLP) generators with one hidden layer. As shown in Fig. 5(a), the input layer of MLP consists of one or two neurons, and noise sampled from the standard Gaussian distribution are feed as inputs. ReLU activations are added in the hidden layer to perform nonlinear transformation. In the output layer, the activation function, Softmax, is employed. It is mainly because that the Softmax activation share the same function with normalization constraint of the quantum generator, i.e., enforcing the sum of generator outputs to be equal to 1. The exploited discriminator D has the identical configuration with quantum patch GAN. Moreover, following the implementation of the original GAN, the adversarial training process

are formulated as,

$$\begin{aligned} \min_D \mathbb{E}_{\mathbf{x} \sim P_{data}} [\log D(\mathbf{x})] + \mathbb{E}_{\mathbf{z} \sim P(\mathbf{z})} [\log(1 - D(G(\mathbf{z})))], \\ \max_G \mathbb{E}_{\mathbf{z} \sim P_p(\mathbf{z})} [\log D(G(\mathbf{z}))]. \end{aligned} \quad (24)$$

In the generator of GAN-CNN (Figure 5(b)), the convolutional kernels with shape ‘(1×2)’ and ‘(2×1)’ are applied to the input noise and hidden features, respectively. Giving a sampled noised as input, the CNN generator can directly output a  $2 \times 2$  gray-scale bar image. Similar to the MLP generator, nonlinear activations are added in the hidden and output layer. For both GAN-MLP and GAN-CNN, the stochastic gradient descent (SGD) [7] is utilized to the classical generator and discriminator alternately.

To comprehensively explore the capability of classical GANs, grid-search is performed to find the optimal hyperparameters for each classical GAN model. Specifically, we start searching the learning rate from  $10^{-4}$ , and gradually increase it to  $5 \times 10^{-3}$  by  $10^{-4}$  each step. For the coefficients of optimizers, such as Nesterov momentum of SGD, we start searching from 0.5, and increase them to 1 by 0.1 each step. To ensure classical GANs could achieve reasonable results, we trained each parameter combination 10 times, and save 5 models with higher FD scores.

- [1] Nielsen, M. A. & Chuang, I. L. *Quantum computation and quantum information* (Cambridge University Press, 2010).
- [2] Goodfellow, I., Bengio, Y. & Courville, A. *Deep learning* (MIT press, 2016).
- [3] Krizhevsky, A., Sutskever, I. & Hinton, G. E. Imagenet classification with deep convolutional neural networks. In *Advances in neural information processing systems*, 1097–1105 (2012).
- [4] He, K., Zhang, X., Ren, S. & Sun, J. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 770–778 (2016).
- [5] Vaswani, A. et al. Attention is all you need. In *Advances in neural information processing systems*, 5998–6008 (2017).
- [6] Bishop, C. M. *Pattern recognition and machine learning* (springer, 2006).
- [7] Ruder, S. An overview of gradient descent optimization algorithms. *arXiv preprint arXiv:1609.04747* (2016).
- [8] Qian, N. On the momentum term in gradient descent learning algorithms. *Neural networks* **12**, 145–151 (1999).
- [9] Kingma, D. P. & Welling, M. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114* (2013).
- [10] Duchi, J., Hazan, E. & Singer, Y. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of machine learning research* **12**, 2121–2159 (2011).
- [11] Goodfellow, I. et al. Generative adversarial nets. In *Advances in neural information processing systems*, 2672–2680 (2014).
- [12] Arjovsky, M., Chintala, S. & Bottou, L. Wasserstein generative adversarial networks. In *International Conference on Machine Learning*, 214–223 (2017).
- [13] Mirza, M. & Osindero, S. Conditional generative adversarial nets. *arXiv preprint arXiv:1411.1784* (2014).
- [14] Zhang, H. et al. Stackgan: Text to photo-realistic image synthesis with stacked generative adversarial networks. In *Proceedings of the IEEE International Conference on Computer Vision*, 5907–5915 (2017).
- [15] Makhzani, A., Shlens, J., Jaitly, N., Goodfellow, I. & Frey, B. Adversarial autoencoders. *arXiv preprint arXiv:1511.05644* (2015).
- [16] Deng, C. et al. Unsupervised semantic-preserving adversarial hashing for image search. *IEEE Transactions on Image Processing* **28**, 4032–4044 (2019).
- [17] Mao, X. et al. Least squares generative adversarial networks. In *Proceedings of the IEEE International Conference on Computer Vision*, 2794–2802 (2017).
- [18] Wang, C., Xu, C., Wang, C. & Tao, D. Perceptual adversarial networks for image-to-image transformation. *IEEE Transactions on Image Processing* **27**, 4066–4079 (2018).
- [19] Sainath, T. N., Vinyals, O., Senior, A. & Sak, H. Convolutional, long short-term memory, fully connected deep neural networks. In *2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 4580–4584 (IEEE, 2015).
- [20] Boyd, S. & Vandenberghe, L. *Convex optimization* (Cambridge university press, 2004).
- [21] Zhang, H., Goodfellow, I., Metaxas, D. & Odena, A. Self-attention generative adversarial networks. *arXiv preprint arXiv:1805.08318* (2018).
- [22] Ioffe, S. & Szegedy, C. Batch normalization: Accelerating deep network training by reducing internal covariate shift. *arXiv preprint arXiv:1502.03167* (2015).
- [23] Miyato, T., Kataoka, T., Koyama, M. & Yoshida, Y. Spectral normalization for generative adversarial networks. *arXiv preprint arXiv:1802.05957* (2018).
- [24] Pande, G. & Middleton, J. *NUMETA 90 Numerical Methods in Engineering: Theory and Applications: Numerical techniques for engineering analysis and design* (CRC press, 2014).
- [25] Benedetti, M., Lloyd, E., Sack, S. & Fiorentini, M. Parameterized quantum circuits as machine learning models. *Quantum Science and Technology* (2019).
- [26] Benedetti, M. et al. A generative modeling approach for benchmarking and training shallow quantum circuits. *npj Quantum Information* **5**, 45 (2019).

- [27] Tacchino, F., Macchiavello, C., Gerace, D. & Bajoni, D. An artificial neuron implemented on an actual quantum processor. *npj Quantum Information* **5**, 26 (2019).
- [28] Du, Y., Hsieh, M.-H., Liu, T. & Tao, D. Implementable quantum classifier for nonlinear data. *arXiv preprint arXiv:1809.06056* (2018).
- [29] Hu, L. *et al.* Quantum generative adversarial learning in a superconducting quantum circuit. *Science advances* **5**, eaav2761 (2019).
- [30] Preskill, J. Quantum computing in the nisq era and beyond. *Quantum* **2**, 79 (2018).
- [31] Du, Y., Hsieh, M.-H., Liu, T. & Tao, D. The expressive power of parameterized quantum circuits. *arXiv preprint arXiv:1810.11922* (2018).
- [32] Farhi, E. & Neven, H. Classification with quantum neural networks on near term processors. *arXiv preprint arXiv:1802.06002* (2018). URL <https://arxiv.org/abs/1802.06002>.
- [33] Grant, E. *et al.* Hierarchical quantum classifiers. *arXiv preprint arXiv:1804.03680* (2018). URL <https://arxiv.org/abs/1804.03680>.
- [34] Wan, K. H., Dahlsten, O., Kristjánsson, H., Gardner, R. & Kim, M. Quantum generalisation of feedforward neural networks. *npj Quantum Information* **3**, 36 (2017). URL <https://www.nature.com/articles/s41534-017-0032-4>.
- [35] Mitarai, K., Negoro, M., Kitagawa, M. & Fujii, K. Quantum circuit learning. *Physical Review A* **98**, 032309 (2018).
- [36] Paszke, A. *et al.* Automatic differentiation in pytorch (2017).
- [37] Schuld, M. & Petruccione, F. *Supervised Learning with Quantum Computers*, vol. 17 (Springer, 2018).
- [38] Knill, E. Approximation by quantum circuits. *arXiv preprint quant-ph/9508006* (1995).
- [39] Möttönen, M., Vartiainen, J. J., Bergholm, V. & Salomaa, M. M. Quantum circuits for general multiqubit gates. *Physical review letters* **93**, 130502 (2004).
- [40] Vartiainen, J. J., Möttönen, M. & Salomaa, M. M. Efficient decomposition of quantum gates. *Physical review letters* **92**, 177902 (2004).
- [41] Plesch, M. & Brukner, Č. Quantum-state preparation with universal gate decompositions. *Physical Review A* **83**, 032302 (2011).
- [42] Liu, J.-G. & Wang, L. Differentiable learning of quantum circuit born machine. *arXiv preprint arXiv:1804.04168* (2018). URL <https://arxiv.org/abs/1804.04168>.
- [43] Huggins, W. J., Patil, P., Mitchell, B., Whaley, K. B. & Stoudenmire, M. Towards quantum machine learning with tensor networks. *Quantum Science and technology* (2018).
- [44] Zoufal, C., Lucchi, A. & Woerner, S. Quantum generative adversarial networks for learning and loading random distributions. *arXiv preprint arXiv:1904.00043* (2019).
- [45] Romero, J. & Aspuru-Guzik, A. Variational quantum generators: Generative adversarial quantum machine learning for continuous distributions. *arXiv preprint arXiv:1901.00848* (2019).
- [46] Sweke, R. *et al.* Stochastic gradient descent for hybrid quantum-classical optimization. *arXiv e-prints* arXiv:1910.01155 (2019). 1910.01155.
- [47] Schuld, M. & Killoran, N. Quantum machine learning in feature hilbert spaces. *Physical review letters* **122**, 040504 (2019).
- [48]  $Q_1$  splits off the lowest 25% of data from the highest 75%.  $Q_3$  splits off the highest 25% of data from the lowest 75%.