



## **Tier data to cloud**

### **ONTAP 9**

[netapp-aherbin], netapp-forry, netapp-lenida  
February 05, 2021

# Table of Contents

Tier data to cloud ..... 1

# Tier data to cloud

Storing data in tiers can enhance the efficiency of your storage system. You can manage storage tiers by using FabricPool to store data in a tier, based on how frequently the data is accessed.

This procedure sets up an object store as the cloud tier for FabricPool. Keep in mind that once you attach to a local tier (aggr) the cloud tier cannot be unattached.

A FabricPool license is not required when using StorageGRID or ONTAP S3 as the cloud tier or when using Amazon S3, Google Cloud Storage, or Microsoft Azure Blob Storage as the cloud tier for Cloud Volumes for ONTAP. A FabricPool license is required for other cloud tier locations.

If you are tiering to ONTAP S3, there are additional requirements:

- \* There must be an entry for the remote ONTAP S3 server's hostname in the DNS server configured for the admin storage VM, including the S3 server's FQDN name and the IP addresses on its network interfaces.


- \* [Intercluster network interfaces](#) must be configured on both local and remote clusters, although cluster peering is not required.

You also have the option to create a volume tiering policy in System Manager.

## Steps

1. Click **Storage > Tiers > Add Cloud Tier** and select the object store provider you want to use.
2. If you want to create a cloud mirror, click **Add as FabricPool Mirror**.

A FabricPool mirror provides a method for you to seamlessly replace a data store, and it helps to ensure that your data is available in the event of disaster.

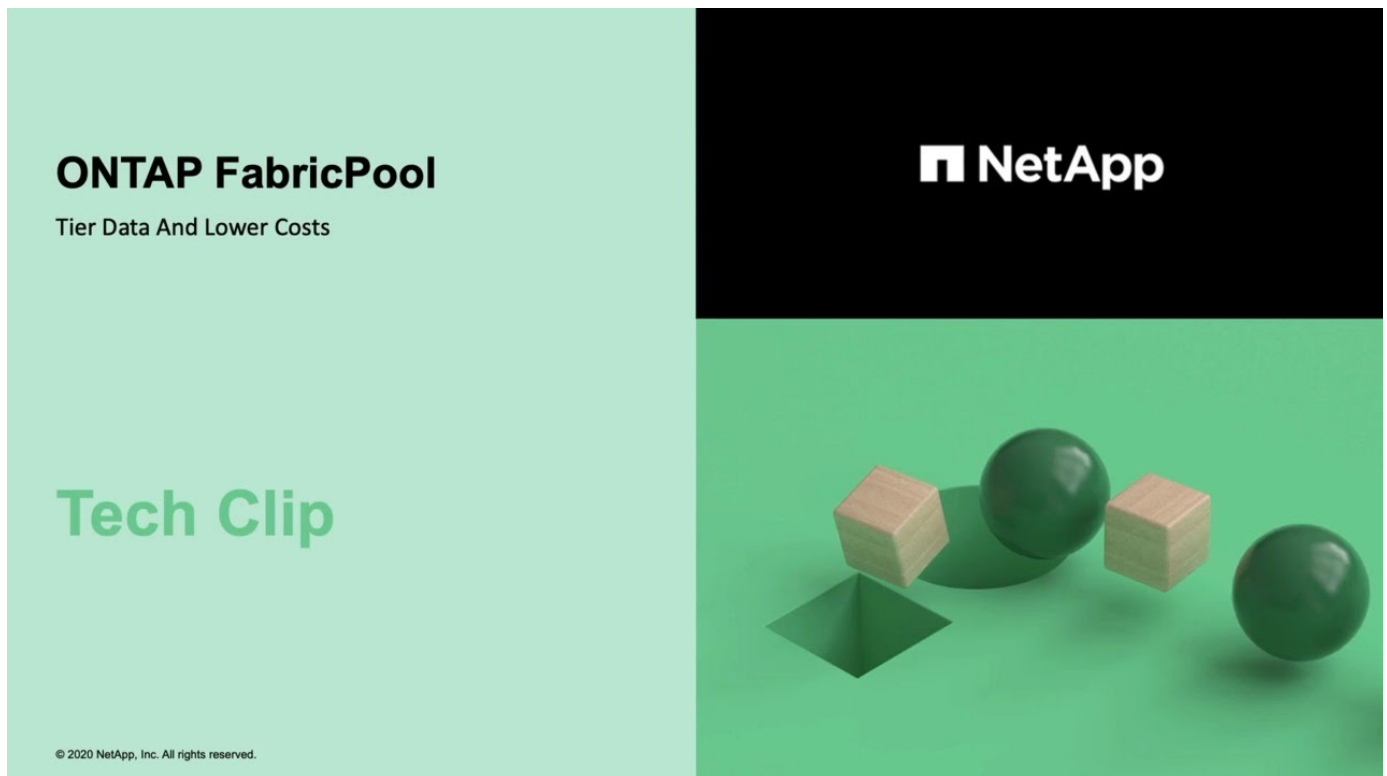

## Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

## Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.