


LAB EF-04: Advanced Querying

BookShop System

0. Book Shop Database

You must create a **database** for a **book shop system**. It should look like this:

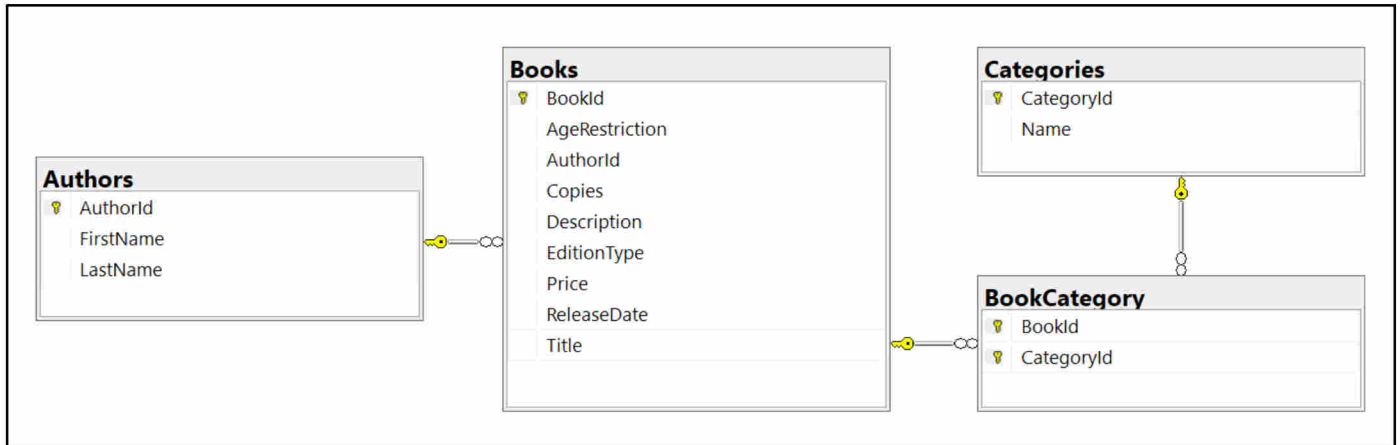

Constraints

Your **namespaces** should be:

- **BookShop.Startup** – for your **Startup** class
- **BookShop.Data** – for your **DbContext**
- **BookShop.Models** – for your models

Your **models** should be:

- **BookShopContext** – your **DbContext**
- **Author:**
 - **AuthorId**
 - **FirstName** (up to 50 characters, unicode, not required)
 - **LastName** (up to 50 characters, unicode)
- **Book:**
 - **BookId**
 - **Title** (up to 50 characters, unicode)
 - **Description** (up to 1000 characters, unicode)
 - **ReleaseDate** (not required)
 - **Copies** (an integer)
 - **Price**
 - **EditionType** – enum (Normal, Promo, Gold)
 - **AgeRestriction** – enum (Minor, Teen, Adult)
 - **Author**
 - **BookCategories**
- **Category:**
 - **CategoryId**
 - **Name** (up to 50 characters, unicode)

- CategoryBooks
- **BookCategory** – mapping class

For the following tasks, you will be creating methods that accept a `BookShopContext` as a parameter and use it to run some queries. Create those methods inside your **Startup** class and upload your whole solution to **Judge**.

1. Age Restriction

Create a **method** `GetBooksByAgeRestriction(BookShopContext context, string command)`, that returns in a **single string** all book **titles**, each on a **new line**, that have **age restriction**, equal to the **given command**. Order the titles **alphabetically**.

Read **input** from the console in your **main method**, and call your **method** with the **necessary arguments**. Print the **returned string** to the console. **Ignore** casing of the input.

Example

Input	Output
miNor	A Confederacy of Dunces A Farewell to Arms A Handful of Dust ...
teEN	A Passage to India A Scanner Darkly A Swiftly Tilting Planet ...

2. Golden Books

Just like in task 1, write a method `GetGoldenBooks(BookShopContext context)`, that returns in a **single string** **titles of the golden edition books** that have **less than 5000 copies**, each on a **new line**. Order them by **book id** ascending.

Call the `GetGoldenBooks()` method in your **Main()** and print the returned string to the console.

Example

Output
Lilies of the Field Look Homeward The Mirror Crack'd from Side to Side ...

3. Books by Price

Write a `GetBooksByPrice(BookShopContext context)` method that returns in a single string all **titles and prices of books** with **price higher than 40**, each on a **new row** in the **format** given below. Order them by **price** descending.

Example

Output
O Pioneers! - \$49.90 That Hideous Strength - \$48.63 A Handful of Dust - \$48.63 ...

4. Not Released In

Write a **GetBooksNotReleasedIn**(BookShopContext context, **int year**) method that returns in a **single** string all **titles of books** that are **NOT released** on a given year. Order them by **book id** ascending.

Example

Input	Output
2000	Absalom Nectar in a Sieve Nine Coaches Waiting ...
1998	The Needle's Eye No Country for Old Men No Highway ...

5. Book Titles by Category

Write a **GetBooksByCategory**(BookShopContext context, string input) method that **selects** and **returns** in a single string the **titles of books** by a given **list of categories**. The list of **categories** will be given in a single line separated with one or more spaces. Ignore casing. Order by **title** alphabetically.

Example

Input	Output
horror mystery drama	A Fanatic Heart A Farewell to Arms A Glass of Blessings ...

6. Released Before Date

Write a **GetBooksReleasedBefore**(BookShopContext context, string date) method that **returns the title, edition type and price** of all books that are **released before a given date**. The date will be a string in format **dd-MM-yyyy**.

Return all of the rows in a **single** string, ordered by **release date descending**.

Example

Input	Output
12-04-1992	If I Forget Thee Jerusalem - Gold - \$33.21 Oh! To be in England - Normal - \$46.67 The Monkey's Raincoat - Normal - \$46.93 ...
30-12-1989	A Fanatic Heart - Normal - \$9.41 The Curious Incident of the Dog in the Night-Time - Normal - \$23.41 The Other Side of Silence - Gold - \$46.26 ...

7. Author Search

Write a **GetAuthorNamesEndingIn**(BookShopContext context, string input) method that returns the **full names of authors**, whose **first name** ends with a **given string**.

Return all **names** in a **single string**, each on a **new row**, ordered alphabetically.

Example

Input	Output
e	George Powell Jane Ortiz
dy	Randy Morales

8. Book Search

Write a **GetBookTitlesContaining**(BookShopContext context, string input) method that **returns the titles of book**, which contain a **given string**. Ignore casing.

Return all **titles** in a **single string**, each on a **new row**, ordered alphabetically.

Example

Input	Output
sK	A Catskill Eagle The Daffodil Sky The Skull Beneath the Skin
WOR	Great Work of Time Terrible Swift Sword

9. Book Search by Author

Write a **GetBooksByAuthor**(BookShopContext context, string input) method that **returns all titles of books and their authors' names** for books, which are written by authors whose last names **start with the given string**.

Return a single string with each title on a new row. **Ignore** casing. Order by **book id** ascending.

Example

Input	Output
R	The Heart Is Deceitful Above All Things (Bozhidara Rysinova) His Dark Materials (Bozhidara Rysinova) The Heart Is a Lonely Hunter (Bozhidara Rysinova) ...
po	Postern of Fate (Stanko Popov) Precious Bane (Stanko Popov) The Proper Study (Stanko Popov) ...

10. Count Books

Write a **CountBooks**(BookShopContext context, int lengthCheck) method that **returns the number of books**, which have a **title longer than the number** given as an input.

Example

Input	Output	Comments
12	169	There are 169 books with longer title than 12 symbols
40	2	There are 2 books with longer title than 40 symbols

11. Total Book Copies

Write a method **CountCopiesByAuthor**(BookShopContext context) that **returns the total number of book copies for each author**. Order the results **descending by total book copies**.

Return all results in a **single string**, each on a **new line**.

Example

Output
Stanko Popov - 117778
Lyubov Ivanova - 107391
Jane Ortiz - 103673
...

12. Profit by Category

Write a method **GetTotalProfitByCategory**(BookShopContext context) that **returns the total profit of all books by category**. Profit for a book can be calculated by multiplying its **number of copies** by the **price per single book**. Order the results by **descending by total profit** for category and **ascending by category name**.

Example

Output
Art \$6428917.79
Fantasy \$5291439.71
Adventure \$5153920.77
Children's \$4809746.22
...

13. Most Recent Books

Get the most recent books by categories in a **GetMostRecentBooks**(BookShopContext context) method. The **categories** should be ordered by **total book count**. Only take the **top 3** most recent books from each category - ordered by **release date** (descending). **Select and print the category name**, and for each **book** – its **title** and **release year**.

Example

Output
--Action
Brandy of the Damned (2015)
Bonjour Tristesse (2013)
By Grand Central Station I Sat Down and Wept (2010)
--Adventure
The Cricket on the Hearth (2013)
Dance Dance Dance (2002)
Cover Her Face (2000)
...

14. Increase Prices

Write a method **IncreasePrices**(BookShopContext context) that **increases the prices of all books released before 2010 by 5**.

15. Remove Books

Write a method **RemoveBooks**(BookShopContext context) that **removes from the database those books, which have less than 4200 copies**. Return an **int** - the **number of books that were deleted** from the database.

Example

Output
34 books were deleted