

Open source JavaScript voxelization library, with complementary applications

André Storhuag

May 2020

PROJECT / BACHELOR'S THESIS

Department of ICT and Natural Sciences

Norwegian University of Science and Technology

Supervisor 1: Ricardo Da Silva Torres

Supervisor 2: Saleh Abdel-Afou Alaliyat

Preface

This bachelor thesis is written a student from Computer Engineering at NTNU Ålesund

This type of technology....

What intrigued us ...

Acknowledgement

We would like to thank.....

- Our mentors....
- Family and friends...
-

Abstract

This report concerns the development of

The purpose of this project

Glossary

Content Delivery Network Deliver static, cached content from a network of servers across the globe.

Open-Source Software Software that is free to use....

Notation

K_p Proportional term of a PID controller

K_i Integral term of a PID controller

K_d Derivative term of a PID controller

Kg System International unit for Kilogram

ACK acknowledge message

Abbreviations

API Application Programming Interface

GUI Graphical User Interface

OSS Open-Source software

CDN Content Delivery Network.

JSX JavaScript XML

JSON JavaScript Object Notation

NPM Node Package Manager

VCS Version Control System

JS JavaScript

ES ECMAScript

ES5 ECMAScript5

ES6 ECMAScript6

CSS Cascading Style Sheets

AMD Asynchronous Module Definition

List of Figures

1.1	Automation of release publishing process.	5
2.1	GitFlow branching model example.	8
2.2	Texture mapping illustration.	14
2.3	Raycasting intersections example.	14
3.1	Solid (voxelization) filling of 3D model cross section.	19
3.2	CI/CD pipelines	22
3.3	Automation of release publishing process.	24
3.4	Automatic updating of major version tag.	25
4.1	Render of anvil 3D model.	27

List of Tables

List of Program Codes

3.1 Example BINVOX data in JSON format	20
sections/methodology/code/voxelizer.js	28

Contents

Preface	ii
Acknowledgement	iii
Abstract	iv
Acronyms	v
1 Introductions	2
1.1 Background	2
1.2 Problem Formulation	3
1.3 Literature Survey	3
1.4 Objectives	4
1.5 Scope	4
1.6 Structure	5
1.6.1 Voxelization systems overview	5
1.6.2 Automation overview	5
1.7 Outline	5
2 Theoretical basis	7
2.1 Agile methods	7
2.1.1 Scrum	7
2.1.2 Kanban	7
2.2 Git	7
2.2.1 GitFlow	7
2.3 GitHub	8
2.3.1 GitHub Actions	8

2.3.2	GitHub Pages	8
2.4	HyperText Markup Language (HTML)	9
2.5	Cascading Style Sheets (CSS)	9
2.6	JavaScript	9
2.6.1	Module systems	10
2.6.2	Package managers	10
2.6.3	Transpilation	11
2.6.4	Bundling	11
2.7	TypeScript	11
2.8	JavaScript Object Notation (JSON)	12
2.9	Tools and libraries	12
2.9.1	JSDoc	12
2.9.2	Electron	12
2.9.3	React	12
2.9.4	Semmler LGTM	12
2.9.5	Coveralls	12
2.10	Data structures	13
2.10.1	Multidimensional arrays	13
2.10.2	Octrees	13
2.10.3	Bounding volume hierarchy	13
2.11	Computer graphics	13
2.11.1	Texture maps	13
2.11.2	Ray casting	14
2.11.3	OpenGL	15
2.11.4	WebGL	15
2.11.5	three.js	15
2.12	Voxelizer v0.1.3	15
2.13	3D Modeling	15

3	Method	16
3.1	Project Organization	16
3.2	Tools and libraries	16
3.2.1	JavaScript	16
3.2.2	Babel	16
3.2.3	npm	16
3.2.4	Third party libraries	16
3.2.5	GitHub Actions	17
3.3	Working methodology	17
3.3.1	Scrum	17
3.3.2	Requirements specification	17
3.3.3	GitFlow	17
3.3.4	Semantic versioning	17
3.4	three-voxel-loader	17
3.4.1	Loading data	17
3.4.2	Visualization	18
3.4.3	Debugging	18
3.5	Voxelizer	18
3.5.1	implementation	18
3.5.2	Voxelization	18
3.5.3	Color system	19
3.5.4	Loading	19
3.5.5	Exporting	20
3.5.6	Debugging	20
3.6	BINVOX	20
3.7	Voxelizer-Desktop	21
3.7.1	Electron	21
3.7.2	GUI	21
3.8	JSDoc Action	21
3.8.1	JSDoc	21

3.8.2	Templates	21
3.9	Automation	21
3.9.1	Workflows	21
3.9.2	Release automation	23
3.9.3	Dependency updating	23
3.9.4	LaTeX generation	23
3.10	file-existence-action	24
3.11	file-reader-action	25
4	Result	26
4.1	three-voxel-loader	26
4.1.1	Level Of Detail	26
4.1.2	Performance	26
4.1.3	Loading support	26
4.1.4	Example	26
4.2	Voxelizer	27
4.2.1	Voxelization	27
4.2.2	Visual inspection	27
4.2.3	Performance	27
4.2.4	Importing	28
4.2.5	Exporting	28
4.2.6	Usage example	28
4.3	Voxelizer Desktop	29
4.4	JSDoc Action	29
4.5	Supportive projects	29
4.5.1	BINVOX	29
4.5.2	file-existence-action	29
4.5.3	file-reader-action	29
4.6	Automation	29
4.6.1	JavaScript modules	30

<i>CONTENTS</i>	1
4.6.2 GitHub Actions	30
4.6.3 LaTeX automation?	30
4.7 Open-source community	30
4.7.1 Statistics	30
4.7.2 Feedback	30
5 Discussion	31
5.1 Completeness compared to requirements specification	31
5.2 Test results	31
5.2.1 Result 1	31
5.3 Future work	31
5.3.1 three-voxel-loader	31
5.3.2 Voxelize	32
5.3.3 isosurface extraction	32
6 Conclusions	33
6.1 Further work	33
Appendices	36
A Preliminary report	37
B Progress reports	62

Chapter 1

Introduction

This report will review different

1.1 Background

Since the introduction of the relatively new technology WebGL, users has been able to significantly expand the graphical user-experience for the large user mass of the web. It has allowed for almost desktop like / native graphics performance,

WebGl has especially expanded the abilities regarding the creation of web browser games and simulations. Creating high performance graphics applications in the browser has never been easier. It has opened up for a sea of possibilities where only your imagination is the limit.

In a lot of simulation software, and even some games, volumetric information plays a crucial part. With everything from fluid dynamics to voxel games like Minecraft, volumetric information is a key component. However, to the best of my knowledge, it does not exist any easy to use open-source voxelization software in JavaScript. In order to obtain such volumetric data, developers are therefore forced to go through a tedious preprocessing steps, often involving old and complex, har to use, platform specific tools.

This was a problem I encountered myself a year ago in 2019. In connection with an assignment in a simulation course at the Norwegian University of Science and Technology, I needed to be able to easily generate some volumetric data based on 3D models. I was using web-

technologies so I was looking for a simple solution in plain JavaScript. However, I was not able to find such a solution. I therefore decided to make one myself. The result was an open source voxelization project, written entirely in JavaScript, named Voxelizer.

The Voxelizer project carries strong signs of the limited amount of time allocated for sowing the software together. PROBLEMS HERE..... Due to it's vast range of applicability, improving and expanding the capabilities of the project could therefore serve to be a valuable open-source asset to the web based game- and simulation-development ecosystem, providing easy access to voxelization.

1.2 Problem Formulation

Problems to be addressed

There exists an open-source JavaScript voxelization engine for voxelizing 3D models. The project faces several issues and is lacking important features. The engine does not produce accurate and representative results. The output sometimes contains holes and contains a lot of artifacts. Importing support is limited to OBJ files. In terms of exporting, only 3D arrays are supported. [SHORTEN THIS!!!!].. Documentation is lacking, and the coding quality is relatively poor. The project needs to be professionalized, and made easy to both use and maintain.

Something about automation, maintainability?

- Design ..
- Develop ...

1.3 Literature Survey

This report is based on published in 2016.

1.4 Objectives

The main goals of this thesis is to improve and extend the open-source JavaScript Voxelizer engine, turning it into a maintainable, high-quality, open-source project. A secondary goal will be to develop complimentary software for the Voxelizer project. This will be in the form of a cross platform desktop application and CLI, based on the Voxelizer engine, making it easy to voxelize 3D models.

In order to ensure the maintainability of the various software projects, automation is a critical component. Therefore a common subgoal will be to develop a GitHub Action for automating the API documentation generation process.

SOMETHING ABOUT REQUIREMENT SPECIFICATION???? Thus, the objectives for this report thesis are: ????????

1. Make ...
2. Implement ...
3. Create ...

1.5 Scope

In this particular project

The main purpose of this thesis is to make it easy to conduct high quality voxelization of 3D models.

It is important to note that the project does not mainly focus on speed of the voxelization algorithm. The targeted systems often runs in an environment where resources are scarce and performance is important. However, usability is also extremely important. This thesis will mainly focus on providing easy access to high-quality voxelization, within a reasonable performance. If speed is of the main concerns, it would be better to do the extra work i setting up native solutions, often written in C/C++.

1.6 Structure

1.6.1 Voxelization systems overview

The diagram in figure 1.1 shows how the different software repositories regarding voxelization interconnects. The green boxes represents the main software projects. The blue box represents side projects. During development, some components were generalized and extracted into a separate repository.

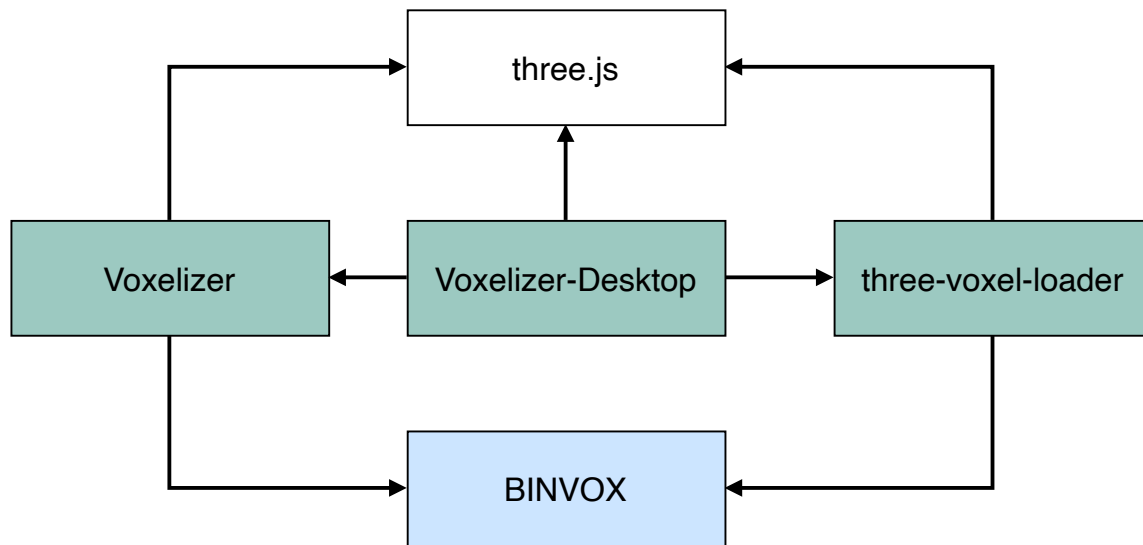


Figure 1.1: Automation of release publishing process.

1.6.2 Automation overview

Include diagram of simple github automation proses?

1.7 Outline

The rest of the report is structured as follows.

Chapter 2 - Theory: Chapter two gives an introduction to the theoretical background that lies the foundation of this thesis.

Chapter 3 - Method: Contains a description of the methodology and materials that were considered throughout the project.

Chapter 4 - Result: Contains a description of the finished software systems.

Chapter 5 - Discussion: Discusses the achieved results, the execution of methodologies and tools, in addition to encountered difficulties.

Chapter 6 - Conclusions: This chapter presents an overall conclusion of the project, reviewing the objectives and the progress made.

Chapter 2

Theoretical basis

2.1 Agile methods

2.1.1 Scrum

Scrum is an agile methodology. Background and history of the evolution of scrum..... What is it? How does it work?

2.1.2 Kanban

2.2 Git

Git is a type of distributed version control system (VCS), originally created by Linus Torvalds in 2005. Git is free and opensource, and is today the most popularly used VCS. It is fast and efficient, able to handle everything from small hobby projects to giant projects like the Linux kernel. Every Git directory is a complete repository with history and full version-tracking abilities. It does not need access to internet, nor a central server in order to work.

2.2.1 GitFlow

GitFlow is a popular branching model for Git, created by [1]. Figure 2.1 displays an example git history, adhering the GitFlow branching style.

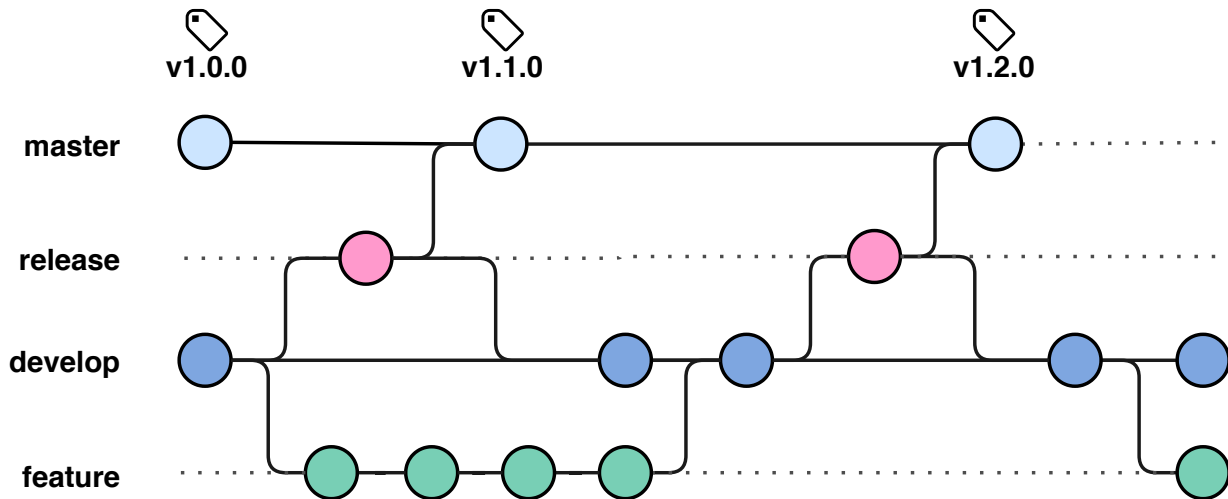


Figure 2.1: GitFlow branching model example.

2.3 GitHub

GitHub is primarily a hosting service for Git repositories. The company was acquired by Microsoft in 2019. In addition to repository hosting, GitHub provides a range of different services through its web-based GUI. This includes both wikis, access controls, simple task management tools, automation capabilities and websites hosting.

2.3.1 GitHub Actions

GitHub Actions [2] is a fairly very new service provided by GitHub. It enables users to automate software workflows, effectively providing a high quality CI/CD for free¹. It is also possible to set up self-hosted runners. GitHub Actions makes it possible to both build, test and deploy code directly from within GitHub.

2.3.2 GitHub Pages

GitHub provides its users with a public webpage hosting service. This is named GitHub Pages [3]. Users are able to serve static websites directly from their repository hosted on GitHub.

¹GitHub Actions usage is completely free for public repositories. For private repositories, depending on the subscription plan, some thousand minutes of free usage is provided each month.

2.4 HyperText Markup Language (HTML)

HTML is a markup language, originally defined by Tim Berners-Lee and Robert Caillau in 1989. It is primarily used for documents on the web, intended to be displayed in a web-browser. It is used for structuring and formatting information. HTML can be used in conjunction with other web technologies such as Cascading Style Sheets (CSS) and scripting languages like JavaScript, in order to either style or dynamically change and alter the contents of a web page. The currently latest release of the language is HTML5.

2.5 Cascading Style Sheets (CSS)

CSS is short for Cascading Style Sheets. CSS is a programming language in order to describe how HTML elements in a HTML file are to be rendered. Everything from the boldness of a headline, to the background of the entire page.

2.6 JavaScript

JavaScript is a lightweight interpreted programming language. The language is prototype-based, a type of object-oriented programming where properties and methods are added to an instance of an implicitly defined class [4].

JavaScript was developed by Brendan Eich and released in 1995 [5]. Initially, it was designed to be a small scripting language for enabling interaction with web pages. A standardization effort of JavaScript, led by Ecma International [6], led to the ECMAScript specification, that the modern JavaScript language conforms to. Several releases. Since then, the language has evolved rapidly and gained massive in popularity. It has become the de-facto language for adding dynamic behavior to HTML. As of may 2020, JavaScript is among the top ten programming languages according to the TIOBE index [7].

Originally, JavaScript engines were mainly used in browser environments. However, with the development of Node.js in early 2009, this was dramatically changed. Node.js provides a runtime environment for executing JavaScript outside of a web browser. It set the stage for server-side JavaScript programs. In January 2010, a package manager named npm [8] was released for

Node.js. This made it easy for developers to share and use source code.

The size of JavaScript programs has increased massively in size. With increased size, so does the complexity of the code. However, JavaScript had very limited functionality in terms of splitting a program up in smaller modules for use with the browser. Maintaining large codebases was a nightmare. It therefore became apparent that a way of breaking down a JavaScript program into smaller modules was needed. Several open-source module systems were therefore developed by the community in order to tackle this problem.

2.6.1 Module systems

- **CommonJS** is a module specification meant for JavaScript outside the browser. It is mainly used in Node.js, and hence it is one of the most popularly used module definitions. The modules are mainly imported and exported with the keywords "require" and "module.exports".
- **Asynchronous module definition**, or more commonly known as AMD, is a JavaScript module definition intended for the browser. It defines an API for defining code as modules, including their dependencies. AMD also has the capability of loading modules asynchronously. The most popular AMD module loader is named RequireJS [9].
- **Universal Module Definition**, abbreviated UMD, is a module definition wrapper to be able to use various module systems [10]. Be it in the browser or in Node.js. It is compatible with both CommonJS and AMD.
- **JavaScript modules** are a language native module system, introduced with ECMAScript 2015 (ES6) in 2015.

2.6.2 Package managers

Various Package registries, like NPM and GitHub Package Registry.

npm

(I use this one) -> More info

Bower

Asd...

2.6.3 Transpilation

Asd...

Babel

Asd...

2.6.4 Bundling

JavaScript bundling is an optimization technique to combine separate resource files into one file. This is done in order to reduce the number of HTTP requests required for a page to load. In addition to the performance gain, bundling is also often done in order to develop a JavaScript application in separate files, also called modules. ES6 modules, CommonJS etc...

Webpack

Asd...

Rollup

Asd...

Browserify

Short section?

2.7 TypeScript

TypeScript is a typed superset of JavaScript that compiles to plain JavaScript. It is open source, and primarily developed and maintained by [\[11\]](#).

2.8 JavaScript Object Notation (JSON)

2.9 Tools and libraries

2.9.1 JSDoc

Markup language for annotating JavaScript source code files. JSDoc companion documentation generator: JSDoc3 - see git repo....

2.9.2 Electron

Electron [12] is an open-source framework developed and maintained by GitHub [13]. It allows one to build cross-platform desktop applications with JavaScript, HTML and CSS. Electron is used by thousands of people, and apps like Visual Studio Code [14], Facebook Messenger [15] and Microsoft Teams [16] are all made with Electron.

2.9.3 React

React [17] is a JavaScript library for building user interfaces, created by Facebook [18]. It is based around components that manages their own state. These are then composed together, enabling the creation of intricate and complex UIs. The library also implements its own syntax extension to JavaScript. It is named JavaScript XML, or the more popular used term - JSX. In addition to this, there exists a vast ecosystem of plugins for React, greatly simplifying the implementation of everything from localization to state management.

2.9.4 Semmle LGTM

LGTM by Semmle is a web service providing code security analysis with their

2.9.5 Coveralls

Coveralls [19] is a web service for code testing coverage. It enables one to track a projects code coverage over time, providing valuable insight in a projects testing suite. Coveralls also features

close integration with GitHub, enabling pull request coverage reviews.

2.10 Data structures

Plural names ok?

2.10.1 Multidimensional arrays

Reference ndarray by Mikola Lysenko Also discuss Strided Arrays (in JS?).

2.10.2 Octrees

2.10.3 Bounding volume hierarchy

A bounding volume hierarchy, abbreviated BVH, is a type of tree structure.

2.11 Computer graphics

Faces, vertexes.... What is 3D models built up by? (polygons) triangles... color... texture maps
Rendered by shaders (pipeline)

2.11.1 Texture maps

A texture map is an image which is applied, or mapped, onto the surface of a geometry. The images is often in the form of a bitmap image or a procedural texture. Texture mapping, or UV mapping, is the process of projecting an actual 2D image onto a 3D model. The technique was initially developed by Edwin Catmull in 1974 [20]. UVs are two-dimensional texture coordinates, assigned to every vertex in a polygon. They are essential in terms of describing how an image gets applied onto a geometry. Figure 2.2 shows an illustrative example of how a 2D image gets "wrapped" around a 3D model. A lot of 3D modeling software are able to do the UV unwrapping automatically, for example Blender [21]. It is also possible to map a finalized render into a surface texture, a process known as baking [22]. This is primarily used as an optimization technique.



Figure 2.2: Texture mapping illustration.

2.11.2 Ray casting

Ray casting is the concept of use of ray-surface intersection tests to solve a variety of problems in 3D computer graphics and computational geometry. The first use of the term ray casting was made by Scott Roth, in a paper from 1982 titled "Ray casting for modeling solids" [23]. Raycasting is demonstrated in Figure 2.3. A ray is directed towards an object. If it crosses a face, an intersection is registered.

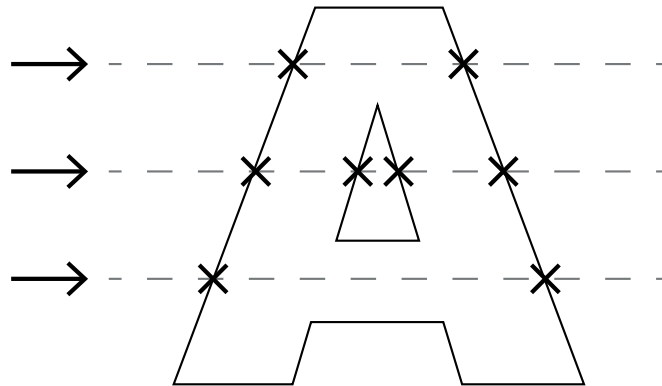


Figure 2.3: Raycasting intersections example.

2.11.3 OpenGL

2.11.4 WebGL

Uses OpenGL ES, a subset of OpenGL. ...

2.11.5 three.js

three.js abstracts away a lot of the manual handling of constructing vertices, faces, setup of WebGL

2.12 Voxelizer v0.1.3

Voxelizer v0.1.3 is a JavaScript library for conducting voxelization of 3D models. It features a voxelization algorithm based on raycasting.

The algorithm used for sampling a model tries to produce a solid voxelization. It samples the front and the back of the model, combines the two results together and tries to fill the in-between gap.

The library is not bundled. Hence, it is not possible to use the program out of the box in a browser. One is limited to Node.js, or setting up a build system involving a module bundler like Webpack or Rollup.

Although, it is very hard to extend, and understand. It is missing documentation... Voxelizer produces unsatisfactory voxelization results. Several of the voxelizations contain holes. The software can only produce a solid model. This is because of its limiting raycasting. It only samples one side of the model. In turn, this results in Meaning, it is only able to produce usable results when . When not using the "filled" mode, the voxelizations are

When it comes to the quality of the actual code, it refle

2.13 3D Modeling

Describe the process and fundamentals of 3D modeling. UV mapping Procedural generated texture.. Texture baking Use Blender etc...

Chapter 3

Materials and methods

3.1 Project Organization

Do i need this? The group consists of ... Meetings

3.2 Tools and libraries

3.2.1 JavaScript

3.2.2 Babel

- Babel - ES6 needs to be transpiled to ES5 (Browser compatibility).

3.2.3 npm

Needed packages.. Published all packages to npm.. Most stabile compared to GitHubs new repo....

3.2.4 Third party libraries

Why did i use them??? list up like: - xxx because ... - xxx provides ... Elaborate some on three.js - why is it good? (popularity)

3.2.5 GitHub Actions

Why? How did i use it? - For automation... - deeply integrated in GitHub.

3.3 Working methodology

3.3.1 Scrum

Even though this is a one man project, i have tried to adapt the scrum methodology. ...

3.3.2 Requirements specification

Acceptance criteria

Acceptance criteria - custom field in Jira. Specially for the voxelization algorithm?

3.3.3 GitFlow

Why did i follow gitflow? Any changes to the usage?? Good for enforcing standards, automation etc..

3.3.4 Semantic versioning

All published modules are enforcing Semantic versioning. This

3.4 three-voxel-loader

3.4.1 Loading data

Used Three.js internal "Loader" -> Factory pattern -> Octree - XML - VOX - BINVOX -> Separate repo! - 3D array

3.4.2 Visualization

Traverse the octree -> Level Of Detail support -> BufferGeometry (Many cubes) Merged BufferGeometry => Better performance -> only one draw call.

3.4.3 Debugging

Developed an example -> later polished so you can find it on github...

3.5 Voxelizer

Short intro

3.5.1 implementation

UML diagram of system here

3.5.2 Voxelization

Currently, the only voxelization algorithm that is implemented is mainly based on raycasting.

SKIP?: Alternatively to raycasting ..., one could make use of color picking. This is in principle significantly quicker than normal raycasting since it is computed on the GPU. One could render a "heightmap" from each side of the 3D model. Each pixel in the heightmaps could then be looped over, mapping the pixel color back to the face's location in space, representing a filled voxel. Even though effective, it has a severe downside. No hidden or internal structures would be detected with this sort of system. Raycasting is therefore the obvious choice, even though it is CPU bound.

The raycasting is supplied by three.js library. The library provides a thoroughly tested and accurate raycasting solution. However, it iterates every face.. $O(n)$.. Not good... The implementation of a three.js plugin were therefore used. it uses BVH to speed up the raycasting from $O(n)$ to $O(\log n)$.

Shell voxelization

Asd

Solid voxelization

Maybe more discussion or result related? The solid voxelisation, or filled voxelisation, is achieved by interpreting the first raycast intersect as the surface of the object. From this point will everything be considered "inside" the object. When a second intersect is detected, the state is changed to be "outside" the object. A new hit would indicate "inside", and so on. This works very well with a watertight (edges are manifold?) 3D model, as can be seen from figure 3.1a. However, when trying to fill an object which is not watertight, this can result in severe inaccuracies. This can be seen in figure 3.1b

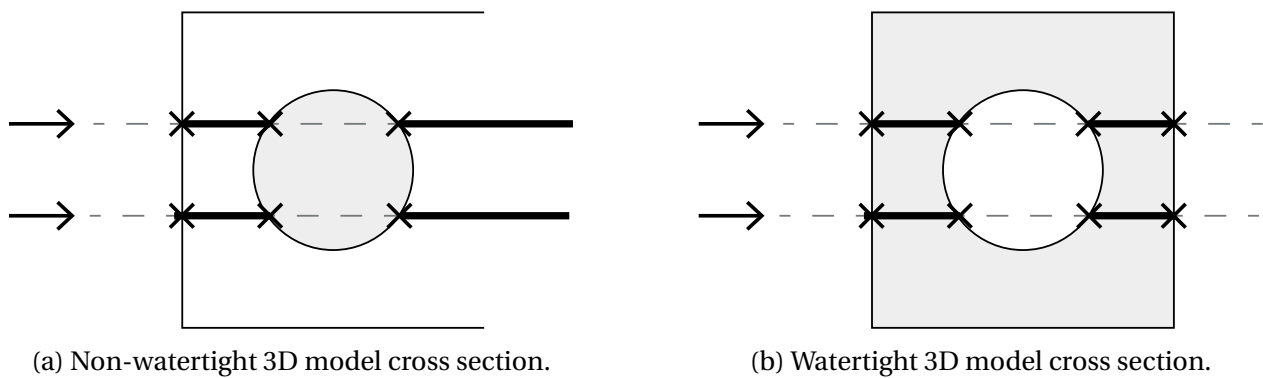


Figure 3.1: Solid (voxelization) filling of 3D model cross section.

3.5.3 Color system

Reads object texture maps, extracts color etc...

3.5.4 Loading

The Voxelizer library/engine previously made use of a wrapper OBJ loader. This support has been dropped in favor of the ES6 JS modules provided by three.js.

3.5.5 Exporting

- XML - BINVOX (Separate repo) - 3D array

3.5.6 Debugging

Developed an example -> later polished so you can find it on github...

3.6 BINVOX

A separate repo for building and parsing binvox files were constructed during refactoring of the voxelizer and the three-voxel-loader plugin....

Program Code 3.1: Example BINVOX data in JSON format

```
1 {  
2   "dimension": { "depth": 32, "width": 32, "height": 32 },  
3   "translate": {  
4     "depth": 11.81, "width": 21.39, "height": -1.69  
5   },  
6   "scale": 30.206,  
7   "voxels": [  
8     { "x": 0, "y": 2, "z": 3 },  
9     { "x": 0, "y": 3, "z": 3 },  
10    { "x": 0, "y": 4, "z": 3 }  
11  ]  
12 }
```

3.7 Voxelizer-Desktop

3.7.1 Electron

Auto updating

3.7.2 GUI

... Sketches?? Wireframe diagrams of GUI etc...

3.8 JSDoc Action

Implementation in JS, not docker. Gives best possible speed, and cross compatibility (Win, linux and macos) Can be used with any other action to upload to the desired service, for example GitHub pages.

Diagram of implementation here

3.8.1 JSDoc

Passes to cmd, loads configs, etc....

3.8.2 Templates

Support for templates. Downloads with the help of npm. Can be a github repository, npm package, etc...

3.9 Automation

3.9.1 Workflows

GitHub Actions... Figure [3.2](#) shows the continuous integration and continuous development pipelines. Describe how they work here....

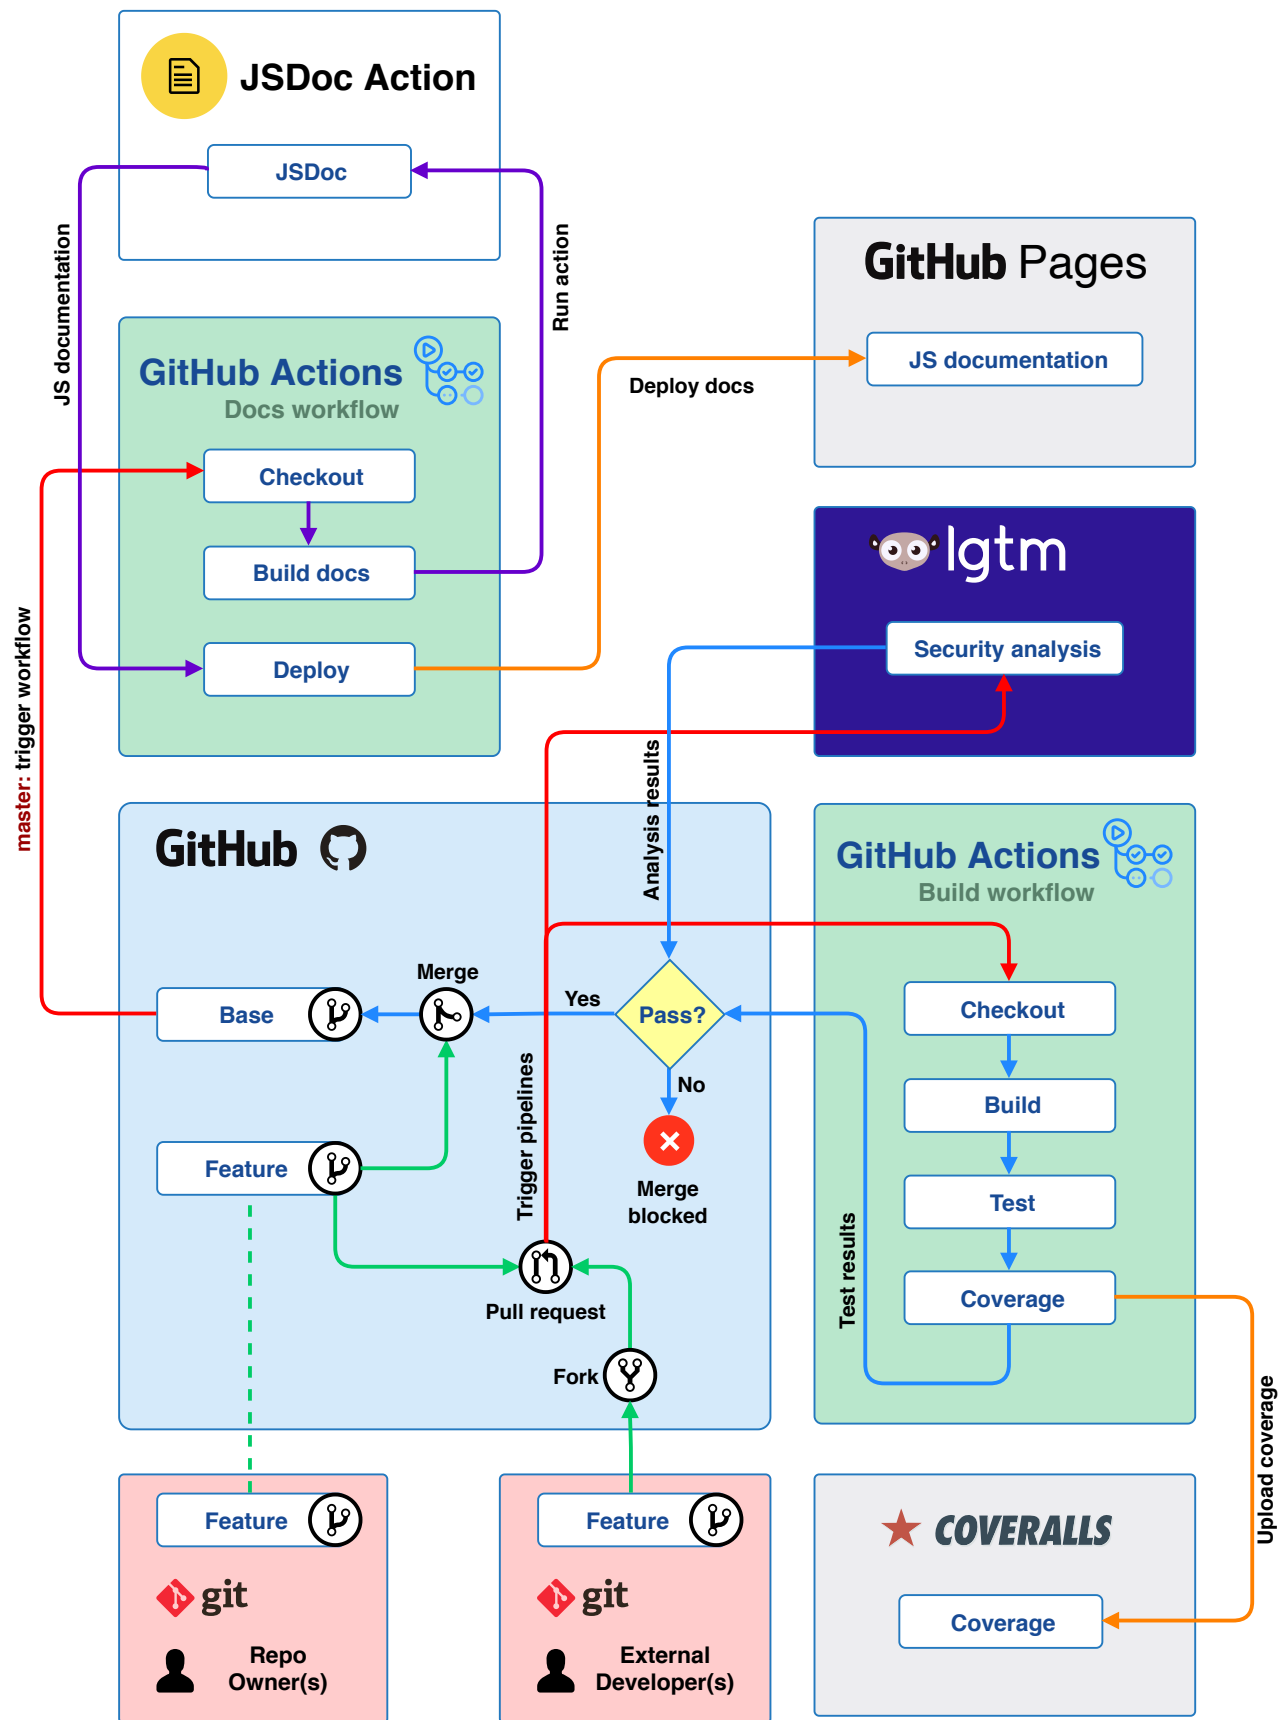


Figure 3.2: CI/CD pipelines

And continue explaining here....

Build

Test

Coverage

Coveralls

Security analysis

LGTM

Documentation generation

JSdoc Action -> GitHub pages

3.9.2 Release automation

Publish package

See figure [3.3](#)

GitHub Action version tagging

Auto major version tagging update See figure [3.4](#)

3.9.3 Dependency updating

Automated by Dependabot (acquired by GitHub).

3.9.4 LaTeX generation

Include how i have setup automation between my latex projects in order to generate thesis?

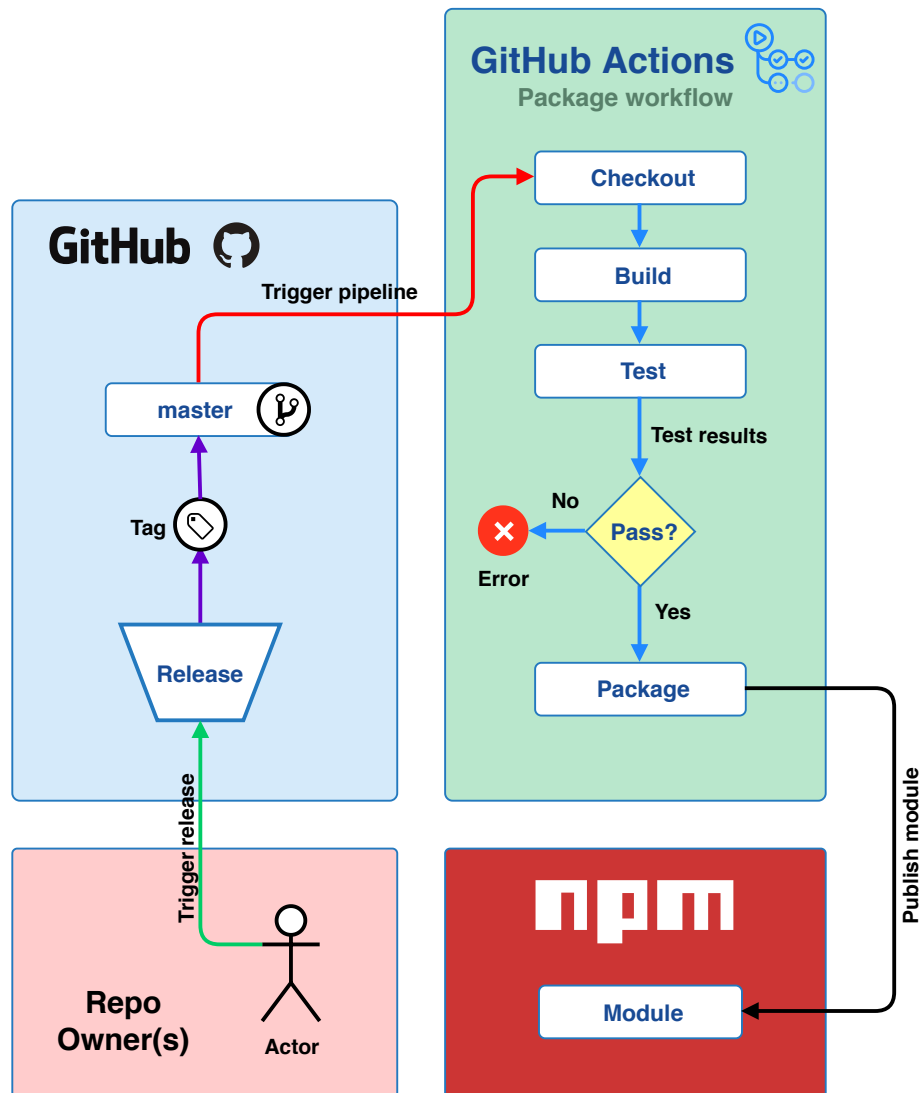


Figure 3.3: Automation of release publishing process.

3.10 file-existence-action

During development of the workflows, it became apparent that i needed to be able to check if a file existed, and use this result in the following steps of the workflow. This resulted in a relatively small GitHub action, named File Existence.

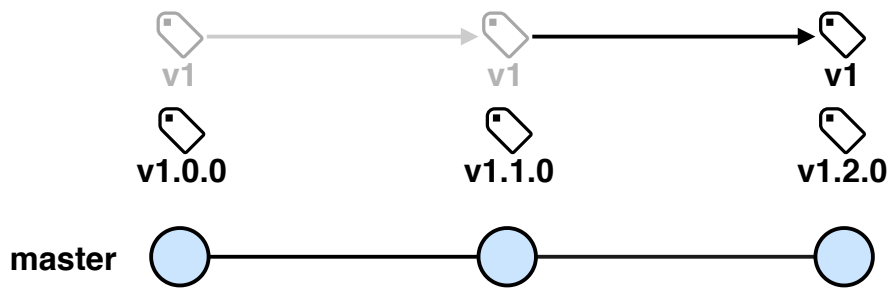


Figure 3.4: Automatic updating of major version tag.

3.11 file-reader-action

During development of the workflows, it became apparent that i needed to be able to read the contents of a file, in order to check if it was empty and in that case, terminate the workflow. this resulted in a very small GitHub action, named File Reader.

Chapter 4

Result

Brief assessment of the overall goals (or recap?) What to be discussed in this chapter... This section presents a walk through of the results...

4.1 three-voxel-loader

Include picture of voxelized chicken here

4.1.1 Level Of Detail

Include picture of torus with low LOD

4.1.2 Performance

Not optimized, a lot of unnecessary voxel geometry rendered when only outer mesh is visible.

4.1.3 Loading support

- XML - VOX - BINVOX -> Separate repo! - 3D array

4.1.4 Example

An example is available on GitHub pages (repo)

4.2 Voxelizer

General overview of the engine.... Completely redesigned.. Features: Extendible ...

4.2.1 Voxelization

side by side image of anvil and the anvil voxelized.

As you can see from the figure xxx, the system support coloring.....

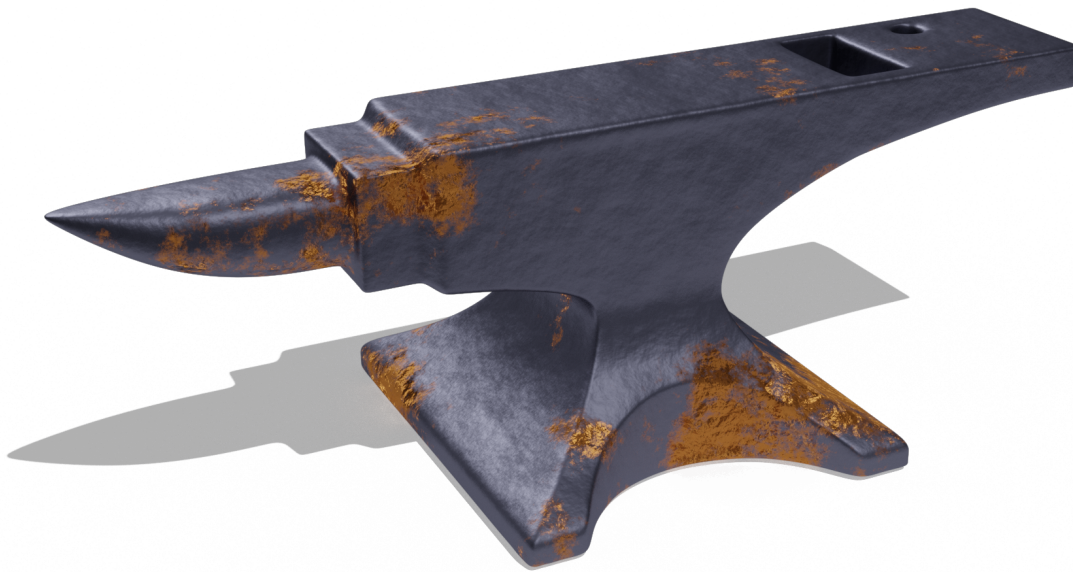


Figure 4.1: Render of anvil 3D model.

4.2.2 Visual inspection

No holes, accurate representation Compare to requirement specification.

4.2.3 Performance

Do some tests and present them in a table. Compare to requirement specification acceptance criteria.

4.2.4 Importing

This will be left up to the user. Supports all three.js meshes....

4.2.5 Exporting

Several formats... - XML - BINVOX - 3D array - ndarray

4.2.6 Usage example

Example of how to use the library with code!!!! HERE!!!!

```
1 // Import via ES6 modules
2 import * as THREE from 'three';
3 import {Sampler, XMLExporter} from 'voxelizer';
4
5 // Generate a yellow torus mesh to voxelize.
6 let geometry = new THREE.TorusGeometry( 10, 3, 16, 100 );
7 let material = new THREE.MeshBasicMaterial( { color: 0xffff00 } );
8 let torus = new THREE.Mesh( geometry, material );
9
10 // Setup Voxelizer.
11 let options = {
12   fill: false,
13   color: true
14 };
15 const sampler = new Sampler('raycast', options);
16
17 // Voxelize torus.
18 const resolution = 10;
19 let data = sampler.sample(torus, resolution);
20
21 // Export result to XML.
22 const exporter = new XMLExporter()
23 exporter.parse(data, function (xml) {
24   console.log(xml)
25 });
```

4.3 Voxelizer Desktop

TODO Cross compatibility Speed Simple to use Secure

4.4 JSDoc Action

Easy automation of JSDoc generation and publication. Included in MAIN JSDOC REPO!!! 10.000 stars and 38.000 users!!!

Supports templates and all that JSDoc3 natively supports. Can use other actions to deploy docs to arbitrary service.

4.5 Supportive projets

4.5.1 BINVOX

JS module Binary format... Parses BINVOX files into JSON. Builds BINVOX from JSON. Works according to the official specification Cross platform support (Node.js and Browser), ES6 and UMD.

4.5.2 file-existence-action

Simple GitHub action to check for the existence of files.

4.5.3 file-reader-action

Simple GitHub action to read the contents of a file.

4.6 Automation

More or less fully automated all build and release/publishing steps.

4.6.1 JavaScript modules

- Building - Testing - coverage upload to coveralls - Security analysis with LGTM - JavaScript documentation Generation and deployment of the docs to GH pages. - Publishing module to NPM.

4.6.2 GitHub Actions

- automation of "node-modules" installation setup - automatic update of major version tags according to guidelines recommended by GitHub.

4.6.3 LaTeX automation?

Should i include this?

4.7 Open-source community

Several of the projects has already gained interest by the public. Promotion og JSDoc Action in the main repo with 38 thousand users.

4.7.1 Statistics

Number of stars, weekly downloads, etc

4.7.2 Feedback

Several filed issues (which has been resolved). Feedback from the users, etc... Feature requests...

Chapter 5

Discussion

5.1 Completeness compared to requirements specification

The system is overall considered a success. All primary objectives are completed and

5.2 Test results

5.2.1 Result 1

The ...

5.3 Future work

5.3.1 three-voxel-loader

Performance

The three-voxel-loader plugin generates a cube buffer geometry for every voxel. Even for voxels that are not visible from outside the model. When loading a large and filled voxel model, this results in an enormous number of faces being rendered, putting a heavy load on the hardware. A future improvement could be to only render a shell geometry based on the voxel "cubes". This would dramatically reduce the number of triangles needed to render the voxel model.

5.3.2 Voxelizer

Currently, raw usage of the engine in a browser, the program will run on the main thread. This will in turn freeze the GUI. It should be possible to run the engine in a WebWorker, hence leveraging multithreading. However, future work could look into implementing support for webworkers directly into the Voxelizer engine. This way, the heavy voxelization calculations could be split up into chunks and voxelized in parallel.

5.3.3 isosurface extraction

Isosurface extraction is the exact opposite process of the voxelization process. It tries to approximate a 3D mesh based on voxel data. Implementing this possibility into the projects could be of great value.

Chapter 6

Conclusions

The

6.1 Further work

In the

- Implement
- Expand
- Upgrade

Bibliography

- [1] V. Driessen. (Jan. 2010). “A successful git branching model,” [Online]. Available: <https://nvie.com/posts/a-successful-git-branching-model/> (visited on 04/29/2020).
- [2] GitHub. (). “Github actions,” [Online]. Available: <https://github.com/features/actions>.
- [3] —, (2020). “Github pages,” [Online]. Available: <https://pages.github.com> (visited on 05/02/2020).
- [4] M. D. Network. (Mar. 2019). “Prototype-based programming,” [Online]. Available: https://developer.mozilla.org/en-US/docs/Glossary/Prototype-based_programming (visited on 05/04/2020).
- [5] Netscape. (Dec. 1995). “Netscape and sun announce javascript,” [Online]. Available: <https://web.archive.org/web/20070916144913/http://wp.netscape.com/newsref/pr/newsrelease67.html> (visited on 05/03/2020).
- [6] E. International. (2020). “Ecma international,” [Online]. Available: <http://www.ecma-international.org> (visited on 05/03/2020).
- [7] TIOBE Software. (Mar. 2020). “TIOBE index for may 2020,” [Online]. Available: <https://www.tiobe.com/tiobe-index/> (visited on 05/03/2020).
- [8] npm. (2020). “Npm,” [Online]. Available: <https://www.npmjs.com> (visited on 05/03/2020).
- [9] RequireJS. (). “Requirejs,” [Online]. Available: <https://requirejs.org> (visited on 05/04/2020).
- [10] UMD. (Oct. 2017). “UMD,” [Online]. Available: <https://github.com/umdjs/umd> (visited on 05/04/2020).

- [11] Microsoft. (2020). “Microsoft,” [Online]. Available: <https://www.microsoft.com> (visited on 04/30/2020).
- [12] GitHub. (2020). “Electron,” [Online]. Available: <https://www.electronjs.org> (visited on 05/02/2020).
- [13] —, (2020). “About github,” [Online]. Available: <https://github.com/about> (visited on 01/25/2020).
- [14] Microsoft. (2020). “Visual studio code,” [Online]. Available: <https://code.visualstudio.com> (visited on 05/02/2020).
- [15] Facebook. (2020). “Facebook messenger,” [Online]. Available: <https://www.messenger.com/desktop> (visited on 05/02/2020).
- [16] Microsoft. (2020). “Microsoft teams,” [Online]. Available: <https://www.messenger.com/desktop> (visited on 05/02/2020).
- [17] Facebook. (2020). “React,” [Online]. Available: <https://reactjs.org> (visited on 05/02/2020).
- [18] —, (). “Facebook,” [Online]. Available: <https://about.fb.com> (visited on 05/02/2020).
- [19] Coveralls. (). “Coveralls,” [Online]. Available: <https://coveralls.io> (visited on 05/02/2020).
- [20] E. E. Catmull, “A subdivision algorithm for computer display of curved surfaces,” Ph.D. dissertation, University of Utah, 1974.
- [21] B. Foundation. (). “About blender,” [Online]. Available: <https://www.blender.org/about>.
- [22] —, (2020). “Render baking,” [Online]. Available: <https://docs.blender.org/manual/en/latest/render/cycles/baking.html> (visited on 05/03/2020).
- [23] S. D. Roth, “Ray casting for modeling solids,” *Computer Graphics and Image Processing*, vol. 18, no. 2, pp. 109–144, Feb. 1982.

Appendices

Appendix A

Preliminary report

Preliminary report for bachelor's thesis

TITLE

Open source JavaScript voxelization library, with complementary applications

CANDIDATE

André Storhaug

DATE

31.01.2020

SUBJECT CODE

IE303612

SUBJECT

Bachelor's thesis

DOCUMENT ACCESS

- Open

STUDY

Computer engineering

PAGES/ATTACHMENTS

21/0

BIBL. NR.

Not used

SUPERVISOR(S)

Primary: Ricardo Da Silva Torres

Secondary: Saleh Abdel-Afou Alaliyat

Summary

This preliminary report concerns the plans and preparations for a bachelor's thesis at the Norwegian University of Science and Technology (NTNU).

The purpose of the thesis is to improve and further develop the already existing open source project named Voxelizer. Voxelizer is a JavaScript library for converting 3D models into a volumetric representation, a process known as voxelization. The library needs to be refined, professionalized and extended.

To ease the use of the library, a cross platform desktop application and a command line interface will be developed. In order to make the Voxelizer library and the complementary software easy to maintain, the projects will have a focus on automation. Especially, a GitHub action will be developed for automating the generation of JavaScript documentation.

Postal address

NTNU i Ålesund
N-6025 Ålesund
Norway

Visitation address

Larsgårdsvegen 2

Internet

www.ntnu.no

Phone

[70 16 12 00](tel:70161200)

E-mail

postmottak@ntnu.no

Fax

[70 16 13 00](tel:70161300)

Bank account

7694 05 00636

Foretaksregisteret

NO 947 767 880

This assignment is an exam submission done by a student at NTNU in Ålesund.

Contents

1 Terminology	2
2 Introductions	3
3 Project organization	4
3.1 Project group	4
3.2 Steering group	4
4 Attitudes	5
5 Project description	6
5.1 Thesis problem - goals - purpose	6
5.1.1 Thesis problem	6
5.1.2 Goals	6
5.1.3 Purpose	6
5.2 Requirements specification	7
5.2.1 Voxelizer	7
5.2.2 three.js voxel loader	8
5.2.3 Voxelizer Desktop	8
5.2.4 Voxelizer CLI	9
5.2.5 JSDoc Action	9
5.2.6 Automation	9
5.3 Methodology	9
5.4 Information gathering	10

<i>CONTENTS</i>	1
5.5 Risk analysis	10
5.6 Primary activities in further work	13
5.7 Progress plan	14
5.7.1 Master plan	14
5.7.2 Project control assets	16
5.7.3 Development assets	16
5.7.4 Internal control and evaluation	16
6 Documentation	17
6.1 Reports and technical documents	17
7 Planned meetings and reports	18
7.1 Meetings	18
7.2 Progress reports	18
8 Planned deviation management	19
Bibliography	20

Chapter 1

Terminology

Concepts

Voxel Three-dimensional analogue of a pixel, representing a value on a regular grid in three-dimensional space.

Voxelization The process of converting a 3D model into voxels.

Library A collection of data and programming code that are used to develop software.

Cross-platform Computer software that can be run on multiple computing platforms.

Abbreviations

MDN Mozilla Developer Network

API Application Programming Interface

UML Unified Modeling Language

GUI Graphical User Interface

CLI Command Line Interface

Chapter 2

Introduction

This project aims to improving an already existing open source [\[27\]](#) library named Voxelizer [\[20\]](#). It is a cross-platform library for conducting voxelization of 3D models, and is written in JavaScript.

The background for its creation was an assignment in a simulation course. The objective was to simulate diffusion using a cellular automaton. I wanted to do the simulation in the shape of a 3D object. Hence, I needed some way of constructing a volume representation out of a 3D model. Further, I also wanted to make the simulation with web technologies by making use of Three.js [\[21\]](#), an abstraction layer over WebGL [\[11\]](#).

To my surprise, I couldn't find any simple open source JavaScript solution for this. I therefore decided to make a solution myself. The result was the open source library "Voxelizer". However, due to time constraints, the current state of the library can only be considered a crude prototype. It has several issues, lacks important features and needs to be professionalized.

Alongside the library, a desktop program and a CLI interface will be developed. These will be making use of the Voxelizer library, and will greatly simplify the use of it.

Chapter 3

Project organization

3.1 Project group

Table 3.1: Students in the group

Name of student
André Storhaug

3.2 Steering group

The steering group will consist of Ricardo Da Silva Torres at NTNU in Ålesund, along with Saleh Abdel-Afou Alaliya at NTNU in Ålesund. Torres will act as supervisor and Alaliyat will be the co-supervisor.

Chapter 4

Attitudes

As a computer engineer, one is expected to behave responsible and professional. One should be curious of new technology and strive to provide the best solutions possible. Further, one should take proud in ones own work and feel a certain responsibility of the work that is done.

In a world that is becoming increasingly smaller, good collaboration is essential. In the role as a computer engineer, it is expected that one will come into contact and collaborate with persons from many different disciplines. It is therefore vital to have open mindsets and welcome new ideas. Discussions are to be expected. However, disagreements should be kept factual and handled respectfully.

The development of software is often a large part of the job as a computer engineer. Software has potential to affect human lives. Either directly or indirectly. The creation of software should therefore be rooted in strong ethics and respect for the users privacy. With this in mind, open source is a great way of achieving both transparency and openness. Today, everything revolves around profit. Companies are doing everything from charging huge amounts for proprietary software, to profiting on your personal information. However, open source has become a popular platform in which people can collaborate on software projects. By join forces and helping one another, one can achieve truly great things.

Chapter 5

Project description

5.1 Thesis problem - goals - purpose

5.1.1 Thesis problem

There exists an open source JavaScript library for conducting voxelization of 3D models. This library is called "Voxelizer". However, the library faces several issues and is lacking important features. It needs to be professionalized and made easy to both use and maintain.

5.1.2 Goals

This project has two main goals. The first goal is to improve and extend the open source Voxelizer library in such a way that it fulfills the requirements specified in the next section. The second goal is to develop a cross platform desktop application and a CLI for easy voxelization of 3D models, based the Voxelizer library.

In order to ensure maintainability of the various software projects, automation is critical. Therefore, a common subgoal will be to develop a GitHub action in order to automate documentation generation.

5.1.3 Purpose

The purpose of this project is to make it easy to conduct high quality voxelization of 3D models.

5.2 Requirements specification

The scope of this project is defined and limited by the requirements specification defined in following sections. In addition to this specification below, a backlog with user stories shall be created.

5.2.1 Voxelizer

Algorithms

The voxelisation algorithm should provide an accurate render of the original 3D model (polygon mesh [25]). The result should be geometrically representative without distortions. No holes should be present, unless dictated so by the given 3D model shape. Internal cavities and structures need to be accurately preserved. Lastly, there should be an absolute minimum of artifacts.

It should be possible to do two types of voxelization. One that is a shell voxelization, and another that is a filled volume version. The shell-type algorithm should only capture the surface of the 3D model. The filled-type algorithm needs to capture a complete volume representation of the 3D model.

One should be able to set the wanted resolution of the voxelization.

Input

The library should support a large variety of different input types. Both in terms of various file types and data structures. Support for popular file formats such as OBJ, STL and glTF should be implemented.

Output

A diverse mixture of output types have to be supported. This includes relevant file formats and data structures. Some file formats for saving voxel data are VOX by MagicaVoxel [6], XML, BIN-VOX [14] and minecraft SCHEMATIC format. Relevant data structure exports include 3D arrays and octrees.

It should also be possible to export the voxelized result as normal 3D models. This could be file formats such as OBJ, STL and glTF. Each voxel in the model should be represented as a cube.

Lastly, one could also support image export for each layer of the voxelized result. File format could for example be JPEG or PNG.

Coloring

The texture of a 3D model should carry over to surface voxels. This should be in the form of the most representative color.

Optimization

tree.js raycasting should be optimized. three.js raycasting is CPU based. It iterates each face in a 3D model, checking if the ray intersects a face or not. However, one can speed up the raycasting by employing a spatial index, for example with the help of an octree [\[24\]](#) or aabb tree .

5.2.2 three.js voxel loader

The three.js voxel loader module needs to be able to load voxel data into a three.js mesh [\[23\]](#). The module should manage to load the voxel file formats and data structures that the voxelizer library supports exporting. This is voxel data stored in the form of a 3D array or an octree, or in a file format like VOX, XML BINVOX or SCHEMATIC.

It should be possible to customize the appearance of the loaded voxels. Both in terms of size, material and/or color.

5.2.3 Voxelizer Desktop

The Voxelizer Desktop shall be a cross-platform [\[26\]](#) desktop application. It should work on both MacOS, Windows and Linux. The application should be able to voxelize a 3D models with the use of the Voxelizer library [\[20\]](#). Also, it should automatically update itself when a new release of the application is published.

The application should provide intuitive GUI. It should be possible to view both the original

3D model and the voxelized result. Also, it should be possible to generate a 2D view of the cross-sections of the voxelized model.

5.2.4 Voxelizer CLI

The Voxelizer CLI should be a cross-platform [26] CLI application. It should function on both MacOS, Windows and Linux. The application should be able to voxelize a 3D models with the use of the Voxelizer library [20].

5.2.5 JSDoc Action

The JSDoc GitHub Action should be an installable GitHub Action [9], available from the GitHub marketplace [2]. It should automate the process of generating JavaScript documentation with the help of JSDoc [12].

5.2.6 Automation

Automation should be used to ease maintenance of the various software projects. Firstly, JavaScript projects needs to have the documentation automatically generated with JSDoc [12]. Secondly, the process of publishing new versions should be automated to the greatest extent.

5.3 Methodology

The method that will be utilize in this project is the agile methodology Scrum [19]. Scrum is a very popular working methodology in the software development business. It uses an iterative and incremental approach, where each sprint gives an opportunity to improve the development process. Scrum organizes the work in sprints. This is a predefined period of time that is devoted to a set of very defined goals. The tasks to be done are often defined in a product backlog [18].

Scrum is mainly intended for teams. However, even though this is a one man project. The Scrum methodology will serve as a project framework for keeping up with progress, in addition to being able to adapt the project pace to the available working capacity. By breaking down the

tasks to be done in sprints, this will help with organizing the work and steering the project in the right direction, allowing adjustments along the way.

For this project, each sprint will be two weeks long. After each sprint, a review of the completed sprint will be made. This will be an opportunity to reflect on the process, and see which goals were completed and which wasn't. Further, this review will be highly valuable for determining if adjustments should be made for the next sprint.

Scrum also seems to be a good fit because there will be a meeting with the supervisor every two weeks. By organizing the tasks to be done in two-week sprints, this will make the meetings with the supervisor more effective and relevant. New functionality can be discussed and reviewed, in addition to planning ahead for the next two weeks.

5.4 Information gathering

The main source of information will come from various web resources. Everything from articles to code documentation will be needed for this project. The MDN Web Docs [15] will be an important source for JavaScript documentation. For Node.js related work, the Node.js API Docs [16] will be put to good use. Also, documentation from the third party library Three.js [22] will be essential. Further, Stack Overflow [17] will be a highly valued source of information due to its vast amount of questions and answers in a lot of topics.

5.5 Risk analysis

A qualitative approach will be used for assessing the risk of this project. A risk can be described as the likelihood of an event times the impact. A **MEDIUM** risk level will be accepted. The table 5.1 will be used in order to define the various risk levels.

Table 5.1: Risk level matrix.

		IMPACT			
		LOW	MEDIUM	HIGH	VERY HIGH
LIKELIHOOD	VERY HIGH	MEDIUM	HIGH	VERY HIGH	VERY HIGH
	HIGH	MEDIUM	HIGH	HIGH	VERY HIGH
	MEDIUM	LOW	MEDIUM	HIGH	HIGH
	LOW	LOW	LOW	MEDIUM	MEDIUM

In table 5.2 below, a risk assessment and risk control is conducted. The letter “L” stands for “Likelihood”, “I” for “Impact” and “R” for “Risk”.

Table 5.2: Risk assessment table.

						Residual risk		
ID	Description	L	I	R	Risk control	L	I	R
R1	Services like GitHub, Jira and Confluence may go down, making various resources unavailable.	L	VH	H	Perform regular backups of important data.	L	M	M
R2	Sickness, resulting in inability to work.	M	M	M	Practicing good hygiene.	L	M	M
R3	Damaged equipment used for development.	L	VH	M	Exercise caution when handling important equipment.	L	H	M
R4	Lost or corrupt files due to system crash or failure.	M	VH	H	Perform regular backups of important data.	M	L	L
R5	Incompatibilities between technologies.	M	M	M	Properly assess the technology and plan ahead before starting development.	L	M	L
R6	Security vulnerability in package dependency.	VH	H	VH	Automatic package auditing and fixing provided by GitHub [10].	L	H	M

VH: VERY HIGH risk

H: HIGH risk

M: MEDIUM risk

L: LOW risk

The risk assessment done in table 5.2 shows that with the appropriate counter measures, all risks are reduced to a MEDIUM level. This is an acceptable level.

5.6 Primary activities in further work

Table 5.3: Main activities.

Nr	Main activity	Time/scope
A1	Writing	18 weeks
A11	Preliminary report	3 weeks
A12	Bachelor's thesis	15 weeks
A2	voxelizer	7 weeks
A21	Core improvements	1 week
A22	Algorithm improvements	2 weeks
A23	Texture support	1 week
A24	Extending 3D model file loading	1 week
A25	Extending data exporting	1 week
A26	Write tests	3 days
A27	Optimization	2 days
A3	three-voxel-loader	2 weeks
A4	voxelizer-desktop	3 weeks
A41	Core	1 week
A42	GUI	2 weeks
A5	voxelizer-cli	1 week
A6	jsdoc-action	1 week
A7	Automation	1 week

5.7 Progress plan

5.7.1 Master plan

Following is a gantt diagram [5.1](#) for the planned time sceduling. This includes all activities listed in section [5.6](#). These activities primarily include writing and software development. Activity A1 is concerned about writing the preliminary report and the thesis. Activity A2, A3, A4, A5 and A6 is concerned with the development of various software systems, where each activity is a confined project. A7 is concerned with automation of various tasks in many of the software projects.

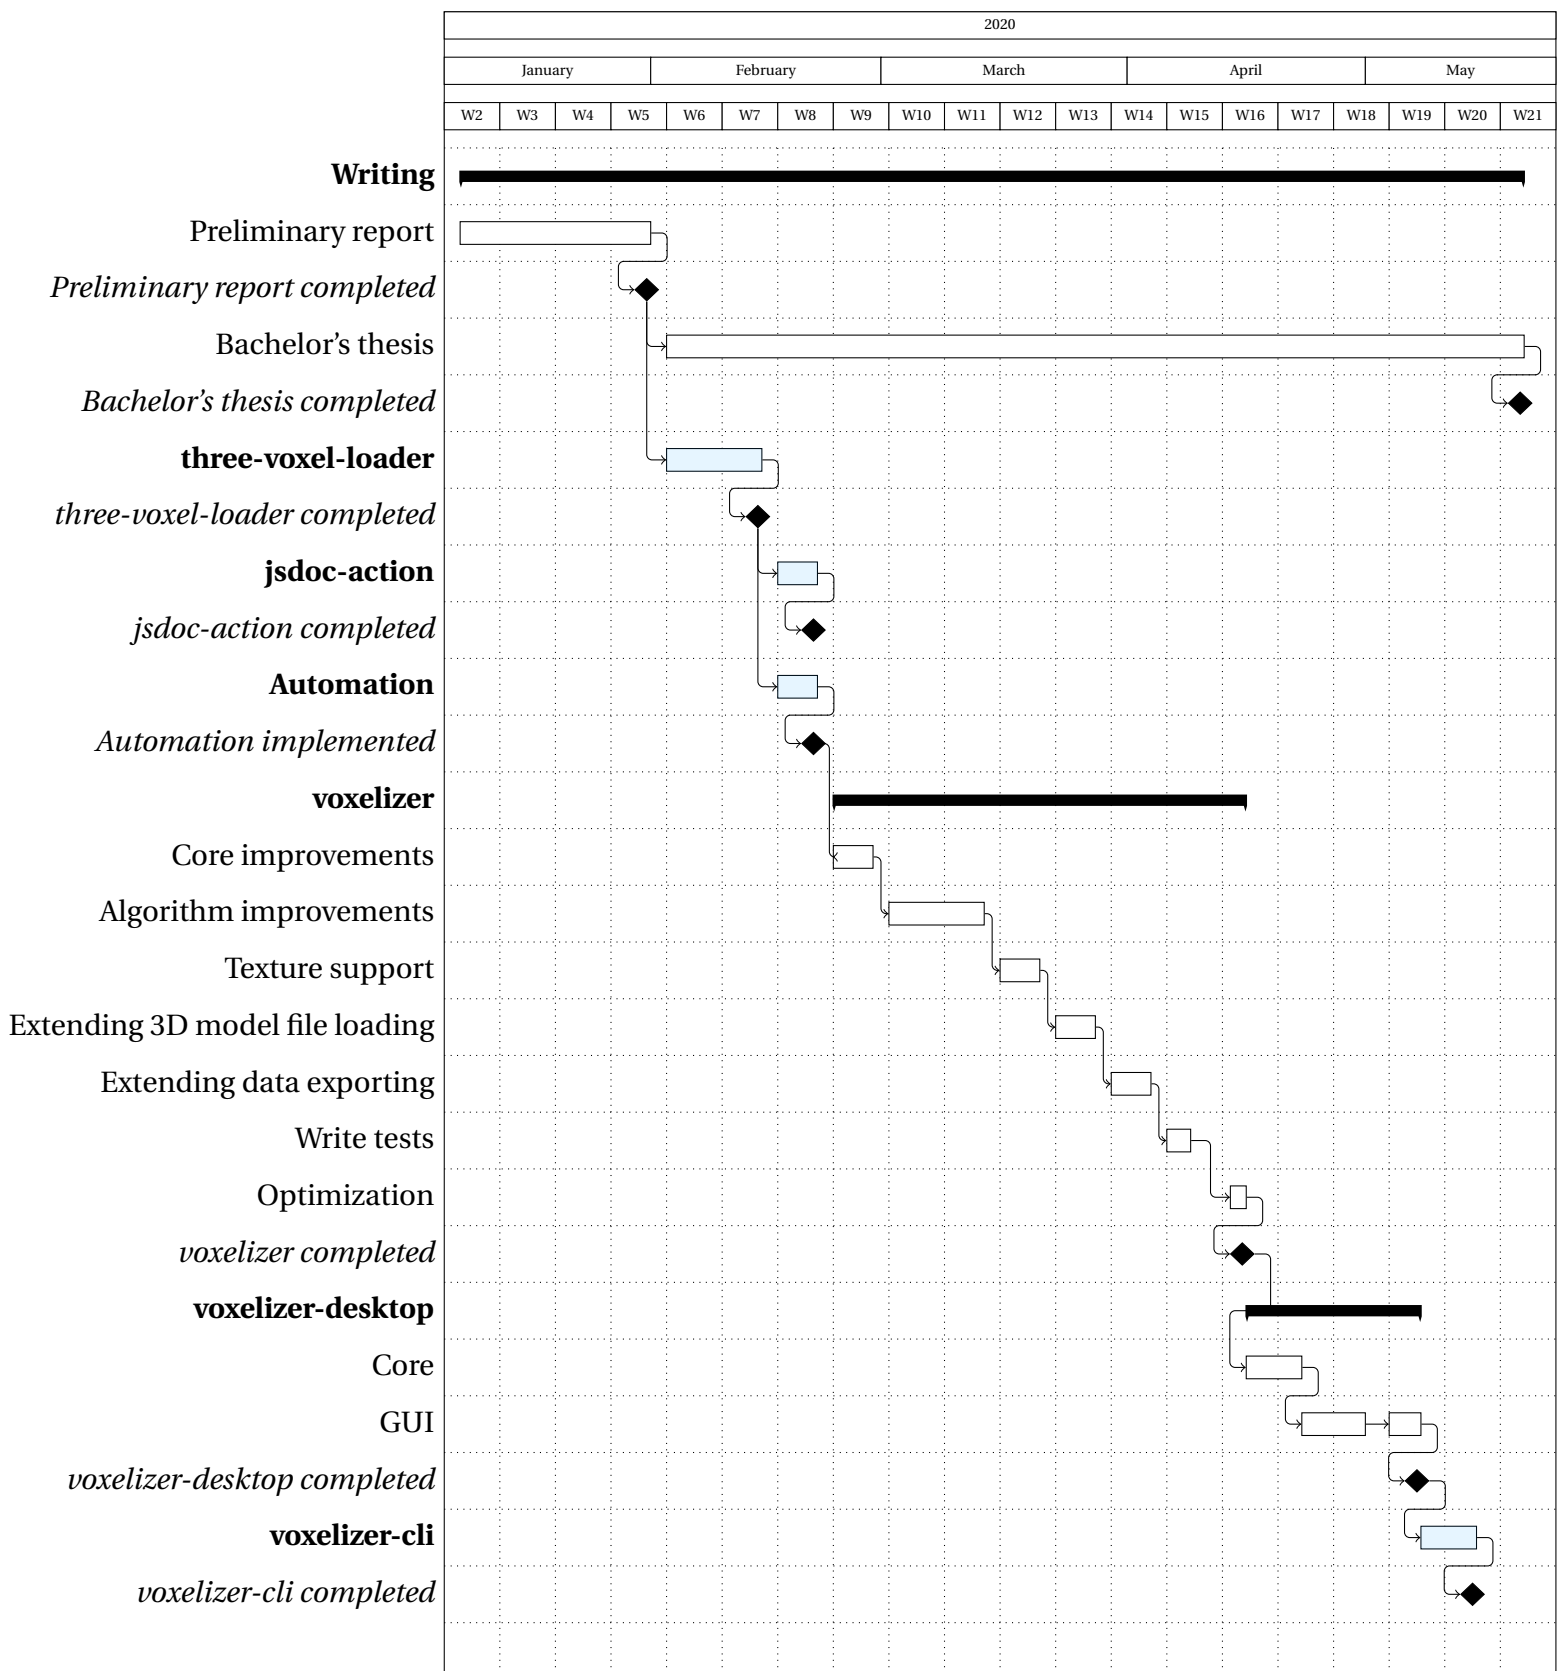


Figure 5.1: Gantt diagram of progress plan.

5.7.2 Project control assets

In order to keep the project on track, Jira [4] will be used. Jira is a project management tool developed by Atlassian, supporting a vast number of features such as issue tracking and project management. The main reason for choosing Jira over for example GitHub's solutions, is that Jira supports the agile methodology Scrum. For managing documents, minutes of meetings, UML diagrams, etc., Confluence [3] will be used.

Since this project revolves around open source projects, Jira and Confluence will only be used for internal related work. For public usage, the GitHub issue tracker and wiki will be used. Any issues, bugs or documentation of public interest shall be placed on GitHub, instead of Jira and Confluence.

5.7.3 Development assets

For developing the various systems, the development tools listed in table 5.4 will be used.

Table 5.4: Development tools.

Development tool	Description
Visual Studio Code [13]	Editor for writing and debugging code.
Blender [7]	3D modeling software.
Git [8]	Version control.
GitHub [1]	Hosting of git repositories.
SourceTree [5]	Git desktop client.

5.7.4 Internal control and evaluation

At the end of each sprint, a review of the completed sprint will be conducted. A burndown chart will be generated for each sprint. This will help identifying if adjustments to the plan is necessary.

The requirements specification will serve as the primary criteria in order to decide whether a goal is completed or not. If a system is implemented but contains minor bugs, it will still be considered complete.

Chapter 6

Documentation

6.1 Reports and technical documents

Firstly, a progress report shall be created for every two weeks. Secondly, documentation for the various systems will be produced. In order to make a successful software library, good documentation is imperative. A lot of this documentation will mainly be automatically generated by JSDoc. The automation will be integrated in the workflow of a new version release of a system (GitHub repository). This ensures the validity of the documentation, as well as ensures future maintenance. This integration will be provided by a GitHub action, also to be a part of this project. The generated documentation will be publicly available, hosted at GitHub Pages. Lastly, various UML diagrams will be created. These will serve as illustration for the relationship between the various systems.

As mentioned in section [5.7.2](#), internal documentation will be kept private in Jira and Confluence. Documents of public interest will be placed publically available on GitHub.

Chapter 7

Planned meetings and reports

7.1 Meetings

A meeting with the advisor will be held every two weeks. These meetings will be used for reporting on the current progress. The meetings are an opportunity of gathering constructive feedback from the supervisor. Further, they will serve as documentation for working both professionally and responsibly. A minutes of a meeting report will be written for every meeting.

7.2 Progress reports

Progress reports will be developed up-front of each meeting. These will describe what activities were planned, and what activities were actually seen through. If any deviations from the plan occurred during the period, these should also be included in the progress report. Further, the activities planned for the next period should also be outlined. The report will be sent to the supervisor at least a day before the meetings. This will form the basis for the matters to be discussed at the meetings.

Chapter 8

Planned deviation management

In the event of deviations from the current plans, both in terms of progress or content, several measures need to be taken. If the deviations from the plan are of greater significance, the supervisor should be alerted. If the deviation is of lesser importance, it should be discussed with the supervisor at the regular meeting. One should then consider to change the planned approach.

Many of the planned systems build upon one another. Therefore, if a task shows to be harder and more time consuming than first anticipated, it should consume time from tasks of lower priority. However, if a task exceeds its planned time schedule because of minor bugs, then these bugs should be properly documented and the task considered finished. These bugs should then be revisited at a later stage if there is time to spare. Since the systems are open source projects, these bugs might also be resolved by volunteers after this project is finished.

Bibliography

- [1] About github, . URL <https://github.com/about>.
- [2] Extend github, . URL <https://github.com/marketplace>.
- [3] Atlassian. Confluence, . URL <https://www.atlassian.com/software/confluence>.
- [4] Atlassian. Jira, . URL <https://www.atlassian.com/software/jira>.
- [5] Atlassian. Sourcetree, . URL <https://www.sourcetreeapp.com>.
- [6] ephtracy. Magicavoxel. URL https://ephtracy.github.io/index.html?page=mv_main.
- [7] Blender Foundation. About blender. URL <https://www.blender.org/about>.
- [8] Git. About git. URL <https://git-scm.com/about>.
- [9] GitHub. Github actions, . URL <https://github.com/features/actions>.
- [10] GitHub. Managing vulnerabilities in your project's dependencies, . URL <https://help.github.com/en/github/managing-security-vulnerabilities/about-security-alerts-for-vulnerable-dependencies#alerts-and-automated-security-updates-for-vulnerable-dependencies>.
- [11] Khronos Group. WebGL overview. URL <https://www.khronos.org/webgl/>.
- [12] JSDoc. Jsdoc. URL <https://github.com/jsdoc/jsdoc>.
- [13] Microsoft. Visual studio code. URL <https://code.visualstudio.com>.

- [14] Patrick Min. Binvex voxel file format specification. URL <https://www.patrickmin.com/binvox/binvox.html>.
- [15] Mozilla. Mdn web docs. URL <https://developer.mozilla.org/en-US/>.
- [16] Node.js. Node.js documentation. URL <https://nodejs.org/api/>.
- [17] Stack Overflow. Stack overflow. URL <https://stackoverflow.com>.
- [18] Scrum.org. What is a product backlog?, . URL <https://www.scrum.org/resources/what-is-a-product-backlog>.
- [19] Scrum.org. Scrum, . URL <http://www.scrum.org/>.
- [20] André Storhaug. Voxelize. URL <https://github.com/andstor/voxelize>.
- [21] three.js. three.js, . URL <https://threejs.org>.
- [22] three.js. three.js docs, . URL <http://threejs.org/docs/>.
- [23] three.js. Mesh, . URL <https://threejs.org/docs/#api/en/objects/Mesh>.
- [24] Wikipedia. Octree, . URL <https://en.wikipedia.org/wiki/Octree>.
- [25] Wikipedia. Polygon mesh, . URL https://en.wikipedia.org/wiki/Polygon_mesh.
- [26] Wikipedia. Cross-platform software, 1 2020. URL https://en.wikipedia.org/wiki/Cross-platform_software.
- [27] Wikipedia. Open source, 1 2020. URL https://en.wikipedia.org/wiki/Open_source.

Appendix B

Progress reports

asd

