
SPATIAL AUDITING DEMO

Kwa Ground

A map shows a building that isn't there. You load an area, move the pin to where the building really is, and the correction is saved. Below: what runs where, what happens when you load an area, and what each button sends.


1. The pieces

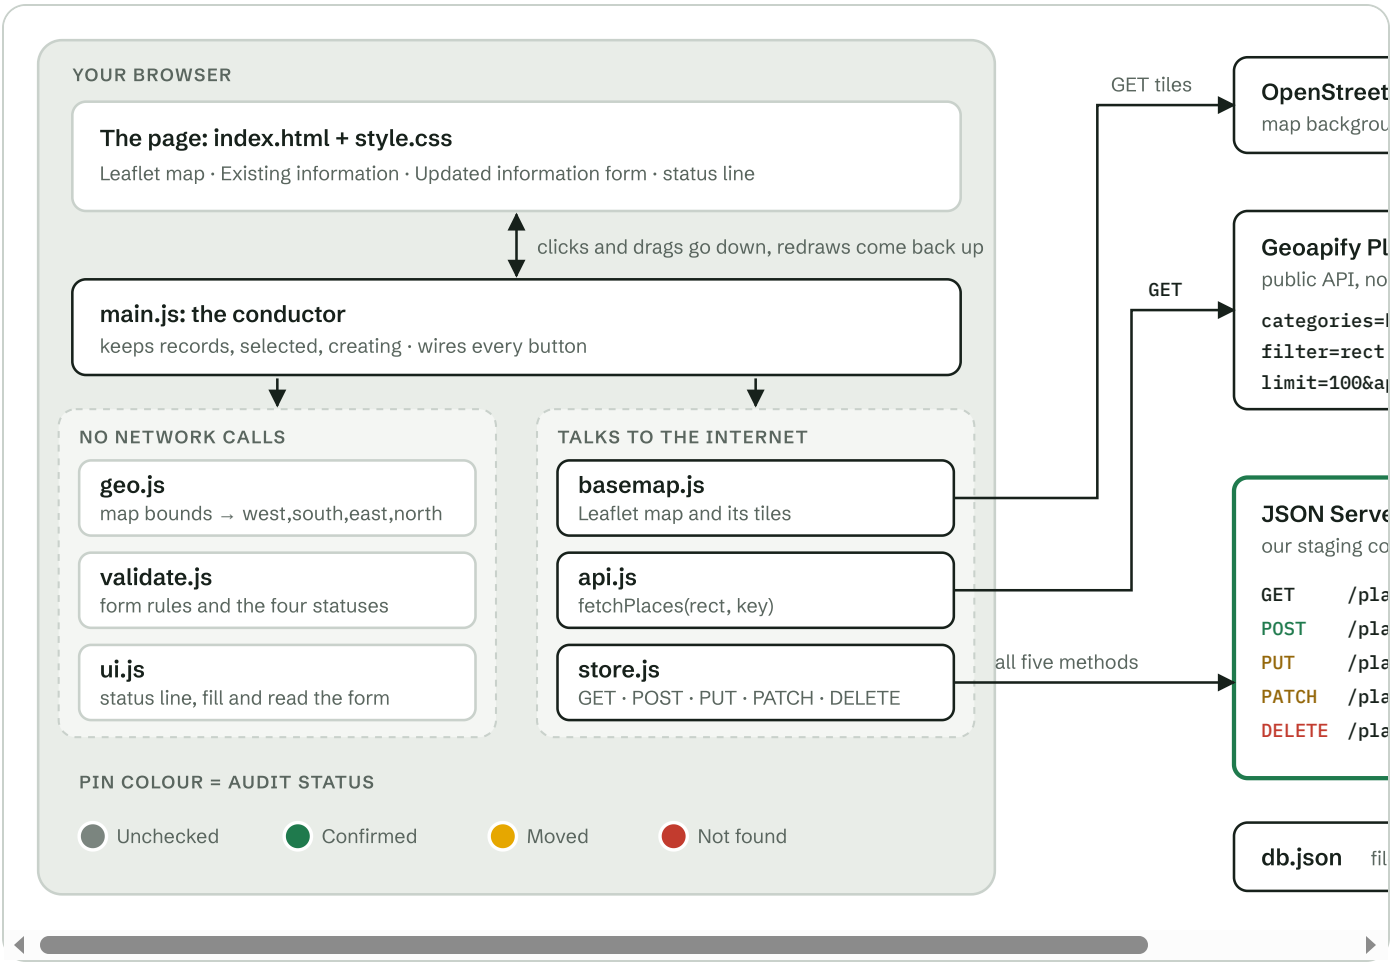

Swipe sideways to see the whole diagram.

Everything on the left runs in the browser. Three modules reach the internet: basemap.js for tiles, api.js for Geoapify (the only place that holds the API key), and store.js for your own JSON Server. Responses come back along the same lines.

2. What "Load this area" does

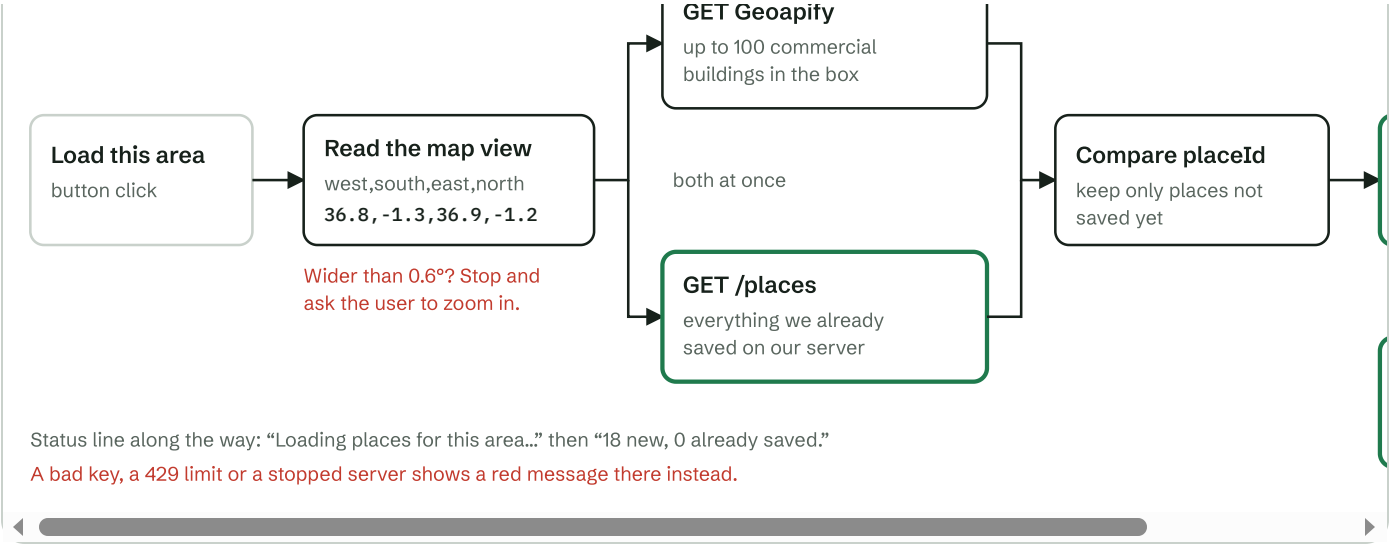


Swipe sideways to see the whole diagram.

The two requests run together. Comparing on placeId is what stops a second load of the same area from creating duplicates. The numbers in the boxes are examples.

3. Correcting a pin

Each saved place keeps two positions: where the map said it was, and where you found it. Dragging only changes the second.

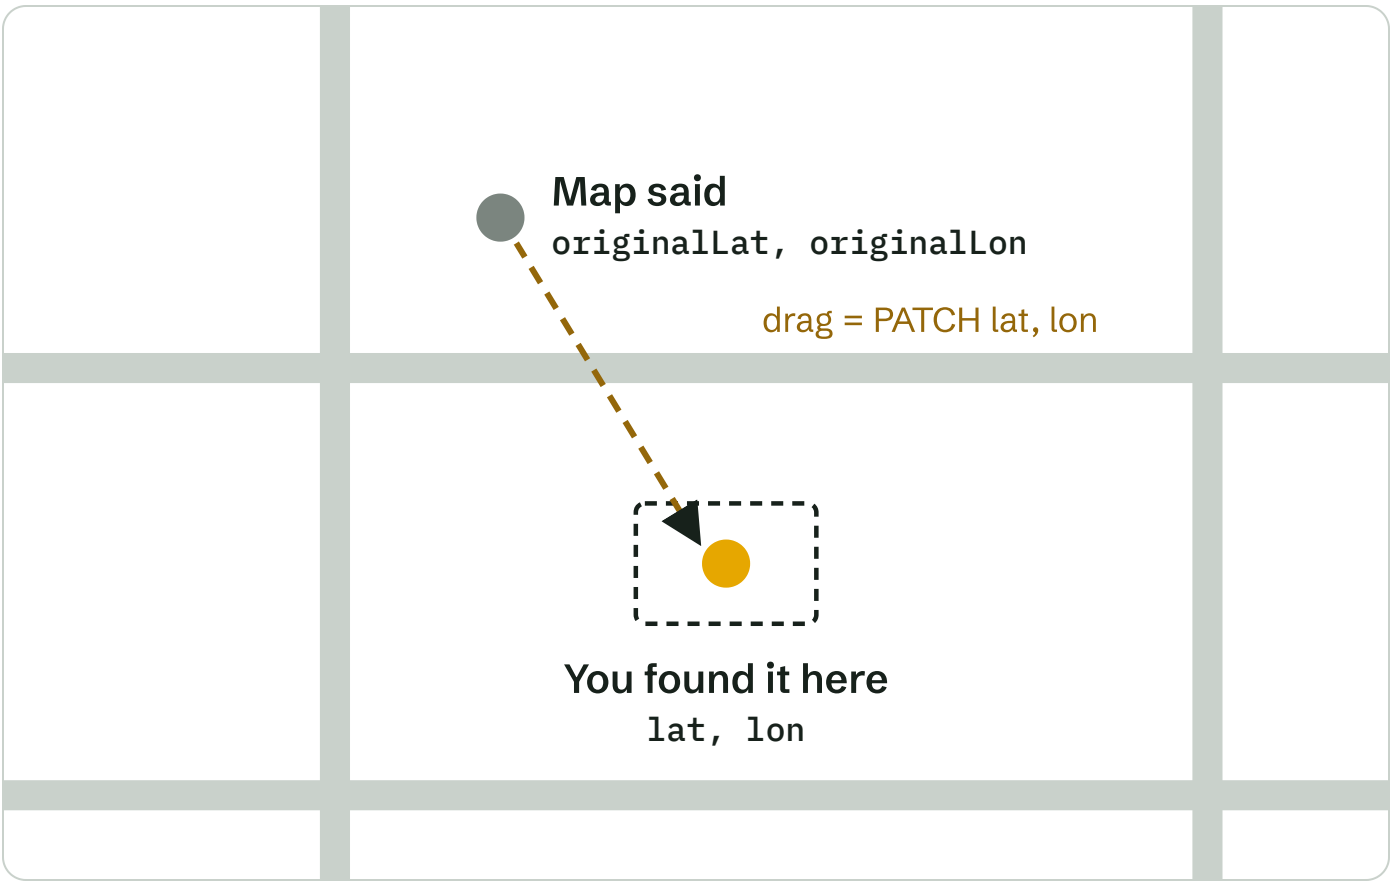

A sketch, not real map data.

ONE SAVED RECORD (EXAMPLE VALUES)

ONE SAVED RECORD (EXAMPLE VALUES)


```
{
  "id": 7,
  "placeId": "51f3…",
  "name": "Example Plaza",
  "address": "Moi Avenue, Nairobi",
  "originalLat": -1.28402,
  "originalLon": 36.81603,
  "lat": -1.28455,
  "lon": 36.81688,
  "status": "moved",
  "note": "Entrance is round the back"
}
```


Unchecked drag the pin → Moved or set it in the form: Confirmed

Not found

Every imported place starts as Unchecked. Dragging only changes the status automatically when it was Unchecked; after that the form decides.

YOU DO THIS	REQUEST	WHAT CHANGES
Open the page, or anything finishes saving	`GET` `/places`	Saved buildings are loaded and pins are drawn.
Press Load this	`GET` `Geoapify, then` `POST` `/places`	New buildings are saved, one POST