

Orient–Survey–Evaluate–Commit: A Cognitive Task Model for SERP Evaluation

Preprint — under revision

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of April 8, 2026

Abstract. Web search interaction is typically modeled as a signal-decoding problem: click models, neural rankers, and hundred-feature cursor classifiers all treat the user’s behavior as a stream to be mapped onto relevance. We argue that this misses a critical dimension. The user is running a *cognitive task*, and when that task is modeled explicitly—with the vocabulary of psychology and HCI task analysis—structure pops out of the same data that end-to-end learners leave on the table. We make this argument concrete with a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—grounded in eye-tracking evidence from 2,776 product search trials (AdSERP dataset, 47 participants). Saccade amplitude analysis reveals a *survey phase* hypothesized by Zhang, Abualsaud & Smucker (CHIIR 2018) in the context of immediate query: ~ 3.5 wide saccades (117 px median) over ~ 1 s, during which users sample the result set before committing to reading. The survey–evaluate transition is marked by an amplitude drop detectable at $p = 10^{-61}$ within individual trials. Survey duration is fixed and does not respond to SERP content, but its output—an impression of result set composition—modulates subsequent evaluation strategy. We operationalize SERP difficulty as *relevance spread* (variance in query-result embedding similarity) and show it predicts page coverage, click position, and trial duration within-participant. Forward evaluation and regressive re-evaluation are shown to be distinct sub-processes under the same task. Taken together, the results are an instance of the larger point: task modeling recovers structure that pure-CS SERP modeling misses.

1 Introduction

Twenty years of web search modeling has been dominated by a single move: treat user behavior as a signal stream and learn a mapping from that stream to relevance. Click models Craswell et al. [2008], Chapelle and Zhang [2009], Dupret and Piwowarski [2008], Chuklin et al. [2015] encode examination and stopping as statistical parameters. Cursor-feature classifiers extract 638-dimensional feature bags from mouse trajectories Arapakis and Leiva [2016]. Transformer-based sequence models now learn end-to-end maps from raw (x, y, t) to click Villaizán-Vallelado et al. [2025], Brückner et al. [2021]. These approaches have produced real engineering gains and are the default framing in SIGIR, CIKM, and WSDM.

Our argument is that this framing misses a critical dimension: the user is running a *cognitive task*, and when the task is modeled explicitly—using the vocabulary of

psychology and HCI task analysis that the field already has Pirolli and Card [1999], Fu and Pirolli [2007], Liu et al. [2014]—structure comes out of the data that pure signal-decoding leaves untouched. Phase boundaries become testable. Content-independent vs. content-modulated subprocesses separate. Forward vs. regressive evaluation stop being one blob. The gains are not about squeezing more accuracy from the same regression; they are about seeing variables that were never in the regression to begin with.

We make the argument concrete with a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—and show that each phase has saccade-level, pupillometric, and behavioral signatures that do not collapse into one another. Every phase in the model has precedent in the literature taken in isolation: orientation is implicit in click models’ position-bias assumptions; scanning-then-reading appears in Liu et al.’s two-stage model Liu et al. [2014]; the SURVEY phase was hypothesized by Zhang, Abualsaud & Smucker Zhang et al. [2018] as a “result inspection phase” gating the stay-or-reformulate decision; committed evaluation is the subject of decades of relevance assessment research; satisficing as a stopping rule is central to the foraging account; scroll regressions are documented by Lorigo et al. Lorigo et al. [2008]. What has not been done is to identify these as phases of a single task with measurable transitions between them, and to draw out the consequences for how SERP behavior should be modeled.

The empirical anchor is a saccade amplitude transition at fixation ~ 5 ($p = 10^{-61}$), operationalizing the survey phase Zhang et al. hypothesized seven years earlier. Click models cannot see this because they examine clicks, not saccades; end-to-end cursor learners cannot see it because they lack the task-level concept of a phase boundary to look for. The decomposition is recoverable only if the analyst is looking for phase structure in the first place.

We test the decomposition on a forced-choice product search task (AdSERP) that eliminates two of the three natural exit paths from SERP evaluation—reformulation and abandonment. This isolates the orient–survey–evaluate–commit sequence but cannot characterize the full foraging decision (stay, refine, or quit). Validating the complete model requires production log data with natural stopping

behavior.

2 Related Work

The phases in our model each have precedent in the literature. The contribution is not the discovery of any single phase but the identification of measurable transitions between them, and—crucially—the observation that the field’s two dominant modeling traditions (click models on the IR side, cognitive-process models on the HCI side) have been running in parallel for twenty years without being connected at the granularity where SERP evaluation actually happens.

2.1 Process models of information seeking

The HCI and information-science tradition models search as a process with identifiable stages. Kuhlthau’s Information Search Process (ISP) identifies six affective and cognitive stages across a multi-session inquiry. Marchionini’s eight sub-processes decompose a single search episode into recognize, accept, define, select, formulate, execute, examine, extract. Bates’s berrypicking abandons the single-query assumption and models search as an evolving sequence of refinements. Belkin’s Anomalous State of Knowledge frames the whole activity as a cognitive gap-closing operation. These models are powerful at the session scale and continue to anchor the HCI/IS view of search behavior, but they are too coarse to predict what happens during the 3–30 seconds between SERP render and first click. Our work zooms into Marchionini’s *examine results* sub-process and applies the same process-model discipline one level deeper, at the granularity where the click-model literature actually lives.

2.2 Click models as implicit task models

The IR click-modeling tradition has been implicitly modeling parts of the same task the whole time, without labelling it as task analysis. The cascade model [Craswell et al. \[2008\]](#) assumes serial top-down examination with a stopping rule—in our vocabulary, an undifferentiated EVALUATE + COMMIT with no SURVEY. The Dynamic Bayesian Network click model [Chapelle and Zhang \[2009\]](#) adds per-position skip/examine decisions that implicitly capture the survey impression without naming it. The User Browsing Model [Dupret and Piwowarski \[2008\]](#) parameterizes position-dependent examination probability and, through the distance-to-last-click term, implicitly models orientation effects. The comprehensive survey by Chuklin et al. [Chuklin et al. \[2015\]](#) makes the pattern visible across the whole family. Every one of these models encodes one or two phases of the Orient–Survey–Evaluate–Commit task as statistical parameters without identifying the cognitive operations that generate those parameters. The parameters are therefore difficult to compose, difficult to validate against behavioral data, and difficult to transfer across paradigms. A task-model layer gives the parameters an interpretation that the regression-by-itself does not.

2.3 Two-stage examination models and the Survey phase hypothesis

Liu et al. [Liu et al. \[2014\]](#) offer the closest prior empirical precedent—a two-stage examination model in which users skim a SERP before reading specific results, with both stages predictable from cursor data. Our model adds ORIENT before skimming, decomposes their “skimming” into SURVEY (gist sampling with wide saccades) and early EVALUATE (committed reading with narrow saccades), and provides a saccade-amplitude marker for the phase boundary.

The sharpest prior statement of the SURVEY phase itself comes from Zhang, Abualsaud & Smucker [Zhang et al. \[2018\]](#), who proposed a *result inspection phase* in which users assess the top 2–3 results as a rapid initial impression, and showed that immediate-requery rates rise as SERP quality drops. In their paradigm the inspection phase gates the stay-or-reformulate decision. In a forced-choice paradigm like AdSERP it cannot gate reformulation (there is no reformulation exit path), so the same phase shows up as a gate on subsequent evaluation *depth*—same cognitive subprocess, different downstream consequence. Our contribution is the saccade-level measurement that pulls Zhang et al.’s hypothesis out of the rapid-decision regime and into a continuous phase structure that can be identified trial by trial.

2.4 Eye tracking on SERPs

The eye-tracking literature has been quietly describing phase structure since the mid-2000s. Granka et al. [Granka et al. \[2004\]](#) reported an initial rapid scan followed by re-examination—phase structure present in the data, unformalized. Cutrell & Guan [Cutrell and Guan \[2007\]](#) showed that snippet length shifts evaluation effort, which in our vocabulary is the survey phase setting the cost budget for the evaluate phase. Lorigo et al. [Lorigo et al. \[2008\]](#) reported that $\sim 2/3$ of SERP scanpaths are non-sequential, directly challenging the cascade assumption and consistent with a survey phase that samples several positions before committed reading begins. Buscher, Dumais & Cutrell [Buscher et al. \[2010\]](#) documented distinct ad vs. organic fixation patterns, which our companion work [Arapakis and Leiva \[2016\]](#) extends to a discrimination-cost argument at the cursor level. Taken together, this literature already contains the phase structure we are modeling—it simply has not been collected into a task-model vocabulary that click models can consume.

2.5 Foraging theory and satisficing

The theoretical ancestor for the whole question is Pirolli & Card’s information foraging theory [Pirolli and Card \[1999\]](#): information scent guides patch assessment, and the marginal value theorem determines when the forager moves on. The survey phase is recognizable in these terms as a patch-quality estimation step that precedes committed patch exploitation. Fu & Pirolli’s SNIF-ACT [Fu and Pirolli \[2007\]](#) gives this an ACT-R implementation, modeling the EVALUATE→COMMIT transition as spreading activation over scent values. Satisficing with aspiration levels (Payne & Duggan, following Simon) models the commit decision itself as a

threshold crossing rather than an optimization. Brumby & Howes [Brumby and Howes \[2004\]](#) capture the survey-to-evaluate transition directly in their “good enough but I’ll just check” analysis: a fast approximate judgment followed by a committed verification—the same two-phase structure recovered here at the saccade level. Our contribution within this tradition is not theoretical novelty but operationalization: we provide a saccade-amplitude marker for the phase boundary that foraging theory has predicted for two decades.

2.6 Task analysis in HCI

The methodology for decomposing tasks into cognitive, perceptual, and motor operators has existed since GOMS (Card, Moran & Newell, 1983). Hornof & Kieras’s CPM-GOMS analyses of menu search show interleaved systematic and opportunistic scanning within a single display—directly analogous to our survey plus evaluate decomposition, applied decades ago at a slightly different granularity. The methodology and the vocabulary both exist; they have simply not been brought to bear on SERP evaluation at the 3–30 second granularity, and none of the dominant SIGIR-family click or cursor models are written in a form that a task analyst can read. This paper is, in part, an argument that the two traditions should be connected.

3 The Model

3.1 Orient

Layout recognition. For familiar SERP layouts, this is a learned prior: 58% of AdSERP trials show first fixation already on a result (0 ms orientation). No learning effect across 60 trials ($\rho = 0.02$, $p = 0.30$).

3.2 Survey

Wide saccades (117 px median), ~ 3.5 fixations, ~ 1 s. Gist sampling: the user builds an impression of result set composition without committed reading. Duration is *fixed*—does not correlate with any difficulty measure (all $p > 0.3$). The survey’s output, not its duration, modulates subsequent behavior.

3.3 Evaluate

Narrow saccades (76 px median). Consecutive fixations on the same result connected by minor saccades (< 100 px) form *reading episodes*: mean 2.16 fixations, 499 ms. Per-fixation duration is flat (~ 220 ms across all positions). The position effect in total fixation time is driven by fixation count, not processing speed. Forward-only dwell *increases* with position ($\rho = +0.82$), consistent with working memory accumulation.

3.4 Commit

Click. Satisficing threshold crossed. In AdSERP (forced choice), every trial ends with a click. In naturalistic search, this phase competes with abandonment and query reformulation.

3.5 Regression loop

65% of trials include at least one scroll regression (Evaluate $\rightarrow$ re-Survey). Backward scrolling is ballistic ($\rho = 0.867$),

with 87% of regression targets at positions 0–4. Regression velocity mediates the dwell delta ($\rho = -0.762$, $p = 0.017$).

4 Data and Methods

4.1 AdSERP dataset

AdSERP [Latifzadeh et al. \[2025\]](#): 2,776 trials, 47 participants, 60 unique product purchase queries (“buy [brand] [product]”). 10 trials per participant across 6 batches. Gazepoint GP3 HD eye tracker (150 Hz). Fixations pre-segmented by the tracker’s internal I-DT filter (FPOG stream). Mean fixation duration 219 ms, median 193 ms.

4.2 Saccade classification

Saccade amplitude computed as Euclidean distance between consecutive fixation coordinates (FPOGX, FPOGY in screen pixels). Minor saccade threshold: 100 px. Fixations < 60 ms filtered as sub-threshold artifacts (1.4% of data).

4.3 Phase identification

Survey–evaluate transition: sliding window of 3 saccades. First window where mean amplitude < 100 px marks the transition. Median transition at saccade 2 (51% of trials transition within first 2 saccades).

4.4 SERP difficulty measures

Three measures computed per SERP:

- **Jaccard**: mean pairwise token-set overlap across results (mean = 0.151)
- **Relevance spread**: std of query–result cosine similarity (mxbai-embed-large, 1024-d). Low spread = all results equidistant from query = hard (mean = 0.052). The precedent for treating variance across a retrieved set as a difficulty signal is the query performance prediction literature: Cronen-Townsend et al.’s clarity score [Cronen-Townsend et al. \[2002\]](#) used divergence between query and collection language models, and Shtok et al.’s Normalized Query Commitment [Shtok et al. \[2012\]](#) used the standard deviation of top- k lexical retrieval scores. Both established that the shape of the retrieved-score distribution carries query-difficulty information. Relevance spread is the same primitive ported to dense embeddings and used here as a stimulus descriptor to test whether a system-side variance signal also predicts user-side behavioral variants (coverage, duration, click Y).
- **Distinctive density**: mean TF-IDF-weighted unique-token fraction per result (mean = 0.460)

Jaccard and relevance spread are strongly anti-correlated ($\rho = -0.450$), confirming they measure different constructs.


5 Results

5.1 Saccade amplitude distinguishes survey from evaluation

Early saccades (fixations 1–5): 117 px median, 56% major (> 100 px). Late saccades (fixations 6+): 76 px median, 40% major. Per-trial amplitude slope over first 20 saccades: mean $\rho = -0.128$, $p = 1.5 \times 10^{-61}$ ($N = 991$).

SERP Evaluation: Forced-Choice Task

AdSERP paradigm — transactional product queries, must click

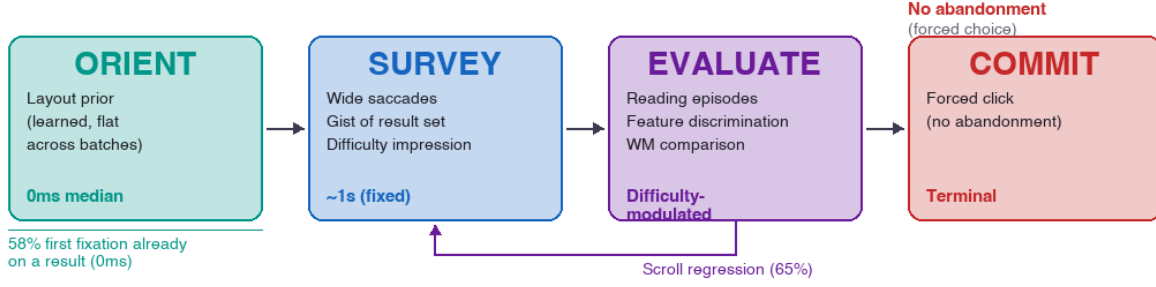

N = 2,776 trials | 47 participants | 60 unique queries | 10 trials each
 Survey: 3.5 saccades, 117px median amplitude | Evaluate: 76px median, 220ms/fixation
 Difficulty (relevance spread) □ Coverage ($p=0.098^{***}$), Click Y ($p=0.046^*$), Duration ($p=0.043^*$)

Figure 1: Orient–Survey–Evaluate–Commit task model as instantiated for the AdSERP forced-choice paradigm. Orient is collapsed (learned prior, 0 ms median). Survey is fixed-duration (~ 1 s). Evaluation duration is modulated by the difficulty impression formed during survey. No abandonment path (forced click).

5.2 Orientation is a learned prior

Median orientation time: 0 ms (58% of first fixations land on a result). No learning across batches ($\rho = 0.02$, $p = 0.30$). No within-participant trend ($\rho = -0.022$, $p = 0.26$).

5.3 Survey duration is content-independent

Mean 3.5 saccades, ~ 1 s. No correlation with relevance spread ($\rho = -0.000$), distinctive density ($\rho = 0.020$), or Jaccard ($\rho = -0.012$). All $p > 0.3$.

5.4 Relevance spread predicts evaluation strategy

Table 1: Spearman correlations: difficulty measure $\times$ behavioral DV ($N = 2,334$). Spread and density: positive ρ = easier SERPs $\rightarrow$ more of DV.

	Dur.	Fix.	Cov.	Reg.	Click Y
Jaccard	-.019	-.021	-.046*	.005	-.055**
Spread	.043*	.047*	.098***	.035	.046**
Density	.014	.015	.071***	.004	-.052*

Within-participant: relevance spread $\rightarrow$ coverage ($\bar{\rho} = 0.089$, $p < 0.001$) and duration ($\bar{\rho} = 0.042$, $p = 0.031$).

Tercile analysis (relevance spread): hard SERPs (low spread) produce 49.0% page coverage vs. 53.3% for easy SERPs ($p < 0.001$). Click Y: 814 px (hard) vs. 870 px (easy, $p = 0.047$).

5.5 Reading episodes and SERP difficulty

Episode pooling (minor saccade threshold 100 px): 95,328 episodes across 2,334 trials. 50.5% single-fixation, 49.5% multi-fixation (mean 2.16 fixations, 499 ms). Proportion of multi-fixation episodes is higher on hard SERPs ($p = 0.004$).

5.6 Fixation decomposition

Per-fixation duration flat at ~ 220 ms (range 202–228 ms across positions 0–9). Fixation count declines with position (~ 10 at position 0 $\rightarrow \sim 7$ at position 9). The position effect is an allocation decision, not a processing speed change.

6 Discussion

6.1 What the survey phase is

The survey phase is not orientation: the layout is known, first fixations land on a result region without preamble, and there is no learning effect across trials. It is also not reading: saccades are too wide (117 px median, $\sim 1.5\text{--}2\times$ the width of a single result block) for meaningful snippet comprehension. What remains is *patch-quality assessment*: an estimate of the decision landscape that the user builds before investing in committed evaluation. The fixed duration (~ 1 s regardless of SERP content, all difficulty correlations null at $p > 0.3$) is consistent with a sampling routine rather than a content-driven process—the user spends a bounded budget of fixations on gist extraction, regardless of what is actually on the page, then commits the fixed-length sample to a downstream strategy decision. What varies across trials is not the duration of the survey but its *output*: the impression the sample leaves behind, which subsequently modulates whether the user satisfices at the first plausible result or explores more deeply. This is exactly the functional form predicted by Simon-style bounded rationality: a cheap gist pass first, then an evaluation budget allocated on the basis of what the gist pass revealed.

6.2 Implications for click models

The cascade model and its descendants assume serial top-down examination—the user looks at position 0, decides, moves to position 1, decides, and so on. The survey phase

violates this assumption structurally, not marginally. Users sample 3–5 result positions with wide saccades before any of them receives committed evaluation, which means the *order* in which positions receive evaluation effort is not the order in which they first receive gaze. Position-bias research conflates two distinct kinds of exposure—survey exposure (gist sample) and evaluation exposure (committed reading)—because the underlying model has no construct that separates them. The practical consequence is that click-through rates at each position are a confounded measurement: they reflect survey attention plus evaluate attention plus commit attention, combined by a fitting procedure that has no way to pull them apart. A task-model layer does not replace click models; it gives them a place to hang the constructs that would let them disambiguate which kind of exposure a given click reflects. The near-term win for click modeling is not a new regression—it is a principled feature separation that makes the existing regressions interpretable.

6.3 Difficulty as discriminability

The strongest empirical difficulty signal in this dataset is not topical similarity (Jaccard, null) or embedding similarity (null within-position), but *relevance spread*: the standard deviation of query-result embedding similarities. Spread predicts coverage, click position, and duration where token overlap and average similarity do not. The interpretation is that transactional product queries are a discrimination problem, not a comprehension problem—the user does not need to understand the results, they need to identify the best one, and that identification is hard precisely when the top- k results are equidistant from the query in meaning space. This parallels the long-established query performance prediction tradition in IR, where Cronen-Townsend et al.’s clarity score [Cronen-Townsend et al. \[2002\]](#) and Shtok et al.’s Normalized Query Commitment [Shtok et al. \[2012\]](#) both use the shape of the retrieved-score distribution as a system-side difficulty signal. Relevance spread is the same primitive ported from lexical retrieval scores to dense embeddings and measured against *user-side* behavior. The fact that a QPP primitive carries user-side signal is itself evidence for the thesis: when the analyst looks for variance-based features with a task-level interpretation (how hard is it to discriminate?), the signal is there; when the analyst looks only at similarity-to-query, it disappears.

6.4 Limitations

The forced-choice paradigm eliminates two of the three natural exit paths from SERP evaluation and therefore inflates regression rates, eliminates the abandonment signal, and makes any stopping-rule claim provisional. Participants completed ~60 trials each, so the crisp phase transitions reported here likely reflect practiced behavior—the expert version of SERP scanning—rather than first-exposure behavior. The domain is narrow (product search on Google SERPs, transactional intent), so the survey-phase measurements should be treated as a lower bound for layout discovery cost on unfamiliar layouts. The Gazepoint GP3 HD tracker’s internal I-DT filter parameters are not publicly documented,

which limits the precision of any saccade-amplitude claim to within the tolerances of that filter. The 100 px minor-saccade threshold is principled (it is approximately the width of a single result block on the stimulus) but arbitrary with respect to individual participants’ vertical result spacing; sensitivity analyses in the notebook repository show the phase boundary is robust across nearby thresholds. Finally, the forward-vs.-regressive split in §3 is currently being refactored in the notebook pipeline to produce cleaner per-trial trajectories; the empirical numbers in that subsection should be read as provisional until that refactor lands.

7 Conclusion

The ORIENT–SURVEY–EVALUATE–COMMIT model provides an explicit cognitive task analysis at the granularity where web search evaluation actually happens—the 3–30 seconds between SERP render and first click. Two specific contributions sit on top of that task model. First, the survey phase: a ~1 s, fixed-duration gist-sampling routine, hypothesized by Zhang, Abualsaud & Smucker [Zhang et al. \[2018\]](#) and operationalized here at saccade granularity, whose *output*—not its duration—modulates subsequent evaluation depth. Second, the decomposition of evaluation into forward and regressive sub-processes, each with its own kinematic profile.

The larger point is the reason for writing the paper. Click models, feature-bag cursor classifiers, and end-to-end neural rankers all treat user behavior as a signal to decode. Each of those framings has delivered real engineering progress, and none of them is wrong. But the task-level phases in this paper—survey, forward evaluation, regressive re-evaluation—are not artifacts that those models failed to optimize; they are variables those models were never looking for in the first place. A task-model layer, built with the psychology and HCI vocabulary the field already has, recovers structure that pure-CS modeling of the same data misses. That is the claim this paper wants readers to take away: task models add a dimension, not just another feature.

References

- Ioannis Arapakis and Luis A. Leiva. Predicting user engagement with direct displays using mouse cursor information. In *Proceedings of the 39th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’16. ACM, 2016. doi: 10.1145/2911451.2911505. Mouse cursor predicts engagement with knowledge panels. Same Leiva/Arapakis team as AdSight.
- Lukas Brückner, Ioannis Arapakis, and Luis A. Leiva. A systematic examination of mouse movement length for decision making in web search. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM, 2021. doi: 10.1145/3404835.3463055. Same Leiva/Arapakis team as AdSight. Mouse movement length as decision signal.
- Duncan P. Brumby and Andrew Howes. Good enough but I’ll just check: Web-page search as attentional refocusing. In *Proceedings of the 6th International Conference on Cognitive Modeling*, ICCM ’04, 2004. Verified via CiteSeerX 2026-04-02.

- Georg Buscher, Susan T. Dumais, and Edward Cutrell. The good, the bad, and the random: An eye-tracking study of ad quality in web search. In *Proceedings of the 33rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '10. ACM, 2010. doi: 10.1145/1835449.1835459. Ad quality affects gaze patterns. Users develop different examination strategies for ads vs organic. Supports our ad_focused/ad_ignorant split.
- Olivier Chapelle and Ya Zhang. A dynamic Bayesian network click model for web search ranking. In *Proceedings of the 18th International Conference on World Wide Web*, WWW '09, pages 1–10. ACM, 2009. doi: 10.1145/1526709.1526711. Verified via ACM DL 2026-04-02.
- Aleksandr Chuklin, Ilya Markov, and Maarten de Rijke. *Click Models for Web Search*. Synthesis Lectures on Information Concepts, Retrieval, and Services. Morgan & Claypool, 2015. doi: 10.2200/S00654ED1V01Y201507ICR043. Comprehensive survey. Most models assume monotonic top-to-bottom examination; our regression data breaks this assumption.
- Nick Craswell, Onno Zoeter, Michael Taylor, and Bill Ramsey. An experimental comparison of click position-bias models. In *Proceedings of the 2008 International Conference on Web Search and Data Mining*, WSDM '08, pages 87–94. ACM, 2008. doi: 10.1145/1341531.1341545. Compares cascade, examination, and logistic position-bias models for clicks.
- Steve Cronen-Townsend, Yun Zhou, and W. Bruce Croft. Predicting query performance. In *Proceedings of the 25th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '02, pages 299–306. ACM, 2002. doi: 10.1145/564376.564429. Clarity score: KL divergence between query language model and collection language model. Founding pre-retrieval QPP predictor. DOI to re-verify against publisher metadata.
- Edward Cutrell and Zhiwei Guan. What are you looking for? An eye-tracking study of information usage in web search. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '07, pages 407–416. ACM, 2007. doi: 10.1145/1240624.1240690. Verified via ACM DL 2026-04-02.
- Georges E. Dupret and Benjamin Piwowarski. A user browsing model to predict search engine click data from past observations. In *Proceedings of the 31st Annual International ACM SIGIR Conference*, SIGIR '08, pages 331–338. ACM, 2008. doi: 10.1145/1390334.1390392. Verified via ACM DL 2026-04-02.
- Wai-Tat Fu and Peter Pirolli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806. Verified via Taylor & Francis 2026-04-02.
- Laura A. Granka, Thorsten Joachims, and Geri Gay. Eye-tracking analysis of user behavior in WWW search. In *Proceedings of the 27th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '04, pages 478–479. ACM, 2004. doi: 10.1145/1008992.1009079. Early SERP eye-tracking. Showed linear scan with rapid drop-off.
- Kayhan Latifzadeh, Jacek Gwizdka, and Luis A. Leiva. A versatile dataset of mouse and eye movements on search engine results pages. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3730325. Dataset on Zenodo: <https://zenodo.org/records/15236546>.
- Yiqun Liu, Chao Wang, Ke Zhou, Jian-Yun Nie, Min Zhang, and Shaoping Ma. From skimming to reading: A two-stage examination model for web search. In *Proceedings of the 23rd ACM International Conference on Information and Knowledge Management*, CIKM '14, pages 849–858. ACM, 2014. doi: 10.1145/2661829.2661907. Verified via ACM DL 2026-04-02. Two-phase SERP evaluation: skimming then reading. Both stages predictable from mouse. Cited by AdSight.
- Lori Lorigo, Maya Haridasan, Hrönn Brynjarsdóttir, Ling Xia, Thorsten Joachims, Geri Gay, Laura A. Granka, Fabio Pellacini, and Bing Pan. Eye tracking and online search: Lessons learned and challenges ahead. *Journal of the American Society for Information Science and Technology*, 59(7):1041–1052, 2008. doi: 10.1002/asi.20794. ~2/3 of scanpaths are nonlinear. Challenges sequential cascade assumptions.
- Peter Pirolli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643. Foundational IFT paper. Adapts optimal foraging theory to human information seeking.
- Anna Shtok, Oren Kurland, David Carmel, Fiana Raiber, and Gad Markovits. Predicting query performance by query-drift estimation. *ACM Transactions on Information Systems*, 30(2):11:1–11:35, 2012. doi: 10.1145/2180868.2180873. NQC (Normalized Query Commitment): standard deviation of top-*k* retrieval scores as a post-retrieval difficulty predictor. Direct conceptual ancestor of our *relevance spread* measure (std of dense query-document cosine similarity). DOI to re-verify against publisher metadata.
- Mario Villaizán-Valledo, Matteo Salvatori, Kayhan Latifzadeh, Antonio Penta, Luis A. Leiva, and Ioannis Arapakis. AdSight: Scalable and accurate quantification of user attention in multi-slot sponsored search. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3729891. Uses same dataset as Latifzadeh et al. [2025]. Transformer predicting fixation from mouse trajectories.
- Haotian Zhang, Mustafa Abualsaud, and Mark D. Smucker. A study of immediate requery behavior in search. In *Proceedings of the 2018 Conference on Human Information Interaction & Retrieval*, CHIIR '18, pages 181–190, New Brunswick, NJ, USA, 2018. ACM. doi: 10.1145/3176349.3176400. Documents a result inspection phase: users evaluate top 2-3 results to decide whether the SERP is worth continued evaluation or immediate requery. Prior observation of what we call the Survey phase, in the context of the stay/reformulate decision that AdSERP's forced-choice task eliminates.

A Reproducibility and Interactive Materials

All analysis code, notebooks, and interactive demos are available at:

- **Repository:** <https://github.com/andyed/attentional-foraging>

- **Interactive scanpath replays:** <https://andyed.github.io/attentional-foraging/> — 10 curated trials with foveated vision rendering, playback controls, and gaze point toggle

Notebooks (rendered via nbviewer):

Analysis	Notebook
Ski-jump decomposition	00_skijump.ipynb
Convergence & click prediction	01_convergence.ipynb
Fixation decomposition	04_fixation_coverage.ipynb
LHIPA cognitive load	05_lhipa.ipynb
Orientation & evaluation	06_orientation_evaluation.ipynb
Regressions (prevalence, triggers, kinematics)	07a-c_regressions_*.ipynb
Lexical priming (null)	08_priming.ipynb
SERP difficulty & episodes	09_difficulty.ipynb
User strategies	10_strategies.ipynb
Individual differences	11_individual_differences.ipynb

Findings document: `docs/findings.md` — comprehensive write-up with all statistical tests (v7).