

Orient–Survey–Evaluate–Commit: A Cognitive Task Model for SERP Evaluation

PRE-SUBMISSION DRAFT — Do not distribute

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of April 3, 2026

Abstract. We propose a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—grounded in eye-tracking evidence from 2,776 product search trials (AdSERP dataset, 47 participants). Saccade amplitude analysis reveals a previously unidentified *survey phase*: ~ 3.5 wide saccades (117px median) over ~ 1 s, during which users sample the result set before committing to reading. The survey–evaluate transition is marked by an amplitude drop detectable at $p = 10^{-61}$ within individual trials. Survey duration is fixed and does not respond to SERP content, but its output—an impression of result set composition—modulates subsequent evaluation strategy. We operationalize SERP difficulty as *relevance spread* (variance in query-result embedding similarity) and show it predicts page coverage ($\rho = 0.098$, $p < 0.001$), click position ($\rho = 0.046$, $p = 0.047$), and trial duration ($\rho = 0.043$, $p = 0.031$), all within-participant. The model bridges session-level information seeking models, implicit task assumptions in click models, and HCI task analysis at the granularity where search evaluation actually happens: the 3–30 seconds between SERP render and first click.

1 Introduction

Every phase in this model has been studied in isolation. Orientation is implicit in click models’ position-bias assumptions. The scanning-then-reading progression appears in Liu et al.’s two-stage model Liu et al. [2014]. Committed evaluation is the subject of decades of relevance assessment research. Satisficing as a stopping rule is central to Payne & Duggan’s foraging account. Scroll regressions are documented by Lorigo et al. Lorigo et al. [2008]. What has not been done is to identify these as phases of a single task with measurable transitions between them.

The contribution is the *survey phase* and the saccadic evidence for phase boundaries. Click models assume serial top-down examination. Eye-tracking studies describe “scanning” but do not separate gist sampling (wide saccades, 117px median) from committed reading (narrow saccades, 76px). The amplitude transition at fixation ~ 5 ($p = 10^{-61}$) is the evidence that these are distinct cognitive operations.

We test this decomposition on a forced-choice product search task (AdSERP) that eliminates two of the three natural exit paths from SERP evaluation—reformulation and abandonment. This isolates the orient–survey–evaluate–commit sequence but cannot characterize the full foraging decision (stay, refine, or quit). Validating the complete

model requires production log data with natural stopping behavior.

2 Related Work

Each phase of our model has precedent in the literature. The contribution is not any single phase but the identification of measurable transitions between them.

2.1 Process models of information seeking

Stub. Kuhlthau ISP, Marchionini 8 sub-processes, Bates berrypicking, Belkin ASK. These model the full search session. Our work zooms into Marchionini’s “examine results” sub-process and decomposes it further. Session-level models don’t predict within-SERP behavior.

2.2 Click models as implicit task models

Stub. Cascade Craswell et al. [2008] assumes serial top-down examination with a stopping rule—implicitly modeling EVALUATE + COMMIT. DBN Chapelle and Zhang [2009] adds skip/examine decisions—implicitly modeling what we call the survey impression. UBM Dupret and Piwowarski [2008] adds position-dependent examination probability—implicitly modeling orientation effects. Each encodes one or two phases as statistical parameters without identifying the cognitive operations that generate them.

2.3 Two-stage examination models

Stub. Liu et al. Liu et al. [2014]: skimming $\rightarrow$ reading. Closest prior work—explicitly identifies two temporal phases. Our model adds ORIENT before skimming, decomposes their “skimming” into SURVEY (gist, wide saccades) and early EVALUATE (committed reading, narrow saccades), and provides the saccade amplitude marker for the transition.

2.4 Eye tracking on SERPs

Stub. Granka et al. Granka et al. [2004]: initial scan then re-examination—evidence for phase structure, not formalized. Cutrell & Guan Cutrell and Guan [2007]: snippet length shifts evaluation effort—the survey phase determines how much reading is needed. Lorigo et al. Lorigo et al. [2008]: $\sim 2/3$ of scanpaths are non-sequential—challenges cascade assumption, consistent with survey-phase sampling. Buscher et al. 2010: distinct ad vs. organic fixation patterns—visual classification during orientation.

2.5 Foraging theory and satisficing

Stub. Pirolli & Card [1999]: information scent guides patch assessment—the theoretical account for what the survey phase computes. SNIF-ACT [2007]: ACT-R implementation of scent-based navigation—models the EVALUATE $\rightarrow$ COMMIT transition as spreading activation. Payne & Duggan: satisficing with aspiration levels—models the commit decision. Brumby & Howes [2004]: “good enough but I’ll just check”—directly models the survey $\rightarrow$ evaluate transition as attentional refocusing.

2.6 Task analysis in HCI

Stub. GOMS (Card, Moran & Newell 1983) provides the methodology for decomposing tasks into cognitive, perceptual, and motor operators. Hornof & Kieras 1997: CPM-GOMS for menu search—interleaved systematic and opportunistic scanning within a display, directly analogous to survey + evaluate. The language and tools exist in HCI but have not been applied at the SERP evaluation granularity.

3 The Model

3.1 Orient

Layout recognition. For familiar SERP layouts, this is a learned prior: 58% of AdSERP trials show first fixation already on a result (0 ms orientation). No learning effect across 60 trials ($\rho = 0.02$, $p = 0.30$).

3.2 Survey

Wide saccades (117 px median), ~ 3.5 fixations, ~ 1 s. Gist sampling: the user builds an impression of result set composition without committed reading. Duration is *fixed*—does not correlate with any difficulty measure (all $p > 0.3$). The survey’s output, not its duration, modulates subsequent behavior.

3.3 Evaluate

Narrow saccades (76 px median). Consecutive fixations on the same result connected by minor saccades (< 100 px) form *reading episodes*: mean 2.16 fixations, 499 ms. Per-fixation duration is flat (~ 220 ms across all positions). The position effect in total fixation time is driven by fixation count, not processing speed. Forward-only dwell *increases* with position ($\rho = +0.82$), consistent with working memory accumulation.

3.4 Commit

Click. Satisficing threshold crossed. In AdSERP (forced choice), every trial ends with a click. In naturalistic search, this phase competes with abandonment and query reformulation.

3.5 Regression loop

65% of trials include at least one scroll regression (Evaluate $\rightarrow$ re-Survey). Backward scrolling is ballistic ($\rho = 0.867$), with 87% of regression targets at positions 0–4. Regression velocity mediates the dwell delta ($\rho = -0.762$, $p = 0.017$).

4 Data and Methods

4.1 AdSERP dataset

AdSERP [2025]: 2,776 trials, 47 participants, 60 unique product purchase queries (“buy [brand] [product]”). 10 trials per participant across 6 batches. Gazepoint GP3 HD eye tracker (150 Hz). Fixations pre-segmented by the tracker’s internal I-DT filter (FPOG stream). Mean fixation duration 219 ms, median 193 ms.

4.2 Saccade classification

Saccade amplitude computed as Euclidean distance between consecutive fixation coordinates (FPOGX, FPOGY in screen pixels). Minor saccade threshold: 100 px. Fixations < 60 ms filtered as sub-threshold artifacts (1.4% of data).

4.3 Phase identification

Survey–evaluate transition: sliding window of 3 saccades. First window where mean amplitude < 100 px marks the transition. Median transition at saccade 2 (51% of trials transition within first 2 saccades).

4.4 SERP difficulty measures

Three measures computed per SERP:

- **Jaccard:** mean pairwise token-set overlap across results (mean = 0.151)
- **Relevance spread:** std of query–result cosine similarity (mxbai-embed-large, 1024-d). Low spread = all results equidistant from query = hard (mean = 0.052)
- **Distinctive density:** mean TF-IDF-weighted unique-token fraction per result (mean = 0.460)

Jaccard and relevance spread are strongly anti-correlated ($\rho = -0.450$), confirming they measure different constructs.

5 Results

5.1 Saccade amplitude distinguishes survey from evaluation

Early saccades (fixations 1–5): 117 px median, 56% major (> 100 px). Late saccades (fixations 6+): 76 px median, 40% major. Per-trial amplitude slope over first 20 saccades: mean $\rho = -0.128$, $p = 1.5 \times 10^{-61}$ ($N = 991$).

5.2 Orientation is a learned prior

Median orientation time: 0 ms (58% of first fixations land on a result). No learning across batches ($\rho = 0.02$, $p = 0.30$). No within-participant trend ($\rho = -0.022$, $p = 0.26$).

5.3 Survey duration is content-independent

Mean 3.5 saccades, ~ 1 s. No correlation with relevance spread ($\rho = -0.000$), distinctive density ($\rho = 0.020$), or Jaccard ($\rho = -0.012$). All $p > 0.3$.


5.4 Relevance spread predicts evaluation strategy

Within-participant: relevance spread $\rightarrow$ coverage ($\bar{\rho} = 0.089$, $p < 0.001$) and duration ($\bar{\rho} = 0.042$, $p = 0.031$).

Tercile analysis (relevance spread): hard SERPs (low spread) produce 49.0% page coverage vs. 53.3% for easy

SERP Evaluation: Forced-Choice Task

AdSERP paradigm — transactional product queries, must click

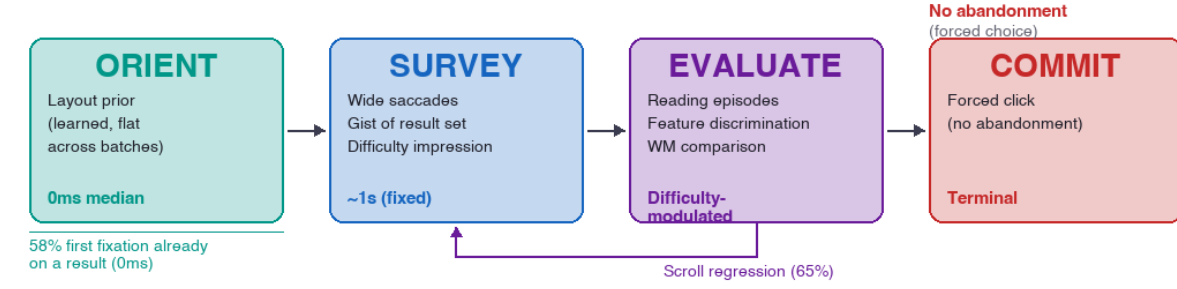

N = 2,776 trials | 47 participants | 60 unique queries | 10 trials each
 Survey: 3.5 saccades, 117px median amplitude | Evaluate: 76px median, 220ms/fixation
 Difficulty (relevance spread) □ Coverage ($p=0.098^{***}$), Click Y ($p=0.046^*$), Duration ($p=0.043^*$)

Figure 1: Orient–Survey–Evaluate–Commit task model as instantiated for the AdSERP forced-choice paradigm. Orient is collapsed (learned prior, 0 ms median). Survey is fixed-duration (~ 1 s). Evaluation duration is modulated by the difficulty impression formed during survey. No abandonment path (forced click).

Table 1: Spearman correlations: difficulty measure $\times$ behavioral DV ($N = 2,334$). Spread and density: positive ρ = easier SERPs $\rightarrow$ more of DV.

	Dur.	Fix.	Cov.	Reg.	Click Y
Jaccard	-.019	-.021	-.046*	.005	-.055**
Spread	.043*	.047*	.098***	.035	.046*
Density	.014	.015	.071***	.004	-.052*

SERPs ($p < 0.001$). Click Y: 814 px (hard) vs. 870 px (easy, $p = 0.047$).

5.5 Reading episodes and SERP difficulty

Episode pooling (minor saccade threshold 100 px): 95,328 episodes across 2,334 trials. 50.5% single-fixation, 49.5% multi-fixation (mean 2.16 fixations, 499 ms). Proportion of multi-fixation episodes is higher on hard SERPs ($p = 0.004$).

5.6 Fixation decomposition

Per-fixation duration flat at ~ 220 ms (range 202–228 ms across positions 0–9). Fixation count declines with position (~ 10 at position 0 $\rightarrow$ ~ 7 at position 9). The position effect is an allocation decision, not a processing speed change.

6 Discussion

6.1 What the survey phase is

Stub. Not orientation (layout is known). Not reading (saccades too wide). It’s patch quality assessment—estimating the decision landscape before investing in evaluation. Fixed duration suggests a sampling routine, not a content-driven process. Output modulates strategy: satisfice early vs. explore deeply.

6.2 Implications for click models

Stub. Cascade model assumes serial top-down. Survey violates this—users sample 3–5 results before systematic evaluation. Position bias research conflates survey exposure with evaluation exposure.

6.3 Difficulty as discriminability

Stub. Bag-of-words and embedding similarity are null within-position. Relevance spread works because it captures “is there an obvious best answer?” These are transactional queries—the user needs to discriminate, not comprehend.

6.4 Limitations

Stub. Forced-choice paradigm. Product search only. GP3 HD filter parameters unknown. 100 px threshold principled but arbitrary. No novel layout variation (all Google SERPs). Survey duration ceiling from repeat trials.

7 Conclusion

Stub. The orient–survey–evaluate–commit model provides an explicit cognitive task analysis at the granularity where search evaluation happens. The survey phase is the key contribution: a fixed-duration gist sampling routine whose output modulates subsequent foraging strategy.

References

- Duncan P. Brumby and Andrew Howes. Good enough but I’ll just check: Web-page search as attentional refocusing. In *Proceedings of the 6th International Conference on Cognitive Modeling*, ICCM ’04, 2004. Verified via CiteSeerX 2026-04-02.
- Olivier Chapelle and Ya Zhang. A dynamic Bayesian network click model for web search ranking. In *Proceedings of the 18th International Conference on World Wide Web*, WWW ’09, pages 1–10. ACM, 2009. doi: 10.1145/1526709.1526711. Verified via ACM DL 2026-04-02.

Nick Craswell, Onno Zoeter, Michael Taylor, and Bill Ramsey. An experimental comparison of click position-bias models. In *Proceedings of the 2008 International Conference on Web Search and Data Mining*, WSDM '08, pages 87–94. ACM, 2008. doi: 10.1145/1341531.1341545. Compares cascade, examination, and logistic position-bias models for clicks.

Edward Cutrell and Zhiwei Guan. What are you looking for? An eye-tracking study of information usage in web search. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '07, pages 407–416. ACM, 2007. doi: 10.1145/1240624.1240690. Verified via ACM DL 2026-04-02.

Georges E. Dupret and Benjamin Piwowarski. A user browsing model to predict search engine click data from past observations. In *Proceedings of the 31st Annual International ACM SIGIR Conference*, SIGIR '08, pages 331–338. ACM, 2008. doi: 10.1145/1390334.1390392. Verified via ACM DL 2026-04-02.

Wai-Tat Fu and Peter Pirolli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806. Verified via Taylor & Francis 2026-04-02.

Laura A. Granka, Thorsten Joachims, and Geri Gay. Eye-tracking analysis of user behavior in WWW search. In *Proceedings of the 27th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '04, pages 478–479. ACM, 2004. doi: 10.1145/1008992.1009079. Early SERP eye-tracking. Showed linear scan with rapid drop-off.

Kayhan Latifzadeh, Jacek Gwizdka, and Luis A. Leiva. A versatile dataset of mouse and eye movements on search engine results pages. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3730325. Dataset on Zenodo: <https://zenodo.org/records/15236546>.

Yiqun Liu, Chao Wang, Ke Zhou, Jian-Yun Nie, Min Zhang, and Shaoping Ma. From skimming to reading: A two-stage examination model for web search. In *Proceedings of the 23rd ACM International Conference on Information and Knowledge Management*, CIKM '14, pages 849–858. ACM, 2014. doi: 10.1145/2661829.2661907. Verified via ACM DL 2026-04-02. Two-phase SERP evaluation: skimming then reading. Both stages predictable from mouse. Cited by AdSight.

Lori Lorigo, Maya Haridasan, Hrönn Brynjarsdóttir, Ling Xia, Thorsten Joachims, Geri Gay, Laura A. Granka, Fabio Pellacini, and Bing Pan. Eye tracking and online search: Lessons learned and challenges ahead. *Journal of the American Society for Information Science and Technology*, 59(7):1041–1052, 2008. doi: 10.1002/asi.20794. ~2/3 of scanpaths are nonlinear. Challenges sequential cascade assumptions.

Peter Pirolli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643. Foundational IFT paper. Adapts optimal foraging theory to human information seeking.

A Reproducibility and Interactive Materials

All analysis code, notebooks, and interactive demos are available at:

- **Repository:** <https://github.com/andyed/attentional-foraging>
- **Interactive scanpath replays:** <https://andyed.github.io/attentional-foraging/> — 10 curated trials with foveated vision rendering, playback controls, and gaze point toggle

Notebooks (rendered via nbviewer):

Analysis	Notebook
Fixation decomposition	<code>fixation_coverage.ipynb</code>
Scroll regressions	<code>scroll_regressions.ipynb</code>
Scroll kinematics	<code>scroll_kinematics.ipynb</code>
User strategies	<code>user_strategies.ipynb</code>
Lexical priming (null)	<code>serp_priming.ipynb</code>
SERP difficulty & episodes	<code>serp_difficulty.ipynb</code>
Orientation & evaluation	<code>orientation_evaluation.ipynb</code>
LHIPA validation	<code>lhipa_validation.ipynb</code>
Regression decisions	<code>regression_decisions.ipynb</code>

Findings document: `docs/findings.md` — comprehensive write-up with all statistical tests (v4, updated continuously).