


The searcher does not stop where they stop looking

C/W/L derives the stopping distribution from one descent: stop = deepest rank reached. Every AdSERP trial ends in a click, so the observed stop is the clicked rank; the two are compared per trial. Trials with viewport opportunity known on every slot; ranks bucketed at 10 or deeper for both distributions. Fixations are whole-trial; 82% with fixations after the mouse press removed. [LAB, AdSERP, typed]

(a) Framework stop vs clicked rank (n = 2,151 trials)

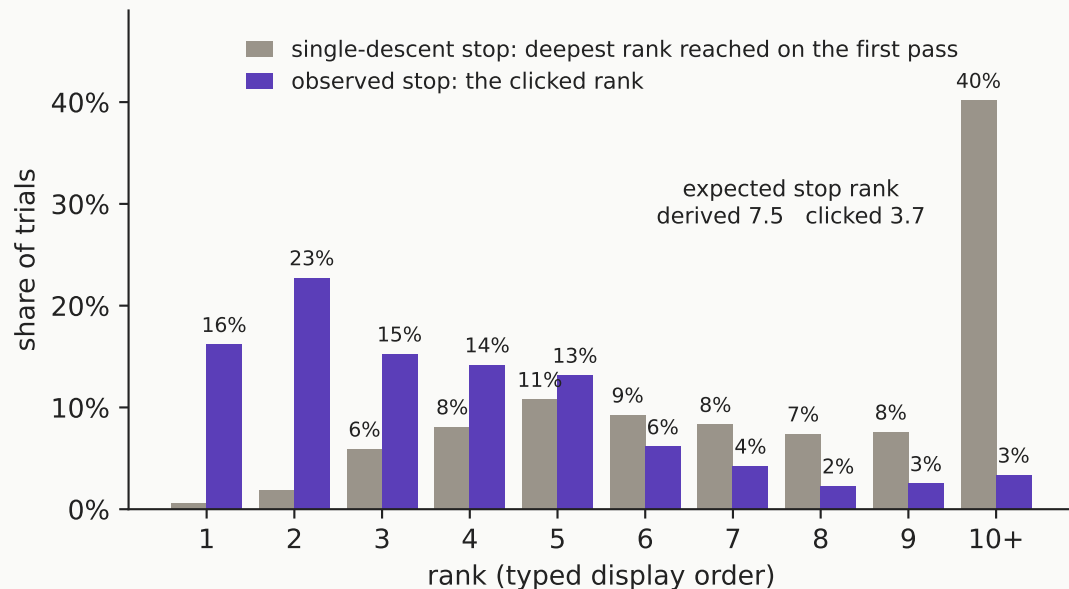

(b) Deepest rank examined minus clicked rank

