

Orient–Survey–Evaluate–Commit: A Cognitive Task Model for SERP Evaluation

Preprint — under revision

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of April 27, 2026

Abstract. We propose a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—in the rational-analysis tradition that runs from Anderson [\[1990\]](#), [Anderson and Schooler \[1991\]](#) through Pirolli & Card’s information foraging [Pirolli and Card \[1999\]](#) and Fu & Pirolli’s SNIF-ACT [Fu and Pirolli \[2007\]](#). The model takes that lineage to saccade-level granularity, grounded in eye-tracking evidence from 2,776 product search trials (AdSERP dataset, 47 participants). Saccade amplitude analysis identifies the SURVEY phase as ~ 3.5 wide saccades (107.8 px median) over ~ 1 s, during which users sample the result set before committing to reading. The survey–evaluate transition is marked by an amplitude drop detectable at $p = 9.3 \times 10^{-168}$ within individual trials ($N = 2,754$). Survey duration is fixed and does not respond to SERP content, but its output—an impression of result set composition—modulates subsequent evaluation strategy. The Survey/Evaluate split converges with a structurally analogous decomposition arrived at independently from the economic-IR tradition: Zhang & Gwizdka’s PCA on search-cost variables [Zhang and Gwizdka \[2016\]](#) recovers exploratory and validation processes that map onto Survey and Evaluate, and Zhang, Abualsaud & Smucker [Zhang et al. \[2018\]](#) hypothesize a result-inspection phase consistent with the same mechanism. We operationalize SERP difficulty as *relevance spread* (variance in query-result embedding similarity) and show it predicts page coverage, click position, and trial duration within-participant. The model adds a within-evaluation axis neither tradition has decomposed: *forward* evaluation and *regressive* re-evaluation are distinct sub-processes within the same task, with cursor-gaze coupling tighter for regressive than forward fixations across acquisition, evaluation, and scanning windows (37/46 participants in the predicted direction; Wilcoxon $p = 4.8 \times 10^{-5}$).

1 Introduction

Information search has been analyzed as a cost-rational adaptation since Anderson’s rational analysis of cognition [\[1990\]](#), which frames cognitive performance as cost-optimized to the structure of the environment. Anderson & Schooler [\[1991\]](#) model memory retrieval probability as a Bayesian function of environmental need probability—retrieval as relevance estimation. Pirolli & Card’s information foraging theory [\[1999\]](#) operationalizes this account for information search: scent-driven patch assessment with marginal-value-theorem stopping. Fu & Pirolli’s SNIF-ACT [\[2007\]](#) gives the framework an ACT-R implementation in

which the patch-leaving decision is spreading activation over scent values. The granularity beneath SNIF-ACT—saccade-level decomposition of within-SERP evaluation cost—has not yet been reached.

Click models [Craswell et al. \[2008\]](#), [Chapelle and Zhang \[2009\]](#), [Dupret and Piwowarski \[2008\]](#), [Chuklin et al. \[2015\]](#) parameterize examination and stopping but do not connect their parameters to the rational-analysis lineage. Cursor-feature classifiers extract feature bags from mouse trajectories [Arapakis and Leiva \[2016\]](#); transformer sequence models learn end-to-end maps from raw (x, y, t) to click [Villaizán-Vallelado et al. \[2025\]](#), [Brückner et al. \[2021\]](#). These deliver real engineering gains but treat user behavior as a signal to decode rather than as a cost-allocation process. We model that process explicitly with a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—with measurable transitions between phases and a within-evaluation *forward/regressive* axis no prior account has decomposed.

Each phase in the model has precedent in the literature taken in isolation. Orientation is implicit in click models’ position-bias assumptions. Scanning-then-reading appears in Liu et al.’s two-stage examination model [\[2014\]](#). The SURVEY phase converges with two findings from a different theoretical backbone—the economic-IR cost-modeling tradition (Stigler 1961, Varian 1999, Azzopardi [\[2011, 2014\]](#)): Zhang & Gwizdka’s [\[2016\]](#) factor-analytic decomposition of search cost into exploratory and validation processes, and Zhang, Abualsaud & Smucker’s [\[2018\]](#) mechanistic hypothesis of a result-inspection phase. Committed evaluation is the subject of decades of relevance-assessment research. Satisficing as a stopping rule is central to the foraging account. Scroll regressions are documented by Lorigo et al. [\[2008\]](#). The contribution is the synthesis: identifying these as phases of a single task with measurable transitions, and adding a within-evaluation forward/regressive axis that no prior account in either tradition has decomposed.

The empirical anchor is a saccade amplitude transition at fixation ~ 5 ($p = 9.3 \times 10^{-168}$, $N = 2,754$ trials), operationalizing the survey phase Zhang et al. hypothesized seven years earlier. Click models cannot see this because they examine clicks, not saccades; end-to-end cursor learn-

ers cannot see it because they lack the task-level concept of a phase boundary to look for. The decomposition is recoverable only if the analyst is looking for phase structure in the first place.

We test the decomposition on a forced-choice product search task (AdSERP) that eliminates two of the three natural exit paths from SERP evaluation—reformulation and abandonment. This isolates the orient–survey–evaluate–commit sequence but cannot characterize the full foraging decision (stay, refine, or quit). Validating the complete model requires production log data with natural stopping behavior.

2 Related Work

OSEC sits inside a three-decade lineage that has progressively decomposed search cost at finer and finer granularities. We review the lineage explicitly, then turn to what has *not* yet been decomposed—the within-evaluation forward/regressive axis that this paper adds.

2.1 Rational-analysis cognitive psychology of search

The model sits in the rational-analysis tradition that runs from Anderson through Pirolli & Card. Anderson [Anderson \[1990\]](#) frames cognitive performance as cost-optimized adaptation to the structure of the environment. Anderson & Schooler [Anderson and Schooler \[1991\]](#) provide the empirical instantiation: memory retrieval probability tracks the environmental statistics of need probability—retrieval as relevance estimation. Pirolli & Card’s information foraging theory [Pirolli and Card \[1999\]](#) operationalizes the account for information search: scent-driven patch-quality assessment with marginal-value-theorem stopping. Fu & Pirolli’s SNIF-ACT [Fu and Pirolli \[2007\]](#) gives the framework an ACT-R implementation in which patch-leaving is spreading activation over scent values. Brumby & Howes [Brumby and Howes \[2004\]](#) capture a fast/slow two-phase structure (“good enough but I’ll just check”) consistent with the same lineage. Satisficing with aspiration levels (Payne & Duggan, following Simon) models the commit decision as a threshold crossing rather than an optimization. Each rung operationalizes search behavior at a finer granularity. OSEC takes the granularity below SNIF-ACT: saccade-level decomposition of within-SERP evaluation cost, with phase boundaries identifiable trial-by-trial.

2.2 Convergent decomposition from the economic-IR tradition

A separate research tradition arrives at a structurally analogous decomposition by a different route. Stigler’s economics of information [Stigler \[1961\]](#) and Varian’s SIGIR 1999 keynote [Varian \[1999\]](#) opened a cost-economic line in IR that Azzopardi’s economic models of interactive retrieval [Azzopardi \[2011, 2014\]](#) formalized: production costs (per-query, per-snippet, per-document inspection), benefit functions (relevance returned per unit time), and stopping rules derived from microeconomic theory. Zhang & Gwizdka [Zhang and Gwizdka \[2016\]](#) took this line empirical: a PCA of six search-cost variables (time and word-count on unproductive queries, SERP fixation count, time and fixation-count on the

task description, fixation-count on unproductive documents) recovered two well-separated factors with cross-loadings near zero, which they labelled *exploratory process* (loading on query-issuing and SERP scanning) and *validation process* (loading on task-description re-reading and unproductive-document reading), and mapped onto Kuhlthau’s Initiation/Selection/Exploration vs Formulation/Collection stages and Marchionini’s Define/Select/Formulate/Execute vs Examine Results stages.

The decomposition is structurally analogous to a Survey-then-Evaluate split, recovered at participant-aggregate granularity from search-cost variables alone. The two traditions share no central citations: Anderson, Pirolli & Card, and SNIF-ACT do not appear in Zhang & Gwizdka’s reference list, and Stigler, Varian, and Azzopardi are absent from the rational-analysis literature OSEC inherits from. That two independently developed cost frameworks—one psychological, one economic—recover the same two-factor decomposition is a robustness signal for the decomposition itself: not a single tradition’s idiosyncratic carving of the data, but a structure that survives translation across vocabularies. Zhang, Abualsaud & Smucker’s [Zhang et al. \[2018\]](#) mechanistic hypothesis of a “result inspection phase” gating the stay-or-reformulate decision is consistent with the same survey-phase structure at the per-trial decision level.

We note one cost-variable mismatch with the economic-IR factor structure: Zhang & Gwizdka’s *exploratory* factor includes the cost of generating new queries, which OSEC does not (query generation is upstream of ORIENT); their *validation* factor includes task-description re-reading, which has no OSEC analog. The mappings are analogous, not identical—the convergence is on structure, not on cost-variable composition.

2.3 Process models of information seeking

The HCI and information-science tradition models search as a process with identifiable stages. Kuhlthau’s Information Search Process (ISP) identifies six affective and cognitive stages across a multi-session inquiry. Marchionini’s eight sub-processes decompose a single search episode into recognize, accept, define, select, formulate, execute, examine, extract. Bates’s berrypicking abandons the single-query assumption and models search as an evolving sequence of refinements. Belkin’s Anomalous State of Knowledge frames the whole activity as a cognitive gap-closing operation. These models are powerful at the session scale and anchor the HCI/IS view of search behavior, but they are too coarse to predict what happens during the 3–30 seconds between SERP render and first click. Zhang & Gwizdka’s [Zhang and Gwizdka \[2016\]](#) factor-analytic decomposition (§2.2) brought them down one level. Our work continues that descent.

2.4 Click models as implicit cost models

The IR click-modeling tradition encodes assumptions about cost without labelling them as such. The cascade model [Craswell et al. \[2008\]](#) assumes serial top-down examination with a stopping rule—in cost-decomposition vo-

cabulary, an undifferentiated cost-allocation policy that pays per-position inspection cost and stops when the running benefit clears a threshold. The Dynamic Bayesian Network click model [Chapelle and Zhang \[2009\]](#) adds per-position skip/examine decisions that implicitly modulate the inspection-cost rate. The User Browsing Model [Dupret and Piwowarski \[2008\]](#) parameterizes position-dependent examination probability and, through the distance-to-last-click term, implicitly models orientation cost. The comprehensive survey by Chuklin et al. [Chuklin et al. \[2015\]](#) makes the pattern visible across the family. Every one of these models is a parameterized cost-allocation policy without explicit cognitive grounding. Connecting their parameters to the cost-rational lineage of §2.1—instead of fitting them in isolation—is the route to interpretable parameters that compose, validate against behavioral data, and transfer across paradigms.

2.5 Two-stage examination models

Liu et al. [Liu et al. \[2014\]](#) provide the closest finergularity empirical precedent for the Survey/Evaluate split: a two-stage examination model in which users skim a SERP before reading specific results, with both stages predictable from cursor data. Our model adds ORIENT before skimming and decomposes Liu et al.’s “skimming” into SURVEY (gist sampling, wide saccades) and early EVALUATE (committed reading, narrow saccades), with a saccade-amplitude marker for the phase boundary. Brumby & Howes [Brumby and Howes \[2004\]](#) (§2.1) capture the same fast/slow structure within the rational-analysis lineage at a different task. Zhang, Abualsaud & Smucker’s [Zhang et al. \[2018\]](#) result-inspection-phase hypothesis (§2.2) is the same survey-phase mechanism observed in the requery context. Our contribution relative to these precedents is saccade-level measurement that pulls the phase into a continuous trial-by-trial structure.

2.6 Eye tracking on SERPs

The eye-tracking literature has been describing phase structure since the mid-2000s without naming it. Granka et al. [Granka et al. \[2004\]](#) reported an initial rapid scan followed by re-examination—phase structure in the data, unformalized. Cutrell & Guan [Cutrell and Guan \[2007\]](#) showed that snippet length shifts evaluation effort, which we read as the survey phase setting the cost budget for the evaluate phase. Lorigo et al. [Lorigo et al. \[2008\]](#) reported that $\sim 2/3$ of SERP scanpaths are non-sequential, challenging the cascade assumption and consistent with a survey phase sampling several positions before committed reading. Buscher, Dumais & Cutrell [Buscher et al. \[2010\]](#) documented distinct ad vs. organic fixation patterns, which our companion work [Arapakis and Leiva \[2016\]](#) extends to a discrimination-cost argument at the cursor level. The phase structure is in the data; what has been missing is a task-model vocabulary that lifts it into a form click models can consume.

2.7 The forward/regressive axis at SERP-evaluation granularity

Within-SERP forward and regressive evaluation has not been decomposed at task-model granularity by either tradition this paper draws on. The rational-analysis lineage (§2.1) is mode-agnostic at the within-patch level: Pirolli & Card model patch-leaving as a directional decision but do not split within-patch fixations by direction; SNIF-ACT’s spreading-activation account is direction-neutral. The economic-IR lineage (§2.2) parameterizes unit costs without distinguishing forward inspection from regressive re-inspection, and Zhang & Gwizdka’s PCA pools all SERP fixations into a single F_{SERP} variable. Liu et al.’s two-stage examination distinguishes skimming from reading temporally, not directionally.

Two adjacent literatures formalize forward/regressive at different granularities. Reading research—reviewed by Rayner [Rayner \[1998\]](#)—models word-sequence regressions explicitly: roughly 10–15% of fixations during text reading are saccadic regressions used to recover comprehension, and process models like E-Z Reader formalize their dynamics. Our forward/regressive split is at SERP-evaluation granularity using a scroll-position high-water-mark classifier, not within-result-saccade direction; the constructs are related but not identical. In the IR-evaluation tradition, the C/W/L framework [Moffat et al. \[2017\]](#) models per-rank continuation probability as the stay/leave decision, decomposing examination effort by rank but not by direction within rank. The within-SERP forward/regressive split sits in the space between: it is the within-patch direction axis that reading research formalizes for word sequences and that IR-evaluation models leave folded into rank-level continuation. We treat forward and regressive evaluation as task-level modes with separate motor, pupillometric, and geometric signatures (§5.7), not as a saccade-classification artifact.

2.8 Task analysis in HCI

The methodology for decomposing tasks into cognitive, perceptual, and motor operators has existed since GOMS (Card, Moran & Newell, 1983). Hornof & Kieras’s CPM-GOMS analyses of menu search show interleaved systematic and opportunistic scanning within a single display—directly analogous to our survey plus evaluate decomposition, applied decades ago at a slightly different granularity. Gray et al.’s soft-constraints hypothesis [Gray et al. \[2006\]](#) provides the rational-analysis framing at the millisecond scale, treating microstrategy selection as cost-optimized resource allocation. The methodology and vocabulary both exist; bringing them to bear on SERP evaluation at the 3–30 second granularity, in a form click models can consume, is the connecting move this paper attempts.

3 The Model

3.1 Orient

Layout recognition. For familiar SERP layouts, this is a learned prior: 58% of AdSERP trials show first fixation already on a result (0 ms orientation). No learning effect

SERP Evaluation: Forced-Choice Task

AdSERP paradigm — transactional product queries, must click

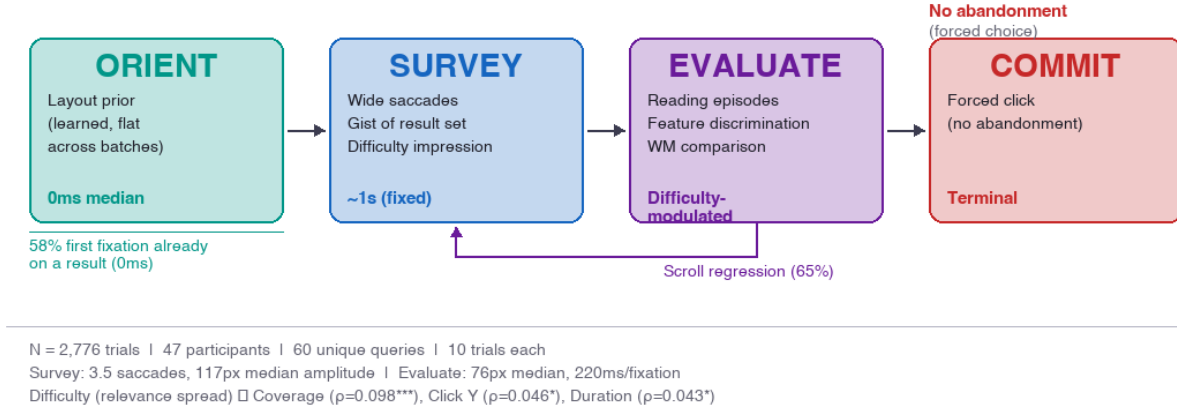


Figure 1: Orient–Survey–Evaluate–Commit task model as instantiated for the AdSERP forced-choice paradigm. Orient is collapsed (learned prior, 0 ms median). Survey is fixed-duration (~ 1 s). Evaluation duration is modulated by the difficulty impression formed during survey. No abandonment path (forced click).

across 60 trials ($\rho = 0.02$, $p = 0.30$).

3.2 Survey

Wide saccades (107.8 px median), ~ 3.5 fixations, ~ 1 s. Gist sampling: the user builds an impression of result set composition without committed reading. Duration is *fixed*—does not correlate with any difficulty measure (all $p > 0.3$). The survey’s output, not its duration, modulates subsequent behavior.

3.3 Evaluate

Narrow saccades (69.4 px median). Consecutive fixations on the same result connected by minor saccades (< 100 px) form *reading episodes*: mean 2.16 fixations, 499 ms. Per-fixation duration is flat (~ 220 ms across all positions). The position effect in total fixation time is driven by fixation count, not processing speed. Forward-only dwell *increases* with position ($\rho = +0.82$), consistent with growing comparison-set size under framework compilation (per-position cognitive load *decreases*; see Butterworth LF/HF validation).

3.4 Commit

Click. Satisficing threshold crossed. In AdSERP (forced choice), every trial ends with a click. In naturalistic search, this phase competes with abandonment and query reformulation.

3.5 Regression loop

69% of trials include at least one scroll regression (1,566 / 2,266 trials; Evaluate $\rightarrow$ re-Survey). Backward scrolling is ballistic ($\rho = 0.867$), with 87% of regression targets at positions 0–4.

4 Data and Methods

4.1 AdSERP dataset

AdSERP Latifzadeh et al. [2025]: 2,776 trials, 47 participants, 60 unique product purchase queries (“buy [brand] [product]”). 10 trials per participant across 6 batches. Gazepoint GP3 HD eye tracker (150 Hz). Fixations pre-segmented by the tracker’s internal I-DT filter (FPOG stream). Mean single-fixation duration 218 ms, median 187 ms ($N = 234,339$ fixations across all trials, post 2026-04-12 coordinate-space audit; see NB04:K24–K27 for the canonical source).

4.2 Saccade classification

Saccade amplitude computed as Euclidean distance between consecutive fixation coordinates (FPOGX, FPOGY in screen pixels). Minor saccade threshold: 100 px. Fixations < 60 ms filtered as sub-threshold artifacts (1.4% of data).

4.3 Phase identification

Survey–evaluate transition: sliding window of 3 saccades. First window where mean amplitude < 100 px marks the transition. Median transition at saccade 2 (51% of trials transition within first 2 saccades).

4.4 SERP difficulty measures

Three measures computed per SERP:

- **Jaccard**: mean pairwise token-set overlap across results (mean = 0.151)
- **Relevance spread**: std of query–result cosine similarity (mxbai-embed-large, 1024-d). Low spread = all results equidistant from query = hard (mean = 0.052). The precedent for treating variance across a retrieved set as a difficulty signal is the query performance

prediction literature: Cronen-Townsend et al.’s clarity score [Cronen-Townsend et al. \[2002\]](#) used divergence between query and collection language models, and Shtok et al.’s Normalized Query Commitment [Shtok et al. \[2012\]](#) used the standard deviation of top- k lexical retrieval scores. Both established that the shape of the retrieved-score distribution carries query-difficulty information. Relevance spread is the same primitive ported to dense embeddings and used here as a stimulus descriptor to test whether a system-side variance signal also predicts user-side behavioral variants (coverage, duration, click Y).

- **Distinctive density:** mean TF-IDF-weighted unique-token fraction per result (mean = 0.460)

Jaccard and relevance spread are strongly anti-correlated ($\rho = -0.450$), confirming they measure different constructs.

5 Results

5.1 Saccade amplitude distinguishes survey from evaluation

Early saccades (fixations 1–5): 107.8px median ($N = 13,840$). Late saccades (fixations 6+): 69.4px median ($N = 65,764$). Survey/evaluate amplitude ratio $1.55\times$. Per-trial amplitude slope over first 20 saccades: mean $\rho = -0.135$, $t = -29.63$, $p = 9.33 \times 10^{-168}$ ($df = 2,753$, $N = 2,754$ trials with ≥ 10 saccades). 71.8% of trials have $\rho < 0$.

5.2 Orientation is a learned prior

Median orientation time: 0 ms (58% of first fixations land on a result). No learning across batches ($\rho = 0.02$, $p = 0.30$). No within-participant trend ($\rho = -0.022$, $p = 0.26$).

5.3 Survey duration is content-independent

Mean 3.5 saccades, ~ 1 s. No correlation with relevance spread ($\rho = -0.000$), distinctive density ($\rho = 0.020$), or Jaccard ($\rho = -0.012$). All $p > 0.3$.

5.4 Relevance spread predicts evaluation strategy

Table 1: Spearman correlations: difficulty measure $\times$ behavioral DV ($N = 2,334$). Spread and density: positive ρ = easier SERPs $\rightarrow$ more of DV.

	Dur.	Fix.	Cov.	Reg.	Click Y
Jaccard	-.019	-.021	-.046*	.005	-.055**
Spread	.043*	.047*	.098***	.035	.046*
Density	.014	.015	.071***	.004	-.052*

Within-participant: relevance spread $\rightarrow$ coverage ($\bar{\rho} = 0.089$, $p < 0.001$) and duration ($\bar{\rho} = 0.042$, $p = 0.031$).

Tercile analysis (relevance spread): hard SERPs (low spread) produce 49.0% page coverage vs. 53.3% for easy SERPs ($p < 0.001$). Click Y: 814 px (hard) vs. 870 px (easy, $p = 0.047$).

5.5 Reading episodes and SERP difficulty

Episode pooling (minor saccade threshold 100 px): 95,328 episodes across 2,334 trials. 50.5% single-fixation, 49.5%

multi-fixation (mean 2.16 fixations, 499 ms). Proportion of multi-fixation episodes is higher on hard SERPs ($p = 0.004$).

5.6 Fixation decomposition

Per-fixation duration is flat at ~ 220 ms across positions 0–9 (range 202–228 ms). Fixation count declines monotonically with organic rank (mean per-(trial, rank) fixation count $17.5 \rightarrow 13.4 \rightarrow 11.0 \rightarrow 9.3 \rightarrow 7.9 \rightarrow 6.9 \rightarrow 6.3 \rightarrow 5.4 \rightarrow 3.9 \rightarrow 3.4$ across organic ranks 0–9; Spearman $\rho = -1.000$, $p = 5.5 \times 10^{-7}$, $N = 10$ ranks). Total dwell follows the same monotonic decline ($3.80 \rightarrow 0.80$ s across the same ranks; $\rho = -1.000$, $p = 5.5 \times 10^{-7}$). The position effect in total fixation time is therefore carried by fixation count, not per-fixation duration—consistent with allocation rather than a processing-speed change. (Both correlations are computed on the full corpus of 2,776 trials; ad slots are excluded by indexing on organic rather than absolute rank, which removes the `dd_top` displacement that flattens the absolute-rank curve to non-significance, $\rho = -0.44/-0.52$.)

5.7 Forward and regressive evaluation as task-level modes

We operationalize the forward/regressive split with the scroll high-water-mark rule used in `data_loader.classify_fixations`: a fixation is forward iff its scroll offset is within 50 px of the running HWM sampled at all prior fixations, otherwise regressive. The classifier is parity-verified at 4,036/4,036 fixations against the per-fixation rule when lifted to episode granularity (`episode_classifier.classify_episode`) and stable across tolerances $\in \{25, 50, 100\}$ px. Forward fixations are 74% of the classified set ($N = 150,993$); regressive fixations are 26% ($N = 53,583$). Three independent measurement streams each recover the same mode distinction.

Motor. Cursor-to-gaze Euclidean distance is systematically tighter for regressive than for forward fixations. Overall medians are 316.1 px (regressive, $N = 60,673$) vs 360.2 px (forward, $N = 142,569$) across 2,774 trials with usable cursor traces. The gap is largest in the evaluation window 2–5 s before click (245.4 vs 291.1 px; 46 px tighter), present but smaller at acquisition 0–2 s (292.1 vs 316.7 px) and scanning 5–15 s (340.2 vs 371.9 px), and reverses to a small forward advantage at long time-to-click > 15 s (386.8 vs 376.8 px). The pattern is consistent with regressive fixations being a partially-committed motor state that emerges only once a candidate target has been formed. The effect is dominated by the vertical component on a single-column SERP. (Recomputed against the post-2026-04-12 fixation- y coordinate fix; pre-fix magnitudes were roughly $2\times$ larger but direction is bugfix-robust at every window before late. Source: `scripts/verify_regressive_cursor_gaze_acquisition.py`.)

Pupillometric, with a load-bearing caveat. Trial-level LHIPA (lower = higher cognitive load) correlates negatively with per-trial regressive fraction at $\rho = -0.381$ ($p \approx 9 \times 10^{-95}$, $n = 2,720$). Top tercile of regressive fraction ($> 30\%$) has median LHIPA 0.0378 vs 0.0682 for the bottom tercile of 0%; Kruskal-Wallis $H = 466$, $p < 10^{-100}$. The

confound: regressive fraction is itself a task-difficulty proxy—LHIPA independently correlates with trial duration, scroll regression count, click position, and fixation count. This adds a fifth difficulty proxy; it does not identify regression-specific load independently of difficulty. We flag it as a confound rather than a claim of causation; a direction-specific load claim would require partial correlation within difficulty quartiles.

Geometric, suggestive but not clustered-significant.

Top Ad retreat-arc ratio (path length / direct distance) is 2.06 for regressive entries and 1.40 for forward entries at the arc level ($n = 731$ retreat arcs total)—regressive re-examination of ads produces 47% more curvature on exit. Same direction in the lateral-displacement-to-arc ratio: 0.196 regressive vs 0.151 forward. The participant-clustered test (median arc per participant, Mann-Whitney across participants) returns $p = 0.076$ for arc ratio and $p = 0.078$ for lateral displacement, with only 12 participants contributing to the regressive cell. The arc-level effect sizes are large and direction-consistent with the motor and ski-jump findings; the per-participant n is the limit. We read this as pattern-consistent and worth more data, not yet a standalone claim.

Why this belongs to a task model, not a click model. A click model can in principle absorb a “regressive” feature as another input, but then it loses the structural point: the two modes are not two features on the same user state—they are two cognitive states with different motor kinematics, different pupillometric load profiles, different arc geometries, and different exit actions. A user reading forward is in a different task state from a user re-examining under partial commitment. The task model makes this explicit; bag-of-features does not.

Within-participant robustness of the motor pillar.

The pooled 44px gap is not a participant-concentration artifact. Computing per-participant median (forward) – median (regressive) across the 46 participants with both fixation classes, 37 show the predicted direction (regressive tighter), 9 show the opposite, with a median within-participant gap of +37.5 px. Wilcoxon signed-rank $W = 185$, $p = 4.8 \times 10^{-5}$ (two-sided); sign test $p = 4.1 \times 10^{-5}$. Dropping the four participants with the most extreme deltas, 34/42 still show the predicted direction.

6 Discussion

6.1 What the survey phase is

The survey phase is not orientation: the layout is known, first fixations land on a result region without preamble, and there is no learning effect across trials. It is also not reading: saccades are too wide (107.8px median, $\sim 1.5\times$ the width of a single result block) for meaningful snippet comprehension. What remains is *patch-quality assessment*: an estimate of the decision landscape that the user builds before investing in committed evaluation. The fixed duration (~ 1 s regardless of SERP content, all difficulty correlations null at $p > 0.3$) is consistent with a sampling routine rather than a content-driven process—the user spends a bounded budget of fixations on gist extraction, regardless of what is

actually on the page, then commits the fixed-length sample to a downstream strategy decision. What varies across trials is not the duration of the survey but its *output*: the impression the sample leaves behind, which subsequently modulates whether the user satisfices at the first plausible result or explores more deeply. This is exactly the functional form predicted by Simon-style bounded rationality: a cheap gist pass first, then an evaluation budget allocated on the basis of what the gist pass revealed.

6.2 Implications for click models

The cascade model and its descendants assume serial top-down examination—the user looks at position 0, decides, moves to position 1, decides, and so on. The survey phase violates this assumption structurally. Users sample 3–5 result positions with wide saccades before any of them receives committed evaluation, which means the *order* in which positions receive evaluation effort is not the order in which they first receive gaze. Position-bias research conflates two distinct kinds of exposure—survey exposure (cheap gist sample) and evaluation exposure (committed reading)—because the underlying model has no construct that separates them. The practical consequence is that click-through rates at each position are a confounded measurement: they reflect survey attention plus evaluate attention plus commit attention, combined by a fitting procedure that has no way to pull them apart. A task-model layer does not replace click models; it gives them a place to hang the constructs that would let them disambiguate which exposure a given click reflects. The near-term gain is not a new regression—it is a principled feature separation that makes existing regressions interpretable.

The within-evaluation *forward/regressive* axis (§5.7, §2.7) is a related cost-allocation distinction. Forward and regressive fixations show different motor signatures (cursor-gaze coupling tighter under regressive entry, 37/46 participants, Wilcoxon $p = 4.8 \times 10^{-5}$); pupillometric and geometric pillars are reported with explicit caveats. Click models with per-position cost parameters cannot represent this difference; the rational-analysis lineage has the framework to do so but has not yet operationalized direction at within-patch granularity. Per-mode unit costs and per-mode benefit functions are a candidate next rung the present evidence makes worth attention—with the qualification that the motor pillar is the only currently-supported leg of the three.

6.3 Difficulty as discriminability

The strongest empirical difficulty signal in this dataset is not topical similarity (Jaccard, null) or embedding similarity (null within-position), but *relevance spread*: the standard deviation of query-result embedding similarities. Spread predicts coverage, click position, and duration where token overlap and average similarity do not. The interpretation is that transactional product queries are a discrimination problem, not a comprehension problem—the user does not need to understand the results, they need to identify the best one, and that identification is hard precisely when the top- k results are equidistant from the query in meaning

space. This parallels the long-established query performance prediction tradition in IR, where Cronen-Townsend et al.’s clarity score [Cronen-Townsend et al. [2002]] and Shtok et al.’s Normalized Query Commitment [Shtok et al. [2012]] both use the shape of the retrieved-score distribution as a system-side difficulty signal. Relevance spread is the same primitive ported from lexical retrieval scores to dense embeddings and measured against *user-side* behavior. The fact that a QPP primitive carries user-side signal is itself evidence for the thesis: when the analyst looks for variance-based features with a task-level interpretation (how hard is it to discriminate?), the signal is there; when the analyst looks only at similarity-to-query, it disappears.

6.4 Limitations

The forced-choice paradigm eliminates two of the three natural exit paths from SERP evaluation and therefore inflates regression rates, eliminates the abandonment signal, and makes any stopping-rule claim provisional. Participants completed ~60 trials each, so the crisp phase transitions reported here likely reflect practiced behavior—the expert version of SERP scanning—rather than first-exposure behavior. The domain is narrow (product search on Google SERPs, transactional intent), so the survey-phase measurements should be treated as a lower bound for layout discovery cost on unfamiliar layouts. The Gazepoint GP3 HD tracker’s internal I-DT filter parameters are not publicly documented, which limits the precision of any saccade-amplitude claim to within the tolerances of that filter. The 100 px minor-saccade threshold is principled (it is approximately the width of a single result block on the stimulus) but arbitrary with respect to individual participants’ vertical result spacing; sensitivity analyses in the notebook repository show the phase boundary is robust across nearby thresholds. The forward/regressive evaluation split rests primarily on the motor pillar of §5.7; the pupillometric finding is reported with an explicit difficulty-confound disclosure, and the geometric arc-ratio finding is reported as direction-consistent but not clustered-significant. A previously-investigated position-9 fixation uptick failed participant clustering and is retired (see [‘docs/null-findings/2026-04-26-pos9-fixation-uptick-collapse.md’](https://github.com/andyed/attentional-foraging/blob/main/docs/null-findings/2026-04-26-pos9-fixation-uptick-collapse.md) for the full audit).

7 Conclusion

The ORIENT–SURVEY–EVALUATE–COMMIT model takes the rational-analysis tradition (Anderson, Pirolli & Card, SNIF-ACT) to saccade-level granularity, with phase boundaries identifiable trial-by-trial. The Survey/Evaluate split it produces converges with the structurally analogous decomposition Zhang & Gwizdka recovered independently from the economic-IR cost-modeling tradition—two theoretical backbones with no shared citation lineage arriving at the same two-factor structure, and at the per-trial decision level Zhang, Abualsaud & Smucker’s mechanistic result-inspection hypothesis tracks the same survey-phase

signature.

The forward/regressive evaluation split is a within-evaluation distinction neither tradition has decomposed. The cleanest evidence is motor: cursor-gaze coupling is tighter for regressive than forward fixations across acquisition, evaluation, and scanning windows (37/46 participants in the predicted direction; Wilcoxon $p = 4.8 \times 10^{-5}$). The pupillometric and geometric pillars are reported with explicit caveats. Per-mode cost parameters are a candidate next step for either tradition’s cost models to operationalize.

Click models, feature-bag cursor classifiers, and end-to-end neural rankers fit cost-allocation policies without naming them as such. Connecting their parameters to the rational-analysis lineage—instead of fitting in isolation—is what gives them interpretable, composable, transferable structure. That is what the task model adds: not another feature for the regression, but a vocabulary for naming what the regression is fitting.

References

- John R. Anderson. *The Adaptive Character of Thought*. Lawrence Erlbaum, Hillsdale, NJ, 1990. Foundational rational-analysis text. Frames cognition as cost-optimized adaptation to the structure of the environment, including memory retrieval as relevance estimation. Theoretical root of information foraging (Pirolli and Card, 1999) — the rational-analysis lineage OSEC inherits from. The economic-IR cost-modeling tradition (Stigler, 1961, Varian, 1999, Azzopardi, 2011, Zhang and Gwizdka, 2016) does not cite Anderson and is treated as a parallel strand with convergent results, not a downstream extension.
- John R. Anderson and Lael J. Schooler. Reflections of the environment in memory. *Psychological Science*, 2(6):396–408, 1991. doi: 10.1111/j.1467-9280.1991.tb00174.x. Empirical instantiation of Anderson [1990]’s rational analysis: memory retrieval probability tracks the environmental statistics of need probability. The formal Bayesian-cost piece of the rational-analysis program that Pirolli & Card later operationalized for information search.
- Ioannis Arapakis and Luis A. Leiva. Predicting user engagement with direct displays using mouse cursor information. In *Proceedings of the 39th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’16. ACM, 2016. doi: 10.1145/2911451.2911505. Mouse cursor predicts engagement with knowledge panels. Same Leiva/Arapakis team as AdSight.
- Leif Azzopardi. The economics in interactive information retrieval. In *Proceedings of the 34th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR ’11)*, pages 15–24, 2011. doi: 10.1145/2009916.2009923.
- Leif Azzopardi. Modelling interaction with economic models of search. In *Proceedings of the 37th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR ’14)*, pages 3–12, 2014. doi: 10.1145/2600428.2609574.
- Lukas Brückner, Ioannis Arapakis, and Luis A. Leiva. A systematic examination of mouse movement length for decision

- making in web search. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM, 2021. doi: 10.1145/3404835.3463055. Same Leiva/Arapakis team as AdSight. Mouse movement length as decision signal.
- Duncan P. Brumby and Andrew Howes. Good enough but I'll just check: Web-page search as attentional refocusing. In *Proceedings of the 6th International Conference on Cognitive Modeling*, ICCM '04, 2004. Verified via CiteSeerX 2026-04-02.
- Georg Buscher, Susan T. Dumais, and Edward Cutrell. The good, the bad, and the random: An eye-tracking study of ad quality in web search. In *Proceedings of the 33rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '10. ACM, 2010. doi: 10.1145/1835449.1835459. Ad quality affects gaze patterns. Users develop different examination strategies for ads vs organic. Supports our ad_focused/ad_ignorant split.
- Olivier Chapelle and Ya Zhang. A dynamic Bayesian network click model for web search ranking. In *Proceedings of the 18th International Conference on World Wide Web*, WWW '09, pages 1–10. ACM, 2009. doi: 10.1145/1526709.1526711. Verified via ACM DL 2026-04-02.
- Aleksandr Chuklin, Ilya Markov, and Maarten de Rijke. *Click Models for Web Search*. Synthesis Lectures on Information Concepts, Retrieval, and Services. Morgan & Claypool, 2015. doi: 10.2200/S00654ED1V01Y201507ICR043. Comprehensive survey. Most models assume monotonic top-to-bottom examination; our regression data breaks this assumption.
- Nick Craswell, Onno Zoeter, Michael Taylor, and Bill Ramsey. An experimental comparison of click position-bias models. In *Proceedings of the 2008 International Conference on Web Search and Data Mining*, WSDM '08, pages 87–94. ACM, 2008. doi: 10.1145/1341531.1341545. Compares cascade, examination, and logistic position-bias models for clicks.
- Steve Cronen-Townsend, Yun Zhou, and W. Bruce Croft. Predicting query performance. In *Proceedings of the 25th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '02, pages 299–306. ACM, 2002. doi: 10.1145/564376.564429. Clarity score: KL divergence between query language model and collection language model. Founding pre-retrieval QPP predictor. DOI to re-verify against publisher metadata.
- Edward Cutrell and Zhiwei Guan. What are you looking for? An eye-tracking study of information usage in web search. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '07, pages 407–416. ACM, 2007. doi: 10.1145/1240624.1240690. Verified via ACM DL 2026-04-02.
- Georges E. Dupret and Benjamin Piwowarski. A user browsing model to predict search engine click data from past observations. In *Proceedings of the 31st Annual International ACM SIGIR Conference*, SIGIR '08, pages 331–338. ACM, 2008. doi: 10.1145/1390334.1390392. Verified via ACM DL 2026-04-02.
- Wai-Tat Fu and Peter Pirolli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806. Verified via Taylor & Francis 2026-04-02.
- Laura A. Granka, Thorsten Joachims, and Geri Gay. Eye-tracking analysis of user behavior in WWW search. In *Proceedings of the 27th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '04, pages 478–479. ACM, 2004. doi: 10.1145/1008992.1009079. Early SERP eye-tracking. Showed linear scan with rapid drop-off.
- Wayne D. Gray, Chris R. Sims, Wai-Tat Fu, and Michael J. Schoelles. The soft constraints hypothesis: A rational analysis approach to resource allocation for interactive behavior. *Psychological Review*, 113(3):461–482, 2006. doi: 10.1037/0033-295X.113.3.461.
- Kayhan Latifzadeh, Jacek Gwizdka, and Luis A. Leiva. A versatile dataset of mouse and eye movements on search engine results pages. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3730325. Dataset on Zenodo: <https://zenodo.org/records/15236546>.
- Yiqun Liu, Chao Wang, Ke Zhou, Jian-Yun Nie, Min Zhang, and Shaoping Ma. From skimming to reading: A two-stage examination model for web search. In *Proceedings of the 23rd ACM International Conference on Information and Knowledge Management*, CIKM '14, pages 849–858. ACM, 2014. doi: 10.1145/2661829.2661907. Verified via ACM DL 2026-04-02. Two-phase SERP evaluation: skimming then reading. Both stages predictable from mouse. Cited by AdSight.
- Lori Lorigo, Maya Haridasan, Hrönn Brynjarsdóttir, Ling Xia, Thorsten Joachims, Geri Gay, Laura A. Granka, Fabio Pellacini, and Bing Pan. Eye tracking and online search: Lessons learned and challenges ahead. *Journal of the American Society for Information Science and Technology*, 59(7):1041–1052, 2008. doi: 10.1002/asi.20794. ~2/3 of scanpaths are nonlinear. Challenges sequential cascade assumptions.
- Alistair Moffat, Peter Bailey, Falk Scholer, and Paul Thomas. Incorporating user expectations and behavior into the measurement of search effectiveness. *ACM Transactions on Information Systems*, 35(3):24:1–24:38, 2017. doi: 10.1145/3052768. The C/W/L framework: continuation probability at each rank is the stay-or-leave decision per position. Directly maps to IFT patch-staying applied within a SERP at result granularity. Cited in §6.4 for the commit-to-deepen exit. DOI from LLM knowledge, re-verify.
- Peter Pirolli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643. Foundational IFT paper. Adapts optimal foraging theory to human information seeking.
- Keith Rayner. Eye movements in reading and information processing: 20 years of research. *Psychological Bulletin*, 124(3):372–422, 1998. doi: 10.1037/0033-2909.124.3.372. Canonical review of eye-movement research in reading. Establishes that 10–15% of fixations during text reading are saccadic regressions used to recover comprehension. The within-SERP analog of these regressions is what OSEC's forward/regressive split formalizes at the task level.
- Anna Shtok, Oren Kurland, David Carmel, Fiana Raiber, and Gad Markovits. Predicting query performance by query-drift

estimation. *ACM Transactions on Information Systems*, 30 (2):11:1–11:35, 2012. doi: 10.1145/2180868.2180873. NQC (Normalized Query Commitment): standard deviation of top- k retrieval scores as a post-retrieval difficulty predictor. Direct conceptual ancestor of our *relevance spread* measure (std of dense query-document cosine similarity). DOI to re-verify against publisher metadata.

George J. Stigler. The economics of information. *Journal of Political Economy*, 69(3):213–225, 1961. doi: 10.1086/258464. Foundational paper for the economic-IR cost-modeling tradition. Cited by Z&G 2016 as the lineage starting point on the economics side of search-cost modeling. OSEC does not inherit from this strand directly — it appears here as the parent of the convergent decomposition Z&G 2016 recovered.

Hal R. Varian. Economics and search. *SIGIR Forum*, 33(1): 1–5, 1999. doi: 10.1145/331403.331404. SIGIR 1999 keynote. Connected economic-cost-of-information theory to IR retrieval evaluation. Cited by Z&G 2016 as the second pillar (after Stigler 1961) of the economic-IR cost-modeling lineage.

Mario Villaizán-Vallelado, Matteo Salvatori, Kayhan Latifzadeh, Antonio Penta, Luis A. Leiva, and Ioannis Arapakis. Ad-Sight: Scalable and accurate quantification of user attention in multi-slot sponsored search. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3729891. Uses same dataset as Latifzadeh et al. [2025]. Transformer predicting fixation from mouse trajectories.

Haotian Zhang, Mustafa Abualsaud, and Mark D. Smucker. A study of immediate requery behavior in search. In *Proceedings of the 2018 Conference on Human Information Interaction & Retrieval*, CHIIR ’18, pages 181–190, New Brunswick, NJ, USA, 2018. ACM. doi: 10.1145/3176349.3176400. Hypothesizes a result inspection phase: users assess the top 2–3 results as a rapid initial impression that gates the stay-or-reformulate decision before any detailed snippet reading. Mechanism precedent for the Survey phase in OSEC (paired with Zhang & Gwizdka 2016 as the structural/factor-analytic precedent). AdSERP’s forced-choice task eliminates the requery exit, so the same phase shows up as a gate on evaluation depth instead. Note: this is Haotian Zhang (Waterloo/Smucker group), not Yinglong Zhang of zhang2016rethinking.

Yinglong Zhang and Jacek Gwizdka. Rethinking the cost of information search behavior. In *Proceedings of the 39th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’16, pages 969–972, Pisa, Italy, 2016. ACM. doi: 10.1145/2911451.2914742. Verified via PDF 2026-04-26 (~/Downloads/2911451.2914742.pdf). PCA on six SERP/document/task-description cost variables (KMO 0.64, Bartlett $p < .001$) recovers two well-separated factors with cross-loadings near zero: *exploratory process* (T_notUseful .98, W_notUseful .94, F_SERP .75) and *validation process* (F_taskDescription .98, T_taskDescription .94, D_notUseful .70). Mapped explicitly to Kuhlthau Initiation/Selection/Exploration vs Formulation/Collection and to Marchionini Define/Select/Formulate/Execute vs Examine Results. Structural (factor-analytic) precedent for OSEC’s Survey/Evaluate decomposition; pairs with zhang2018requery (mechanism precedent). Note: Yinglong Zhang (UNC/UT-Austin), not Haotian Zhang of zhang2018requery.

A Reproducibility and Interactive Materials

All analysis code, notebooks, and interactive demos are available at:

- **Repository:** <https://github.com/andyed/attentional-foraging>
- **Interactive scanpath replays:** <https://andyed.github.io/attentional-foraging/> — 10 curated trials with foveated vision rendering, playback controls, and gaze point toggle

Notebooks (rendered via nbviewer):

Analysis	Notebook
Ski-jump decomposition	00_skijump.ipynb
Convergence & click prediction	01_convergence.ipynb
Fixation decomposition	04_fixation_coverage.ipynb
LHIPA cognitive load	05_lhipa.ipynb
Orientation & evaluation	06_orientation_evaluation.ipynb
Regressions (prevalence, triggers, kinematics)	07a-c_regressions_*.ipynb
Lexical priming (null)	08_priming.ipynb
SERP difficulty & episodes	09_difficulty.ipynb
User strategies	10_strategies.ipynb
Individual differences	11_individual_differences.ipynb

Findings document: [docs/findings.md](#) — comprehensive write-up with all statistical tests (v7).